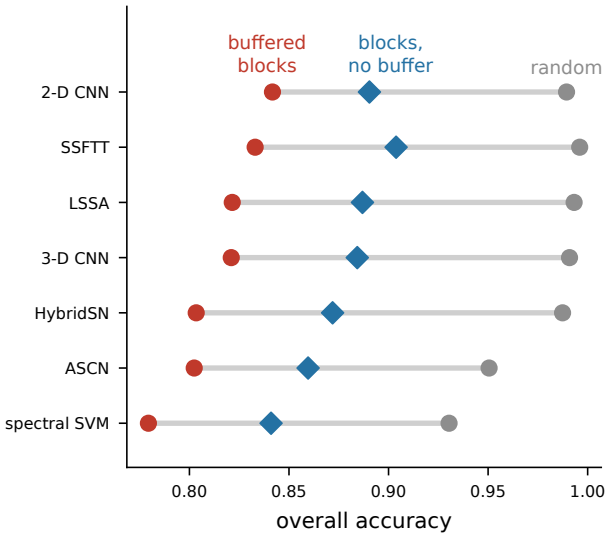
Three protocols, same models
buffered blocks
blocks, no buffer
random
2-D CNN
SSFTT
LSSA
3-D CNN
HybridSN
ASCN
spectral SVM
0.80
0.85
0.90
0.95
1.00
overall accuracy

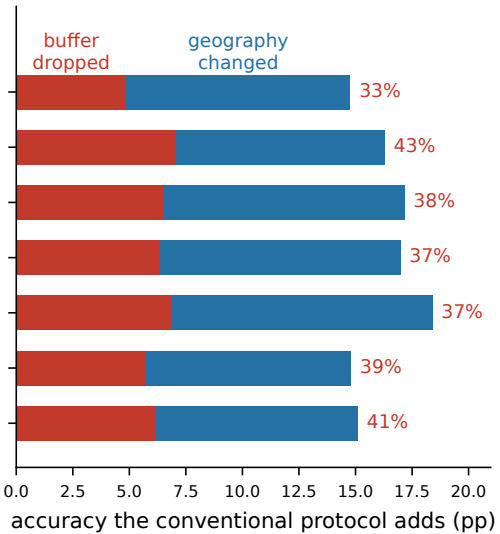
Dropping the buffer: 33 to 43 per cent
buffer dropped
geography changed
33%
43%
38%
37%
37%
39%
41%
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
20.0
accuracy the conventional protocol adds (pp)

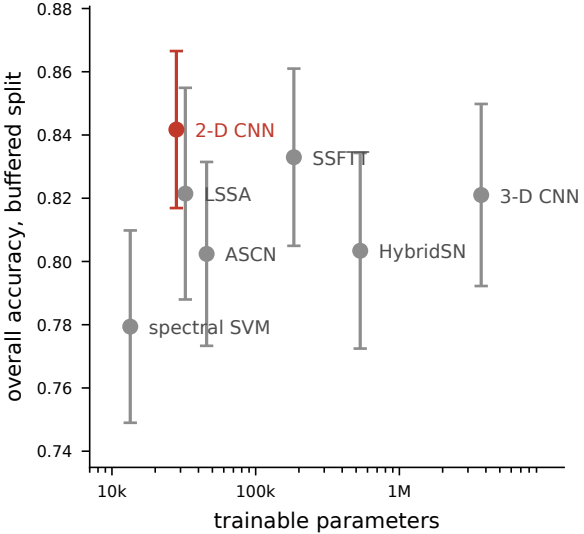
Accuracy against model size
0.88
0.86
0.84
0.82
0.80
0.78
0.76
0.74
overall accuracy, buffered split
2-D CNN
SSFTT
LSSA
3-D CNN
ASCN
HybridSN
spectral SVM
10k
100k
1M
trainable parameters