

Class

Pseudocode

Employee

Dog

- Name
- Age
- Breed
- ...

Cat


- Name
- Age
- Breed
- ...

Programmer

Sale

Manager

At1
At2
At3

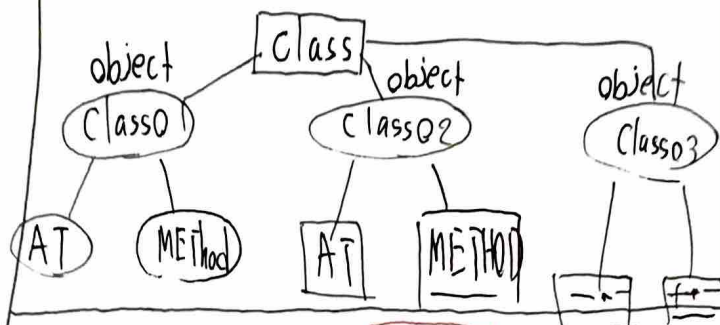

define a class:

```
def __init__(self, At1, At2, At3, ...)
```

self.name = name

self.salary = salary

self.age = age

Attribute

Constructor

Totally opposite

```
def method1(self):
```

command

```
def __del__(self)
```

Destructor


isinstance(^{object}emp1, ^{class}Employee) # True or False

Is object in class?

Encapsulation: Set permission for each attribute. (Access modifier)

- Public ☺
- Protected(Ⓜ) - attribute
- Private(Ⓜ) -- attribute

Polymorphism

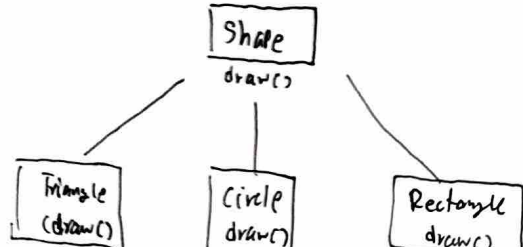

Setter, getter method

```
def setname(self, newname):  
    self._name = newname
```

```
def getname(self):  
    return self._name
```

```
super().__init__(name)
```

• To use method (Bring in).
(and attribute)

• It's like importing.

- Overloading method: same name, differ method.
- Overriding method: same name, same method.

```
def __str__(self) < Change object to string >
```

Inheritance

• create on what is built.

