Algorithm

1. Start
2. Input three values a, b, c.
3. Store them in a list: digits = [a, b, c]
4. Initialize loop variable i from 0 to 2.
5. Inside that, initialize loop variable j from 0 to 2.
6. Inside that, initialize loop variable k from 0 to 2.
7. Check condition: if (i ≠ j AND i ≠ k AND j ≠ k) If true → Print digits[i] + digits[j] + digits[k]
8. Repeat until all loops finish.
9. Stop

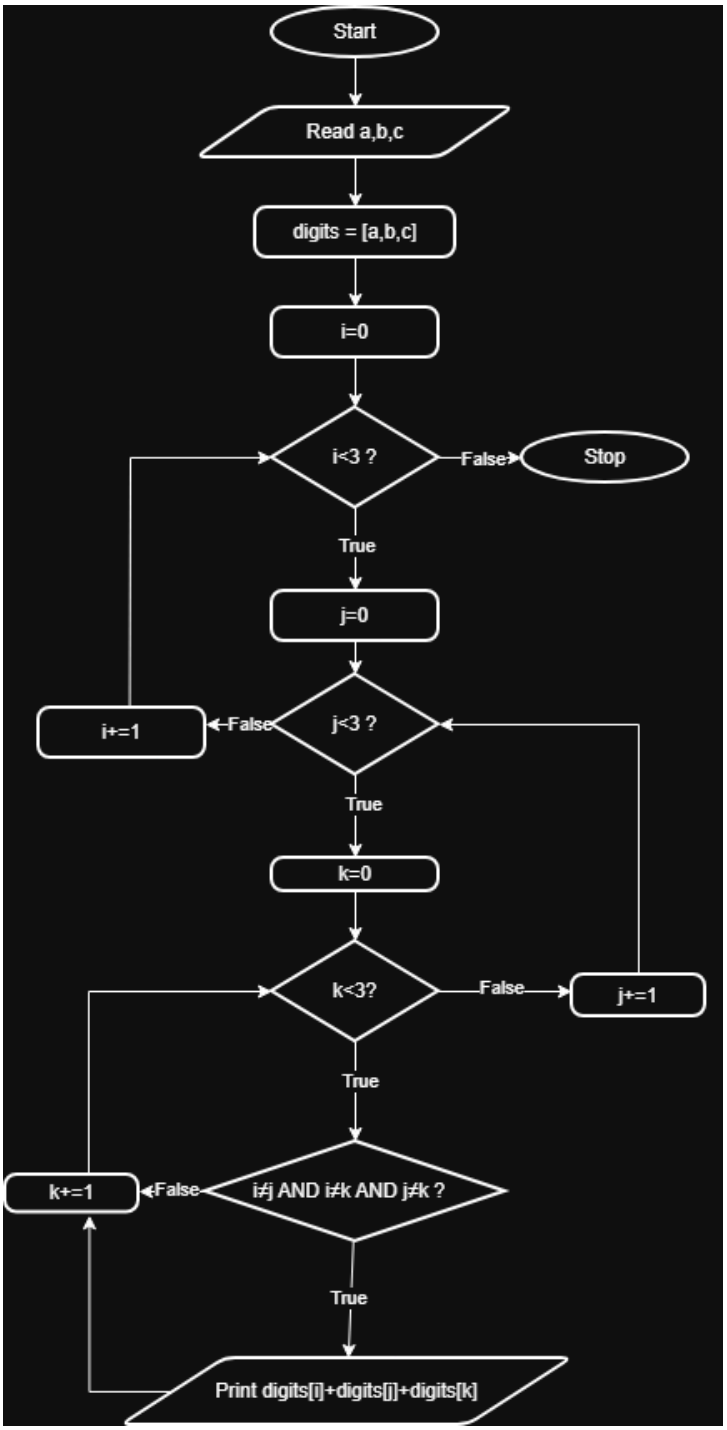

CODETANTRA Home

ayush.dehankar.batch2025@sitnagpur.siu.edu.in Support Logout

7.1.2. Possible Combinations from Three Digits

00:19

Write a Python program to accept three digits and print all possible 3-digit combinations that can be formed using those three digits. Each digit should be used exactly once in each combination.

For three digits a, b, and c, there are 6 possible arrangements based on their indices: abc, acb, bac, bca, cab, cba.

Input Format:

- Single line contains three space-separated non-negative integers, a, b, and c, representing the three digits

Output Format:

- Print all possible 3-digit combinations
- Each combination should be printed as a 3-digit number on a separate line
- Print combinations as they appear (maintain leading zeros if first digit is 0)

Constraints:

- $0 \leq \text{each digit} \leq 9$
- Digits can be same or different

Sample Test Cases +

Explorer

combinat...

Submit

Debugger

```python
a,b,c = input().split()
digits = [a,b,c]
for i in range(3):
    for j in range(3):
        for k in range(3):
            if(i!=j and i!=k and j!=k):
                print(digits[i]+digits[j]+digits[k])# Type Content here...
```

Average time	Maximum time
0.004 s	0.005 s
3.71 ms	5.00 ms

3 out of 3 shown test case(s) passed

4 out of 4 hidden test case(s) passed

Test case 1 5 ms Debug

Expected output	Actual output
1 2 3	1 2 3
123	123
132	132
213	213
231	231
312	312

Terminal Test cases

Prev Reset Submit Next