



# **\*UNIX AND LINUX ESSENTIALS\***

## **ASSIGNMENT - 7**

**SUBMITTED BY:**

**AYUSH KUMAR JHA**


**SAP ID - 500086400**

**Enrollment no - R200220083**

**B.C.A -I.O.T.**


## Assignment 7: -

Vim :-

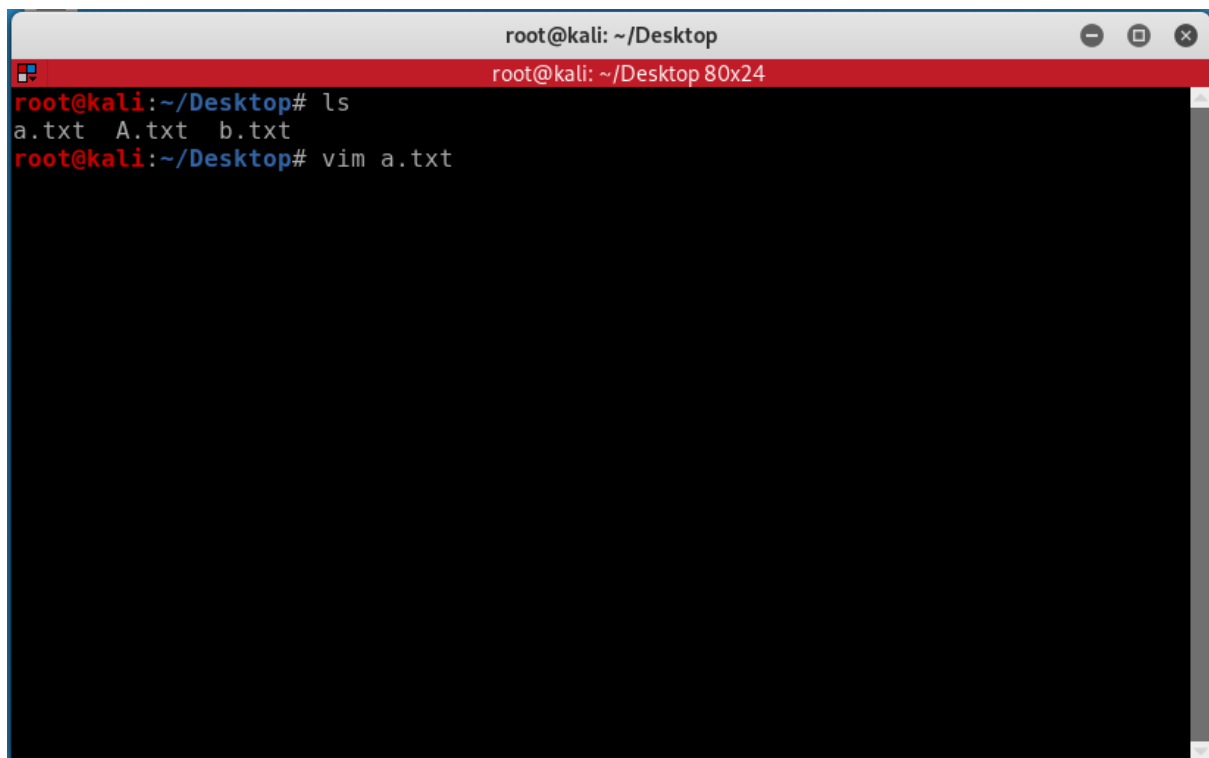

```
root@kali: ~/Desktop
root@kali: ~/Desktop 80x24
root@kali:~/Desktop# ls
a.txt  A.txt  b.txt
root@kali:~/Desktop# vim a.txt
```


Use I to insert

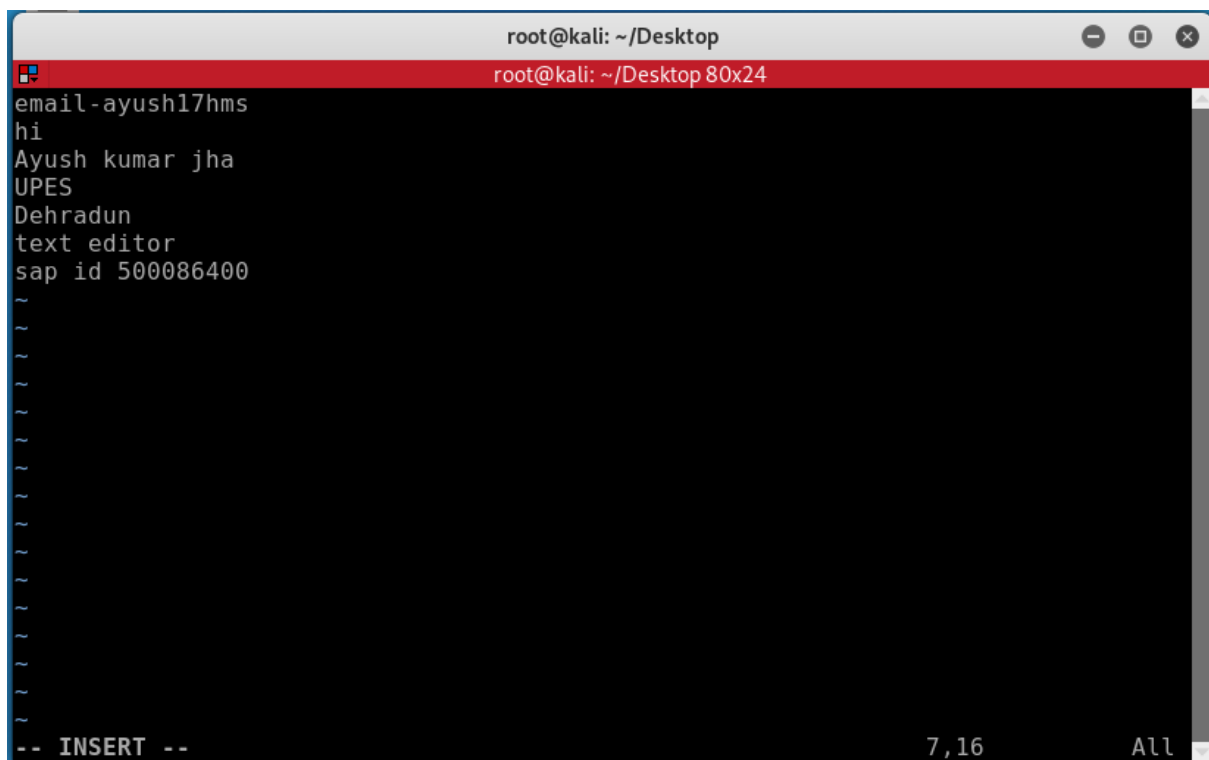

```
root@kali: ~/Desktop
root@kali: ~/Desktop 80x24
email-ayush17hms
hi
Ayush kumar jha
UPES
Dehradun
text editor
sap id 500086400
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
~
-- INSERT --
7,16 All
```

- I -(insert)
- ZZ,wq -(Saving and quit)
- ZQ -(quit without save)
- q! -(cancel the saving)
- w (save)

- view -(to view the file)

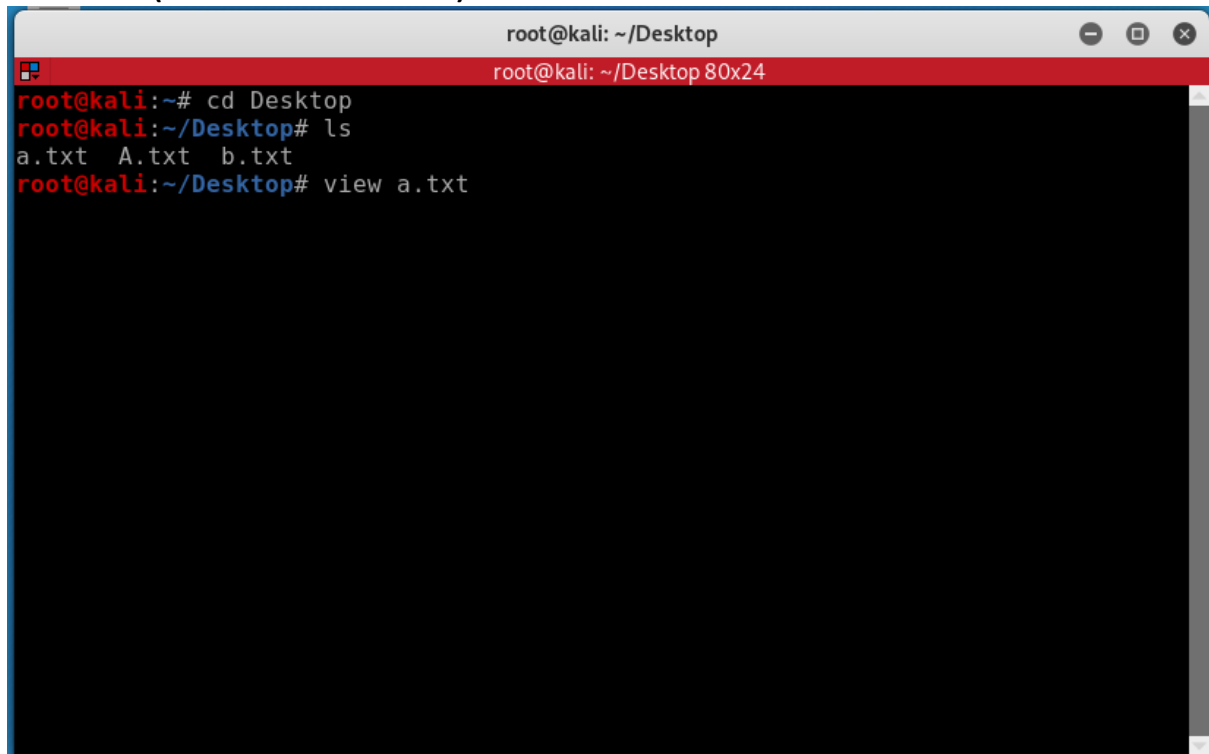

```
root@kali: ~/Desktop
root@kali: ~/Desktop 80x24
root@kali:~# cd Desktop
root@kali:~/Desktop# ls
a.txt  A.txt  b.txt
root@kali:~/Desktop# view a.txt
```

The image shows a terminal window with a title bar that reads "root@kali: ~/Desktop". The terminal has a red header bar with the text "root@kali: ~/Desktop 80x24". The command history is as follows: the user enters "cd Desktop", then "ls" which lists "a.txt", "A.txt", and "b.txt", and finally "view a.txt". The terminal background is black with white text.

