



Bansilal Ramnath Agarwal Charitable Trust's
Vishwakarma Institute of Information Technology

Department of
Artificial Intelligence and Data Science

Name: Ayush Shende

Class: TY

Division: A

Roll No: 371056

Semester: V

Academic Year: 2022-2023

Subject Name & Code: Cloud Computing and Analytics

Title of Assignment: Deploy web applications on commercial cloud Technology: Google app Engine/ Windows Azure 2.

Date of Performance: 28/10/2022

Date of Submission: 05/12/2022

Aim: Deploy web applications on commercial cloud Technology: Google app Engine/ Windows Azure 2.

Problem Statement: Deploy web applications on commercial cloud Technology: Google app Engine/ Windows Azure 2.

Background Information:


App Engine is a managed service provided by google cloud platform, it provides you the simplest way to deploy and scale your applications in GCP and end-to-end application management, it supports Go, Java, .Net, Node.js, PHP, python, Ruby, using pre-configured run times, you can also use a custom run-time and write code in any language, App engine also supports running containers, Some of the important features of app engine are Automatic load balancing & Auto scaling, Application health monitoring, Application versioning, Traffic splitting .

App Engine is a PAAS (Platform as a service) serverless/ fully managed service provided by gcp, you will have less responsibilities and lower flexibility compared to app engine.

Cloud Resource Requirements: Google App Engine

Steps:

Step1: You can launch cloud shell from web console as shown below .

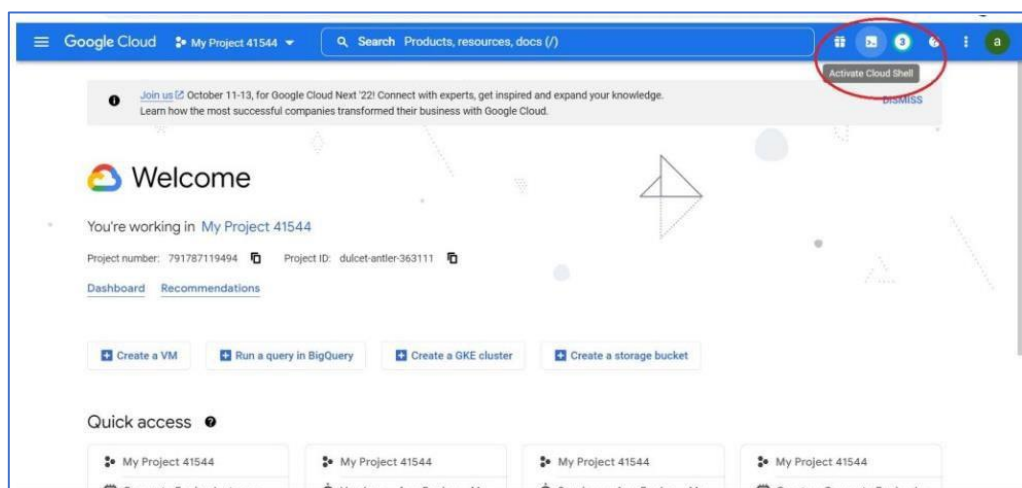

Step2: Installing gcloud CLI

```
curl -O https://dl.google.com/dl/cloudsdk/channels/rapid/downloads/google-cloud-cli-403.0.0-linux-x86_64.tar.gz
```

```
tar -xvf google-cloud-cli-403.0.0-linux-x86_64.tar.gz
```

Now run below given command to install gcloud CLI , and enter yes and give the path when it prompts for

```
./google-cloud-sdk/install.sh
```

Step3: Initializing gcloud CLI: then to initialize gcloud CLI run **gcloud init** command on your terminal , Select option **Log in with a new account** when it prompts “choose an account that you would like to initialize with , same is shown in the below given snapshot”

```
aksnalmas@instance-2:~$ gcloud init
Welcome! This command will take you through the configuration of gcloud.

Your current configuration has been set to: [default]

You can skip diagnostics next time by using the following flag:
  gcloud init --skip-diagnostics

Network diagnostic detects and fixes local network connection issues.
Checking network connection...done.
Reachability Check passed.
Network diagnostic passed (1/1 checks passed).

Choose the account you would like to use to perform operations for this configuration:
[1] 791787119494-compute@developer.gserviceaccount.com
[2] Log in with a new account
Please enter your numeric choice: 2
```

then a link will be provided which you should copy and open it in your browser and login to your gcp account in order to get authorization code .

```
You can run:

$ gcloud config set account 'ACCOUNT'

to switch accounts if necessary.

Your credentials may be visible to others with access to this
virtual machine. Are you sure you want to authenticate with
your personal account?


Do you want to continue (Y/n)? y

Go to the following link in your browser:

https://accounts.google.com/o/oauth2/auth?response_type=code&client_id=32555940559.apps.googleusercontent.com&redirect_uri=https%3A%2F%2Fsdk.cloud.google.com%2Fauthcode.html&scope=openid+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fuserinfo.email+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fcloud-platform+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fappengine.admin+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fsqlservice.login+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fcompute+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Faccounts.reauth&state=1Ez57BAkvXfJkGp5mVRXK2AVAUkhF5&prompt=consent&access_type=offline&code_challenge=ts7qRzD2qgld79Ju8_3LbrVITdRTag0BgChM0HEG6ms&code_challenge_method=S256

Enter authorization code: 
```

After opening the link in your browser , select the account that you want to authorize with and click on allow ,

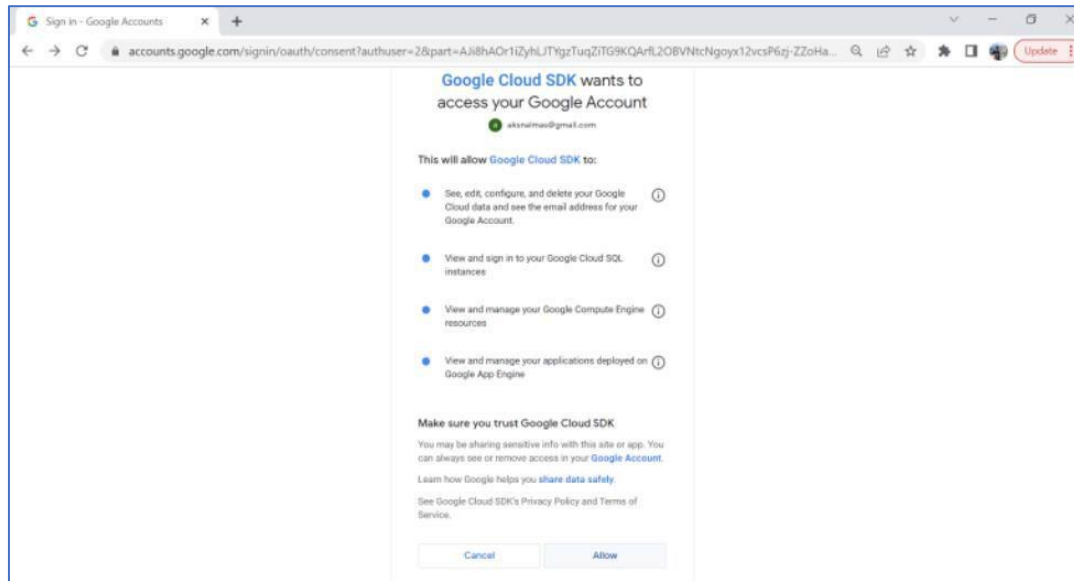

then copy the authorization code and give it in your terminal:

```
Do you want to continue (Y/n)? y
Go to the following link in your browser:

https://accounts.google.com/o/oauth2/auth?response_type=code&client_id=32555940559.apps.googleusercontent.com&redirect_uri=https%3A%2F%2Fsdk.cloud.google.com%2Fauthcode.html&scope=openid+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fuserinfo.email+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fcloud-platform+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fappengine.admin+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fsqlservice.login+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Fcompute+https%3A%2F%2Fwww.googleapis.com%2Fauth%2Faccounts.reauth&state=GI8QcGQJwG3PeuyDRK2AmX4NXCaHk0&prompt=consent&access_type=offline&code_challenge=nlcmk3QNANTJsU-Vdafx3ofbkkoGHhrUepxMzXXQqoQ&code_challenge_method=S256

Enter authorization code: 4/0ARTbsJoBv5rVCPZ2UfmGnkwIm1u_XxMFM4CLjU-ucowNtCB3SbZWDejX5Ju6OQdbyM1GmQ
You are logged in as: [aksnalmas@gmail.com].

Pick cloud project to use:
[1] dulcet-antler-363111
[2] onyx-zodiac-363110
[3] rock-partition-363003
[4] Enter a project ID
[5] Create a new project
Please enter numeric choice or text value (must exactly match list item): 1
```

Check the initialization by using any gcloud command

```
aksnalmas@instance-2:~$ gcloud compute instances list
NAME          ZONE          MACHINE_TYPE  PREEMPTIBLE  INTERNAL_IP  EXTERNAL_IP  STATUS
instance-1    us-west4-b    e2-medium     10.182.0.2   34.125.199.249  RUNNING
instance-2    us-west4-b    e2-medium     10.182.0.3   34.125.175.109  RUNNING
aksnalmas@instance-2:~$
```

Step 4: Writing the Web App: create a folder with any name(helloworld is the name used in this blog) , and create files named app.yaml, main.py, requirements.txt. To deploy your web app to App Engine, you need an configuration file named **app.yaml** , it defines your web application's settings for App Engine , **main.py** is where the python code for this specific application is present , **requirements.txt** is where the dependencies of this application are mentioned. Copy the content into the files as given below **main.py**

```
import flask
```

```
# If `entrypoint` is not defined in app.yaml, App Engine will look for an app called `app` in `main.py`.
```

```

app = flask.Flask( __name__ )

@app.get("/")

def hello():

    """Return a friendly HTTP greeting."""

    return "Hello World!\n"

if __name__ == "__main__":

    app.run(host="localhost", port=8080, debug=True)

```

above given code is written using flask frame work , this just gives **Hello World!** on the website.

requirements.txt:

```
Flask==2.0.3
```

app.yaml:

```
runtime: python39
```

Now lets deploy this application on google App Engine, go on to your terminal and set the project that you want to deploy on, use below given command.

gcloud config set project <project-ID>

```

aksnalmas@instance-1:~$ gcloud config set project capable-pixel-363308
Updated property [core/project].
aksnalmas@instance-1:~$

```

you can get project-ID by using command **gcloud projects list**

```

aksnalmas@instance-1:~$ gcloud projects list
PROJECT_ID          NAME                PROJECT_NUMBER
capable-pixel-363308 My Project 96667    1063768344572
dulcet-antler-363111 My Project 41544    791787119494
onyx-zodiac-363110   My Project 65186    358507265794
rock-partition-363003 My First Project 895374116447
aksnalmas@instance-1:~$

```

Now change to the directory where your application files are stored

cd helloworld

Create app using command **gcloud app create** and select the region that you want to deploy your app on, all the app engine commands start with **gcloud <app>**, and it starts with **gcloud <compute>** for compute engine commands.

```
SSH-in-browser
aksnalmas@instance-1:~/helloworld$ gcloud app create
You are creating an app for project [capable-pixel-363308].
WARNING: Creating an App Engine application for a project is irreversible and the region
cannot be changed. More information about regions is at
<https://cloud.google.com/appengine/docs/locations>.

Please choose the region where you want your App Engine application located:

[1] asia-east1      (supports standard and flexible)
[2] asia-east2      (supports standard and flexible and search_api)
[3] asia-northeast1 (supports standard and flexible and search_api)
[4] asia-northeast2 (supports standard and flexible and search_api)
[5] asia-northeast3 (supports standard and flexible and search_api)
[6] asia-south1     (supports standard and flexible and search_api)
[7] asia-southeast1 (supports standard and flexible)
[8] asia-southeast2 (supports standard and flexible and search_api)
[9] australia-southeast1 (supports standard and flexible and search_api)
[10] europe-central2 (supports standard and flexible)
[11] europe-west    (supports standard and flexible and search_api)
[12] europe-west2   (supports standard and flexible and search_api)
[13] europe-west3   (supports standard and flexible and search_api)
[14] europe-west6   (supports standard and flexible and search_api)
[15] northamerica-northeast1 (supports standard and flexible and search_api)
[16] southamerica-east1 (supports standard and flexible and search_api)
[17] us-central     (supports standard and flexible and search_api)
[18] us-east1       (supports standard and flexible and search_api)
[19] us-east4       (supports standard and flexible and search_api)
[20] us-west1       (supports standard and flexible)
[21] us-west2       (supports standard and flexible and search_api)
[22] us-west3       (supports standard and flexible and search_api)
[23] us-west4       (supports standard and flexible and search_api)
[24] cancel

Please enter your numeric choice: 17

Creating App Engine application in project [capable-pixel-363308] and region [us-central]....done.
Success! The app is now created. Please use 'gcloud app deploy' to deploy your first app.
aksnalmas@instance-1:~/helloworld$
```

Now run the following command to deploy the application.

gcloud app deploy

```
aksnalmas@instance-1:~/helloworld$ gcloud app deploy
Services to deploy:

descriptor:      [/home/aksnalmas/helloworld/app.yaml]
source:          [/home/aksnalmas/helloworld]
target project:  [rock-partition-363003]
target service:  [default]
target version:  [20220922t101701]
target url:      [https://rock-partition-363003.el.r.appspot.com]
target service account: [App Engine default service account]

Do you want to continue (Y/n)? y

Beginning deployment of service [default]...

[= Uploading 3 files to Google Cloud Storage =]

File upload done.
Updating service [default]...done.

Setting traffic split for service [default]...done.

Deployed service [default] to [https://rock-partition-363003.el.r.appspot.com]

You can stream logs from the command line by running:
$ gcloud app logs tail -s default

To view your application in the web browser run:
$ gcloud app browse
aksnalmas@instance-1:~/helloworld$
```


Then use command **gcloud app browse** , it will give you a link to the application or it will directly open your application on the browser.

```
aksnalmas@instance-1:~/helloworld$ gcloud app browse
Did not detect your browser. Go to this link to view your app:
https://rock-partition-363003.el.r.appspot.com
aksnalmas@instance-1:~/helloworld$
```




As we successfully deployed the application , let's see how versioning and traffic splitting works in app engine, you can list versions by using **gcloud app versions list**


```
aksnalmas@instance-1:~$ gcloud app versions list
SERVICE  VERSION.ID      TRAFFIC_SPLIT  LAST_DEPLOYED      SERVING_STATUS
default   20220922t101701  1.00           2022-09-22T10:18:42+00:00  SERVING
aksnalmas@instance-1:~$
```

Now deploy the application again but with a version tag this time, In production you may have many changes in each version of the application to be deployed , but here I am deploying same application with a different version tag.

gcloud app deploy --version=v2

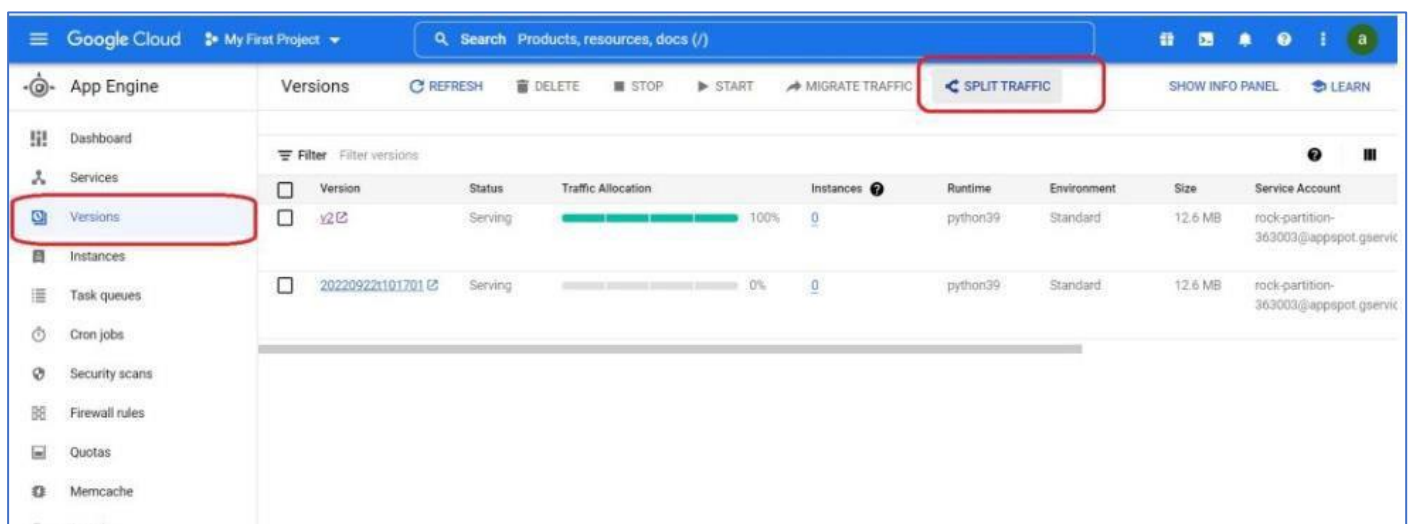

Click on Add version and select version and traffic weight that you want to divert and save it.

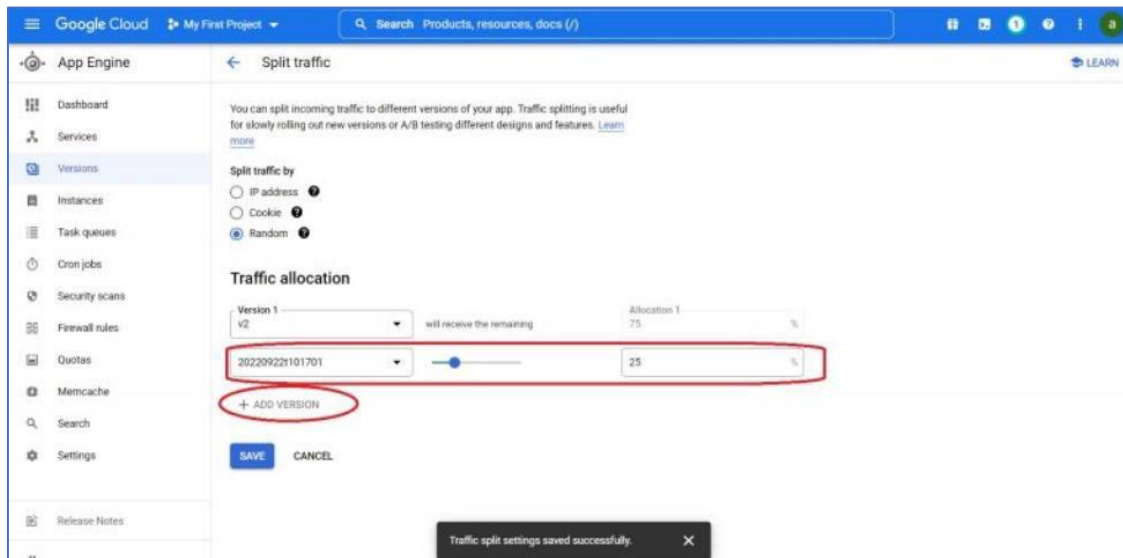

On your terminal or web console check for the traffic splitting now,

```
aksnalmas@instance-1:~/helloworld$ gcloud app versions list
SERVICE  VERSION.ID  TRAFFIC_SPLIT  LAST_DEPLOYED  SERVING_STATUS
default   20220922t101701  0.25           2022-09-22T10:18:42+00:00  SERVING
default   v2           0.75           2022-09-22T11:42:50+00:00  SERVING
aksnalmas@instance-1:~/helloworld$
```

[GitHub Repo Link:](#)

https://github.com/ayush270707/CCA_Assignments

[Conclusion:](#)

App engine provides two different kinds of environments **Standard** and **Flexible**, use **Standard** when you want to run application in pre-configured language specific sandboxes where you will only take of your application, it provides services only for applications using Java, Python, PHP, Node.js, Ruby, Go. If you want to deploy containers use **Flexible** environment, it makes use of compute engine virtual machines, you can use any runtime as long as you can build a docker image for it, it also provides access to background processes in virtual machines.