


/home/ayush/RIOT/tests  
/lwip/bin/pkg/openmote  
-cc2538/lwip/src/include  
/lwip/ip\_addr.h

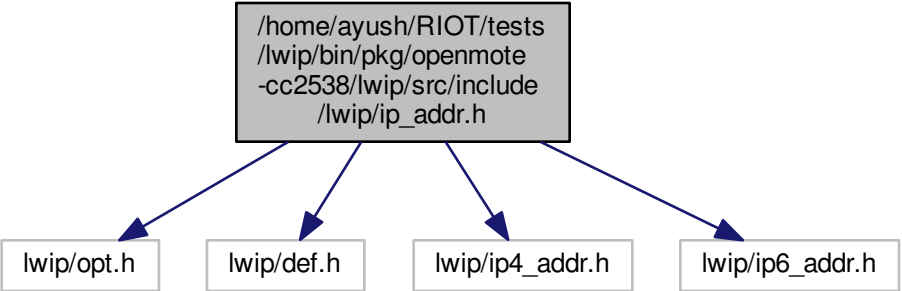

```
graph TD; A["/home/ayush/RIOT/tests  
/lwip/bin/pkg/openmote  
-cc2538/lwip/src/include  
/lwip/ip_addr.h"] --> B["lwip/opt.h"]; A --> C["lwip/def.h"]; A --> D["lwip/ip4_addr.h"]; A --> E["lwip/ip6_addr.h"];
```

lwip/opt.h

lwip/def.h

lwip/ip4\_addr.h

lwip/ip6\_addr.h