


/home/ayush/RIOT/tests
/driver_mma8x5x/main.c

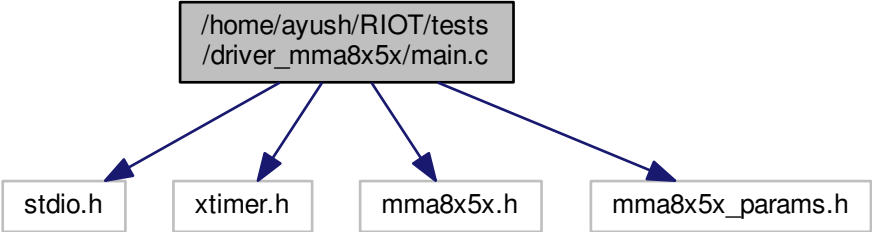

```
graph TD; A["/home/ayush/RIOT/tests  
/driver_mma8x5x/main.c"] --> B["stdio.h"]; A --> C["xtimer.h"]; A --> D["mma8x5x.h"]; A --> E["mma8x5x_params.h"];
```

The diagram illustrates the dependencies of the file `/home/ayush/RIOT/tests/driver_mma8x5x/main.c`. A central box at the top contains the file path. Four arrows point downwards from this box to four separate boxes below, each representing a header file that the main.c file depends on: `stdio.h`, `xtimer.h`, `mma8x5x.h`, and `mma8x5x_params.h`.

stdio.h

xtimer.h

mma8x5x.h

mma8x5x_params.h