


/home/ayush/RIOT/tests  
/lwip/bin/pkg/native/lwip  
/src/include/lwip/apps/lwiperf.h

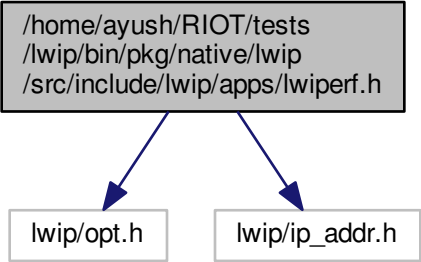

```
graph TD; A["/home/ayush/RIOT/tests  
/lwip/bin/pkg/native/lwip  
/src/include/lwip/apps/lwiperf.h"] --> B["lwip/opt.h"]; A --> C["lwip/ip_addr.h"];
```

The diagram consists of a top grey box containing three file paths. Two blue arrows originate from the bottom of this box and point to two separate white boxes below. The left white box contains 'lwip/opt.h' and the right white box contains 'lwip/ip\_addr.h'.

lwip/opt.h

lwip/ip\_addr.h