


/home/ayush/RIOT/tests
/lwip/bin/pkg/native/lwip
/src/include/lwip/sys.h

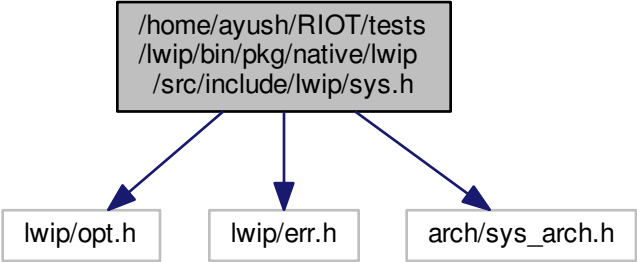

```
graph TD; A["/home/ayush/RIOT/tests  
/lwip/bin/pkg/native/lwip  
/src/include/lwip/sys.h"] --> B["lwip/opt.h"]; A --> C["lwip/err.h"]; A --> D["arch/sys_arch.h"];
```

The diagram illustrates the file inclusion paths for `sys.h`. A central box at the top lists the paths: `/home/ayush/RIOT/tests`, `/lwip/bin/pkg/native/lwip`, and `/src/include/lwip/sys.h`. Three arrows point from this box to three separate boxes below: `lwip/opt.h`, `lwip/err.h`, and `arch/sys_arch.h`.

lwip/opt.h

lwip/err.h

arch/sys_arch.h