UPI Shield

Catching fake UPI payment screenshots before shopkeepers lose money


FETCH-A-THON 3.0 | GCET EDITION | ROUND 1

Team TriNetra

Members Ayush Raj (DSEU), Harshita Goyal (IGDTUW), Sharyansh Gupta (DTU), Anjali Singh (DSEU)

Live agent @upi-shield on Agentverse

agent1qv4a59gu9yvrdmdx7uwhnpuptd833c55az3pe7r9c7p6wu3m2gcxwfjl0ng

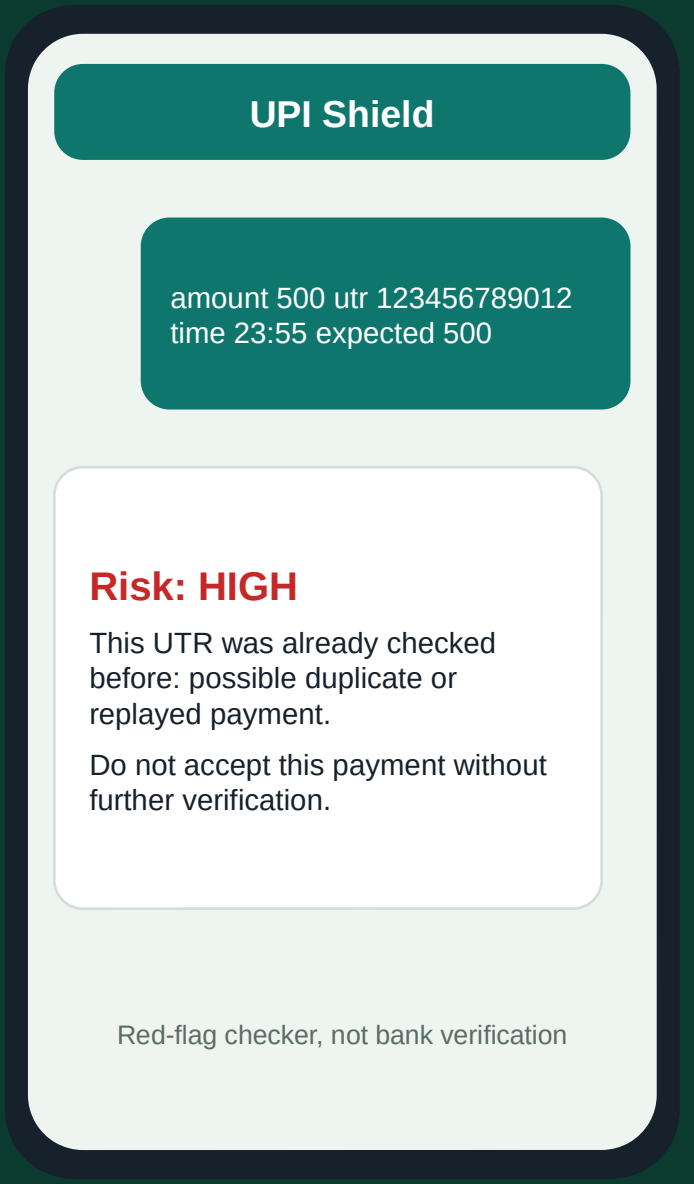

Fake screenshots cost shops real money

A customer shows a payment screenshot. The shopkeeper hands over the goods. Later, the money never arrives.

Today's safeguards (PIN, device binding, limits) protect the person paying, not the shop. And as UPI QR codes reach more counters, more shops are exposed.

₹981 cr lost to UPI fraud in FY25, across 12.64 lakh cases

₹1,087 cr lost in FY24, across 13.42 lakh cases

65.8 crore UPI QR codes in use, up 91.5% in FY25

Sources: Ministry of Finance reply in Lok Sabha (Dec 2025); RBI Annual Report 2024-25. Figures cover all UPI fraud, not only fake screenshots.

How UPI Shield works

1

Send the payment details

The shopkeeper types the amount, UTR, time and expected amount to @upi-shield on ASI:One.

2

Agents check red flags

Wrong UTR format, amount mismatch and a reused UTR are caught in seconds.

3

Get a clear verdict

A risk level with plain reasons, so the shop knows whether to wait for the bank.

What the verdict means

LOW	All checks passed
MEDIUM	One red flag found
HIGH	Reused UTR or several red flags

A red-flag checker, not bank verification. When in doubt, wait for the bank's own confirmation.

Agent architecture: three roles, one pipeline



Chats with @upi-shield on ASI:One

Parses details from the message (screenshot OCR planned)

Checks UTR format and amount match

Remembers UTRs and flags any reuse

Low, Medium or High, with reasons

TOOLS

Parsing of amount, UTR and time from the chat message. Rule checks for UTR format and amount match. A record of UTRs already checked, to spot duplicates.

PLATFORM


Hosted Agentverse agent (@upi-shield). Agent Chat Protocol, so ASI:One can discover and talk to it. Built with the uAgents framework in Python.

Prototype note: the three roles run inside one hosted Agentverse agent today. Splitting them into separate agents that message each other is the next step.

Working prototype, live on Agentverse


Real replies from @upi-shield on ASI:One. Try a new 12-digit UTR for LOW; resend the same UTR for HIGH.

1 New payment LOW

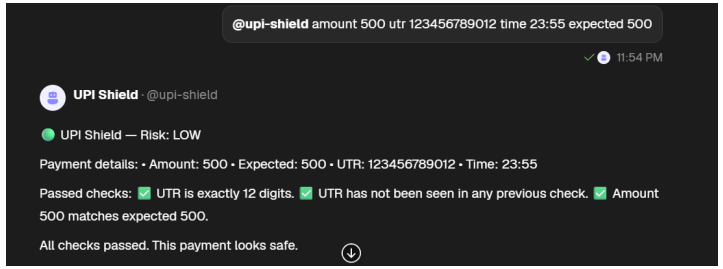


UTR has 12 digits and the amount matches, so the agent answers Risk LOW.

2 Same UTR again HIGH

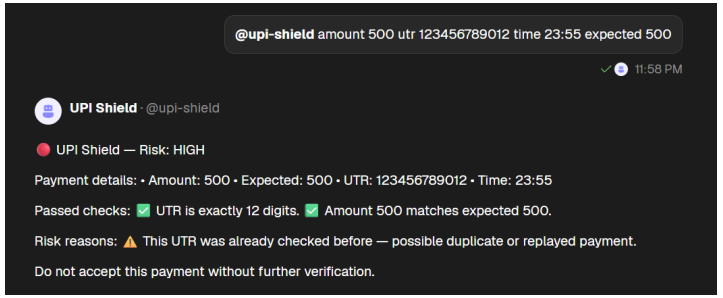

The agent remembers the UTR and warns of a duplicate or replayed payment.

3 Wrong details HIGH

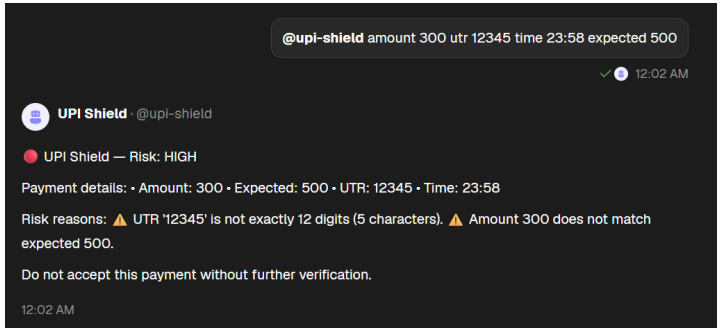

A 5-digit UTR and a wrong amount are both flagged, with reasons.

Agent address: agent1qv4a59gu9yvrdmdx7uwhnpuptd833c55az3pe7r9c7p6wu3m2gcxwfjl0ng

Tech stack and impact

Tech stack

Agents	Fetch.ai uAgents with the Agent Chat Protocol
Hosting	Agentverse hosted agent, running 24/7
Access	ASI:One chat, found by @upi-shield
Logic	Python rule checks and a record of seen UTRs
Next	Gemini vision for screenshot reading (planned)

Impact

Protects small shops

Fewer losses from fake screenshots on busy days.

Built to grow into a network

Reused-UTR memory is the base for cross-shop fraud alerts (planned).

Simple to adopt

Works from any phone through chat. No new app to install.

Limits, roadmap and links

Limits today

- It cannot verify real bank transactions. It is a red-flag checker.
- Input is typed text today. Reading screenshots is next.
- Duplicate memory is simple, not yet a shared database.

Roadmap

1. Read screenshots with Gemini vision (OCR Agent)
2. Time-mismatch and edit detection (Validator Agent)
3. Separate agents messaging each other on Agentverse
4. WhatsApp access and a shared fraud database

LIVE AGENT

Open on Agentverse →

agent1qv4a59gu9yvrdmdx7uwhnpuptd833c55az3pe7r9c7p6wu3m2gcxwfjl0ng

CHAT WITH IT

Open ASI:One →

Search asi1.ai, then message @upi-shield with amount, UTR, time and expected amount.

SOURCE CODE

Open GitHub repo →

github.com/ayushbuildsx/upi-shield