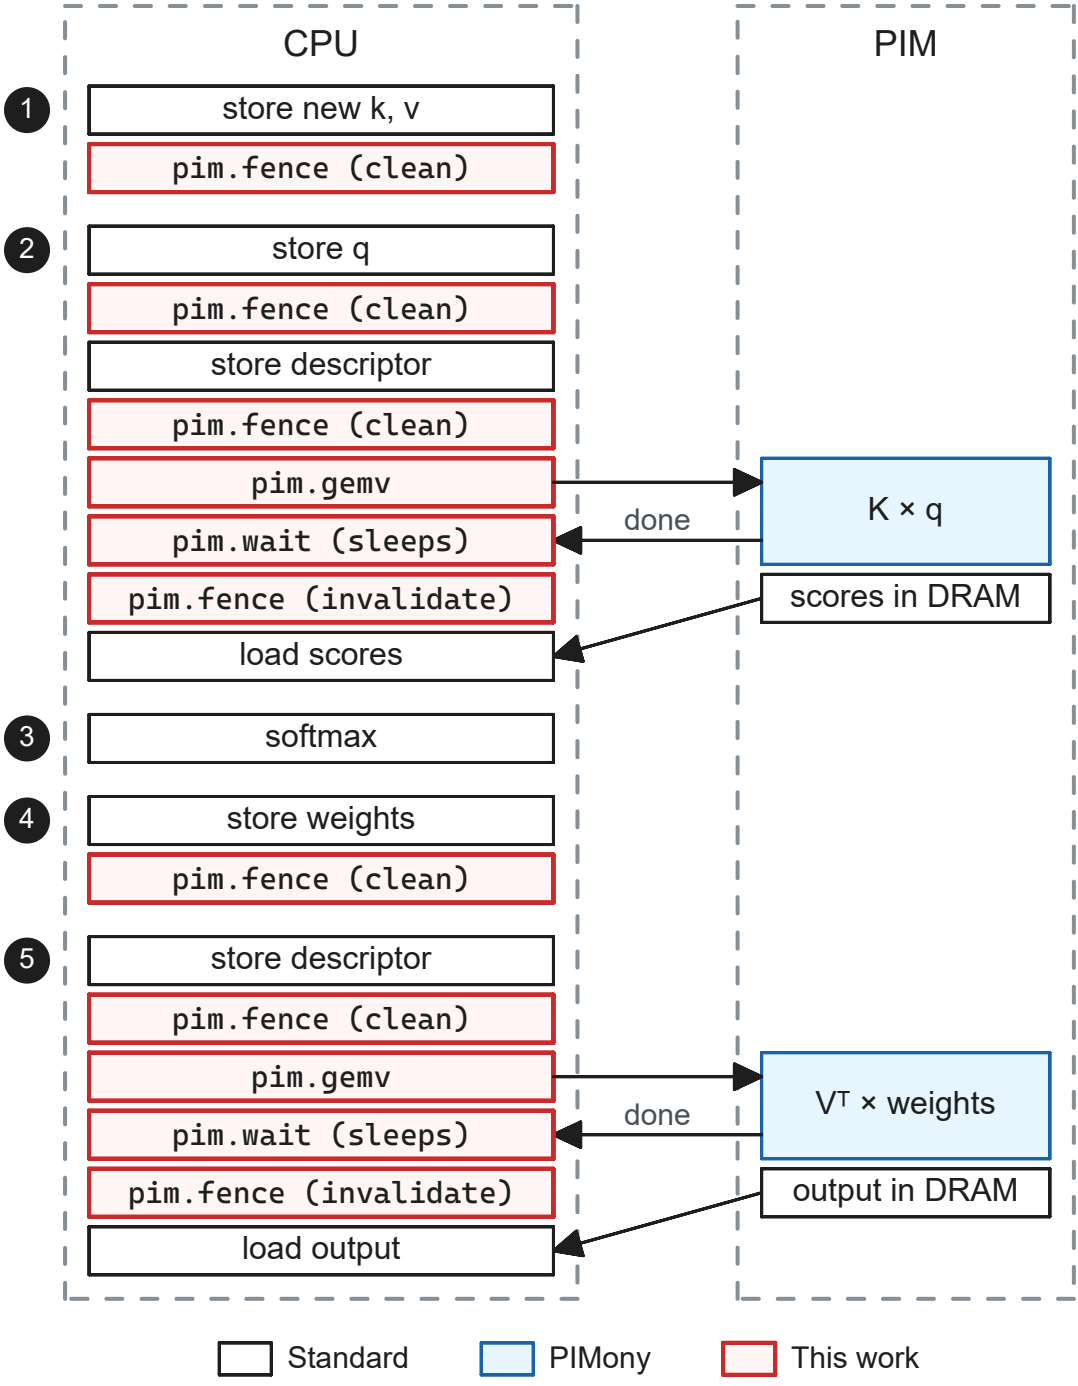

CPU
PIM
1
store new k, v
pim.fence (clean)
2
store q
pim.fence (clean)
store descriptor
pim.fence (clean)
pim.gemv
pim.wait (sleeps)
pim.fence (invalidate)
load scores
done
K × q
scores in DRAM
3
softmax
4
store weights
pim.fence (clean)
5
store descriptor
pim.fence (clean)
pim.gemv
pim.wait (sleeps)
pim.fence (invalidate)
load output
done
V^T × weights
output in DRAM
Standard
PIMony
This work