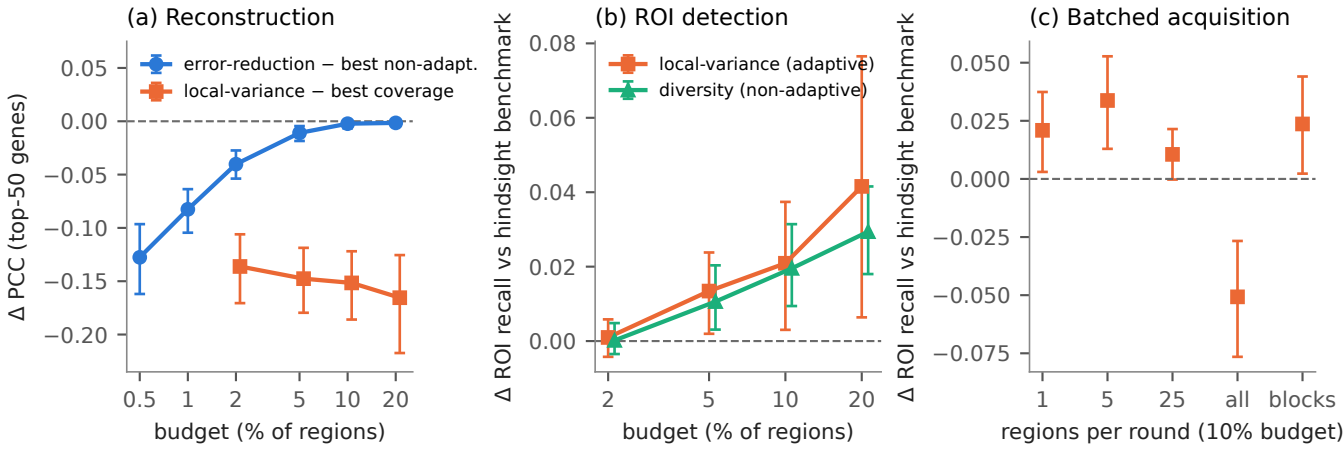
(a) Reconstruction
error-reduction − best non-adapt.
local-variance − best coverage
Δ PCC (top-50 genes)
0.05
0.00
−0.05
−0.10
−0.15
−0.20
0.5
1
2
5
10
20
budget (% of regions)
(b) ROI detection
local-variance (adaptive)
diversity (non-adaptive)
Δ ROI recall vs hindsight benchmark
0.08
0.06
0.04
0.02
0.00
2
5
10
20
budget (% of regions)
(c) Batched acquisition
Δ ROI recall vs hindsight benchmark
0.050
0.025
0.000
−0.025
−0.050
−0.075
1
5
25
all
blocks
regions per round (10% budget)