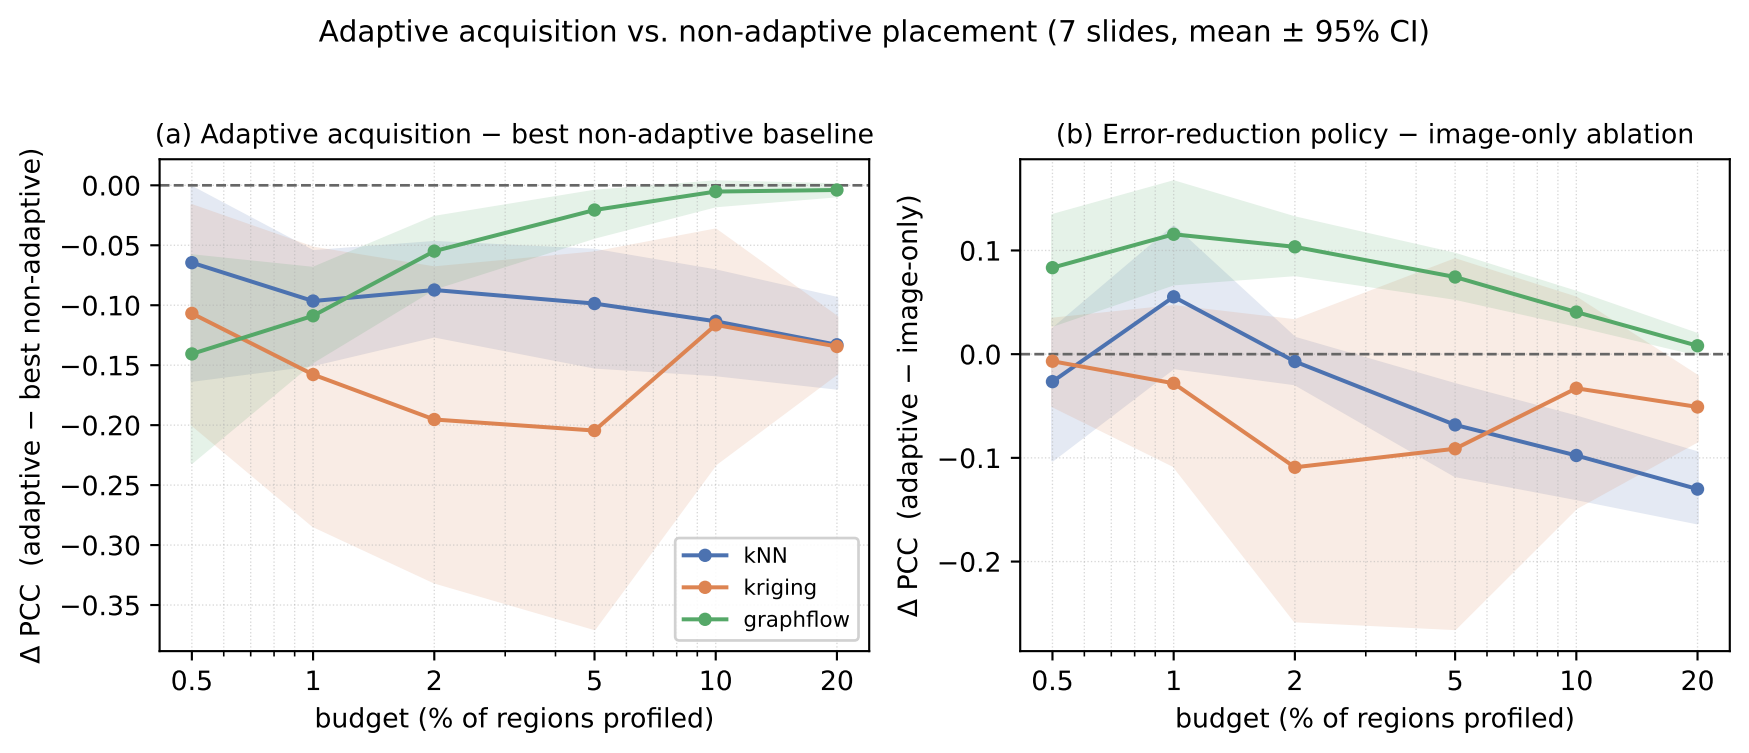
Adaptive acquisition vs. non-adaptive placement (7 slides, mean ± 95% CI)
(a) Adaptive acquisition − best non-adaptive baseline
Δ PCC (adaptive − best non-adaptive)
0.00
−0.05
−0.10
−0.15
−0.20
−0.25
−0.30
−0.35
kNN
kriging
graphflow
0.5
1
2
5
10
20
budget (% of regions profiled)
(b) Error-reduction policy − image-only ablation
Δ PCC (adaptive − image-only)
0.1
0.0
−0.1
−0.2
0.5
1
2
5
10
20
budget (% of regions profiled)