


Student ID: 224880003
Full Name: Ayush Indapure

1) Overview

I downloaded the project **task1_2P.zip** and initially tried importing it into **Eclipse IDE**. However, Eclipse was really slow on my Mac and the “Run as Java Application” option wasn’t working properly. So I switched to **VS Code**, which worked much faster and allowed me to run the program without issues(the above was the error I had come accross)

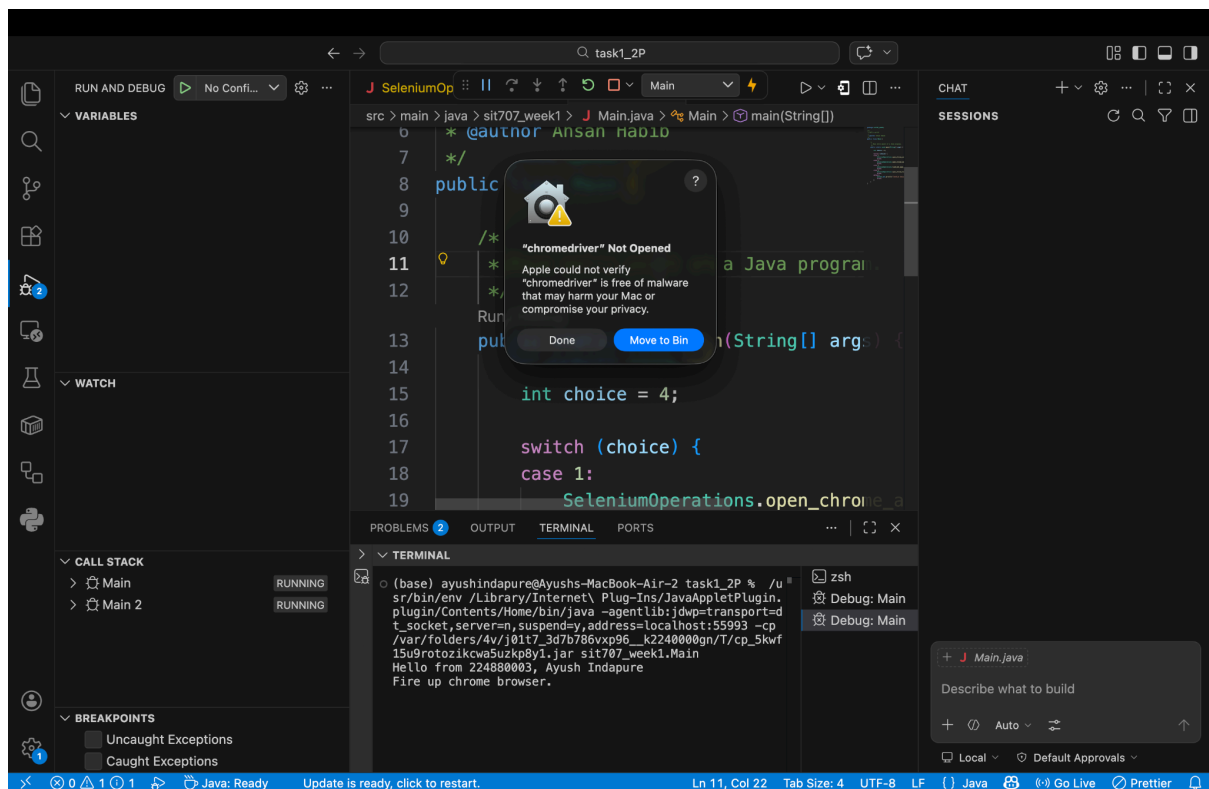



2) Steps performed

1. Setup ChromeDriver

- Downloaded ChromeDriver for **mac-arm64** to match my M2 chip.
- Placed it in /Users/ayushindapure/selenium/chromedriver
- Used `chmod +x chromedriver` to make it executable.
- Mac initially blocked it due to security, but I allowed it in System Preferences and removed quarantine attributes using `xattr -d com.apple.quarantine chromedriver`.

2. Completed SeleniumOperations.java


- Edited `open_chrome_loadpage_resize_close()` function.
- Added personal ID and name in the hello message.
- Opened Google homepage (`https://www.google.com`).
- Resized Chrome window to **640x480**, then **1280x960**, pausing 2 seconds in between.
- Closed the browser.

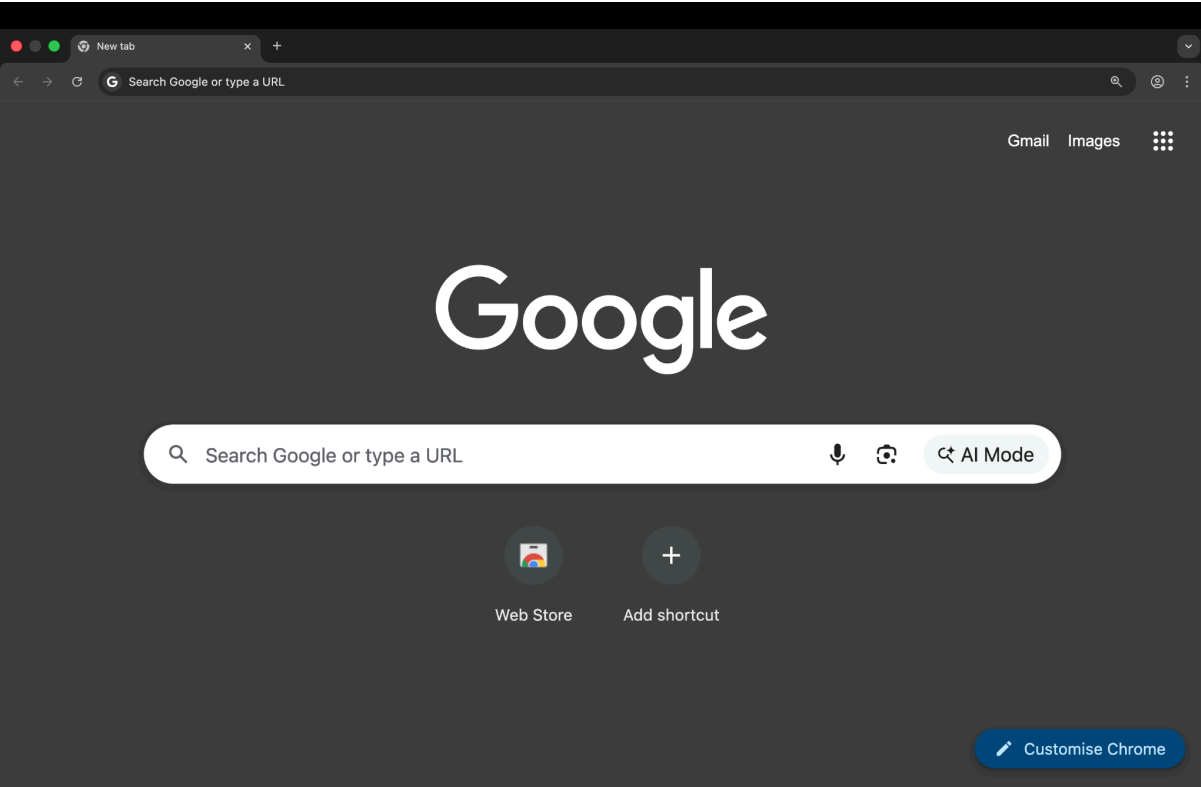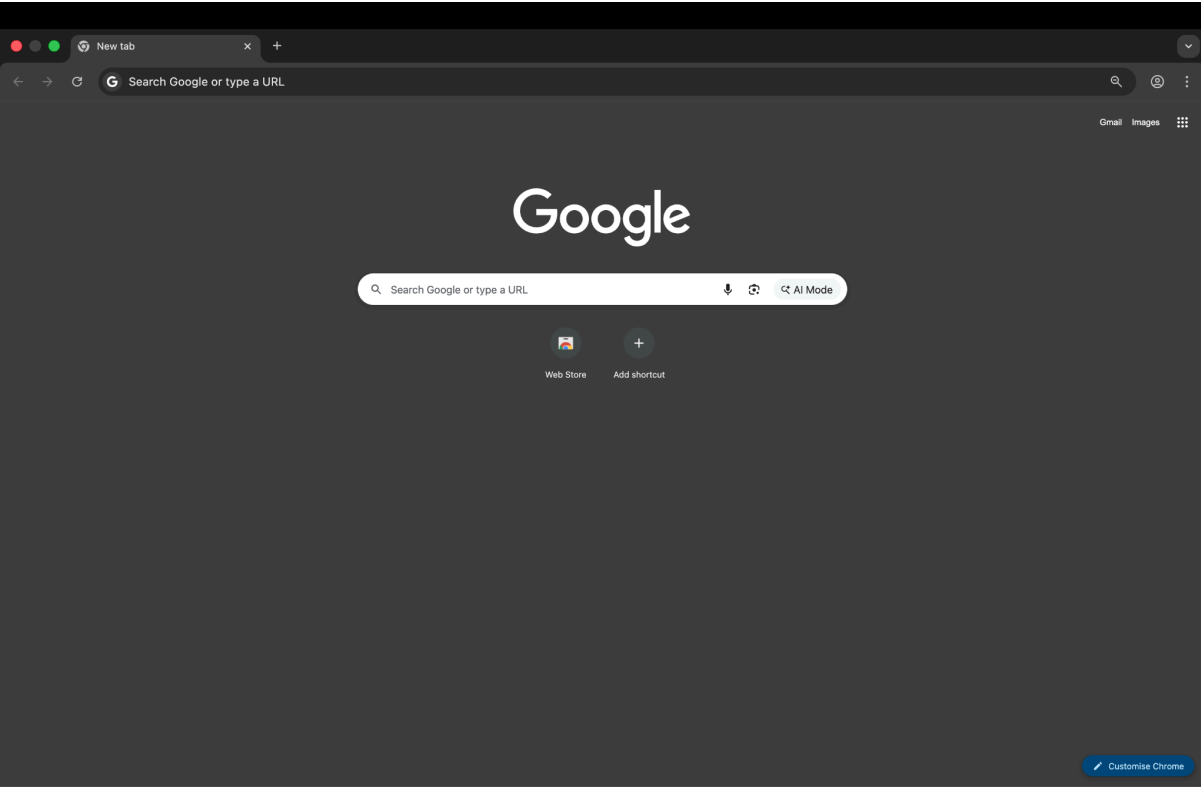

3) Running the program

- Set choice = 4 in Main.java.
- Ran the program in **VS Code** since Eclipse was too slow on Mac.
- Observed Chrome opening, resizing, and closing automatically.
- Console output showed my student ID and confirmation messages.

Console output screenshot:

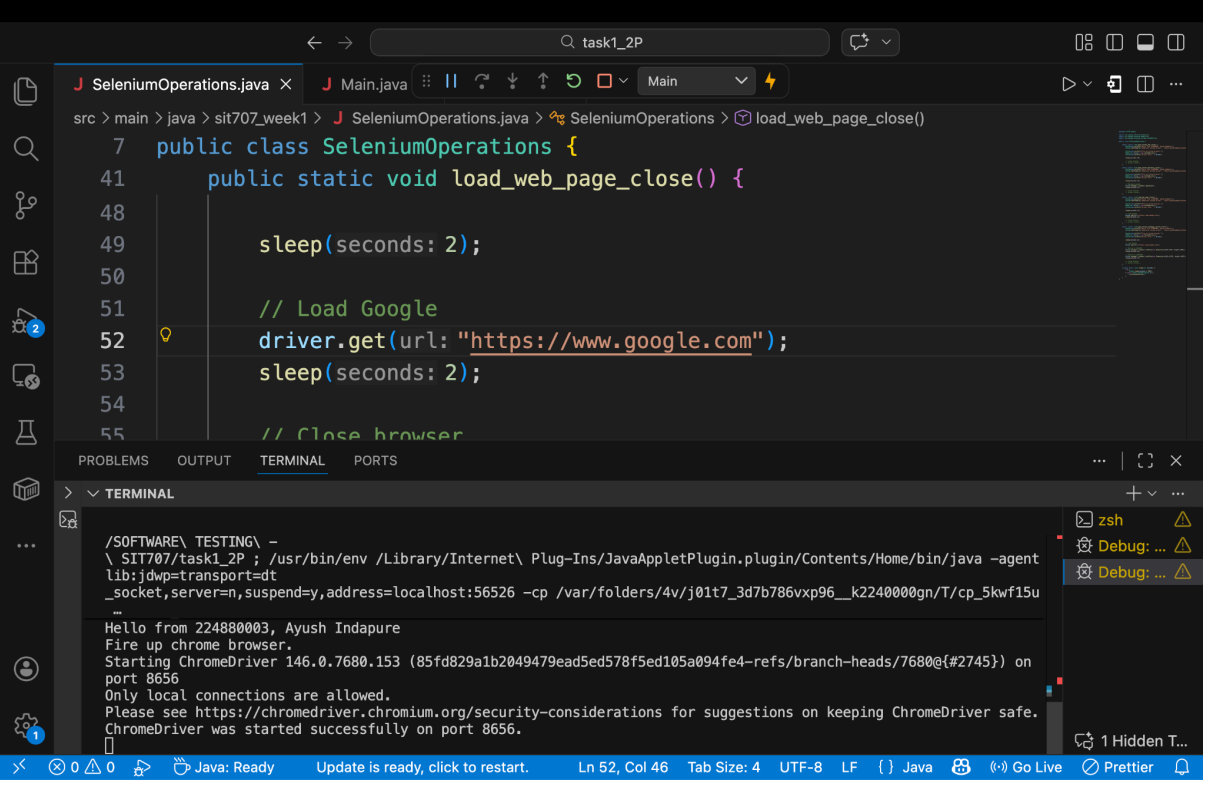

The screenshot shows the VS Code editor with two files open: `SeleniumOperations.java` and `Main.java`. The `SeleniumOperations.java` file is active, showing a `load_web_page_close()` method. The terminal output shows the command to run the program and the resulting messages from the Selenium WebDriver.

```
src > main > java > sit707_week1 > SeleniumOperations.java > SeleniumOperations > load_web_page_close()

7 public class SeleniumOperations {
41     public static void load_web_page_close() {
48
49         sleep(seconds: 2);
50
51         // Load Google
52         driver.get(url: "https://www.google.com");
53         sleep(seconds: 2);
54
55         // Close browser

```

TERMINAL

```
/SOFTWARE/ TESTING\ -
\ SIT707/task1_2P ; /usr/bin/env /Library/Internet\ Plug-Ins/JavaAppletPlugin.plugin/Contents/Home/bin/java -agent
lib:jdpw=transport=dt
_socket,server=n,suspend=y,address=localhost:56526 -cp /var/folders/4v/j01t7_3d7b786vxp96__k2240000gn/T/cp_5kwf15u
...
Hello from 224880003, Ayush Indapure
Fire up chrome browser.
Starting ChromeDriver 146.0.7680.153 (85fd829a1b2049479ead5ed578f5ed105a094fe4-refs/branch-heads/7680@{#2745}) on
port 8656
Only local connections are allowed.
Please see https://chromedriver.chromium.org/security-considerations for suggestions on keeping ChromeDriver safe.
ChromeDriver was started successfully on port 8656.


```

1 Hidden T...

4) Upload to GitHub

- Created a new repo: task1_2P_224880003
- Pushed the entire Maven project folder.
- Verified that all files, including `SeleniumOperations.java`, are present.

GitHub screenshot:

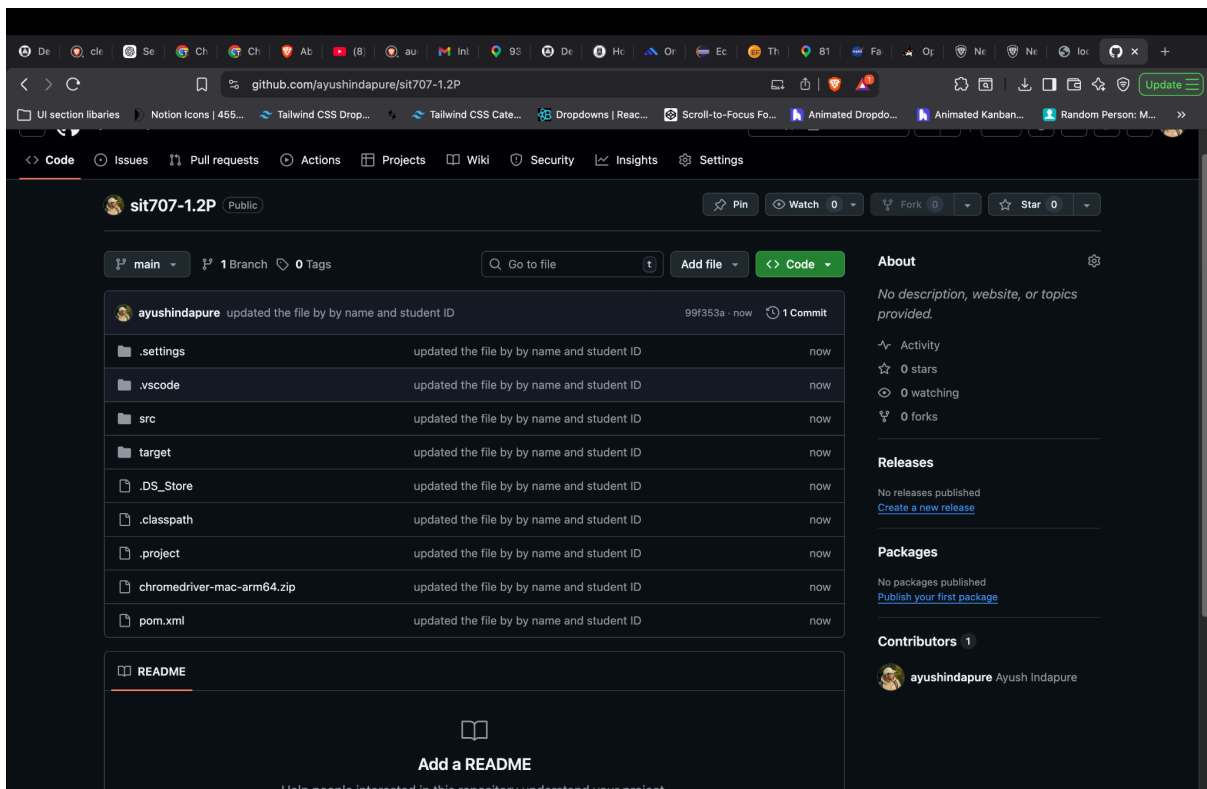

5) Discussion

- Java basics used: `main()` function, static methods, and System output.
- Selenium automates browser actions using WebDriver API.
- Learned to handle ChromeDriver on Apple Silicon (M2), including fixing Gatekeeper warnings.

Notes:

- Initially had some troubles with Error 137 and driver timeouts. Fixed by downloading the correct **mac-arm64 ChromeDriver**.
 - Eclipse didn't run properly on my Mac so I switched to **VS Code**, which was faster.
 - ChromeDriver opens automatically but is not meant to be "clicked" like a normal app.
-

6) Conclusion

The task was straightforward(except installing running the selenium code for the first time ever(paths)) but important for understanding **basic Selenium automation**. I successfully completed all steps and prepared all screenshots for submission.