


PIZZA SALES SQL PROJECT

Business insights from a pizza restaurant's order data — one query at a time.

By Ayush Kumar Singh

BASIC • INTERMEDIATE • ADVANCED

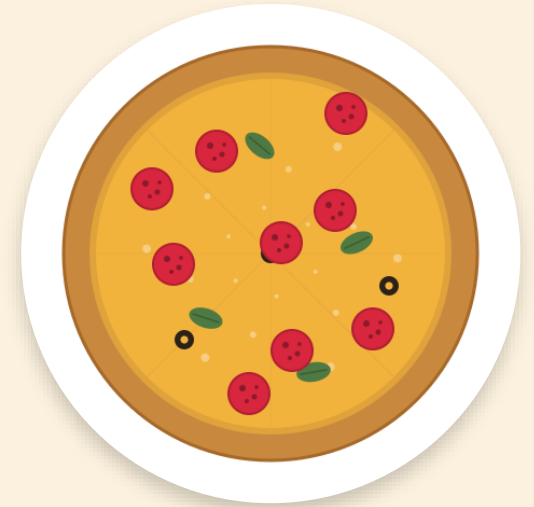

ABOUT THE PROJECT

This project uses SQL to analyze real-world pizza sales data — covering orders, revenue, pizza types, and customer ordering patterns. The goal is to turn raw transactional data into clear business insights using queries ranging from simple counts to advanced window functions.

4

Database
Tables


13

SQL
Queries

3

Difficulty
Levels

Built by Ayush Kumar Singh

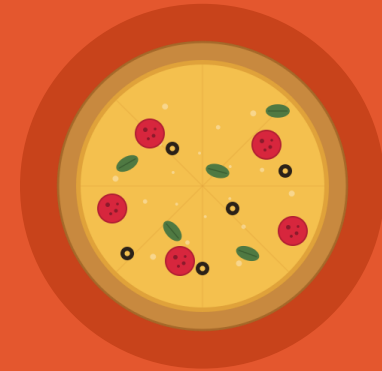

Dataset

orders • order_details
pizzas • pizza_types

DATABASE SCHEMA

Four related tables power every query in this project.



orders

order_id
date
time



order_details

order_details_id
order_id
pizza_id
quantity



pizzas

pizza_id
pizza_type_id
size
price



pizza_types

pizza_type_id
name
category
ingredients

BASIC QUERIES

1

Retrieve the total number of orders placed.

2

Calculate the total revenue generated from pizza sales.

3

Identify the highest-priced pizza.

4

Identify the most common pizza size ordered.

5

List the top 5 most ordered pizza types along with their quantities.

QUERY SPOTLIGHT

Total Revenue from Pizza Sales

```
SELECT ROUND(SUM(od.quantity * p.price), 2)
        AS total_revenue
FROM order_details od
JOIN pizzas p ON od.pizza_id = p.pizza_id;
```

Explanation

Revenue per order line is quantity multiplied by price. Joining order_details to pizzas pulls in the price for each line item, and summing across every row gives the restaurant's total revenue.



Why it matters

Total revenue is the single most important top-line metric for tracking business performance over any period.

INTERMEDIATE QUERIES

1

Find total quantity ordered per pizza category.

2

Determine the distribution of orders by hour of the day.

3

Find the category-wise distribution of pizzas.

4

Calculate the average number of pizzas ordered per day.

5

Determine the top 3 most ordered pizza types by revenue.


QUERY SPOTLIGHT

Orders by Hour of the Day

```
SELECT HOUR(o.time) AS order_hour,  
       COUNT(o.order_id) AS order_count  
FROM orders o  
GROUP BY HOUR(o.time)  
ORDER BY order_hour;
```

Grouping by the HOUR() of each order's timestamp reveals peak ordering windows — typically lunch and dinner rushes — helping with staffing and prep decisions.

Sample Hourly Order Volume

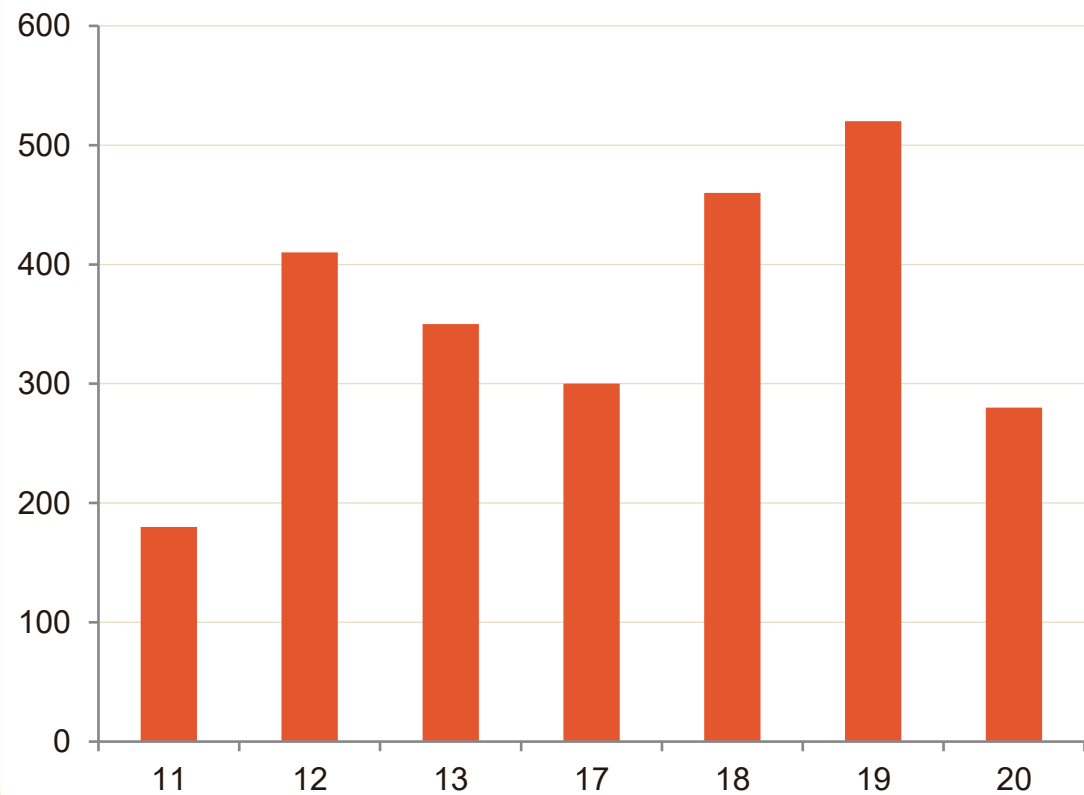

ADVANCED QUERIES

1

Calculate each pizza type's % contribution to total revenue.

2

Analyze cumulative revenue generated over time.

3

Find the top 3 pizza types by revenue, within each category.


QUERY SPOTLIGHT

Top 3 Pizza Types by Revenue, per Category

```
SELECT category, name, revenue FROM (  
  SELECT pt.category, pt.name,  
    SUM(od.quantity*p.price) AS revenue,  
    RANK() OVER (  
      PARTITION BY pt.category  
      ORDER BY SUM(od.quantity*p.price) DESC  
    ) AS rnk  
  FROM pizza_types pt  
  JOIN pizzas p ON pt.pizza_type_id=p.pizza_type_id  
  JOIN order_details od ON p.pizza_id=od.pizza_id  
  GROUP BY pt.category, pt.name  
) ranked WHERE rnk <= 3;
```



RANK() OVER (PARTITION BY category ...) ranks pizza types by revenue separately within each category. Filtering rnk <= 3 keeps only the top 3 earners per category — surfacing each category's best sellers.

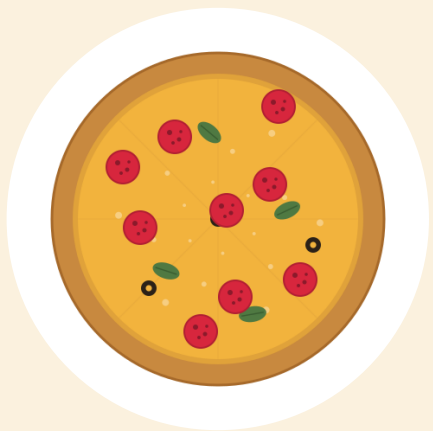

THANK YOU

Questions about the queries? Let's dig into the data together.

Ayush Kumar Singh