
```
niayu@GURU_JI MINGW64 ~/OneDrive/Desktop/oops
$ touch oops.txt
niayu@GURU_JI MINGW64 ~/OneDrive/Desktop/oops
$ 1s
oops.txt
niayu@GURU_JI MINGW64 ~/OneDrive/Desktop/oops
$ git init
Initialized empty Git repository in C:/Users/hiayu/OneDrive/Desktop/oops/.git/
hiayu@GURU_JI MINGW64 ~/OneDrive/Desktop/oops (master)
$ git status
On branch master
No commits yet
Untracked files:
 (use "git add <file>..." to include in what will be committed)
nothing added to commit but untracked files present (use "git add" to track)
 niayu@GURU_JI MINGW64 ~/OneDrive/Desktop/oops (master)
$ git add oops.txt
hiayu@GURU_JI MINGW64 ~/OneDrive/Desktop/oops (master)
$ git add oops.txt
hiayu@GURU_JI MINGW64 ~/OneDrive/Desktop/oops (master)
$ git status
On branch master
No commits yet
Changes to be committed:
(use "git rm --cached <file>..." to unstage)
```

GIT HUB Profile

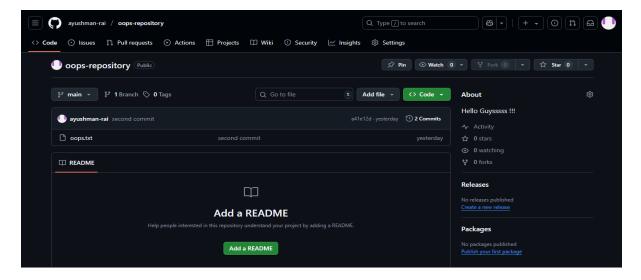

THREE JAVA CODES

```
C: > Users > hiayu > AppData > Local > Microsoft > Windows > INetCache > IE > BF9K4PDC > 🔳 fc[1].java
       public class SumExample {
           public static void main(String[] args) {
               int b = 10;
               int sum = a + b;
               System.out.println("Sum: " + sum);
 12
       public class IfElseExample {
           public static void main(String[] args) {
               int number = 7;
               if (number % 2 == 0) {
                    System.out.println(number + " is even.");
                   System.out.println(number + " is odd.");
       public class HelloWorld {
           public static void main(String[] args) {
               System.out.println("Hello, World!");
```