



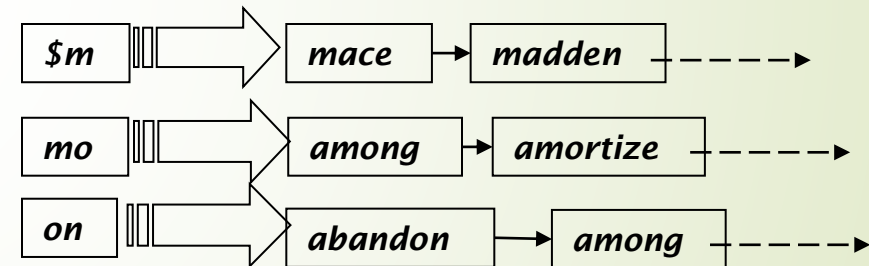
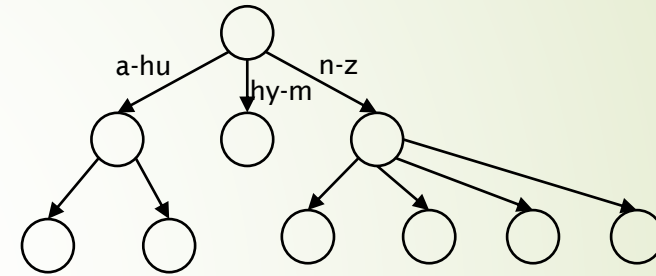
Index Construction

Dr. Subrat Kumar Nayak

Associate Professor

Dept. of CSE, ITER, SOADU

- Last lecture:
 - Dictionary data structures
 - Tolerant retrieval
 - Wildcards
 - Spell correction
 - Soundex
- This chapter:
 - Index construction





Index construction

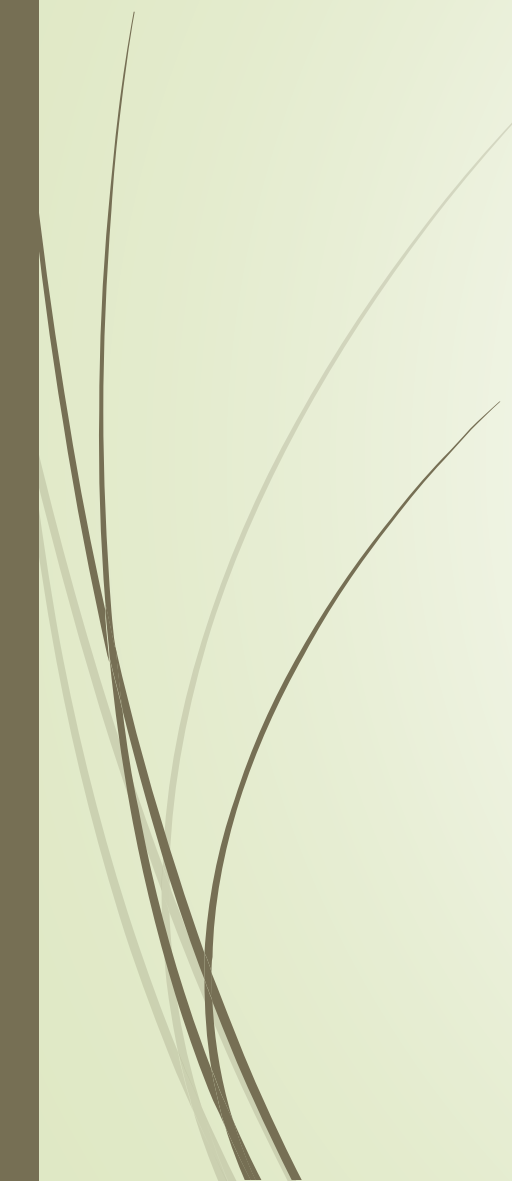
- How do we construct an index?
- What strategies can we use with limited main memory?

Q Indexing vs indexer?





Hardware basics

- Many design decisions in information retrieval are based on the characteristics of hardware
 - We begin by reviewing hardware basics
- 

Hardware Basics

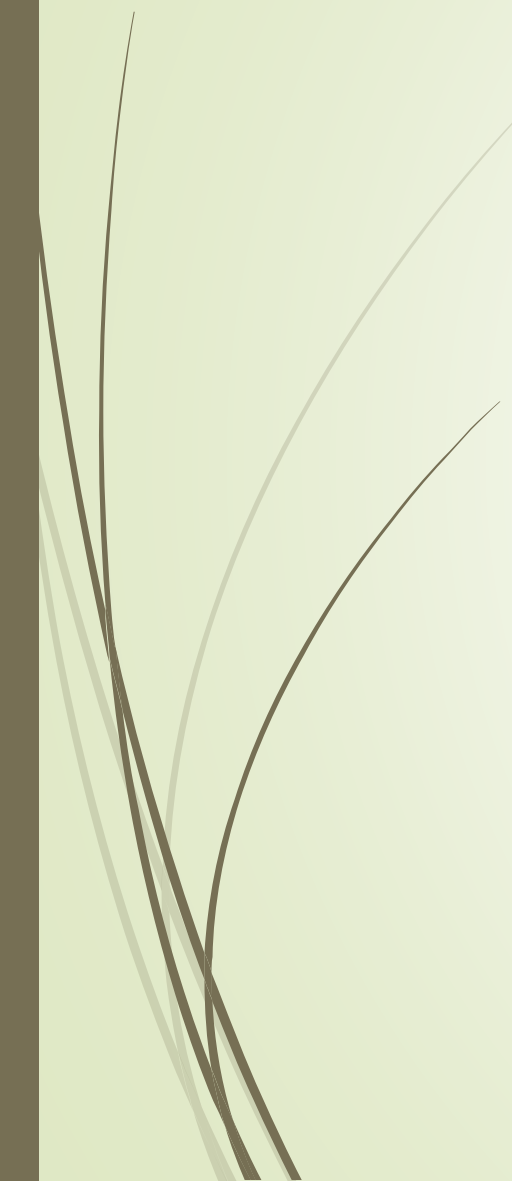
- Access to data is much **faster in memory than on disk**. (roughly a factor of 10)
- **Disk seeks are “idle” time**: No data is transferred from disk while the disk head is being positioned.
- To optimize transfer time from disk to memory: **one large chunk is faster than many small chunks**.
- **Disk I/O is block-based**: Reading and writing of entire blocks (as opposed to smaller chunks). Block sizes: 8KB to 256 KB
- Servers used in IR systems typically have **several GB of main memory**, sometimes tens of GB, and **TBs or 100s of GB of disk space**.
- **Fault tolerance is expensive**: It's cheaper to use many regular machines than one fault tolerant machine.

Hardware assumptions for this lecture

symbol	statistic	value
s	average seek time	5 ms = $5 \times 10^{-3} \text{ s}$
b	transfer time per byte	$0.02 \mu\text{s} = 2 \times 10^{-8} \text{ s}$
	processor's clock rate	10^9 s^{-1}
P	Low-level operation (e.g., compare & swap a word)	$0.01 \mu\text{s} = 10^{-8} \text{ s}$
	size of main memory	several GB
	size of disk space	1 TB or more



RCV1: Our collection for this lecture

- Shakespeare's collected works definitely aren't large enough for demonstrating many of the points in this course.
 - The collection we'll use isn't really large enough either, but it's publicly available and is at least a more plausible example.
 - As an example for applying scalable index construction algorithms, we will use the Reuters RCV1 collection.
 - This is one year of Reuters newswire (part of 1995 and 1996)
- 

A Reuters RCV1 document



You are here: [Home](#) > [News](#) > [Science](#) > [Article](#)

Go to a Section: [U.S.](#) [International](#) [Business](#) [Markets](#) [Politics](#) [Entertainment](#) [Technology](#) [Sports](#) [Oddly Enough](#)

Extreme conditions create rare Antarctic clouds

Tue Aug 1, 2006 3:20am ET

[Email This Article](#) | [Print This Article](#) | [Reprints](#)

[\[-\]](#) Text [\[+\]](#)



SYDNEY (Reuters) - Rare, mother-of-pearl colored clouds caused by extreme weather conditions above Antarctica are a possible indication of global warming, Australian scientists said on Tuesday.

Known as nacreous clouds, the spectacular formations showing delicate wisps of colors were photographed in the sky over an Australian meteorological base at Mawson Station on July 25.

Reuters RCV1 statistics

symbol	statistic	value
➤ N	documents	800,000
➤ L	avg. # tokens per doc	200
➤ M	terms (= word types)	400,000
➤	avg. # bytes per token (incl. spaces/punct.)	6
➤	avg. # bytes per token (without spaces/punct.)	4.5
➤	avg. # bytes per term	7.5
➤	non-positional postings	100,000,000

4.5 bytes per word token vs. 7.5 bytes per word type: why?

Recall IIR 1 index construction

- Documents are parsed to extract words and these are saved with the Document ID.

Doc 1

I did enact Julius
Caesar I was killed
i' the Capitol;
Brutus killed me.

Doc 2

So let it be with
Caesar. The noble
Brutus hath told you
Caesar was ambitious



Term	Doc #
I	1
did	1
enact	1
julius	1
caesar	1
I	1
was	1
killed	1
i'	1
the	1
capitol	1
brutus	1
killed	1
me	1
so	2
let	2
it	2
be	2
with	2
caesar	2
the	2
noble	2
brutus	2
hath	2
told	2
you	2
caesar	2
was	2
ambitious	2

Key step

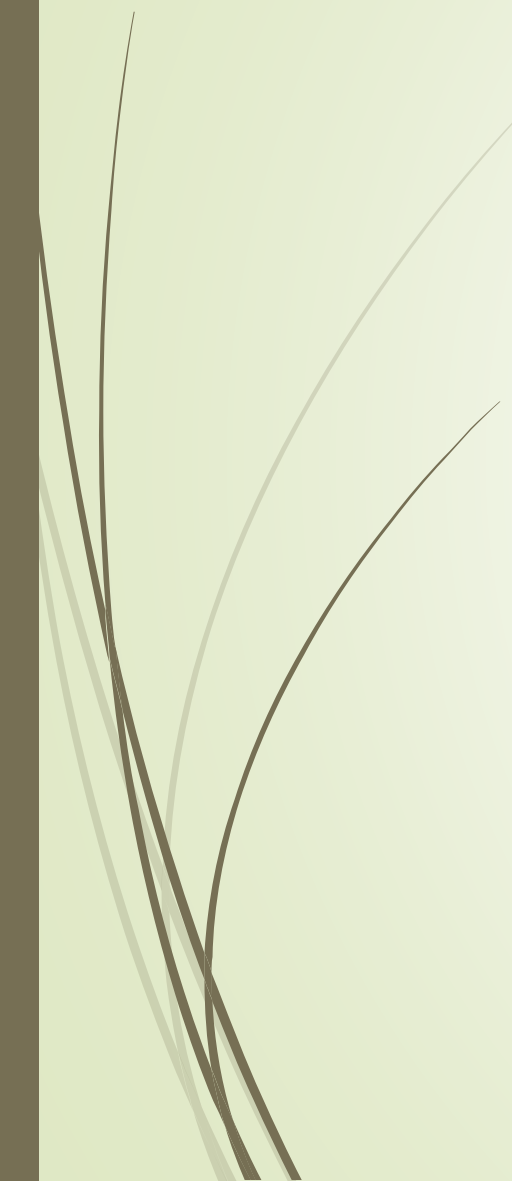
- After all documents have been parsed, the inverted file is sorted by terms.

We focus on this sort step.
We have 100M items to sort.

Term	Doc #	Term	Doc #
I	1	ambitious	2
did	1	be	2
enact	1	brutus	1
julius	1	brutus	2
caesar	1	capitol	1
I	1	caesar	1
was	1	caesar	2
killed	1	caesar	2
i'	1	did	1
the	1	enact	1
capitol	1	hath	1
brutus	1	I	1
killed	1	I	1
me	1	i'	1
so	2	it	2
let	2	julius	1
it	2	killed	1
be	2	killed	1
with	2	let	2
caesar	2	me	1
the	2	noble	2
noble	2	so	2
brutus	2	the	1
hath	2	the	2
told	2	told	2
you	2	you	2
caesar	2	was	1
was	2	was	2
ambitious	2	with	2



Scaling index construction

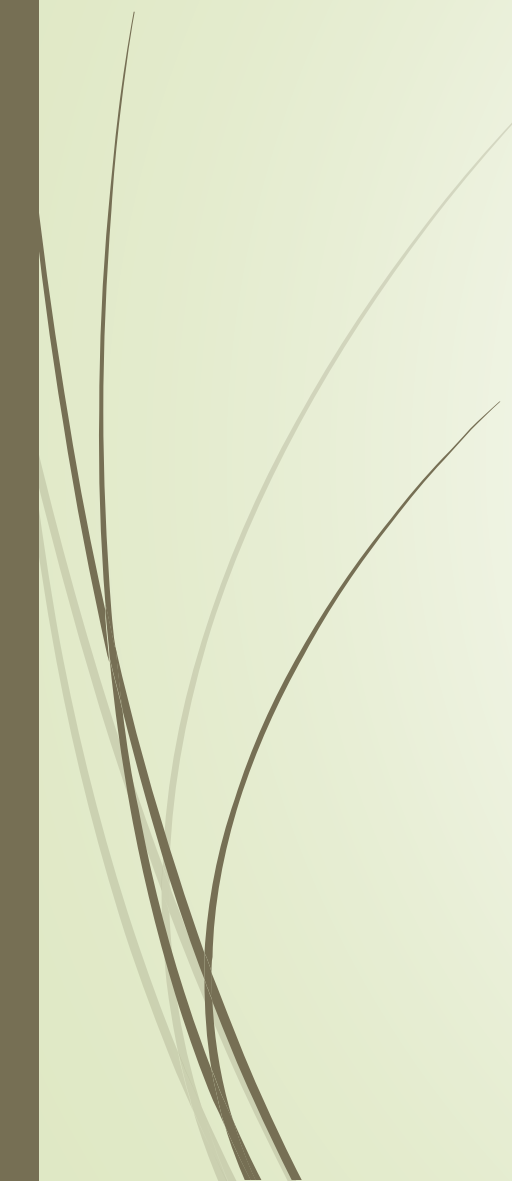
- In-memory index construction does not scale
 - Can't stuff entire collection into memory, sort, then write back
 - How can we construct an index for very large collections?
 - Taking into account the hardware constraints we just learned about . . .
 - Memory, disk, speed, etc.
- 

Sort-based index construction

- As we build the index, we parse docs one at a time.
 - While building the index, we cannot easily exploit compression tricks (you can, but much more complex)
- The final postings for any term are incomplete until the end.
- At 12 bytes per non-positional postings entry (*term, doc, freq*), demands a lot of space for large collections.
- $T = 100,000,000$ in the case of RCV1
 - So ... we can do this in memory in 2009, but typical collections are much larger. E.g., the *New York Times* provides an index of >150 years of newswire
- Thus: We need to store intermediate results on disk.




Same algorithm for disk?

- Can we use the same index construction algorithm for larger collections, but by using disk instead of memory?
 - No: Sorting $T = 100,000,000$ records on disk is too slow – too many disk seeks.
 - We need an *external* sorting algorithm.
- 

Bottleneck

- Parse and build postings entries one doc at a time
- Now sort postings entries by term (then by doc within each term)
- Doing this with random disk seeks would be too slow – must sort $T=100M$ records



If every comparison took 2 disk seeks, and N items could be sorted with $N \log_2 N$ comparisons, how long would this take?

BSBI: Blocked sort-based Indexing (Sorting with fewer disk seeks)

- 12-byte (4+4+4) records (*term*, *doc*, *freq*).
- These are generated as we parse docs.
- Must now sort 100M such 12-byte records by *term*.
- Define a Block ~ 10M such records
 - Can easily fit a couple into memory.
 - Will have 10 such blocks to start with.
- Basic idea of algorithm:
 - Accumulate postings for each block, sort, write to disk.
 - Then merge the blocks into one long sorted order.

postings
to be merged

brutus	d3
caesar	d4
noble	d3
with	d4

brutus	d2
caesar	d1
julius	d1
killed	d2



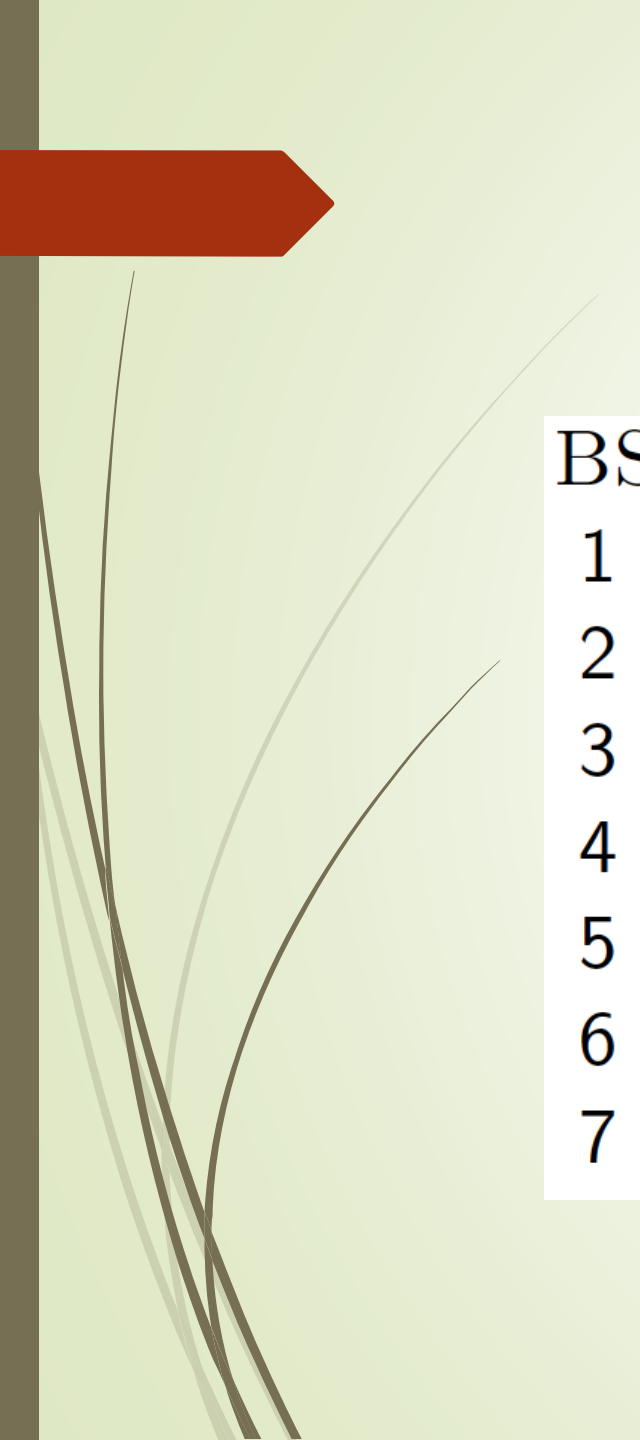
brutus	d2
brutus	d3
caesar	d1
caesar	d4
julius	d1
killed	d2
noble	d3
with	d4

merged
postings



Sorting 10 blocks of 10M records

- First, read each block and sort within:
 - Quicksort takes $2N \ln N$ expected steps
 - In our case $2 \times (10M \ln 10M)$ steps
- *Exercise: estimate total time to read each block from disk and quicksort it.*
- 10 times this estimate – gives us 10 sorted runs of 10M records each.
- Done straightforwardly, need 2 copies of data on disk
 - But can optimize this

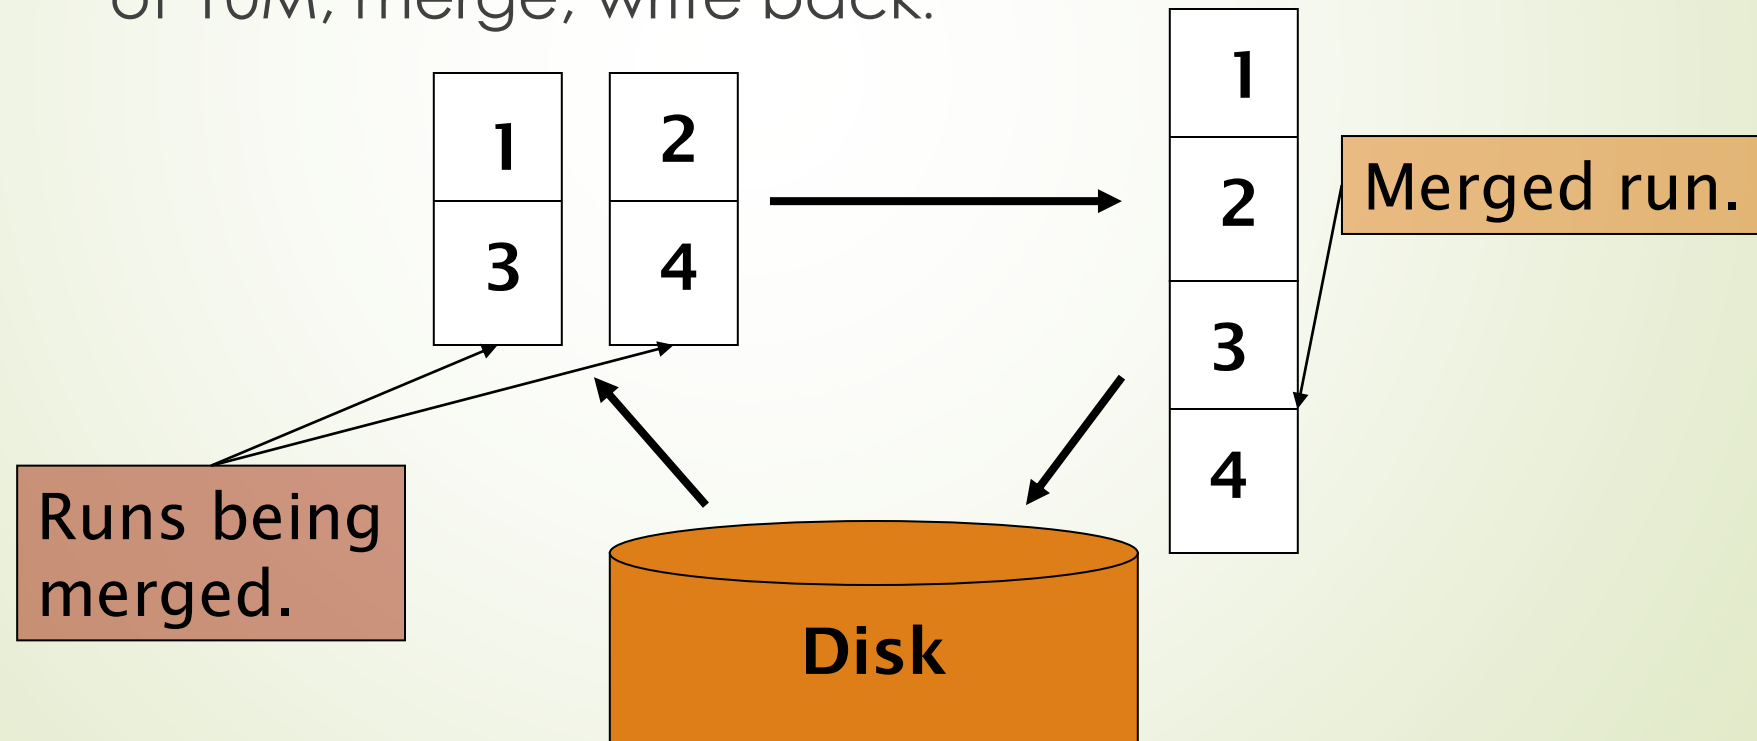


BSBINDEXCONSTRUCTION()

```
1   $n \leftarrow 0$ 
2  while (all documents have not been processed)
3  do  $n \leftarrow n + 1$ 
4       $block \leftarrow \text{PARSENEXTBLOCK}()$ 
5       $\text{BSBI-INVERT}(block)$ 
6       $\text{WRITEBLOCKTODISK}(block, f_n)$ 
7   $\text{MERGEBLOCKS}(f_1, \dots, f_n; f_{\text{merged}})$ 
```

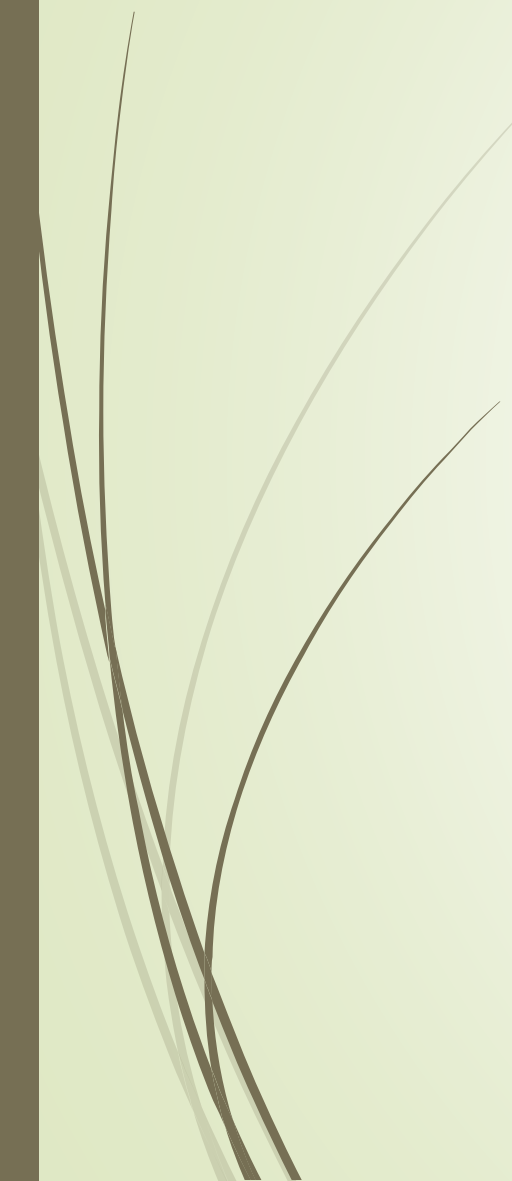
How to merge the sorted runs?

- Can do binary merges, with a merge tree of $\log_2 10 = 4$ layers.
- During each layer, read into memory runs in blocks of 10M, merge, write back.





How to merge the sorted runs?

- But it is more efficient to do a multi-way merge, where you are reading from all blocks simultaneously
 - Providing you read decent-sized chunks of each block into memory and then write out a decent-sized output chunk, then you're not killed by disk seeks
- 

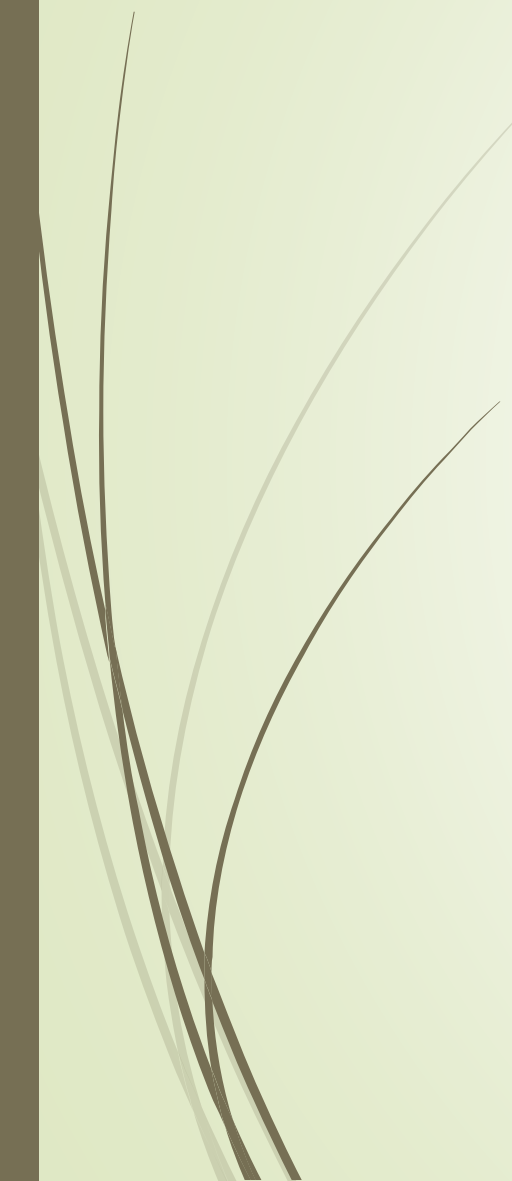


Remaining problem with sort-based algorithm

- Our assumption was: we can keep the dictionary in memory.
- We need the dictionary (which grows dynamically) in order to implement a term to termID mapping.
- Actually, we could work with term,docID postings instead of termID,docID postings . . .
- . . . but then intermediate files become very large. (We would end up with a scalable, but very slow index construction method.)



SPIMI: Single-pass in-memory indexing

- Key idea 1: Generate separate dictionaries for each block – no need to maintain term-termID mapping across blocks.
 - Key idea 2: Don't sort. Accumulate postings in postings lists as they occur.
 - With these two ideas we can generate a complete inverted index for each block.
 - These separate indexes can then be merged into one big index.
- 

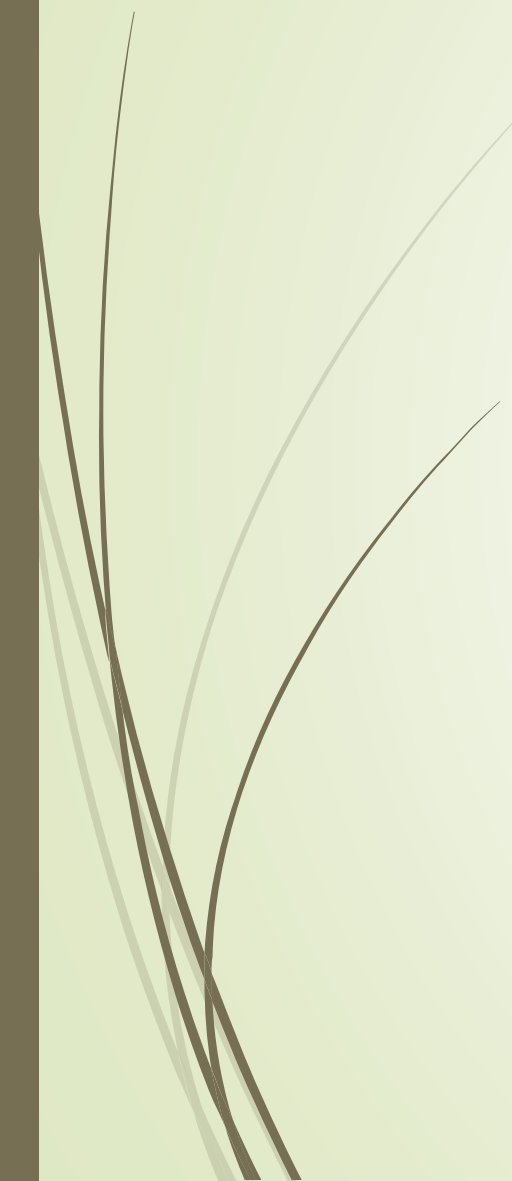
SPIMI-Invert

```
SPIMI-INVERT(token_stream)
1  output_file = NEWFILE()
2  dictionary = NEWHASH()
3  while (free memory available)
4  do token  $\leftarrow$  next(token_stream)
5      if term(token)  $\notin$  dictionary
6          then postings_list = ADDTODICTIONARY(dictionary, term(token))
7          else postings_list = GETPOSTINGSLIST(dictionary, term(token))
8          if full(postings_list)
9              then postings_list = DOUBLEPOSTINGSLIST(dictionary, term(token))
10         ADDTOPOSTINGSLIST(postings_list, docID(token))
11  sorted_terms  $\leftarrow$  SORTTERMS(dictionary)
12  WRITEBLOCKTODISK(sorted_terms, dictionary, output_file)
13  return output_file
```

➤ Merging of blocks is analogous to BSBI.




SPIMI: Compression

- Compression makes SPIMI even more efficient.
 - Compression of terms
 - Compression of postings
 - We will discuss in the next chapter.
- 



Distributed indexing

- For web-scale indexing (don't try this at home!):
 - must use a distributed computing cluster
 - Individual machines are fault-prone
 - Can unpredictably slow down or fail
 - How do we exploit such a pool of machines?
- 




Web search engine data centers

- Web search data centers (Google, Bing, Baidu) mainly contain commodity machines.
 - Data centers are distributed around the world.
 - Estimate: Google ~1 million servers, 3 million processors/cores (Gartner 2007)
- 

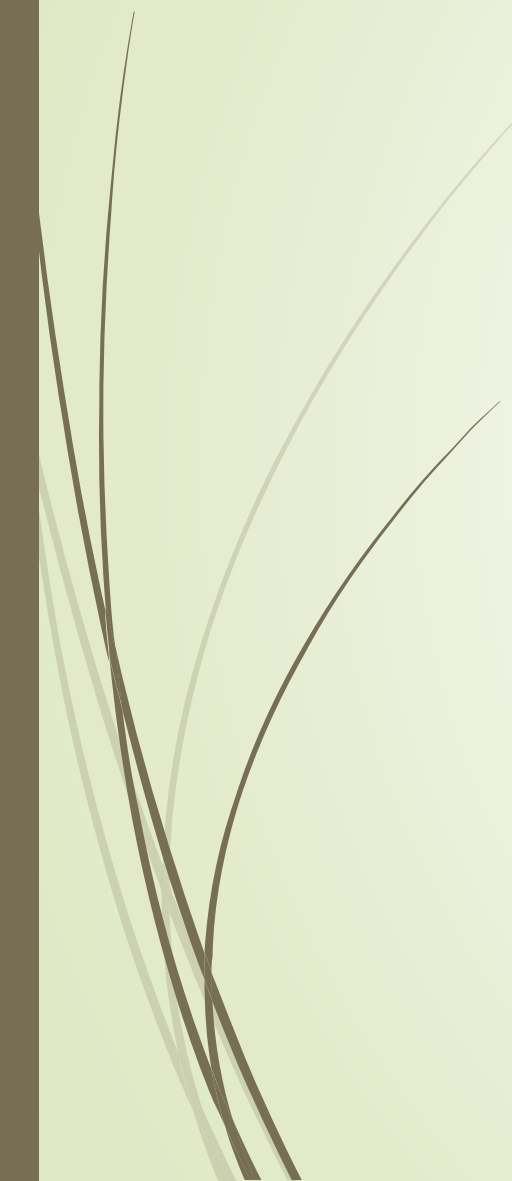


Massive data centers

- If in a non-fault-tolerant system with 1000 nodes, each node has 99.9% uptime, what is the uptime of the system?
 - Answer: 63%
 - Exercise: Calculate the number of servers failing per minute for an installation of 1 million servers.
- 




Distributed indexing

- Maintain a *master* machine directing the indexing job – considered “safe”.
 - Break up indexing into sets of (parallel) tasks.
 - Master machine assigns each task to an idle machine from a pool.
- 



Parallel tasks

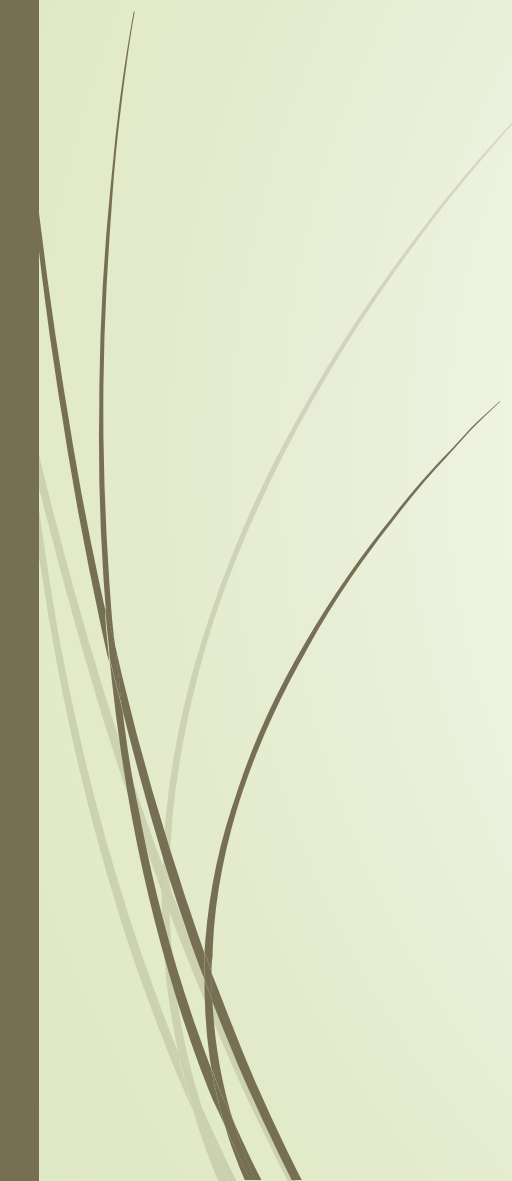
- We will use two sets of parallel tasks
 - Parsers
 - Inverters
 - Break the input document collection into *splits*
 - Each split is a subset of documents (corresponding to blocks in BSBI/SPIMI)
- 

Parsers

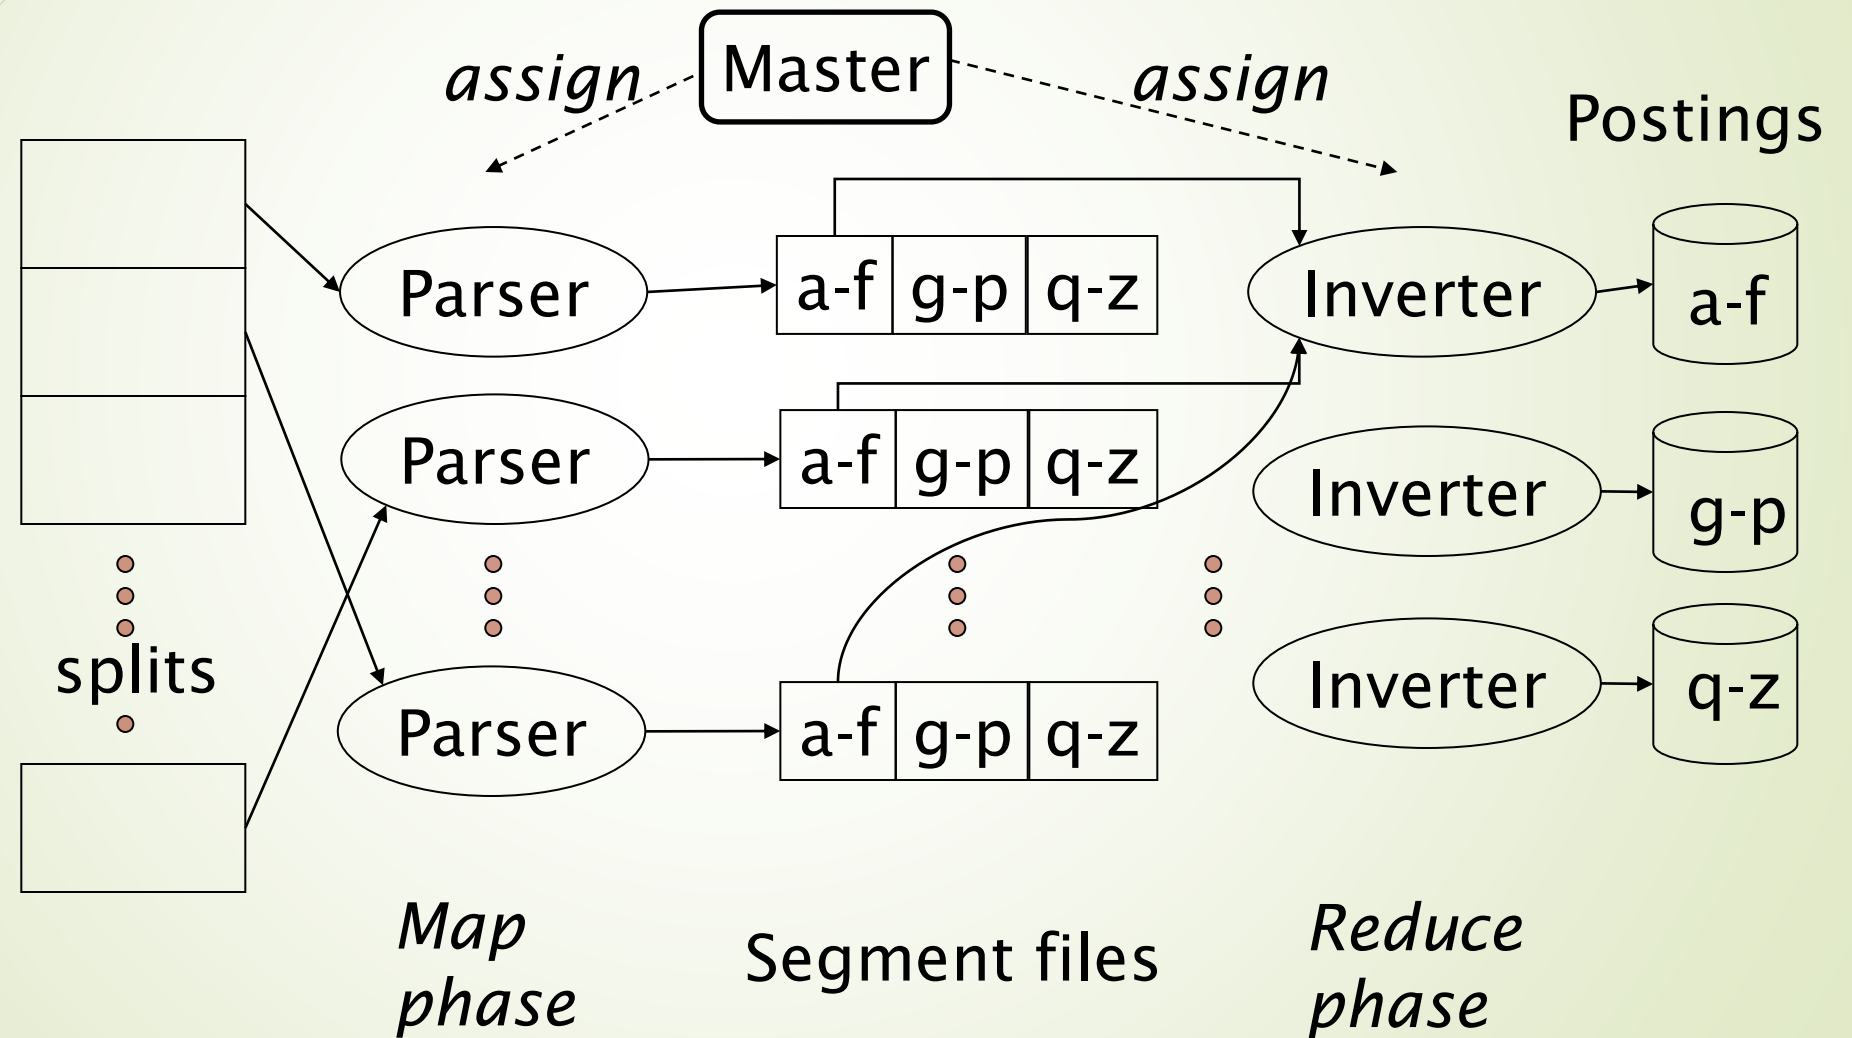
- Master assigns a split to an idle parser machine
- Parser reads a document at a time and emits (term, doc) pairs
- Parser writes pairs into j partitions
- Each partition is for a range of terms' first letters
 - (e.g., **a-f**, **g-p**, **q-z**) – here $j = 3$.
- Now to complete the index inversion



Inverters

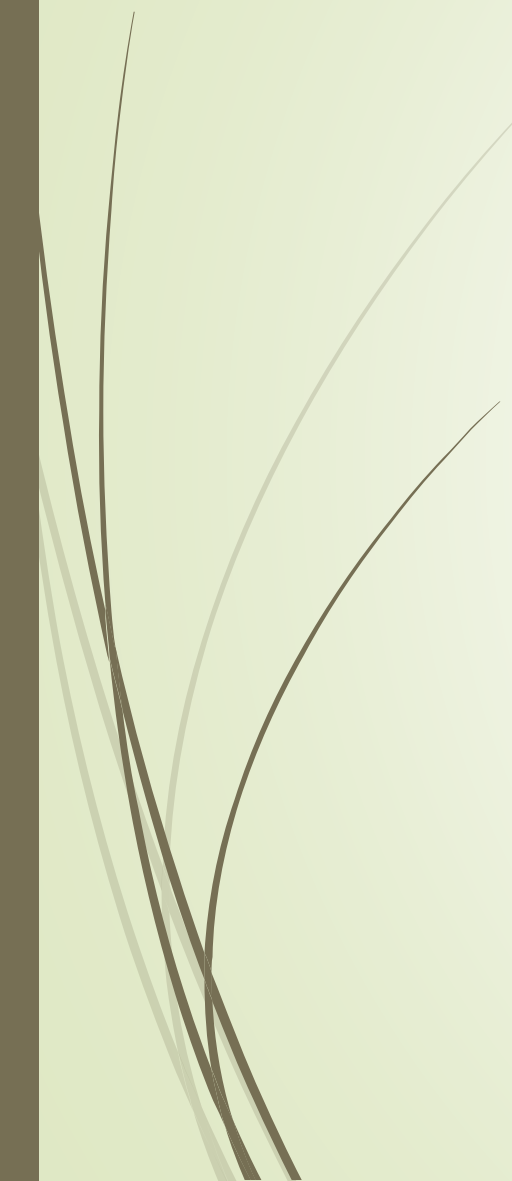
- An inverter collects all (term,doc) pairs (= postings) for one term-partition (e.g., for a-f).
 - Sorts and writes to postings lists
- 

Data flow



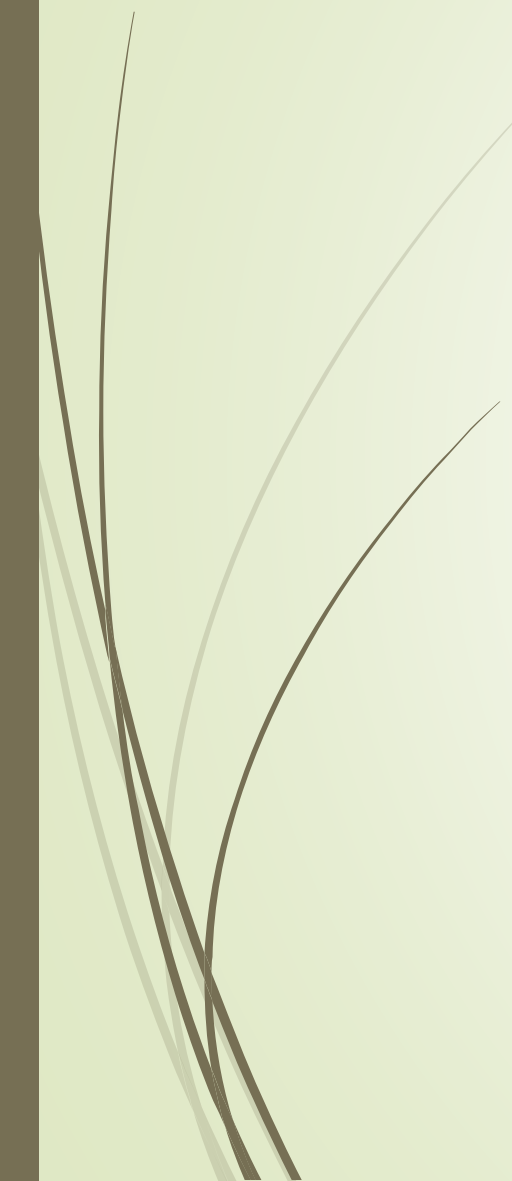


MapReduce

- The index construction algorithm we just described is an instance of *MapReduce*.
 - MapReduce (Dean and Ghemawat 2004) is a robust and conceptually simple framework for distributed computing ...
 - ... without having to write code for the distribution part.
 - They describe the Google indexing system (ca. 2002) as consisting of a number of phases, each implemented in MapReduce.
- 



MapReduce

- Index construction was just one phase.
 - Another phase: transforming a term-partitioned index into a document-partitioned index.
 - *Term-partitioned*: one machine handles a subrange of terms
 - *Document-partitioned*: one machine handles a subrange of documents
 - As we'll discuss in the web part of the course, most search engines use a document-partitioned index ... better load balancing, etc.
- 

Schema for index construction in MapReduce

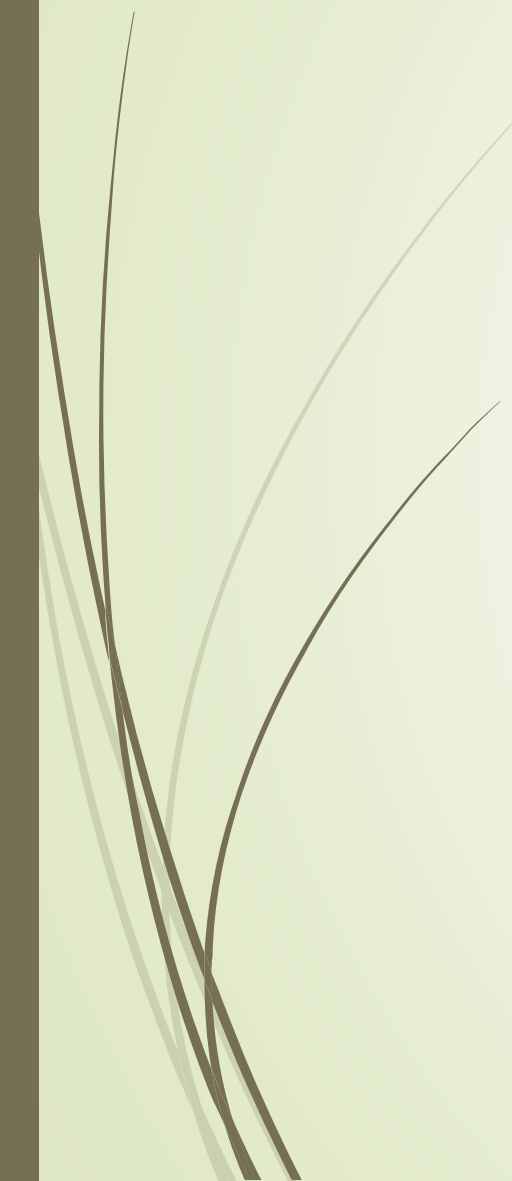
- **Schema of map and reduce functions**
- $\text{map: input} \rightarrow \text{list}(k, v)$ $\text{reduce: } (k, \text{list}(v)) \rightarrow \text{output}$
- **Instantiation of the schema for index construction**
- $\text{map: collection} \rightarrow \text{list}(\text{termID}, \text{docID})$
- $\text{reduce: } (<\text{termID1}, \text{list}(\text{docID})>, <\text{termID2}, \text{list}(\text{docID})>, \dots) \rightarrow (\text{postings list1}, \text{postings list2}, \dots)$

Example for index construction

- Map:
- $d1 : C \text{ came}, C \text{ c'ed}.$
- $d2 : C \text{ died.} \rightarrow$
- $\langle C, d1 \rangle, \langle \text{came}, d1 \rangle, \langle C, d1 \rangle, \langle \text{c'ed}, d1 \rangle, \langle C, d2 \rangle, \langle \text{died}, d2 \rangle$
- Reduce:
- $(\langle C, (d1, d2, d1) \rangle, \langle \text{died}, (d2) \rangle, \langle \text{came}, (d1) \rangle, \langle \text{c'ed}, (d1) \rangle) \rightarrow$
 $(\langle C, (d1:2, d2:1) \rangle, \langle \text{died}, (d2:1) \rangle, \langle \text{came}, (d1:1) \rangle, \langle \text{c'ed}, (d1:1) \rangle)$



Dynamic indexing

- Up to now, we have assumed that collections are static.
 - They rarely are:
 - Documents come in over time and need to be inserted.
 - Documents are deleted and modified.
 - This means that the dictionary and postings lists have to be modified:
 - Postings updates for terms already in dictionary
 - New terms added to dictionary
- 

Dynamic indexing: Simplest approach

- Maintain big **main index on disk**
- New docs go into **small auxiliary index in memory**.
- Search across both, merge results
- Periodically, merge auxiliary index into big index
- Deletions:
 - Invalidation bit-vector for deleted docs
 - Filter docs returned by index using this bit-vector
- Periodically, re-index into one main index

Issues with main and auxiliary indexes

- Problem of frequent merges – you touch stuff a lot
- Poor performance during merge
- Actually:
 - Merging of the auxiliary index into the main index is efficient if we keep a separate file for each postings list.
 - Merge is the same as a simple append.
 - But then we would need a lot of files – inefficient for OS.
- Assumption for the rest of the lecture: The index is one big file.
- In reality: Use a scheme somewhere in between (e.g., split very large postings lists, collect postings lists of length 1 in one file etc.)

Logarithmic merge

- Maintain a series of indexes, each twice as large as the previous one
 - At any time, some of these powers of 2 are instantiated
- Keep smallest (Z_0) in memory
- Larger ones (I_0, I_1, \dots) on disk
- If Z_0 gets too big ($> n$), write to disk as I_0
- or merge with I_0 (if I_0 already exists) as Z_1
- Either write merge Z_1 to disk as I_1 (if no I_1)
- Or merge with I_1 to form Z_2

LMERGEADDTOKEN(*indexes*, Z_0 , *token*)

```
1   $Z_0 \leftarrow \text{MERGE}(Z_0, \{\text{token}\})$ 
2  if  $|Z_0| = n$ 
3      then for  $i \leftarrow 0$  to  $\infty$ 
4          do if  $l_i \in \text{indexes}$ 
5              then  $Z_{i+1} \leftarrow \text{MERGE}(l_i, Z_i)$ 
6                  ( $Z_{i+1}$  is a temporary index on disk.)
7                   $\text{indexes} \leftarrow \text{indexes} - \{l_i\}$ 
8              else  $l_i \leftarrow Z_i$     ( $Z_i$  becomes the permanent index  $l_i$ .)
9                   $\text{indexes} \leftarrow \text{indexes} \cup \{l_i\}$ 
10                 BREAK
11          $Z_0 \leftarrow \emptyset$ 
```

LOGARITHMICMERGE()


```
1   $Z_0 \leftarrow \emptyset$     ( $Z_0$  is the in-memory index.)
2   $\text{indexes} \leftarrow \emptyset$ 
3  while true
4  do LMERGEADDTOKEN(indexes,  $Z_0$ , GETNEXTTOKEN())
```

Logarithmic merge

- Auxiliary and main index: index construction time is $O(T^2)$ as each posting is touched in each merge.
- Logarithmic merge: Each posting is merged $O(\log T)$ times, so complexity is $O(T \log T)$
- So logarithmic merge is much more efficient for index construction
- But query processing now requires the merging of $O(\log T)$ indexes
 - Whereas it is $O(1)$ if you just have a main and auxiliary index



Further issues with multiple indexes

- Collection-wide statistics are hard to maintain
 - E.g., when we spoke of spell-correction: which of several corrected alternatives do we present to the user?
 - We said, pick the one with the most hits
 - How do we maintain the top ones with multiple indexes and invalidation bit vectors?
 - One possibility: ignore everything but the main index for such ordering
 - Will see more such statistics used in results ranking
- 



Dynamic indexing at search engines

- All the large search engines now do dynamic indexing
 - Their indices have frequent incremental changes
 - News items, blogs, new topical web pages
 - Sarah Palin, ...
 - But (sometimes/typically) they also periodically reconstruct the index from scratch
 - Query processing is then switched to the new index, and the old index is deleted
- 