

Java I/O and Files


Why Is Java I/O Hard?

- Java is intended to be used on many very different machines, having
 - different character encodings (ASCII, EBCDIC, 7- 8- or 16-bit...)
 - different internal numerical representations
 - different file systems, so different filename & pathname conventions
 - different arrangements for EOL, EOF, etc.
- The Java I/O classes have to “stand between” your code and all these different machines and conventions.


Java's Internal Characters

- Unicode. 16-bit. Good idea.
- primitive type **char** is 16-bit.
- Reading /writing from a file using 8-bit ASCII characters (for example) requires conversion.
- But binary files (e.g., graphics) are “byte-sized”, so there is a primitive type **byte**.
- So Java has two systems to handle the two different requirements.
- Both are in **java.io**, so import this *always*!

Streams

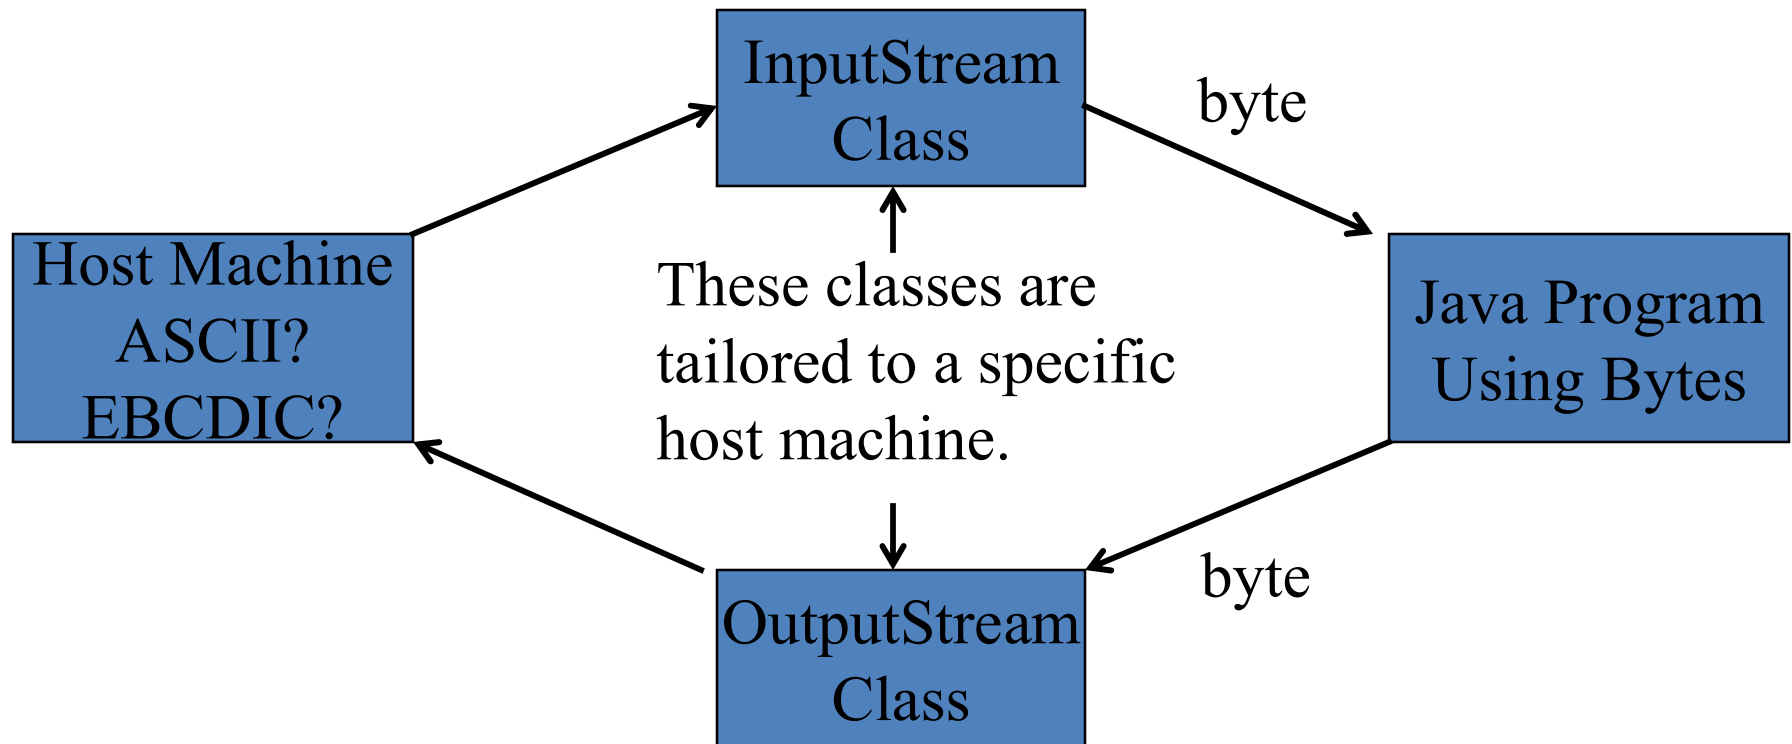

Readers and Writers

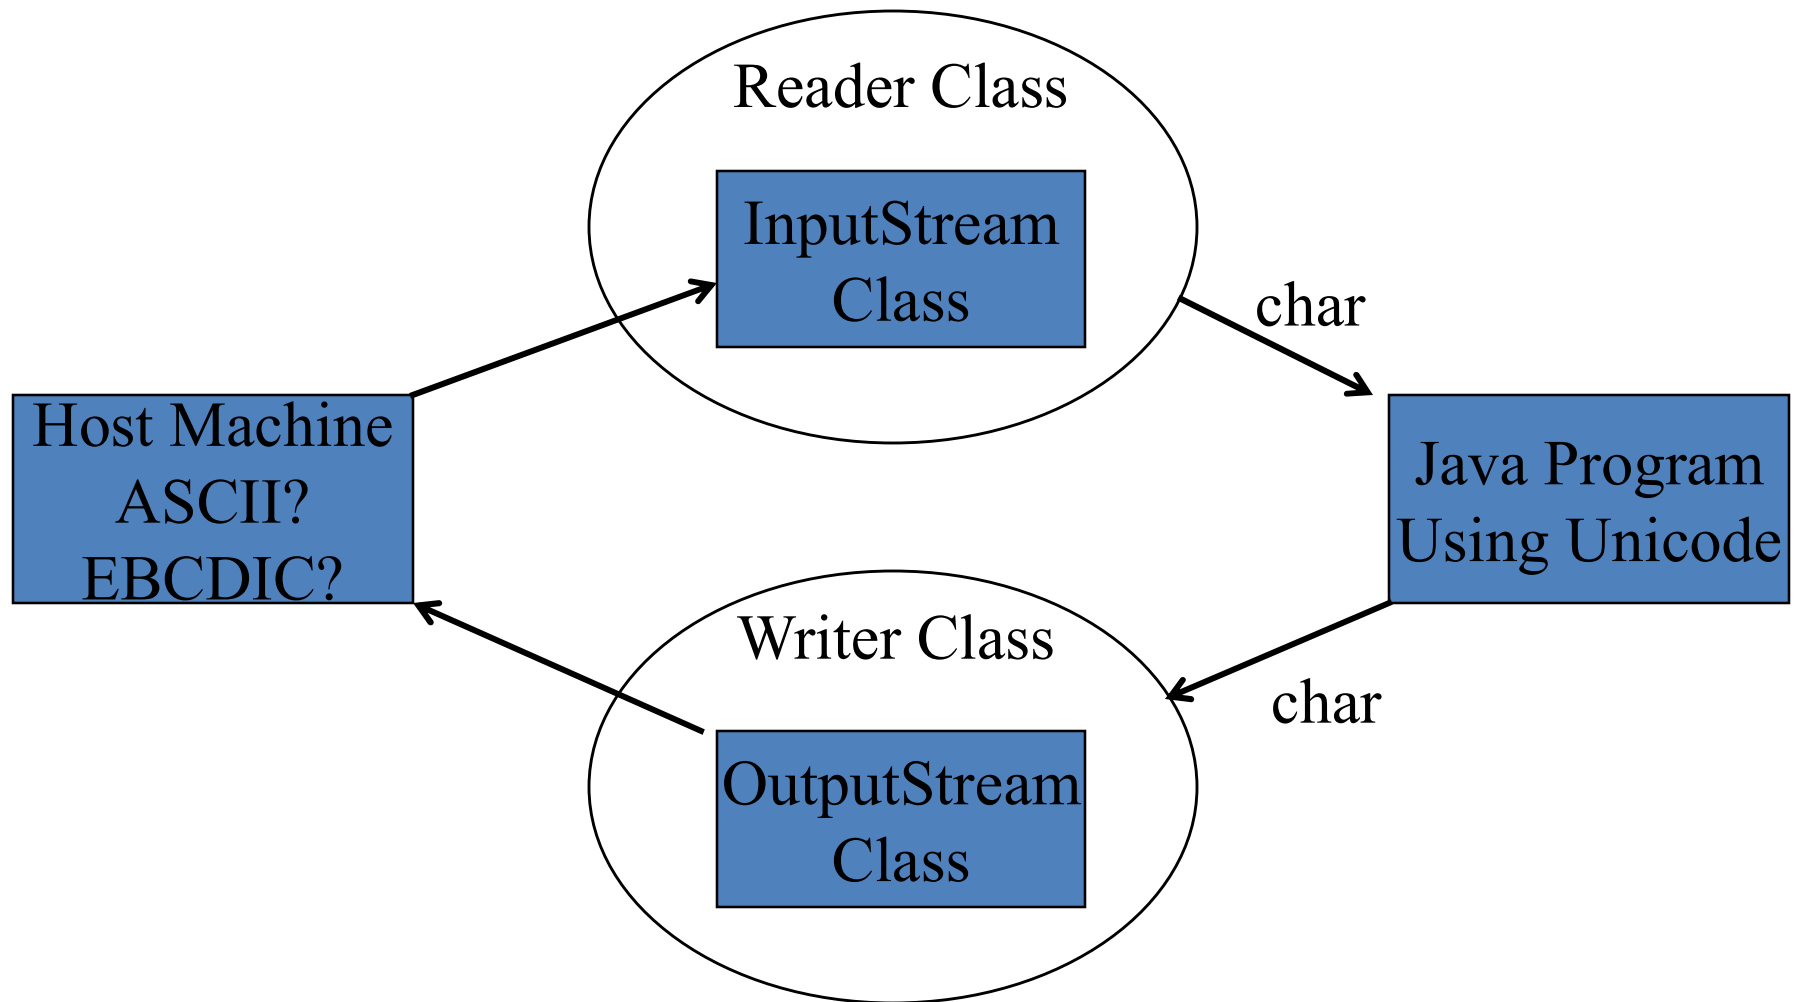

Streams

- A “stream” is an abstraction derived from sequential input or output devices.
- Streams apply not just to files, but also to actual IO devices, Internet streams, and so on.

- In reality streams are *buffered* : it is not practical to read or write one character at a time.

java.io

BufferedInputStream	InputStream	RandomAccessFile
BufferedOutputStream	InputStreamReader	Reader
BufferedReader	LineNumberInputStream	SequenceInputStream
BufferedWriter	LineNumberReader	SerializablePermission
ByteArrayInputStream	ObjectInputStream	StreamTokenizer
ByteArrayOutputStream	ObjectInputStream.GetField	StringBufferInputStream
CharArrayReader	ObjectOutputStream	StringReader
CharArrayWriter	ObjectOutputStream.PutField	StringWriter
DataInputStream	ObjectStreamClass	Writer
DataOutputStream	ObjectStreamField	
File	OutputStream	
FileDescriptor	OutputStreamWriter	
FileInputStream	PipedInputStream	
FileOutputStream	PipedOutputStream	
FilePermission	PipedReader	
FileReader	PipedWriter	
FileWriter	PrintStream	
FilterInputStream	PrintWriter	
FilterOutputStream	PushbackInputStream	
FilterReader	PushbackReader	
FilterWriter		

java.io

- Uses four hierarchies of classes rooted at `Reader`, `Writer`, `InputStream`, `OutputStream`.
- Has a special stand-alone class `RandomAccessFile`.

java.io

- `BufferedReader` and `RandomAccessFile` are the only classes that have a method to read a line of text, **`readLine`**.
- `readLine` returns a `String` or `null` if the end of file has been reached.

“Wrapping”

- Input comes in through a stream (bytes)
- we want to read characters, so “wrap” the stream in a Reader to get characters.

```
public static void main(String[] args) {  
    InputStreamReader isr = new InputStreamReader(System.in);  
    int c;  
    try {  
        while ((c = isr.read()) != -1)  
            System.out.println((char) c);  
    }  
    catch(IOException e) {  
    }  
}
```


InputStreamReader

- This is a bridge between bytes and chars.
- The **read()** method returns an **int**, which must be cast to a **char**.
- **read()** returns -1 if the end of the stream has been reached.
- We need more methods to do a better job!

Use a **BufferedReader**

```
public static void main(String[] args) {  
    BufferedReader br =  
        new BufferedReader(new InputStreamReader(System.in));  
    String s;  
    try {  
        while ((s = br.readLine()).length() != 0)  
            System.out.println(s);  
    }  
    catch(IOException e) {  
    }  
}
```

“Transparent Enclosure”

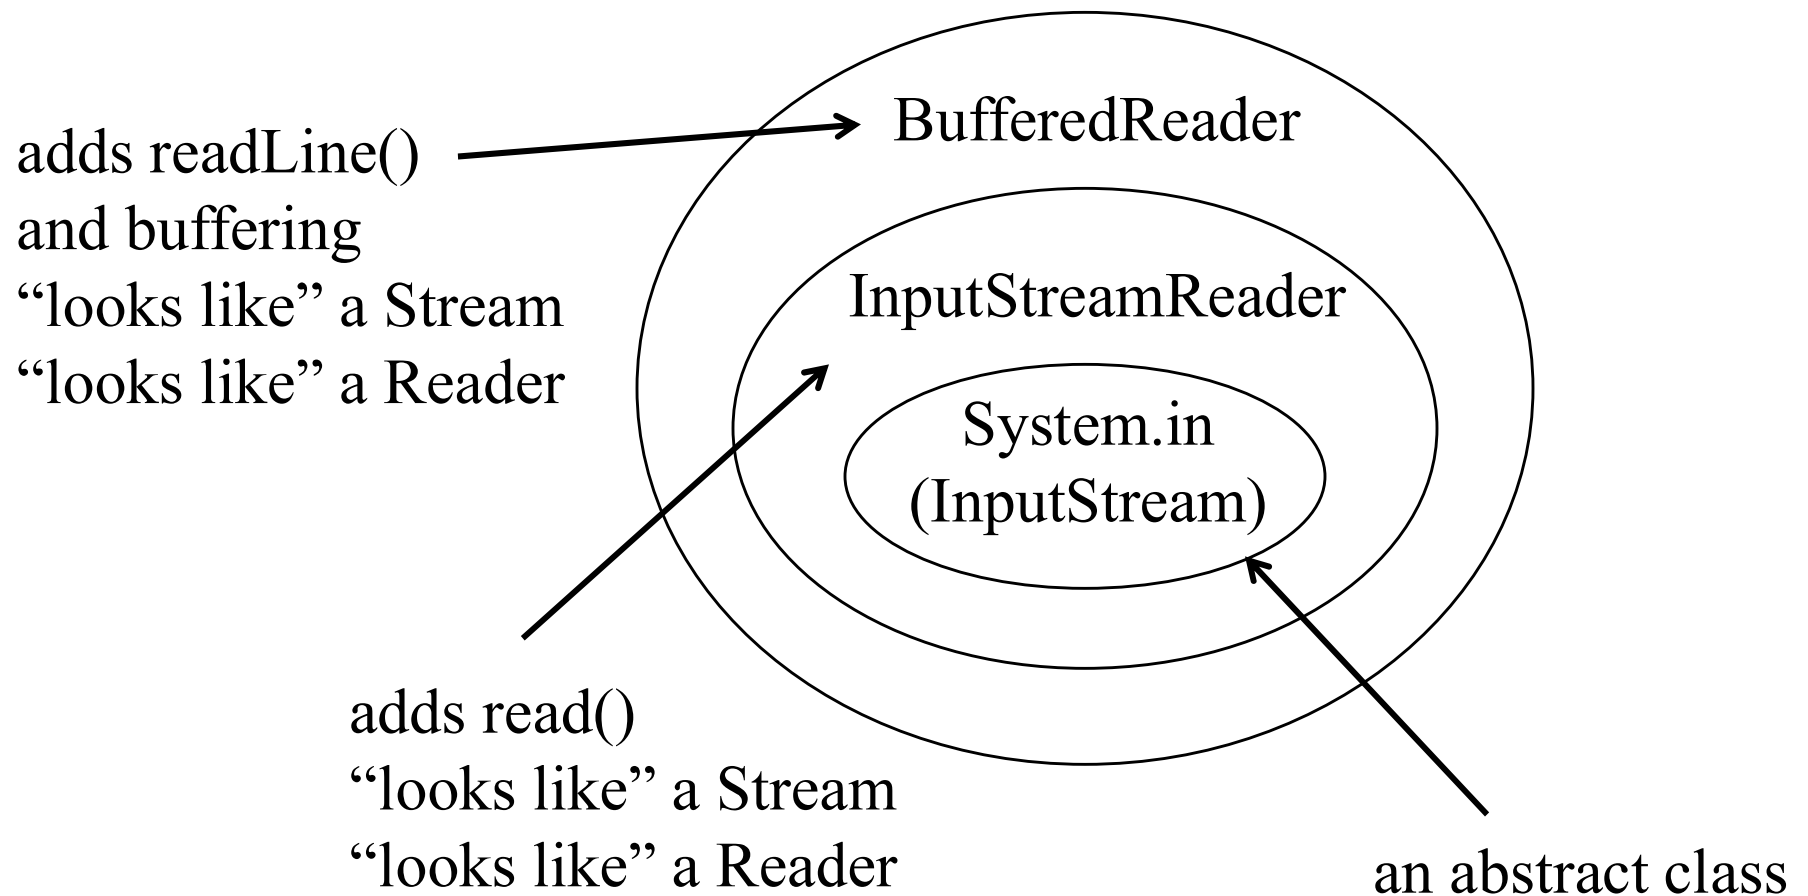

java.io

- “Throws” *checked exceptions* try-catch statement should be used to handle code that throws checked exceptions.

Byte streams

- Two parent abstract classes: **InputStream** and **OutputStream**
- Reading bytes:
 - **InputStream** class defines an abstract method
public abstract int read() throws IOException
 - Designer of a concrete input stream class overrides this method to provide useful functionality.
 - E.g. in the **FileInputStream** class, the method reads one byte from a file
 - **OutputStream** class defines an abstract method
public abstract void write(int b) throws IOException

Example code1:

```
import java.io.*;
class CountBytes {

    public static void main(String[] args)
        throws IOException {
        FileInputStream in = new
            FileInputStream(args[0]);
        int total = 0;
        while (in.read() != -1)
            total++;
        in.close(); //Always close streams
        System.out.println(total + "bytes");
    }
}
```

Example code2:

```
import java.io.*;

class TranslateByte {
    public static void main(String[] args)
        throws IOException {

        byte from = (byte)args[0].charAt(0);
        byte to = (byte)args[1].charAt(0);
        byte x;

        while((x = System.in.read()) != -1)
            System.out.write(x == from ? to :
x) ;

    }
}
```

If you run "java TranslateByte b B" and enter text
bigboy via the keyboard the output will be: BigBoy

Character streams

- Two parent `abstract` classes for characters: **Reader** and **Writer**.
- The standard streams—`System.in`, `System.out` and `System.err`—existed before the invention of character streams. So they are byte streams though logically they should be character streams.

Stream Objects

All Java programs make use of standard stream objects

- `System.in`
 - To input bytes from keyboard
- `System.out`
 - To allow output to the screen
- `System.err`
 - To allow error messages to be sent to screen

Conversion between byte and character streams

–public InputStreamReader(InputStream in)

–public OutputStreamWriter(OutputStream out)

- read method of InputStreamReader

- read bytes from their associated InputStream and convert them to characters

- write method of OutputStreamWriter

- take the supplied characters, convert them to bytes and write them to its associated OutputStream

Reading Characters

```
Import java.io.*;
class Reading{
    public static void main(String a[])throws IOException
    {
        char c;
        BufferedReader br = new BufferedReader(new
InputStreamReader(System.in))
        do{
            c=(char)br.read();
            System.out.println(c);
        } while(c!='q');
    }
}
```