




HARVIN

Built for Performance

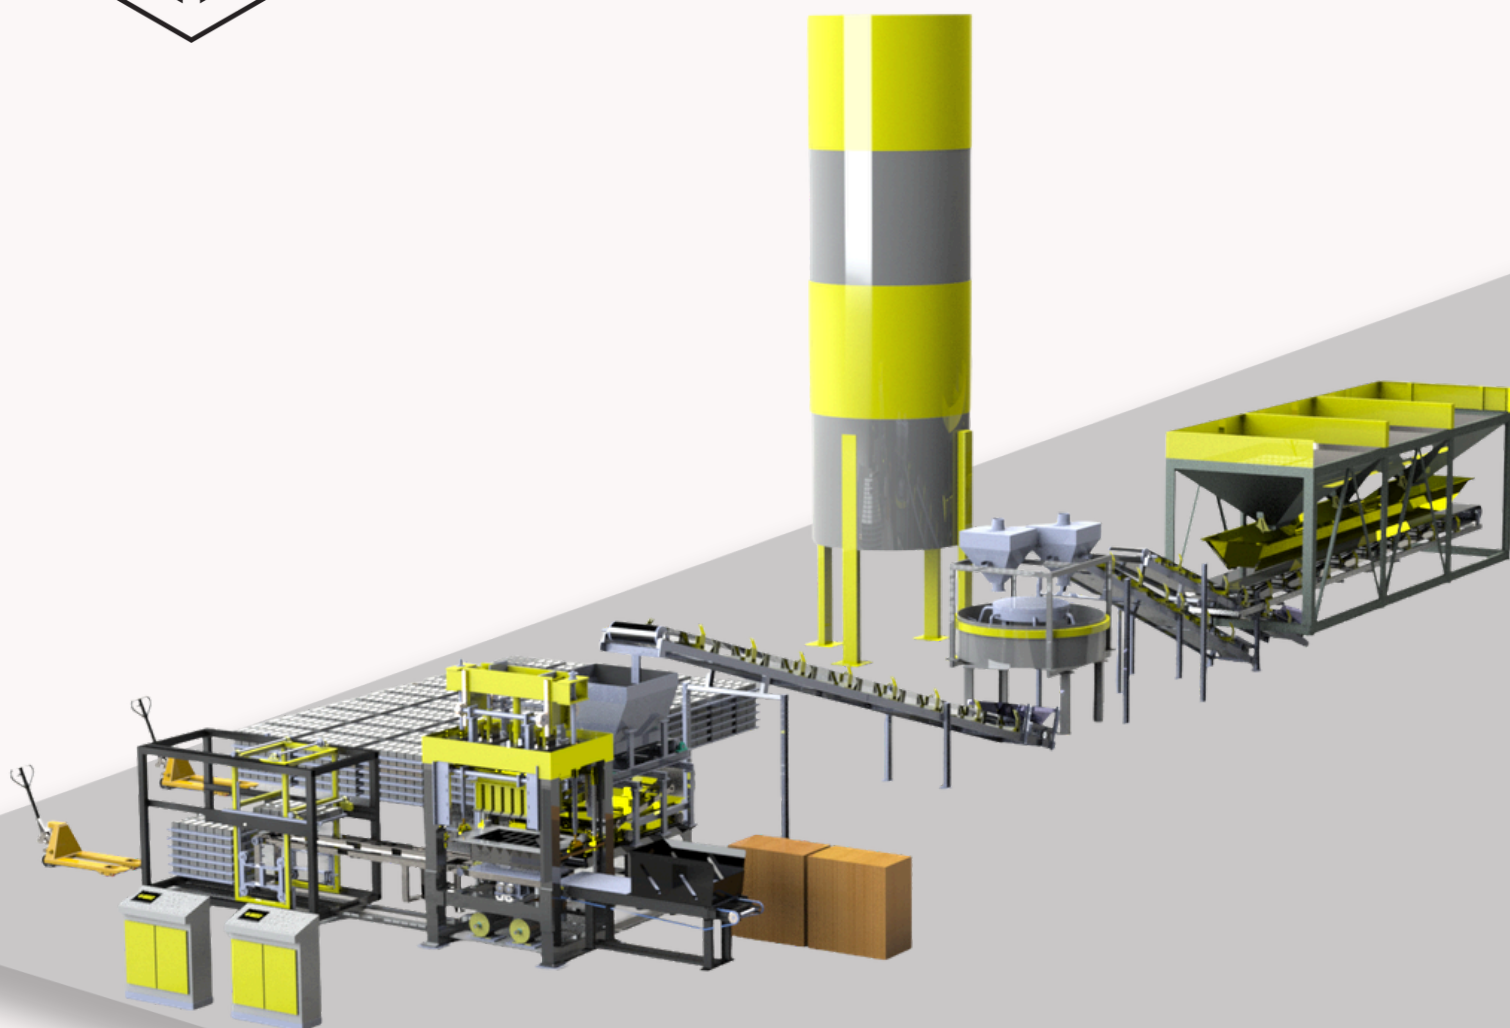

HARVIN

I N D U S T R I E S

ISO 9001:2015

About Our Company



A Story About The Company

Harvin Industries is a trusted Ahmedabad-based manufacturer of Fly Ash Brick, Concrete Brick, and Paver Block Making Machines. ISO 9001:2015 certified, we combine precision engineering with robust design to deliver machines built for performance, durability, and consistent output. From small enterprises to large-scale production units, our solutions empower businesses across India to meet growing construction demands — backed by dedicated technical support every step of the way.

2026

Vision

To empower every builder, entrepreneur, and contractor with world-class brick making solutions that set new standards in efficiency, durability, and productivity.



Mission

01

Quality Without Compromise To manufacture brick and block making machines that meet the highest standards of precision, durability, and performance — backed by ISO 9001:2015 certification.

02

Customer-First Approach To understand the unique needs of every client and deliver tailored solutions with reliable after-sales support and technical assistance.


03

Empowering Growth To enable entrepreneurs, contractors, and manufacturers across India to scale their production efficiently with cost-effective and high-output machinery.

04

Innovation & Advancement To continuously evolve our products through research and engineering, staying ahead of industry demands and construction trends.

2026

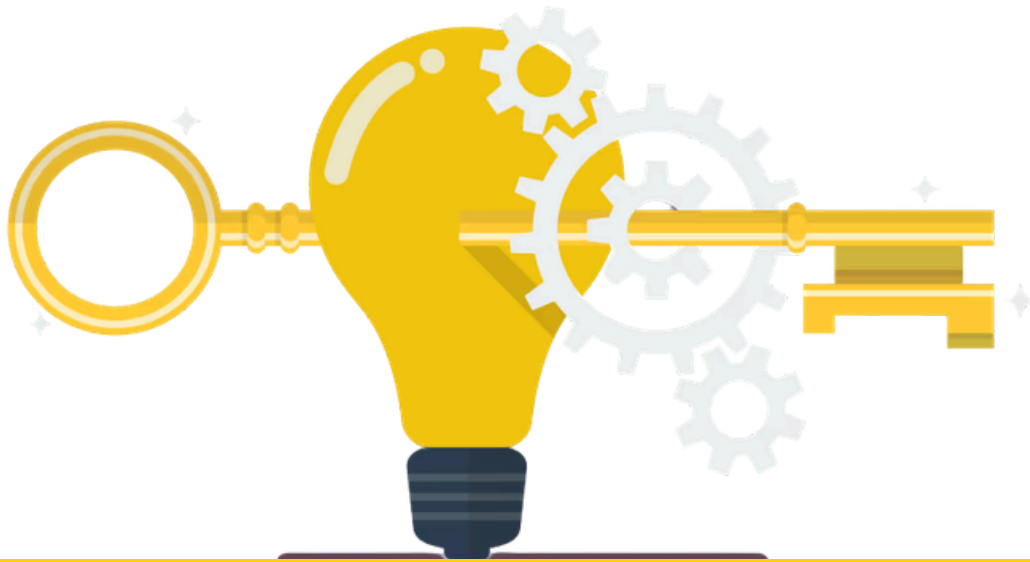

Key Factors

- **Advanced Technology & Robust Design**

Our machines are engineered with high-grade materials and modern manufacturing techniques, delivering maximum output with minimal maintenance.

- **Quality Manufacturing**

Every machine is built under a strict quality management system, ensuring consistent performance, precision engineering, and long-lasting reliability.

- **Customised Solutions for Every Scale**

Whether you're a startup unit or a large-scale producer, we offer flexible machine models tailored to match your production capacity and budget.

- **Strong Support Network**

Pan-India Reach & Strong Support Network From installation to after-sales service, we stand by our customers across India — ensuring minimal downtime and maximum productivity.

Challenges



About The Problem

- **Inconsistent Product Quality :** Traditional and outdated machines produce bricks with uneven size, shape, and strength — leading to rejection, wastage, and loss of credibility in the market.

- **High Production Cost & Low Output**

Manual or semi-automatic processes are slow, labour-intensive, and expensive — making it difficult to meet large-scale construction demands profitably.

- **Frequent Machine Breakdowns & Downtime**

Poor build quality and lack of after-sales support result in frequent breakdowns, causing costly production delays and operational losses.

- **Lack of Technical Guidance**


Many manufacturers struggle with improper machine setup, wrong raw material ratios, and no expert support — directly affecting output quality and efficiency.

Solution



A Brief Story About The Solution

Show that we offer a solution that solves the problems previously described and identified. Make sure that the solutions we offer uphold the values of effectiveness, efficiency, relation, quality and relevant to the market situation

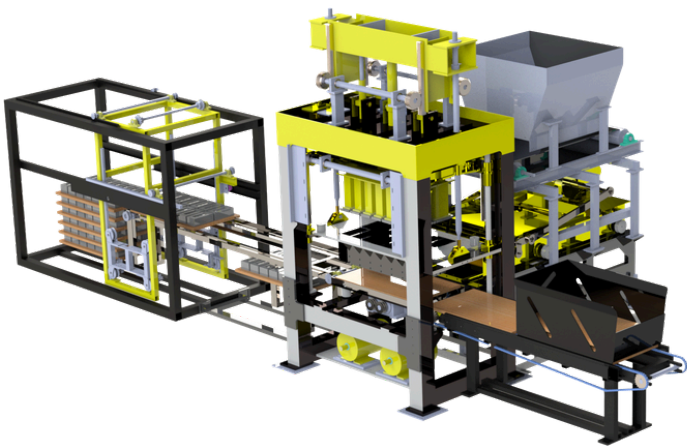


Harvin Machine Advantage

- Universal Vibration Effect.
- Advanced PLC based User Friendly System.
- Case Hardened Mould.



Advance Implementation

- Advanced Power Pack System
- Rotational Multi Shaft Material Feeding System
- Double Acting Hydraulic Cylinder

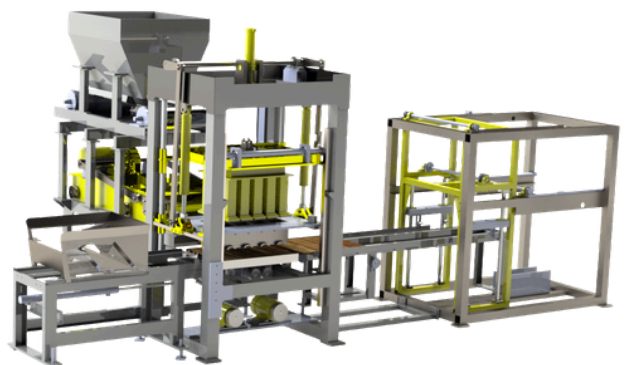



Product Overview

Engineered to manufacture fly ash bricks using industrial waste — fly ash, sand, lime, and gypsum. Produces IS-standard bricks with Harvin machinery for superior strength and thermal insulation. Ideal for mass housing, government projects, and commercial construction.

we combine advanced engineering, durable materials, and state-of-the-art manufacturing processes to create plant, we are here to provide smart, sustainable, and cost-effective solutions.

List of our Product :

HI-1500





HI-2000

HI-3000

MIXTURE

BATCHING PLANT

Product Portfolio

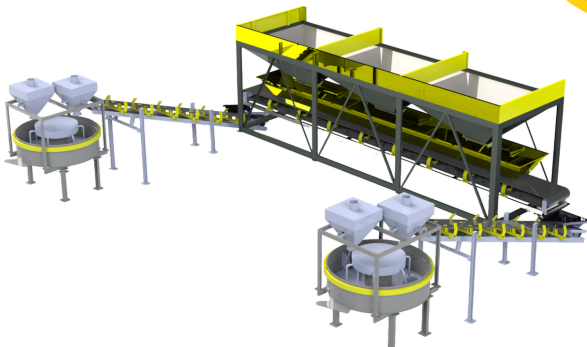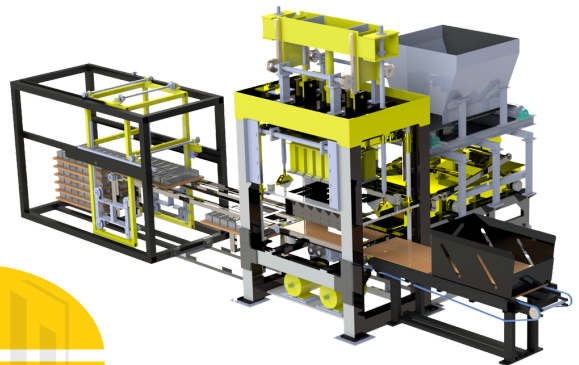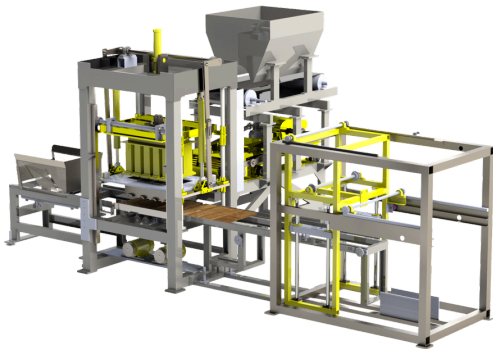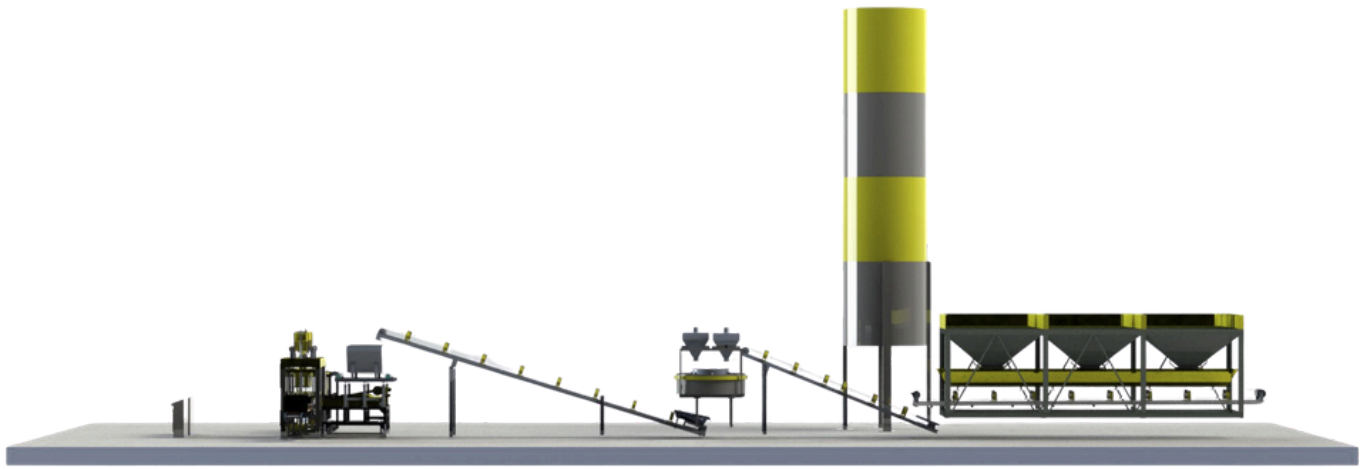

Product Specification

1. Machine Dimension — 10 × 8 × 2.5 Meter

The machine is 10 meters long, 8 meters wide, and 2.5 meters tall. It is a large, heavy-duty machine built for high-volume production. Before purchase, the customer must ensure their factory or shed has enough space to fit and operate this machine comfortably.

2. Required Area — 200 × 200 Square Foot

The customer needs a minimum plot or shed area of 200 × 200 square feet for proper installation. This includes space for the machine, raw material storage, pallet movement, and worker operation around the machine.

3. Brick Per Stroke — 08 Bricks

Every time the machine completes one press cycle, it produces 08 bricks at once. This is the highest output per stroke in the Harvin range — ideal for customers who need very high daily production to fulfill large construction or government contracts.

4. Cycle Time — 15 to 20 Seconds

The machine completes one full cycle — filling, pressing, and releasing bricks — in just 15 to 20 seconds. This means approximately 1440 to 1920 strokes per hour, producing around 1440 to 1920 bricks per hour depending on the mix and mould.

5. Pallet Size — 590 × 560 × 18 mm

The pallet is the flat board on which freshly made bricks sit after pressing. HI 1500 uses a large 590 × 560 mm pallet that is 18 mm thick — strong and wide enough to carry 8 bricks per cycle safely to the curing area without breaking.

6. Tonnage of Hydraulic Pressure — 50 to 60 MT

The machine applies 50 to 60 metric tonnes of hydraulic pressing force on the raw material inside the mould. This enormous pressure is what gives the bricks their high compressive strength and uniform density — ensuring every brick meets IS quality standards.

7. Vibration Force — 60 KN

While the hydraulic pressure compresses from above, the vibration system simultaneously shakes the material at 60 Kilo Newtons of force. This vibration fills every corner of the mould with material, removes air gaps, and ensures the brick is solid, smooth, and strong throughout.


8. Electrical Load — 30 KW (45 HP)

The machine requires a total electrical connection of 30 KW, which equals 45 HP. The customer needs to arrange a 3-phase electrical connection of this capacity from their local electricity board before installation. This powers all motors — vibration, hydraulic, conveyor, mixer, and control panel together.

9. Hydraulic Tank Capacity — 400 Liter

The hydraulic oil tank holds 400 liters of hydraulic oil. This large tank keeps the oil cool during long hours of operation, ensuring the hydraulic system works smoothly without overheating — very important for all-day continuous production.

HI-1500

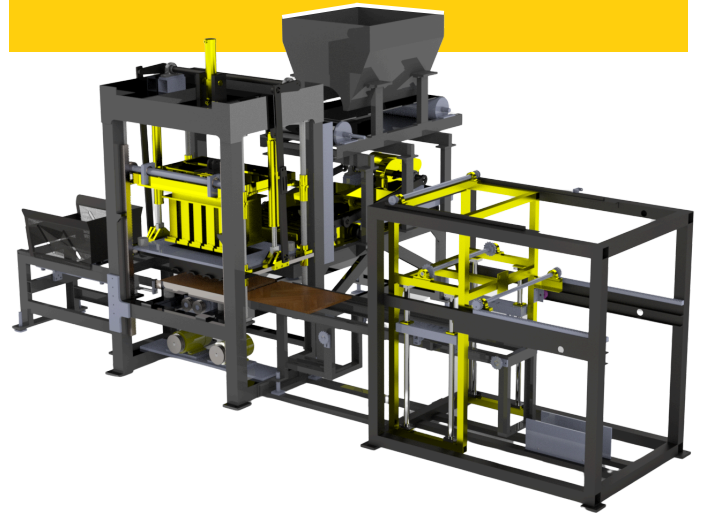

PRODUCTION SPECIFICATION MODEL HI 1500

Products: 8 Max Pcs/Mould
Pcs/Hour: 1800 Power: 45 HP
Electrical Load: 30 KW

No.	Product	Size (mm)	Pcs / Mould	Pcs / Hour
1	Fly Ash Brick	230 × 110 × 75	8	1,500
2	Fly Ash Brick	250 × 125 × 75	8	1,500
3	Fly Ash Brick	190 × 90 × 90	10	1,800
4	I Shape Paver Block	200 × 165 × 60	4	750
5	Zig Zag Paver Block	225 × 112.5 × 80	6	1,100
6	Hollow Block	390 × 190 × 190	2	360
7	Hollow Block	390 × 100 × 100	3	540
8	Solid Block	300 × 200 × 200	2	360

Harvin Industries · Ahmedabad, Gujarat · ISO 9001:2015 ·

Technical of Model HI-2000

1. Machine Dimension — 10 × 8 × 2.5 Meter

The machine is 10 meters long, 8 meters wide, and 2.5 meters tall. It is a large, heavy-duty machine built for high-volume production. Before purchase, the customer must ensure their factory or shed has enough space to fit and operate this machine comfortably.

2. Required Area — 200 × 200 Square Foot

The customer needs a minimum plot or shed area of 200 × 200 square feet for proper installation. This includes space for the machine, raw material storage, pallet movement, and worker operation around the machine.

3. Brick Per Stroke — 10 Bricks

Every time the machine completes one press cycle, it produces 10 bricks at once. This is the highest output per stroke in the Harvin range — ideal for customers who need very high daily production to fulfill large construction or government contracts.

4. Cycle Time — 15 to 20 Seconds

The machine completes one full cycle — filling, pressing, and releasing bricks — in just 15 to 20 seconds. This means approximately 1800 to 2400 strokes per hour, producing around 1800 to 2400 bricks per hour depending on the mix and mould.

5. Pallet Size — 690 × 560 × 18 mm

The pallet is the flat board on which freshly made bricks sit after pressing. HI 2000 uses a large 690 × 560 mm pallet that is 18 mm thick — strong and wide enough to carry 10 bricks per cycle safely to the curing area without breaking.

6. Tonnage of Hydraulic Pressure — 50 to 60 MT

The machine applies 50 to 60 metric tonnes of hydraulic pressing force on the raw material inside the mould. This enormous pressure is what gives the bricks their high compressive strength and uniform density — ensuring every brick meets IS quality standards.

7. Vibration Force — 60 KN

While the hydraulic pressure compresses from above, the vibration system simultaneously shakes the material at 60 Kilo Newtons of force. This vibration fills every corner of the mould with material, removes air gaps, and ensures the brick is solid, smooth, and strong throughout.


8. Electrical Load — 34 KW (50 HP)

The machine requires a total electrical connection of 34 KW, which equals 50 HP. The customer needs to arrange a 3-phase electrical connection of this capacity from their local electricity board before installation. This powers all motors — vibration, hydraulic, conveyor, mixer, and control panel together.

9. Hydraulic Tank Capacity — 450 Liter

The hydraulic oil tank holds 450 liters of hydraulic oil. This large tank keeps the oil cool during long hours of operation, ensuring the hydraulic system works smoothly without overheating — very important for all-day continuous production.

HI-2000

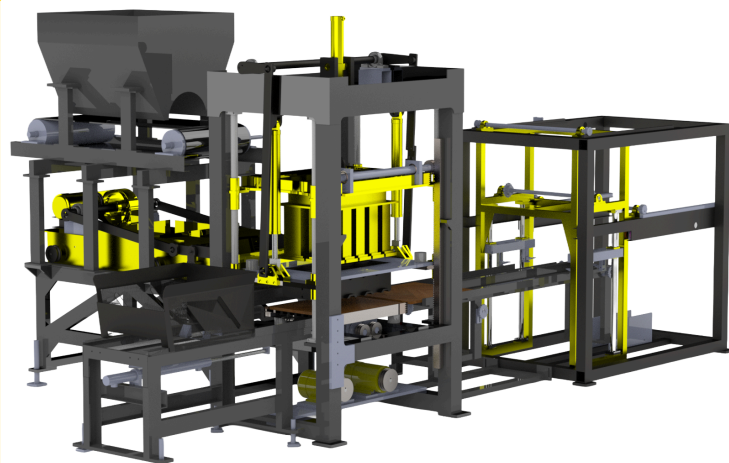

PRODUCTION SPECIFICATION MODEL HI 2000

Products: 10 Pcs/Mould
Pcs/Hour: 2200 Power: 50 HP
Electrical Load: 34 KW

No.	Product	Size (mm)	Pcs / Mould	Pcs / Hour
1	Fly Ash Brick	230 × 110 × 75	10	1,900
2	Fly Ash Brick	250 × 125 × 75	10	1,900
3	Fly Ash Brick	190 × 90 × 90	12	2,200
4	I Shape Paver Block	200 × 165 × 60	6	1,100
5	Zig Zag Paver Block	225 × 112.5 × 80	8	1,500
6	Hollow Block	390 × 190 × 190	3	540
7	Hollow Block	390 × 100 × 100	4	720
8	Solid Block	300 × 200 × 200	3	540

Harvin Industries · Ahmedabad, Gujarat · ISO 9001:2015 ·

Technical of Model HI-3000

HI-3000

1. Machine Dimension — 10 × 8 × 2.5 Meter

The machine is 10 meters long, 8 meters wide, and 2.5 meters tall. It is a large, heavy-duty machine built for high-volume production. Before purchase, the customer must ensure their factory or shed has enough space to fit and operate this machine comfortably.

2. Required Area — 250 × 250 Square Foot

The customer needs a minimum plot or shed area of 250 × 250 square feet for proper installation. This includes space for the machine, raw material storage, pallet movement, and worker operation around the machine.

3. Brick Per Stroke — 14 Bricks

Every time the machine completes one press cycle, it produces 14 bricks at once. This is the highest output per stroke in the Harvin range — ideal for customers who need very high daily production to fulfill large construction or government contracts.

4. Cycle Time — 15 to 20 Seconds

The machine completes one full cycle — filling, pressing, and releasing bricks — in just 15 to 20 seconds. This means approximately 180 to 240 strokes per hour, producing around 2,520 to 3,360 bricks per hour depending on the mix and mould.

5. Pallet Size — 950 × 560 × 25 mm

The pallet is the flat board on which freshly made bricks sit after pressing. HI 3000 uses a large 950 × 560 mm pallet that is 25 mm thick — strong and wide enough to carry 14 bricks per cycle safely to the curing area without breaking.

6. Tonnage of Hydraulic Pressure — 50 to 60 MT

The machine applies 50 to 60 metric tonnes of hydraulic pressing force on the raw material inside the mould. This enormous pressure is what gives the bricks their high compressive strength and uniform density — ensuring every brick meets IS quality standards.

7. Vibration Force — 60 KN


While the hydraulic pressure compresses from above, the vibration system simultaneously shakes the material at 60 Kilo Newtons of force. This vibration fills every corner of the mould with material, removes air gaps, and ensures the brick is solid, smooth, and strong throughout.

8. Electrical Load — 40 KW (60 HP)

The machine requires a total electrical connection of 55 KW, which equals 75 HP. The customer needs to arrange a 3-phase electrical connection of this capacity from their local electricity board before installation. This powers all motors — vibration, hydraulic, conveyor, mixer, and control panel together.

9. Hydraulic Tank Capacity — 500 Liter

The hydraulic oil tank holds 500 liters of hydraulic oil. This large tank keeps the oil cool during long hours of operation, ensuring the hydraulic system works smoothly without overheating — very important for all-day continuous production.

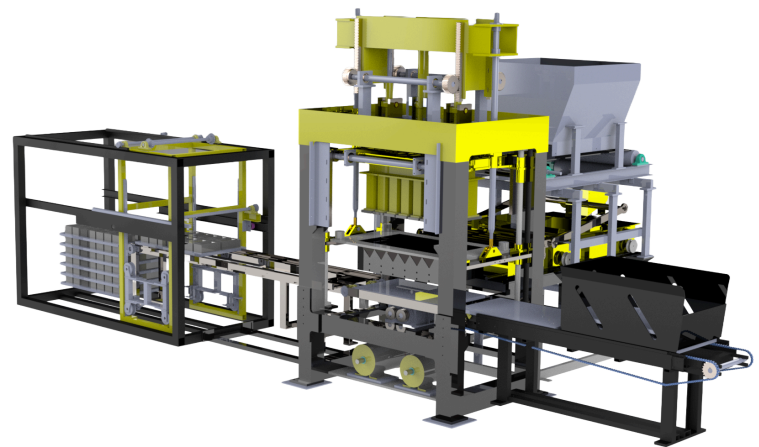


PRODUCTION SPECIFICATION MODEL HI 3000

Products: 14 Max Pcs/Mould
Pcs/Hour: 2,900 Power: 60 HP
Electrical Load: 40 KW

No.	Product	Size (mm)	Pcs / Mould	Pcs / Hour
1	Fly Ash Brick	230 × 110 × 75	14	2,600
2	Fly Ash Brick	250 × 125 × 75	14	2,600
3	Fly Ash Brick	190 × 90 × 90	16	2,900
4	I Shape Paver Block	200 × 165 × 60	8	1,500
5	Zig Zag Paver Block	225 × 112.5 × 80	12	2,200
6	Hollow Block	390 × 190 × 190	4	720
7	Hollow Block	390 × 100 × 100	6	1,100
8	Solid Block	300 × 200 × 200	4	750


Harvin Industries · Ahmedabad, Gujarat · ISO 9001:2015 ·

Batching Plant

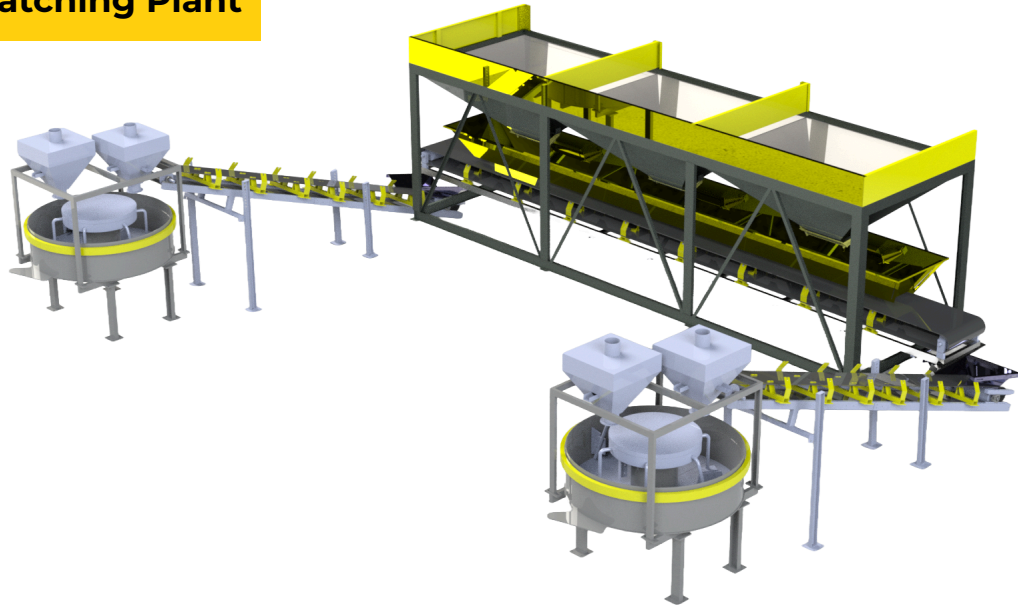

Description	Specification
Batching Plant	• 3 Bin Storage • Concrete Output 30 M3/Hr • Heavy & Sturdy Fabricated Structure • Horizontal Belt Conveyor 750mm wide x 11m long for Weigh Batching with 3 Outlet Conveyor fitted in bottom of each Bin with Crompton Motor & Gearbox. Electric load: 15 kw (22.5 HP)
Automatic Batching & Mixing Control	• Control Panel with PLC for Controls up to Five Raw Materials like Aggregate, Fly Ash, Sand/Stone Dust, Cement, Water • Advanced PLC & HMI System with User-Friendly Interface System
Automatic Cement Feeding (Plate Form Based) Cement Weighing Hopper	• Heavy Duty Screw Conveyor up to 7.0 meter long & Dia. 168 mm for Cement Feeding. • 0.5 Cu.M Storage Platform Type Cement Weighing Hopper. • 3 Nos. Load cell & Discharge Butterfly Valve Mounted at Outlet of Hopper with Sturdy Fabricated Support Structure. • Motor based operated Vibrator mount at Bottom Part of Hopper. • 1HP Compressor
Inclined Dry Mix Belt Conveyor	• 600mm x 10 m long designed to convey Aggregate, Fly Ash & Sand with Supporting Structure, Inlet Chute & Adequate Drive Unit.
Automatic Water Feeding System	• Automatic Water Feeding into Mixer using Automatic Timer.

Mixture Machine

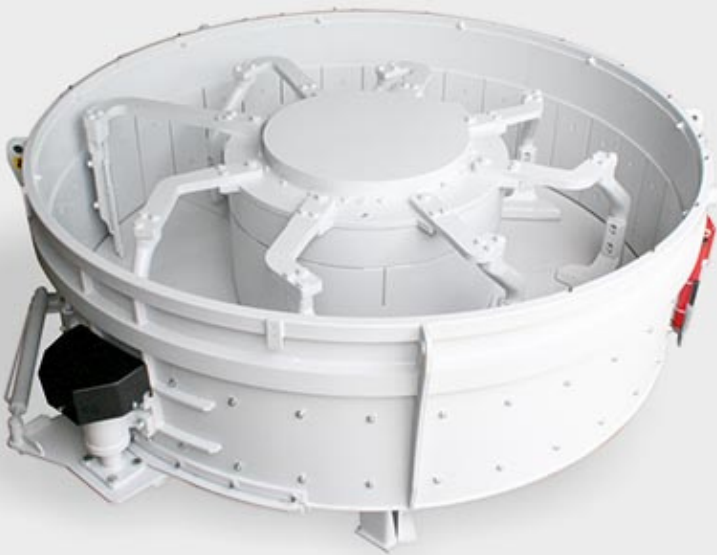


Turbo Mixture

- Most commonly used with fly ash brick machines
- Circular rotating arms mixes material from bottom up
- Ensures uniform, lump-free mixing of fly ash, sand, cement, lime & gypsum
- Capacity: 600–900–1300 kg per batch
- Best for: Fly ash brick plants, small-medium scale production
- Motor: 10–15–20 HP
- Known for Uniform mixing


Planetary Mixture

- Heavy-duty mixing with a multi rotating arms that move in planetary motion (like solar system)
- Multi-layer bottom plate
- Produces extremely consistent mix — no dry pockets
- Used for high-quality concrete bricks, Hollow block, paver blocks, curb stone etc.
- Capacity: 600–900–1300 kg per batch
- Best for: high-strength concrete bricks, Paver block plants, Hollow block plant
- Motor: 10–15–20 HP

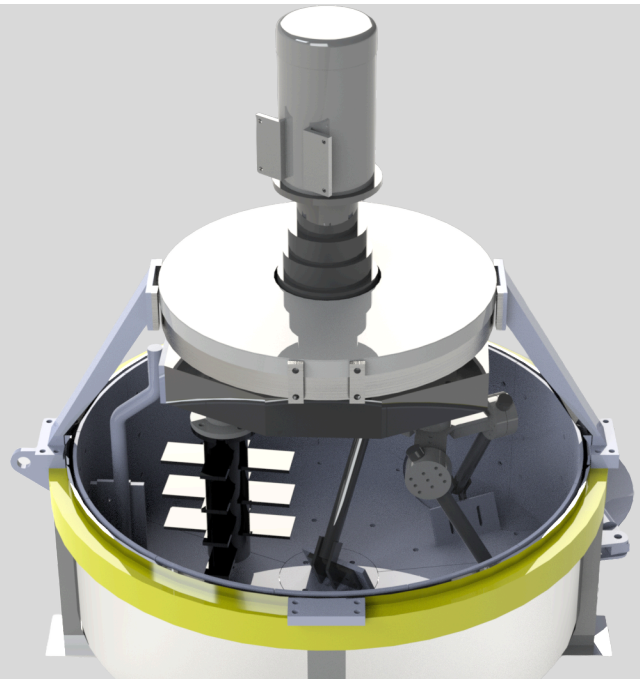

Product List

- Nine forms. One standard — uncompromising quality in every Solid Brick, Fly Ash Brick, Hollow Block, Paver, Retention Block, Curb Stone, and Drain Block that leaves a Harvin machine produce.

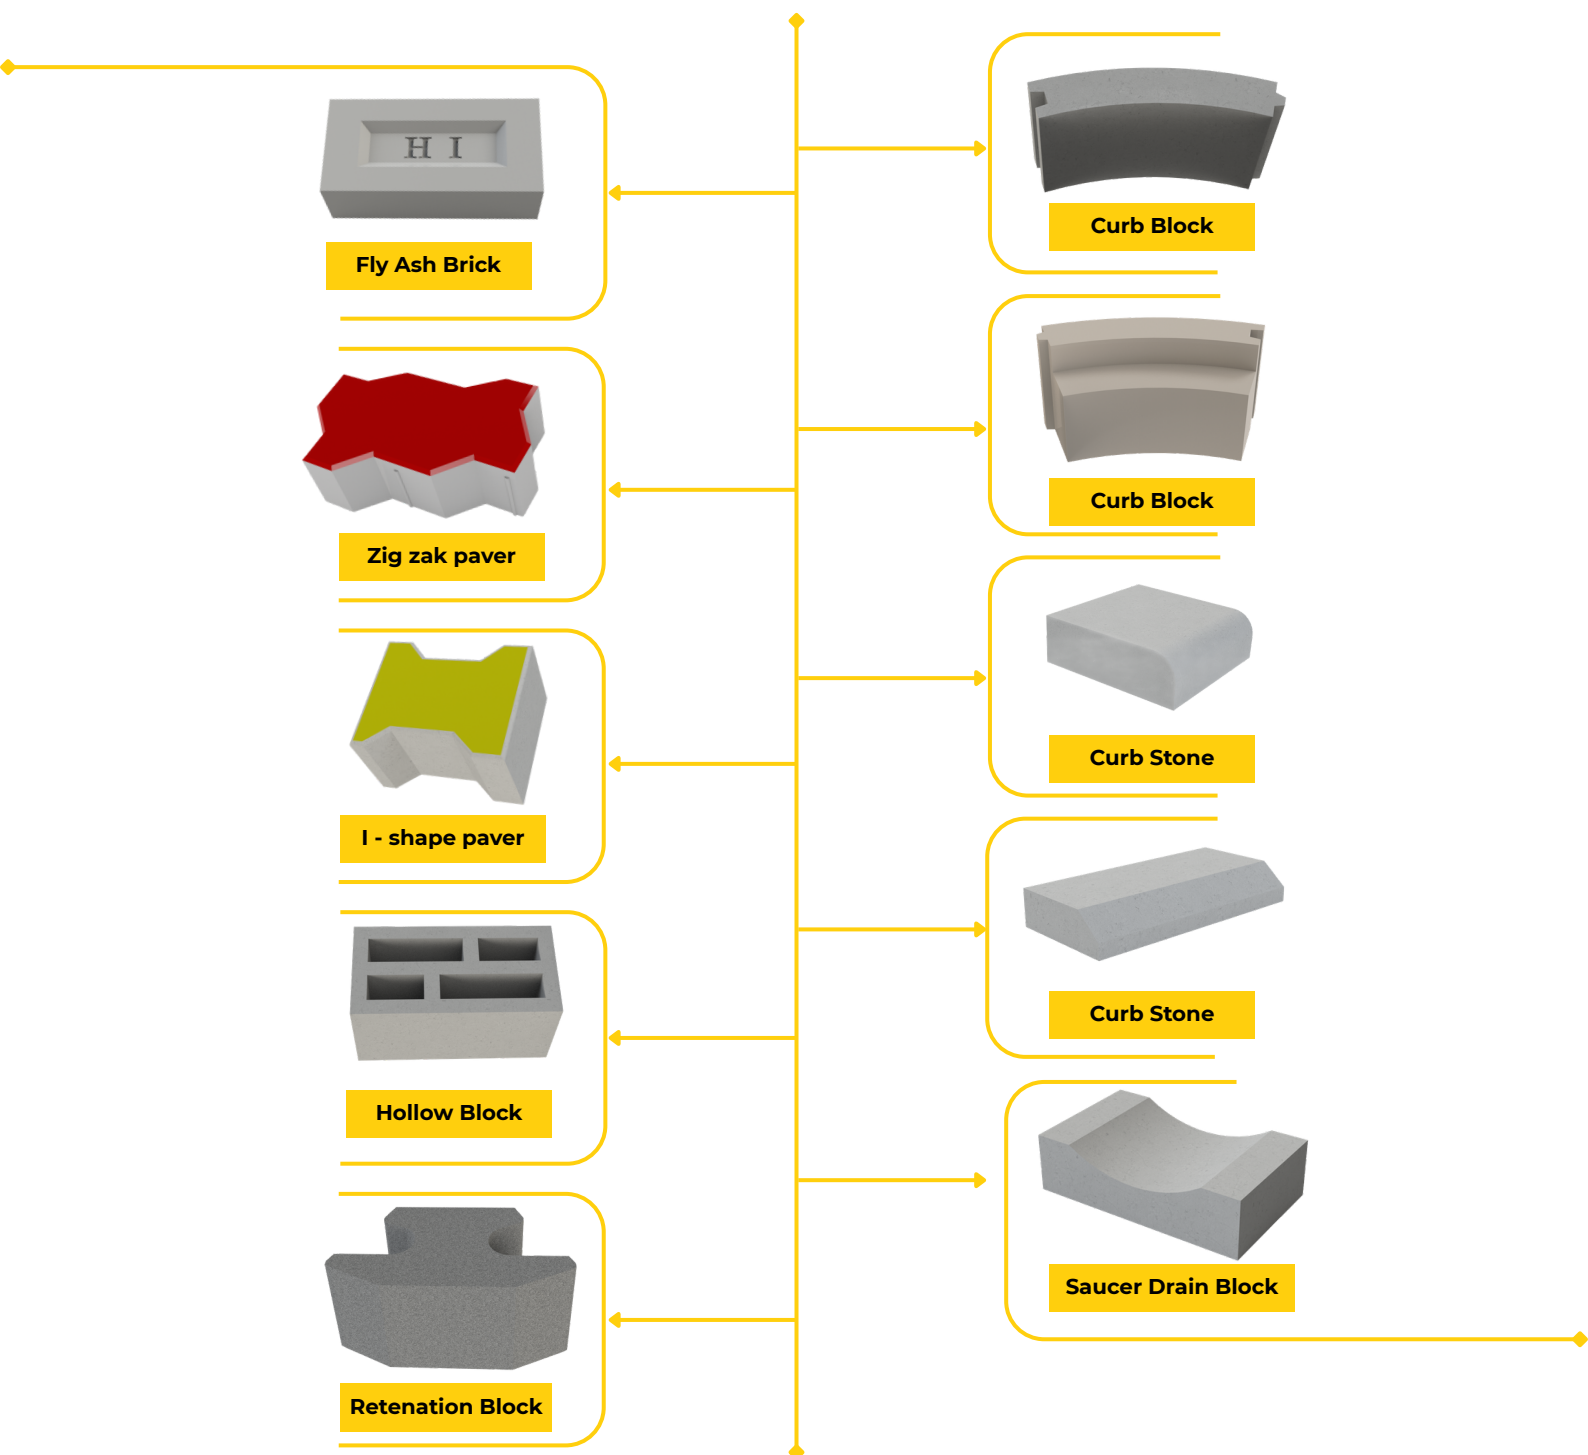



Market Opportunities

Who Buys What Our Machines Produce

Every product our Harvin machine makes has a ready, growing, and government-backed market waiting for it across India.

Biggest Opportunity Right Now

India's Smart City Mission, PMAY housing scheme, and National Highway expansion are driving unprecedented demand for bricks, blocks, pavers, curb stones, and drain blocks — every product our Harvin machine produces is directly in the path of this spending.

Solid Brick & Fly Ash Brick

● **Very High Demand**

Primary Buyers

- Real estate developers & builders
- PMAY government housing contractors
- Affordable housing project builders
- Residential & commercial contractors

Key Driver PMAY • Housing boom • Tier 2 & 3 city

Hollow Block

● **High Demand**

Primary Buyers

- Commercial building contractors
- Industrial shed & warehouse builders
- Hotel & hospital construction firms
- Compound wall contractors

Key Driver Urban construction • Industrial corridors

Retention Block

● **Rapidly Growing**

Primary Buyers

- Highway & expressway contractors
- River bank & canal project contractors
- Railway embankment builders
- Hill road & mountain highway builders

Key Driver Highway expansion • River projects • Railways

I-Shape & Zigzag Paver

● **Very High Demand**

Primary Buyers

- Municipal corporations & gram panchayats
- NHAI & state highway contractors
- Township & housing society developers

Key Driver Smart City Mission • Road tenders • NHAI

Curb Stone & Curb Block

● **High Demand**

Primary Buyers

- Municipal road contractors
- Smart City project contractors
- State PWD (Public Works Dept.)

Key Driver Every city road • Smart Cities • PWD tenders

Saucer Drain Block

● **High Demand**

Primary Buyers

- Road drainage contractors
- Municipal corporations
- Industrial estate developers
- Airport runway drainage

Key Driver Smart Cities • Industrial zones • Highways

Thank You

We are ready to assist you

On behalf of the entire Harvin Industries family, thank you for your time and trust. We believe every brick laid with our machine carries our commitment to quality — and your vision for a better tomorrow.

Mr. Dhaval Sathwara

Harvin Industries, Ahmedabad



**Shed No 28, NK Industrial Park, Gatrad Bakrol Bujrang
Kuha Road, Bakrol Bujrang, Ahmedabad, Gujarat-382430**



+91 98985 75358



GSTIN: 24FNRPS3414P1Z7