



# ADVANCED CONCEPTS

**Ayyappan Murugesan**


**Phone: 7010774329**

**WhatsApp: 8870483557**

# TOPICS

- Class
- Modules
- Important Libraries
- File
- Standard Library
- Threads
- Socket Programming



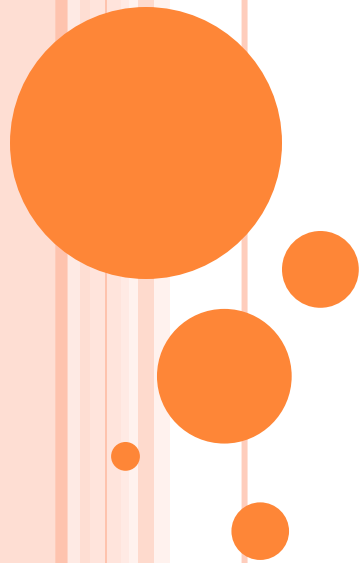

# PYTHON CLASS

**Ayyappan Murugesan**

**Phone: 7010774329**

**WhatsApp: 8870483557**

# PYTHON CLASS

- A class is an arrangement of variables and functions into a single logical entity. It works as a template for creating objects.
- Every object can use class variables and functions as its members.
- The object is a working instance of a class created at runtime.



# CREATING CLASS

- The class statement creates a new class definition.

```
class ClassName:  
    'Optional class documentation string'  
    class_suite
```



# 5 TERMS

- **class keyword**
- **instance attributes**
- **class attributes**
- **self keyword**
- **\_\_init\_\_ keyword**

```
class BookStore:  
    def __init__(self, attrib1, attrib2):  
        self.attrib1 = attrib1  
        self.attrib2 = attrib2
```

```
class BookStore:  
    instances = 0  
    def __init__(self, attrib1, attrib2):  
        self.attrib1 = attrib1  
        self.attrib2 = attrib2  
        BookStore.instances += 1
```

```
b1 = BookStore("", "")  
b2 = BookStore("", "")  
  
print("BookStore.instances:", BookStore.instances)
```



# PUBLIC & PRIVATE (DATA HIDING) ATTRIBUTES

```
class BookStore:  
    def __init__(self, attrib1, attrib2):  
        self.attrib1 = attrib1  
        self.attrib2 = attrib2
```

Public

```
class JustCounter:  
    secretCount = 0  
  
    def count(self):  
        self.secretCount += 1  
        print self.secretCount
```

Private

```
counter = JustCounter()  
counter.count()  
counter.count()  
print counter.secretCount
```



# CLASS INHERITANCE

- Instead of starting from scratch, you can create a class by deriving it from a preexisting class by listing the parent class in parentheses after the new class name.

```
class SubClassName (ParentClass1[, ParentClass2, ...]):  
    'Optional class documentation string'  
    class_suite
```





```
class Parent:          # define parent class
    parentAttr = 100
    def __init__(self):
        print "Calling parent constructor"

    def parentMethod(self):
        print 'Calling parent method'

    def setAttr(self, attr):
        Parent.parentAttr = attr

    def getAttr(self):
        print "Parent attribute :", Parent.parentAttr

class Child(Parent): # define child class
    def __init__(self):
        print "Calling child constructor"

    def childMethod(self):
        print 'Calling child method'

c = Child()            # instance of child
c.childMethod()        # child calls its method
c.parentMethod()       # calls parent's method
c.setAttr(200)         # again call parent's method
c.getAttr()            # again call parent's method
```



# OVERRIDING METHODS

```
class Parent:          # define parent class
    def myMethod(self):
        print 'Calling parent method'

class Child(Parent):   # define child class
    def myMethod(self):
        print 'Calling child method'

c = Child()            # instance of child
c.myMethod()           # child calls overridden method
```



## BASE OVERRIDING METHODS

- `__init__ ( self [,args...] )`
- `__del__( self )`
- `__repr__( self )`
- `__str__( self )`



# OVERLOADING OPERATORS

```
class Vector:
    def __init__(self, a, b):
        self.a = a
        self.b = b

    def __str__(self):
        return 'Vector (%d, %d)' % (self.a, self.b)

    def __add__(self, other):
        return Vector(self.a + other.a, self.b + other.b)

v1 = Vector(2,10)
v2 = Vector(5,-2)
print v1 + v2
```



# GETTER , SETTER & DELETER

```
class C(object):
    def __init__(self):
        self._x = None

    def getx(self):
        return self._x

    def setx(self, value):
        self._x = value

    def delx(self):
        del self._x

x = property(getx, setx, delx, "I'm the 'x' property.")
```

```
class C(object):
    def __init__(self):
        self._x = None

    @property
    def x(self):
        """I'm the 'x' property."""
        return self._x

    @x.setter
    def x(self, value):
        self._x = value

    @x.deleter
    def x(self):
        del self._x
```

```
class Parrot(object):
    def __init__(self):
        self._voltage = 100000

    @property
    def voltage(self):
        """Get the current voltage."""
        return self._voltage
```



# CLASS METHOD & STATIC METHOD

- A class method receives the class as its first argument.
- `classmethod()` or with decorator `@classmethod`.
- A static method receives neither the instance nor the class as its first argument
- `staticmethod()` or with decorator `@staticmethod`

```
class B(object):  
  
    Count = 0  
  
    def dup_string(x):  
        s1 = '%s%s' % (x, x,)  
        return s1  
    dup_string = staticmethod(dup_string)  
  
    @classmethod  
    def show_count(cls, msg):  
        print '%s %d' % (msg, cls.Count, )  
  
def test():  
    print B.dup_string('abcd')  
    B.show_count('here is the count: ')
```



# NEW-STYLE CLASSES

```
class C(list):
    def get_len(self):
        return len(self)

c = C((11,22,33))
c.get_len()

c = C((11,22,33,44,55,66,77,88))
print c.get_len()
# Prints "8".
```

```
class D(dict):
    def __init__(self, data=None, name='no_name'):
        if data is None:
            data = {}
        dict.__init__(self, data)
        self.name = name
    def get_len(self):
        return len(self)
    def get_keys(self):
        content = []
        for key in self:
            content.append(key)
        contentstr = ', '.join(content)
        return contentstr
    def get_name(self):
        return self.name

def test():
    d = D({'aa': 111, 'bb':222, 'cc':333})
    # Prints "3"
    print d.get_len()
    # Prints "'aa, cc, bb'"
    print d.get_keys()
    # Prints "no_name"
    print d.get_name()
```

## IMPORT THE CLASS FROM FILE

```
from folder.file import Klasa
```

Or, with `from folder import file`:


```
from folder import file  
k = file.Klasa()
```

Or again:

```
import folder.file as myModule  
k = myModule.Klasa()
```





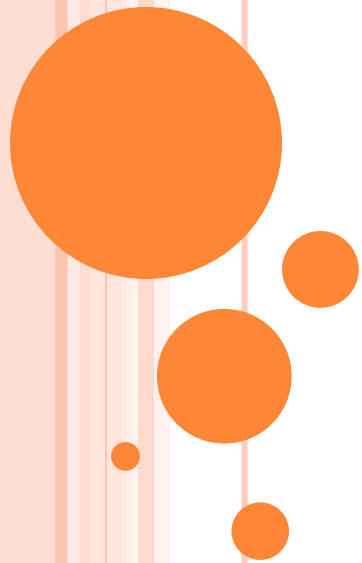

# MODULES

**Ayyappan Murugesan**

**Phone: 7010774329**

**WhatsApp: 8870483557**

# MODULES

- A module allows you to logically organize your Python code
- Grouping related code into a module makes the code easier to understand and use
- a module is a file consisting of Python code



# LOCATING MODULES

- The current directory (`sys.path`)
- If the module isn't found, Python then searches each directory in the shell variable `PYTHONPATH`.
- If all else fails, Python checks the default path. On UNIX, this default path is normally `/usr/local/lib/python/`. On Window, this default path is normally `<Install directory>/lib`



# ASSET FUNCTIONS

Function	Description
<i>dir( )</i>	The list contains the names of all the modules, variables and functions that are defined
<i>globals()</i>	return all the names that can be accessed
<i>locals()</i>	return all the names that can be accessed locally
<i>reload()</i>	if you want to reexecute the top-level code in a module, you can use the <i>reload()</i> function



# PACKAGES IN PYTHON

- A package is a hierarchical file directory structure that defines a single Python application environment that consists of modules and subpackages

```
def Pots():  
    print "I'm Pots Phone"
```

*MyLib/Pots.py*

*MyLib/Pots1.py*

*MyLib/Pots2.py*

*MyLib/\_\_init\_\_.py*

```
from Pots import Pots  
from Pots1 import Pots1  
from Pots2 import Pots2
```

```
import MyLib
```

```
MyLib.Pots()
```

```
MyLib.Pots1()
```

```
MyLib.Pots2()
```





# **IMPORTANT LIBRARY**

**Ayyappan Murugesan**

**Phone: 7010774329**

**WhatsApp: 8870483557**

# SYS

- System-specific parameters and functions

```
>>> import sys
>>> sys.version
'2.6.5 (r265:79063, Apr 16 2010, 13:57:41) \n[GCC 4.4.3]'
>>> sys.version_info
(2, 6, 5, 'final', 0)
```

- Command Line Argument

```
import sys

# it's easy to print this list of course:
print sys.argv

# or it can be iterated via a for loop:
for i in range(len(sys.argv)):
    if i == 0:
        print "Function name: %s" % sys.argv[0]
    else:
        print "%d. argument: %s" % (i, sys.argv[i])
```



## ○ Standard data streams

```
>>> import sys
>>> print "Going via stdout"
Going via stdout
>>> sys.stdout.write("Another way to do it!\n")
Another way to do it!
>>> x = raw_input("read value via stdin: ")
read value via stdin: 42
>>> print x
42
>>> print "type in value: ", ; sys.stdin.readline()[:-1]
type in value: 42

'42'
```





# OS

- The OS module in Python provides a way of using operating system dependent functionality.

Function	Description
<b>os.system()</b>	Executing a shell command
<b>os.environ()</b>	Get the users environment
<b>os.getcwd()</b>	Returns the current working directory.
<b>os.getgid()</b>	Return the real group id of the current process.
<b>os.getuid()</b>	Return the current process's user id
<b>os.getpid()</b>	Returns the real process ID of the current process
<b>os.umask(mask)</b>	Set the current numeric umask and return the previous umask
<b>os.uname()</b>	Return information identifying the current operating system.
<b>os.chroot(path)</b>	Change the root directory of the current process to path
<b>os.listdir(path)</b>	Return a list of the entries in the directory given by path
<b>os.mkdir(path)</b>	Create a directory named path with numeric mode mode



Function	Description
<b>os.makedirs(path)</b>	Recursive directory creation function
<b>os.remove(path)</b>	Remove (delete) the file path.
<b>os.removedirs(path)</b>	Remove directories recursively.
<b>os.rename(src, dst)</b>	Rename the file or directory src to dst.
<b>os.rmdir(path)</b>	Remove (delete) the directory path.



# JSON

- Compact encoding

```
>>> import json
>>> json.dumps([1, 2, 3, {'4': 5, '6': 7}], separators=(',', ':'))
'[1,2,3,{"4":5,"6":7}]'
```

- Pretty printing

```
>>> import json
>>> print(json.dumps({'4': 5, '6': 7}, sort_keys=True, indent=4))
{
    "4": 5,
    "6": 7
}
```



JSON	Python
object	dict
array	list
string	str
number (int)	int
number (real)	float
true	True
false	False
null	None



## ○ Decoding JSON

```
>>> import json
>>> json.loads('["foo", {"bar":["baz", null, 1.0, 2]}]')
['foo', {'bar': ['baz', None, 1.0, 2]}]
>>> json.loads('"\\"foo\\bar"')
'"foo\x08ar'
>>> from io import StringIO
>>> io = StringIO('["streaming API"]')
>>> json.load(io)
['streaming API']
```

```
>>> import json
>>> def as_complex(dct):
...     if '__complex__' in dct:
...         return complex(dct['real'], dct['imag'])
...     return dct
...
>>> json.loads('{"__complex__": true, "real": 1, "imag": 2}',
...     object_hook=as_complex)
(1+2j)
>>> import decimal
>>> json.loads('1.1', parse_float=decimal.Decimal)
Decimal('1.1')
```



```
>>> import json
>>> class ComplexEncoder(json.JSONEncoder):
...     def default(self, obj):
...         if isinstance(obj, complex):
...             return [obj.real, obj.imag]
...         # Let the base class default method raise the TypeError
...         return json.JSONEncoder.default(self, obj)
...
>>> json.dumps(2 + 1j, cls=ComplexEncoder)
'[2.0, 1.0]'
>>> ComplexEncoder().encode(2 + 1j)
'[2.0, 1.0]'
>>> list(ComplexEncoder().iterencode(2 + 1j))
['[2.0', ', 1.0', ']']
```



# HTTP ( REQUESTS )

- HTTP is a set of protocols designed to enable communication between clients and servers. It works as a request-response protocol between a client and server
- HTTP Method
  - GET
  - POST



# HTTP GET

```
# importing the requests library
import requests

# api-endpoint
URL = "http://maps.googleapis.com/maps/api/geocode/json"

# location given here
location = "delhi technological university"

# defining a params dict for the parameters to be sent to the API
PARAMS = {'address':location}

# sending get request and saving the response as response object
r = requests.get(url = URL, params = PARAMS)

# extracting data in json format
data = r.json()

# extracting latitude, longitude and formatted address
# of the first matching location
latitude = data['results'][0]['geometry']['location']['lat']
longitude = data['results'][0]['geometry']['location']['lng']
formatted_address = data['results'][0]['formatted_address']

# printing the output
print("Latitude:%s\nLongitude:%s\nFormatted Address:%s"
      %(latitude, longitude,formatted_address))
```





# HTTP POST

```
# importing the requests library
import requests

# defining the api-endpoint
API_ENDPOINT = "http://pastebin.com/api/api_post.php"

# your API key here
API_KEY = "XXXXXXXXXXXXXXXXXXXX"

# your source code here
source_code = '''
print("Hello, world!")
a = 1
b = 2
print(a + b)
'''

# data to be sent to api
data = {'api_dev_key':API_KEY,
        'api_option':'paste',
        'api_paste_code':source_code,
        'api_paste_format':'python'}

# sending post request and saving response as response object
r = requests.post(url = API_ENDPOINT, data = data)

# extracting response text
pastebin_url = r.text
print("The pastebin URL is:%s"%pastebin_url)
```



```
import json
url = 'https://api.github.com/some/endpoint'
payload = {'some': 'data'}
headers = {'content-type': 'application/json'}

r = requests.post(url, data=json.dumps(payload), headers=headers)
```


```
import requests, json

github_url = "https://api.github.com/user/repos"
data = json.dumps({'name': 'test', 'description': 'some test repo'})
r = requests.post(github_url, data, auth=('user', '*****'))

print r.json
```

```
r = requests.put("http://httpbin.org/put")
r = requests.delete("http://httpbin.org/delete")
r = requests.head("http://httpbin.org/get")
r = requests.options("http://httpbin.org/get")
```



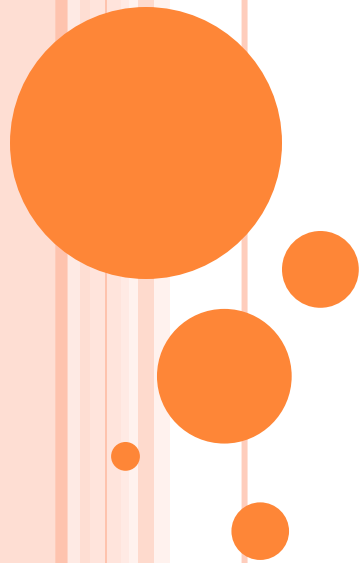

# FILES

**Ayyappan Murugesan**

**Phone: 7010774329**

**WhatsApp: 8870483557**

# OPEN

```
file object = open(file_name [, access_mode][, buffering])
```

Below are the parameter details.

**<access\_mode>**- It's an integer representing the file open mode e.g. read, write, append, etc. It's an optional parameter. By default, it is set to read-only <r>. In this mode, we get data in text form after reading from the file. On the other hand, binary mode returns bytes. It's preferable for accessing the non-text files like an image or the Exe files. See the table in the next section. It lists down the available access modes.

**<buffering>**- The default value is 0 which means buffering won't happen. If the value is 1, then line buffering will take place while accessing the file. If it's greater than 1, then the buffering action will run as per the buffer size. In the case of a negative value, the default behavior is considered.

**<file\_name>**- It's a string representing the name of the file you want to access.



Modes	Description
<code>&lt;r&gt;</code>	It opens a file in read-only mode while the file offset stays at the root.
<code>&lt;rb&gt;</code>	It opens a file in (binary + read-only) modes. And the offset remains at the root level.
<code>&lt;r+&gt;</code>	It opens the file in both (read + write) modes while the file offset is again at the root level.
<code>&lt;rb+&gt;</code>	It opens the file in (read + write + binary) modes. The file offset is again at the root level.
<code>&lt;w&gt;</code>	It allows write-level access to a file. If the file already exists, then it'll get overwritten. It'll create a new file if the same doesn't exist.
<code>&lt;wb&gt;</code>	Use it to open a file for writing in binary format. Same behavior as for write-only mode.
<code>&lt;w+&gt;</code>	It opens a file in both (read + write) modes. Same behavior as for write-only mode.
<code>&lt;wb+&gt;</code>	It opens a file in (read + write + binary) modes. Same behavior as for write-only mode.
<code>&lt;a&gt;</code>	It opens the file in append mode. The offset goes to the end of the file. If the file doesn't exist, then it gets created.
<code>&lt;ab&gt;</code>	It opens a file in (append + binary) modes. Same behavior as for append mode.
<code>&lt;a+&gt;</code>	It opens a file in (append + read) modes. Same behavior as for append mode.
<code>&lt;ab+&gt;</code>	It opens a file in (append + read + binary) modes. Same behavior as for append mode.



```
#Open a file in write and binary mode.
fob = open("app.log", "wb")

#Display file name.
print "File name: ", fob.name
#Display state of the file.
print "File state: ", fob.closed
#Print the opening mode.
print "Opening mode: ", fob.mode
#Output the softspace value.
print "Softspace flag: ", fob.softspace
```

```
Python 2.7.10
[GCC 4.8.2] on Linux
```

```
File name:  app.log
File state:  False
Opening mode:  wb
Softspace flag:  0
```



- Basic Close operation

```
f = open("app.log",encoding = 'utf-8')  
# do file operations.  
f.close()
```

- Using Exception with Close

```
try:  
    f = open('app.log', encoding = 'utf-8')  
    # do file operations.  
finally:  
    f.close()
```

- Close A File Using 'With' Clause In Python

```
with open('app.log', encoding = 'utf-8') as f:  
    #do any file operation.
```



# WRITE & READ (WITH)

```
with open('app.log', 'w', encoding = 'utf-8') as f:
    #first line
    f.write('my first file\n')
    #second line
    f.write('This file\n')
    #third line
    f.write('contains three lines\n')

with open('app.log', 'r', encoding = 'utf-8') as f:
    content = f.readlines()

for line in content:
    print(line)
```





```
with open('app.log', 'w', encoding = 'utf-8') as f:
    #first line
    f.write('my first file\n')
    #second line
    f.write('This file\n')
    #third line
    f.write('contains three lines\n')

f = open('app.log', 'r', encoding = 'utf-8')
print(f.read(10))      # read the first 10 data
# 'my first f'

print(f.read(4))       # read the next 4 data
# 'ile\n'

print(f.read())        # read in the rest till end of file
# 'This file\ncontains three lines\n'

print(f.read())        # further reading returns empty sting
# ''
```



```
with open('app.log', 'w', encoding = 'utf-8') as f:
    #first line
    f.write('It is my first file\n')
    #second line
    f.write('This file\n')
    #third line
    f.write('contains three lines\n')

#Open a file
f = open('app.log', 'r+')
data = f.read(19);
print('Read String is : ', data)

#Check current position
position = f.tell();
print('Current file position : ', position)

#Reposition pointer at the beginning once again
position = f.seek(0, 0);
data = f.read(19);
print('Again read String is : ', data)

#Close the opened file
f.close()
```



# FILE FUNCTIONS

Function	Description
<code>&lt;file.close()&gt;</code>	Close the file. You need to reopen it for further access.
<code>&lt;file.flush()&gt;</code>	Flush the internal buffer. It's same as the <code>&lt;stdio&gt;</code> 's <code>&lt;fflush()&gt;</code> function.
<code>&lt;file.fileno()&gt;</code>	Returns an integer file descriptor.
<code>&lt;file.isatty()&gt;</code>	It returns true if file has a <code>&lt;tty&gt;</code> attached to it.
<code>&lt;file.next()&gt;</code>	Returns the next line from the last offset.
<code>&lt;file.read(size)&gt;</code>	Reads the given no. of bytes. It may read less if EOF is hit.
<code>&lt;file.readline(size)&gt;</code>	It'll read an entire line (trailing with a new line char) from the file.
<code>&lt;file.readlines(size_hint)&gt;</code>	It calls the <code>&lt;readline()&gt;</code> to read until EOF. It returns a list of lines read from the file. If you pass <code>&lt;size_hint&gt;</code> , then it reads lines equalling the <code>&lt;size_hint&gt;</code> bytes.
<code>&lt;file.seek(offset[, from])&gt;</code>	Sets the file's current position.
<code>&lt;file.tell()&gt;</code>	Returns the file's current position.
<code>&lt;file.truncate(size)&gt;</code>	Truncates the file's size. If the optional size argument is present, the file is truncated to (at most) that size.
<code>&lt;file.write(string)&gt;</code>	It writes a string to the file. And it doesn't return any value.
<code>&lt;file.writelines(sequence)&gt;</code>	Writes a sequence of strings to the file. The sequence is possibly an iterable object producing strings, typically a list of strings.





# STANDARD LIBRARY

<https://docs.python.org/3/library/>

Ayyappan Murugesan

Phone: 7010774329

WhatsApp: 8870483557

# TEXT PROCESSING SERVICES

- string — Common string operations
- re — Regular expression operations
- difflib — Helpers for computing deltas
- textwrap — Text wrapping and filling
- unicodedata — Unicode Database
- stringprep — Internet String Preparation
- readline — GNU readline interface
- rlcompleter — Completion function for GNU readline



# BINARY DATA SERVICES

- struct — Interpret bytes as packed binary data
- codecs — Codec registry and base classes

```
>>> from struct import *
>>> pack('hhl', 1, 2, 3)
b'\x00\x01\x00\x02\x00\x00\x00\x03'
>>> unpack('hhl', b'\x00\x01\x00\x02\x00\x00\x00\x03')
(1, 2, 3)
>>> calcsize('hhl')
8
```



# DATA TYPES

- datetime — Basic date and time types
- calendar — General calendar-related functions
- collections — Container datatypes
- collections.abc — Abstract Base Classes for Containers
- heapq — Heap queue algorithm
- bisect — Array bisection algorithm
- array — Efficient arrays of numeric values
- weakref — Weak references
- types — Dynamic type creation and names for built-in types
- copy — Shallow and deep copy operations
- pprint — Data pretty printer
- reprlib — Alternate repr() implementation
- enum — Support for enumerations



# NUMERIC AND MATHEMATICAL MODULES

- numbers — Numeric abstract base classes
- math — Mathematical functions
- cmath — Mathematical functions for complex numbers
- decimal — Decimal fixed point and floating point arithmetic
- fractions — Rational numbers
- random — Generate pseudo-random numbers
- statistics — Mathematical statistics functions





# FUNCTIONAL PROGRAMMING MODULES

- itertools — Functions creating iterators for efficient looping
- functools — Higher-order functions and operations on callable objects
- operator — Standard operators as functions



# FILE AND DIRECTORY ACCESS

- pathlib — Object-oriented filesystem paths
- os.path — Common pathname manipulations
- fileinput — Iterate over lines from multiple input streams
- stat — Interpreting stat() results
- filecmp — File and Directory Comparisons
- tempfile — Generate temporary files and directories
- glob — Unix style pathname pattern expansion
- fnmatch — Unix filename pattern matching
- linecache — Random access to text lines
- shutil — High-level file operations
- macpath — Mac OS 9 path manipulation functions



# DATA PERSISTENCE

- pickle — Python object serialization
- copyreg — Register pickle support functions
- shelve — Python object persistence
- marshal — Internal Python object serialization
- dbm — Interfaces to Unix “databases”
- sqlite3 — DB-API 2.0 interface for SQLite databases



# DATA COMPRESSION AND ARCHIVING

- zlib — Compression compatible with gzip
- gzip — Support for gzip files
- bz2 — Support for bzip2 compression
- lzma — Compression using the LZMA algorithm
- zipfile — Work with ZIP archives
- tarfile — Read and write tar archive files



# FILE FORMATS

- csv — CSV File Reading and Writing
- configparser — Configuration file parser
- netrc — netrc file processing
- xdrlib — Encode and decode XDR data
- plistlib — Generate and parse Mac OS X .plist files



# CRYPTOGRAPHIC SERVICES

- hashlib — Secure hashes and message digests
- hmac — Keyed-Hashing for Message Authentication
- secrets — Generate secure random numbers for managing secrets



# GENERIC OPERATING SYSTEM SERVICES

- os — Miscellaneous operating system interfaces
- io — Core tools for working with streams
- time — Time access and conversions
- argparse — Parser for command-line options, arguments and sub-commands
- getopt — C-style parser for command line options
- logging — Logging facility for Python
- logging.config — Logging configuration
- logging.handlers — Logging handlers
- getpass — Portable password input
- curses — Terminal handling for character-cell displays
- curses.textpad — Text input widget for curses programs
- curses.ascii — Utilities for ASCII characters
- curses.panel — A panel stack extension for curses
- platform — Access to underlying platform's identifying data
- errno — Standard errno system symbols
- ctypes — A foreign function library for Python



# CONCURRENT EXECUTION

- threading — Thread-based parallelism
- multiprocessing — Process-based parallelism
- The concurrent package
- concurrent.futures — Launching parallel tasks
- subprocess — Subprocess management
- sched — Event scheduler
- queue — A synchronized queue class
- dummy\_threading — Drop-in replacement for the threading module
- \_thread — Low-level threading API
- \_dummy\_thread — Drop-in replacement for the \_thread module





# INTERPROCESS COMMUNICATION AND NETWORKING

- socket — Low-level networking interface
- ssl — TLS/SSL wrapper for socket objects
- select — Waiting for I/O completion
- selectors — High-level I/O multiplexing
- asyncio — Asynchronous I/O, event loop, coroutines and tasks
- asyncore — Asynchronous socket handler
- asynchat — Asynchronous socket command/response handler
- signal — Set handlers for asynchronous events
- mmap — Memory-mapped file support



# INTERNET DATA HANDLING

- email — An email and MIME handling package
- json — JSON encoder and decoder
- mailcap — Mailcap file handling
- mailbox — Manipulate mailboxes in various formats
- mimetypes — Map filenames to MIME types
- base64 — Base16, Base32, Base64, Base85 Data Encodings
- binhex — Encode and decode binhex4 files
- binascii — Convert between binary and ASCII
- quopri — Encode and decode MIME quoted-printable data
- uu — Encode and decode uuencode files



# STRUCTURED MARKUP PROCESSING TOOLS

- html — HyperText Markup Language support
- html.parser — Simple HTML and XHTML parser
- html.entities — Definitions of HTML general entities
- XML Processing Modules
- xml.etree.ElementTree — The ElementTree XML API
- xml.dom — The Document Object Model API
- xml.dom.minidom — Minimal DOM implementation
- xml.dom.pulldom — Support for building partial DOM trees
- xml.sax — Support for SAX2 parsers
- xml.sax.handler — Base classes for SAX handlers
- xml.sax.saxutils — SAX Utilities
- xml.sax.xmlreader — Interface for XML parsers
- xml.parsers.expat — Fast XML parsing using Expat



# INTERNET PROTOCOLS AND SUPPORT

- webbrowser — Convenient Web-browser controller
- cgi — Common Gateway Interface support
- cgitb — Traceback manager for CGI scripts
- wsgiref — WSGI Utilities and Reference Implementation
- urllib — URL handling modules
- http — HTTP modules
- ftplib — FTP protocol client
- poplib — POP3 protocol client
- imaplib — IMAP4 protocol client
- nntplib — NNTP protocol client
- smtplib — SMTP protocol client
- smtpd — SMTP Server
- telnetlib — Telnet client
- uuid — UUID objects according to RFC 4122
- socketserver — A framework for network servers
- xmlrpc — XMLRPC server and client modules
- ipaddress — IPv4/IPv6 manipulation library



# MULTIMEDIA SERVICES

- audioop — Manipulate raw audio data
- aifc — Read and write AIFF and AIFC files
- sunau — Read and write Sun AU files
- wave — Read and write WAV files
- chunk — Read IFF chunked data
- colorsys — Conversions between color systems
- imghdr — Determine the type of an image
- sndhdr — Determine type of sound file
- ossaudiodev — Access to OSS-compatible audio devices



# INTERNATIONALIZATION

- gettext — Multilingual internationalization services
- locale — Internationalization services



# PROGRAM FRAMEWORKS

- turtle — Turtle graphics
- cmd — Support for line-oriented command interpreters
- shlex — Simple lexical analysis



# GRAPHICAL USER INTERFACES WITH TK

- tkinter — Python interface to Tcl/Tk
- tkinter.ttk — Tk themed widgets
- tkinter.tix — Extension widgets for Tk
- tkinter.scrolledtext — Scrolled Text Widget
- IDLE
- Other Graphical User Interface Packages





# DEVELOPMENT TOOLS

- typing — Support for type hints
- pydoc — Documentation generator and online help system
- doctest — Test interactive Python examples
- unittest — Unit testing framework
- 2to3 - Automated Python 2 to 3 code translation
- test — Regression tests package for Python



# DEBUGGING AND PROFILING

- bdb — Debugger framework
- faulthandler — Dump the Python traceback
- pdb — The Python Debugger
- The Python Profilers
- timeit — Measure execution time of small code snippets
- trace — Trace or track Python statement execution
- tracemalloc — Trace memory allocations



# SOFTWARE PACKAGING AND DISTRIBUTION

- distutils — Building and installing Python modules
- ensurepip — Bootstrapping the pip installer
- venv — Creation of virtual environments
- zipapp — Manage executable python zip archives



# PYTHON RUNTIME SERVICES

- `sys` — System-specific parameters and functions
- `sysconfig` — Provide access to Python's configuration information
- `builtins` — Built-in objects
- `__main__` — Top-level script environment
- `warnings` — Warning control
- `contextlib` — Utilities for with-statement contexts
- `abc` — Abstract Base Classes
- `atexit` — Exit handlers
- `traceback` — Print or retrieve a stack traceback
- `__future__` — Future statement definitions
- `gc` — Garbage Collector interface
- `inspect` — Inspect live objects
- `site` — Site-specific configuration hook
- `fpectl` — Floating point exception control



# CUSTOM PYTHON INTERPRETERS

- code — Interpreter base classes
- codeop — Compile Python code



# IMPORTING MODULES

- zipimport — Import modules from Zip archives
- pkgutil — Package extension utility
- modulefinder — Find modules used by a script
- runpy — Locating and executing Python modules
- importlib — The implementation of import



# PYTHON LANGUAGE SERVICES

- parser — Access Python parse trees
- ast — Abstract Syntax Trees
- symtable — Access to the compiler's symbol tables
- symbol — Constants used with Python parse trees
- token — Constants used with Python parse trees
- keyword — Testing for Python keywords
- tokenize — Tokenizer for Python source
- tabnanny — Detection of ambiguous indentation
- pycldr — Python class browser support
- py\_compile — Compile Python source files
- compileall — Byte-compile Python libraries
- dis — Disassembler for Python bytecode
- pickletools — Tools for pickle developers



# MISCELLANEOUS SERVICES

- formatter — Generic output formatting





# MS WINDOWS SPECIFIC SERVICES

- msilib — Read and write Microsoft Installer files
- msvcrt — Useful routines from the MS VC++ runtime
- winreg — Windows registry access
- winsound — Sound-playing interface for Windows



# UNIX SPECIFIC SERVICES


- posix — The most common POSIX system calls
- pwd — The password database
- spwd — The shadow password database
- grp — The group database
- crypt — Function to check Unix passwords
- termios — POSIX style tty control
- tty — Terminal control functions
- pty — Pseudo-terminal utilities
- fcntl — The fcntl and ioctl system calls
- pipes — Interface to shell pipelines
- resource — Resource usage information
- nis — Interface to Sun's NIS (Yellow Pages)
- syslog — Unix syslog library routines



# SUPERSEDED MODULES

- optparse — Parser for command line options
- imp — Access the import internals



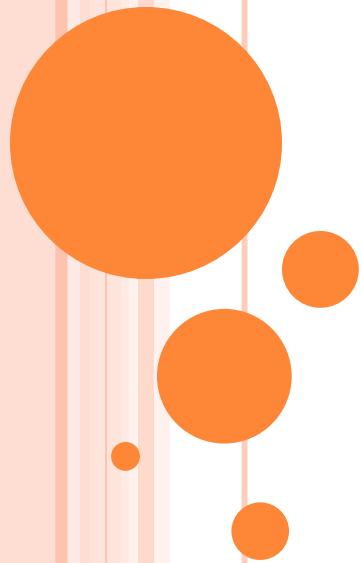


# THREADS

**Ayyappan Murugesan**

**Phone: 7010774329**

**WhatsApp: 8870483557**

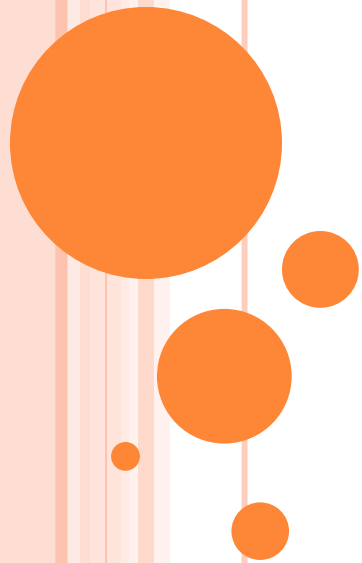

# SOCKET

**Ayyappan Murugesan**

**Phone: 7010774329**

**WhatsApp: 8870483557**