

# Database Systems Lab



## Lab # 09

Stored Procedures and Triggers

Instructor: Engr. Muhammad Usman

Email: [usman.rafiq@nu.edu.pk](mailto:usman.rafiq@nu.edu.pk)

Course Code: CL2005

Department of Computer Science,  
National University of Computer and Emerging Sciences FAST  
Peshawar Campus

## Contents

Stored Procedures	2
Pick a Delimiter	3
Declare a Variable:	4
Local variables Example	4
Parameter IN example	5
Parameter OUT example	6
DROP PROCEDURE	6
Triggers	7
Example	7
The basic trigger syntax is:	9
Exercises	12

# Stored Procedures

A stored procedure is a collection of SQL statements that are stored in Database.

One of the major advantages of stored procedures is that they can be used to encapsulate and represent business transactions.

To create a stored procedure, you use the following syntax:

```
CREATE PROCEDURE procedure_name ([[IN/OUT] argument data-type, ...])
BEGIN
    SQL statements;
    ...
END;
```

Note the following important points about stored procedures and their syntax:

- Argument specifies the parameters that are passed to the stored procedure. A stored procedure could have zero or more arguments or parameters.
- IN/OUT indicates whether the parameter is for input, output, or both.
- data-type is one of the procedural SQL data types used in the RDBMS. The data types normally match those used in the RDBMS table creation statement.

## Sales Co Database:

Consider the following table (*script available on Google Classroom DataSets/sale\_co.sql*):

```
mysql> describe product;
```

Field	Type	Null	Key	Default	Extra
P_CODE	varchar(10)	NO	PRI	NULL	
P_DESCRIPT	varchar(35)	NO		NULL	
P_INDATE	date	NO		NULL	
P_ONHAND	float	NO		NULL	
P_MIN	float	NO		NULL	
P_PRICE	float	NO		NULL	
P_DISCOUNT	float	NO		NULL	
U_CODE	int(11)	YES	MUL	NULL	

```
8 rows in set (0.00 sec)

mysql>
```

```
mysql> select * from product;
```

P_CODE	P_DESCRIPT	P_INDATE	P_ONHAND	P_MIN	P_PRICE	P_DISCOUNT	U_CODE
11QER/31	Power painter, 15 psi., 3-nozzle	2003-11-03	8	5	109.99	0	25595
13-Q2/P2	7.25-in. pwr. saw blade	2003-12-13	32	15	14.99	0.05	21344
14-Q1/L3	9.00-in. pwr. saw blade	2003-11-13	18	12	17.49	0	21344
1546-QQ2	Hrd. cloth, 1/4-in., 2x50	2004-01-04	15	8	39.95	0	23119
1558-QM1	Hrd. cloth, 1/2-in., 3x50	2004-01-15	23	5	43.99	0	23119
2232/QTV	B&D jigsaw, 12-in. blade	2003-12-10	8	5	109.92	0.05	24288
2232/QME	B&D jigsaw, 8-in. blade	2003-12-24	6	5	99.87	0.05	24288
2238/QPD	B&D cordless drill, 1/2-in.	2004-01-20	12	5	38.95	0.05	25595
23109-HB	Claw hammer	2004-01-20	23	10	9.95	0.1	21225
23114-AA	Sledge hammer, 12 lb.	2004-01-20	8	5	14.4	0.05	NULL
54778-2T	Rat-tail file, 1/8-in. fine	2003-12-15	43	20	4.99	0	21344
89-WRE-Q	Hicut chain saw, 16 in.	2004-02-17	11	5	256.99	0.05	24288
PUC23DRT	PUC pipe, 3.5-in., 8-ft	2004-02-20	188	75	5.87	0	NULL
SM-18277	1.25-in. metal screw, 25	2004-03-01	172	75	6.99	0	21225
SW-23116	2.5-in. wd. screw, 50	2004-02-24	237	100	8.45	0	21231
WR3/TT3	Steel matting, 4'x8'x1/6", .5" mesh	2004-01-07	18	5	119.95	0.1	25595

```
16 rows in set (0.00 sec)
```

To illustrate stored procedures, assume that you want to create a procedure (PRC\_PROD\_DISCOUNT) to assign an additional 5 percent discount for all products when the quantity on hand is more than or equal to twice the minimum quantity.

```
CREATE PROCEDURE PRG_PROD()
BEGIN
UPDATE PRODUCT
SET P_DISCOUNT = (P_DISCOUNT*0.05)+ P_DISCOUNT
WHERE P_ONHAND >= P_MIN*2;
END;
```

## Pick a Delimiter

The delimiter is the character or string of characters which is used to complete an SQL statement. By default, we use semicolon (;) as a delimiter. But this causes problem in stored procedure because a procedure can have many statements, and everyone must end with a semicolon. So, for your delimiter, pick a string which is rarely occur within statement or within procedure. Here we have used double dollar sign i.e. \$\$\$. You can use whatever you want. To resume using ";" as a delimiter later, say "DELIMITER ; \$\$. See here how to change the delimiter:

```
DELIMITER $$$
```

```
CREATE PROCEDURE PRG_PROD()  
BEGIN  
UPDATE PRODUCT  
SET P_DISCOUNT = (P_DISCOUNT*0.05)+ P_DISCOUNT  
WHERE P_ONHAND >= P_MIN*2;  
END $$  
  
DELIMITER ; /*to change the delimiter back*/
```

To execute the stored procedure, you must use the following syntax:

*call procedure\_name[(parameter\_list)];*

In this case we will write *call prg\_prod();* to execute the procedure.

### **COMMENT :**

The COMMENT characteristic is a MySQL extension. It is used to describe the stored routine and the information is displayed by the SHOW CREATE PROCEDURE statements.

### **Declare a Variable:**

```
DECLARE var_name [, var_name] ... type [DEFAULT value]
```

To provide a default value for a variable, include a DEFAULT clause. The value can be specified as an expression; it need not be constant. If the DEFAULT clause is missing, the initial value is NULL.

### **Local variables Example**

Local variables are declared within stored procedures and are only valid within the BEGIN...END block where they are declared. Local variables can have any SQL data type. The following example shows the use of local variables in a stored procedure.

```

DELIMITER $$
CREATE PROCEDURE my_procedure_Local_Variables()
BEGIN    /* declare local variables */
DECLARE a INT DEFAULT 10;
DECLARE b, c INT;    /* using the local variables */
SET a = a + 100;
SET b = 2;
SET c = a + b;
BEGIN    /* local variable in nested block */
DECLARE c INT;
SET c = 5;
/* local variable c takes precedence over the one of the
same name declared in the enclosing block. */
SELECT a, b, c;
END;
SELECT a, b, c;
END$$

DELIMITER ;

CALL my_procedure_Local_Variables();

```

## Parameter IN example

In the following procedure, we have used a IN parameter 'var1' (type integer) which accept a number from the user. Within the body of the procedure, there is a SELECT statement which fetches rows from 'P' table and display the data whose p\_ONHAND is equal to var1. Here is the procedure :

```

DELIMITER $$

CREATE PROCEDURE my_proc_IN (IN var1 INT)
BEGIN
    SELECT * FROM PRODUCT where P_ONHAND = var1;
END$$

DELIMITER ;

call my_proc_IN(8);

```

This procedure takes var 1 as a parameter and display that many no of rows from the table p;

```
DELIMITER $$

CREATE PROCEDURE LIMIT_ROW (IN var1 INT)
BEGIN
    SELECT * FROM PRODUCT LIMIT var1;
END$$

DELIMITER ;

call LIMIT_ROW (8);
```

## Parameter OUT example

The following example shows a simple stored procedure that uses an OUT parameter.

Using the product table again:

```
DELIMITER $$

CREATE PROCEDURE PRG_AVG_PRICE(out avg_price decimal)
BEGIN
    SELECT AVG(P_PRICE) INTO avg_price FROM PRODUCT;
END$$
```

In order to execute the procedure, write:

```
call prg_avg_price(@out);
```

and then:

```
SELECT @out;
```

To print the output.

## DROP PROCEDURE

This statement is used to drop a stored procedure or function. That is, the specified routine is removed from the server.

```
DROP PROCEDURE procedure_name ;
```

For more details:


<https://www.w3resource.com/mysql/mysql-procedure.php#SP>

# Triggers

Triggers are the SQL code that are automatically executed in response to a certain events on a particular table. In other words

A trigger is procedural SQL code that is automatically invoked by the RDBMS upon the occurrence of a given data manipulation event. It is useful to remember that:

- A trigger is invoked before or after a data row is inserted, updated, or deleted.
- A trigger is associated with a database table.
- Each database table may have one or more triggers.
- A trigger is executed as part of the transaction that triggered it.

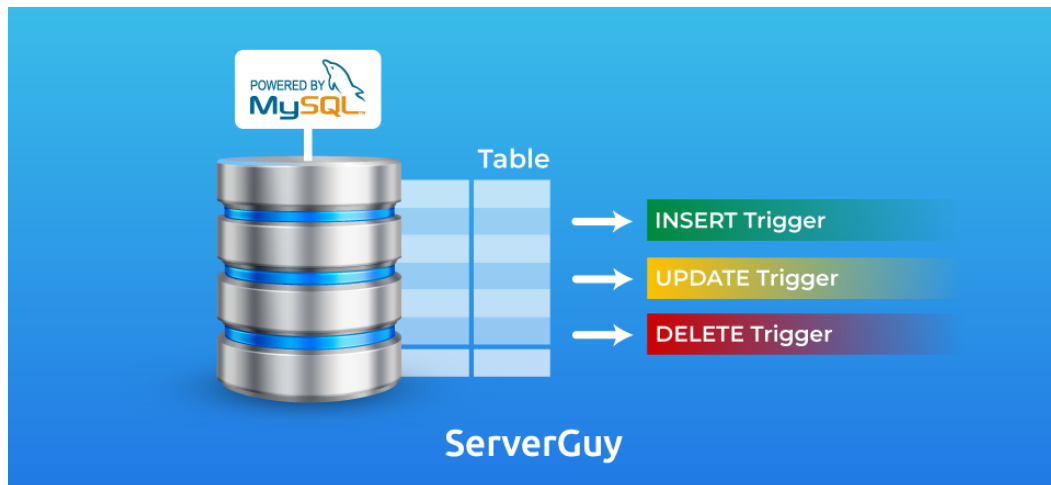

## Example

In order to explain triggers, let us create an example database for a blogging application. Two tables are required:

1. ``blog``: stores a unique post ID, the title, content, and a deleted tag.
2. ``audit``: stores a basic set of historical changes with a record ID, the blog post ID, the change type (NEW, EDIT or DELETE) and the date/time of that change.

The following SQL creates the ``blog`` and indexes the deleted column:



```
CREATE TABLE `blog` (  
  `id` mediumint(8) unsigned NOT NULL AUTO_INCREMENT,  
  `title` text,  
  `content` text,  
  `deleted` tinyint(1) unsigned NOT NULL DEFAULT '0',  
  PRIMARY KEY (`id`),  
  INDEX (deleted)  
);
```

The following SQL creates the `audit` table. All columns are indexed, and a foreign key is defined for audit.blog\_id which references blog.id. Therefore, when we physically DELETE a blog entry, its full audit history is also removed.

```
CREATE TABLE `audit` (  
  `id` mediumint(8) unsigned NOT NULL AUTO_INCREMENT,  
  `blog_id` mediumint(8) unsigned NOT NULL,  
  `changetype` enum('NEW','EDIT','DELETE') NOT NULL,  
  `changetime` timestamp NOT NULL DEFAULT CURRENT_TIMESTAMP ON UPDATE  
  CURRENT_TIMESTAMP,  
  PRIMARY KEY (`id`),  
  INDEX (`blog_id`),  
  INDEX (`changetype`),  
  INDEX (`changetime`),  
  CONSTRAINT `FK_audit_blog_id` FOREIGN KEY (`blog_id`) REFERENCES  
  `blog` (`id`) ON DELETE CASCADE ON UPDATE CASCADE  
);
```

When a record is inserted into the blog table, we want to add a new entry into the audit table containing the blog ID and a type of 'NEW' (or 'DELETE' if it was deleted immediately).

When a record is updated in the blog table, we want to add a new entry into the audit table containing the blog ID and a type of 'EDIT' or 'DELETE' if the deleted flag is set.

Note that the changetime field will automatically be set to the current time.

Each trigger requires:

1. A unique name. It is preferred to use a name which describes the table and action, e.g. `blog_before_insert` or `blog_after_update`.
2. The table which triggers the event. A single trigger can only monitor a single table.
3. When the trigger occurs. This can either be BEFORE or AFTER an INSERT, UPDATE or DELETE. A BEFORE trigger must be used if you need to modify incoming data. An AFTER trigger must be used if you want to reference the new/changed record as a foreign key for a record in another table.
4. The trigger body; a set of SQL commands to run. Note that you can refer to columns in the subject table using `OLD.col_name` (the previous value) or `NEW.col_name` (the new value). The value for `NEW.col_name` can be changed in BEFORE INSERT and UPDATE triggers.

## The basic trigger syntax is:

```
CREATE TRIGGER `event_name` BEFORE/AFTER INSERT/UPDATE/DELETE
ON `database`.`table`
FOR EACH ROW BEGIN
    -- trigger body
    -- this code is applied to every
    -- inserted/updated/deleted row
END;
```

We require two triggers — AFTER INSERT and AFTER UPDATE on the blog table. It's not necessary to define a DELETE trigger since a post is marked as deleted by setting its deleted field to true.

Our trigger body requires a number of SQL commands separated by a semi-colon (;). To create the full trigger code, we must change delimiter to something else such as \$\$.

Our AFTER-INSERT trigger can now be defined. It determines whether the deleted flag is set, sets the `@changetype` variable accordingly, and inserts a new record into the audit table:

```
DELIMITER $$
CREATE
    TRIGGER `blog_after_insert` AFTER INSERT
    ON fb.`blog`
    FOR EACH ROW BEGIN
        INSERT INTO audit (blog_id, changetype) VALUES (NEW.id, 'NEW');
```

```
END $$  
DELIMITER ;
```

The AFTER UPDATE trigger is almost identical:

```
DELIMITER $$  
  
CREATE  
    TRIGGER `blog_after_update` AFTER UPDATE  
    ON fb.`blog`  
    FOR EACH ROW BEGIN  
        IF NEW.deleted THEN  
            SET @changetype = 'DELETE';  
        ELSE  
            SET @changetype = 'EDIT';  
        END IF;  
  
        INSERT INTO audit (blog_id, changetype) VALUES (NEW.id,  
@changetype);  
    END $$  
  
DELIMITER ;
```

Let us see what happens when we insert a new post into our blog table:

```
INSERT INTO blog (title, content) VALUES ('Article One', 'Initial');
```

Check both the blog and the audit table.

Now let us update our blog text:

```
UPDATE blog SET content = 'Edited text' WHERE id = 1;
```

Check the blog and audit tables again.

Finally, let us mark the post as deleted:

```
UPDATE blog SET deleted = 1 WHERE id = 1;
```

The `audit` table is updated accordingly and we have a record of when changes occurred.

In the above example, there is new keyword 'NEW' which is a MySQL extension to triggers. There is two MySQL extension to triggers 'OLD' and 'NEW'. OLD and NEW are not case sensitive.

Within the trigger body, the OLD and NEW keywords enable you to access columns in the rows affected by a trigger

In an INSERT trigger, only NEW.col\_name can be used.

In a UPDATE trigger, you can use OLD.col\_name to refer to the columns of a row before it is updated and NEW.col\_name to refer to the columns of the row after it is updated.

In a DELETE trigger, only OLD.col\_name can be used; there is no new row.

For more details:

<https://www.w3resource.com/mysql/mysql-triggers.php>

## Exercises

Table 1: Users [user\_id (p.k)]

user_id	username	password	email	salary
1	abc123	def321	<a href="mailto:abc123@yahoo.com">abc123@yahoo.com</a>	30000
2	xyz789	asd123	<a href="mailto:xyz789@gmail.com">xyz789@gmail.com</a>	50000

Table 2: Summary [id(p.k)]

id	total_users	Yahoo	Hotmail	Gmail
1	2	1	0	1

Create a database name person and create the tables above.

1. Write a procedure that take id, total\_user, Yahoo, Hotmail, Gmail values as an input and insert the data into the table summary.
2. Write a procedure that take user\_id, username, password, email values as an input and insert the data into the table Users.
3. Write a procedure that output the total number of records/rows in the users table.
4. Write a procedure that output the average salary in the users table.
5. Create a procedure named minmax which displays the lowest and the highest salary of the users. Run the procedure to display the lowest and the highest salary.
6. Create trigger(s) to update the records in the summary table. The summary table will contain only one record and will be updated each time a new entry is made to the users table, or a user is deleted from the users table. You need to create the following two triggers.
  - I. Whenever a new entry is made to the user's table then total\_user attribute in the summary table must be incremented by 1.

- II. Whenever a record is deleted from the user's table then total\_user attribute in the summary table must be decremented by 1.

Insert data in the users table (at least 5-10 records) with different email addresses.

Check the summary table each time you add a new user or delete a user to check if the trigger(s) are working correctly.