W1: Wake-up time (hour) — Old Method
v7/exp1a/cfg3 | coeffs [-10, -5, -1, 0, 1, 5, 10]

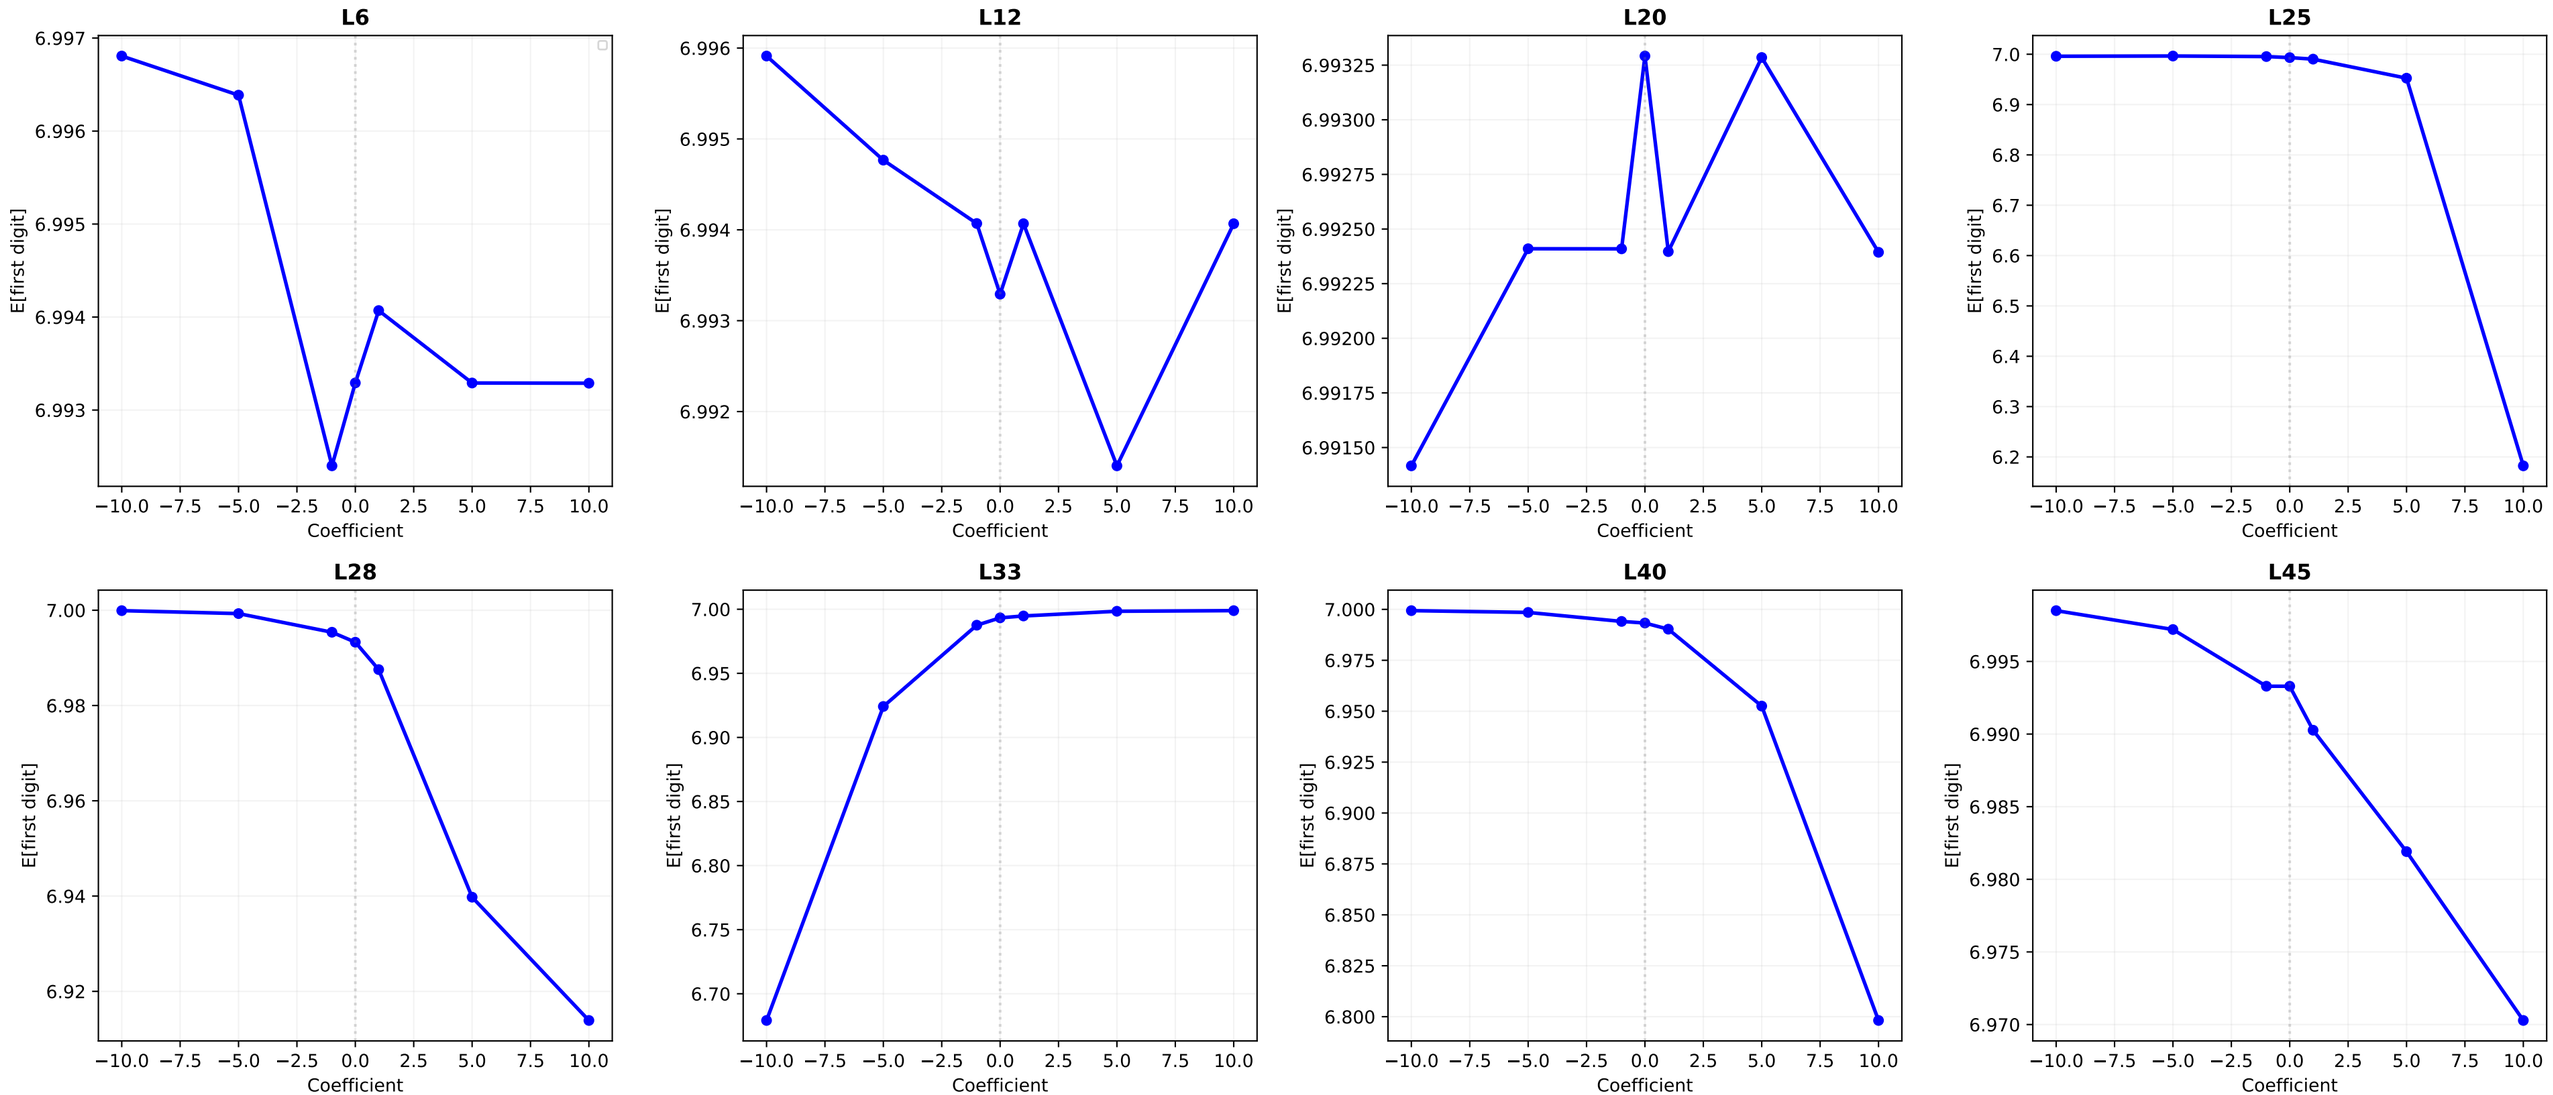

W1: Wake-up time (hour) — Old Method Heatmap
v7/exp1a/cfg3

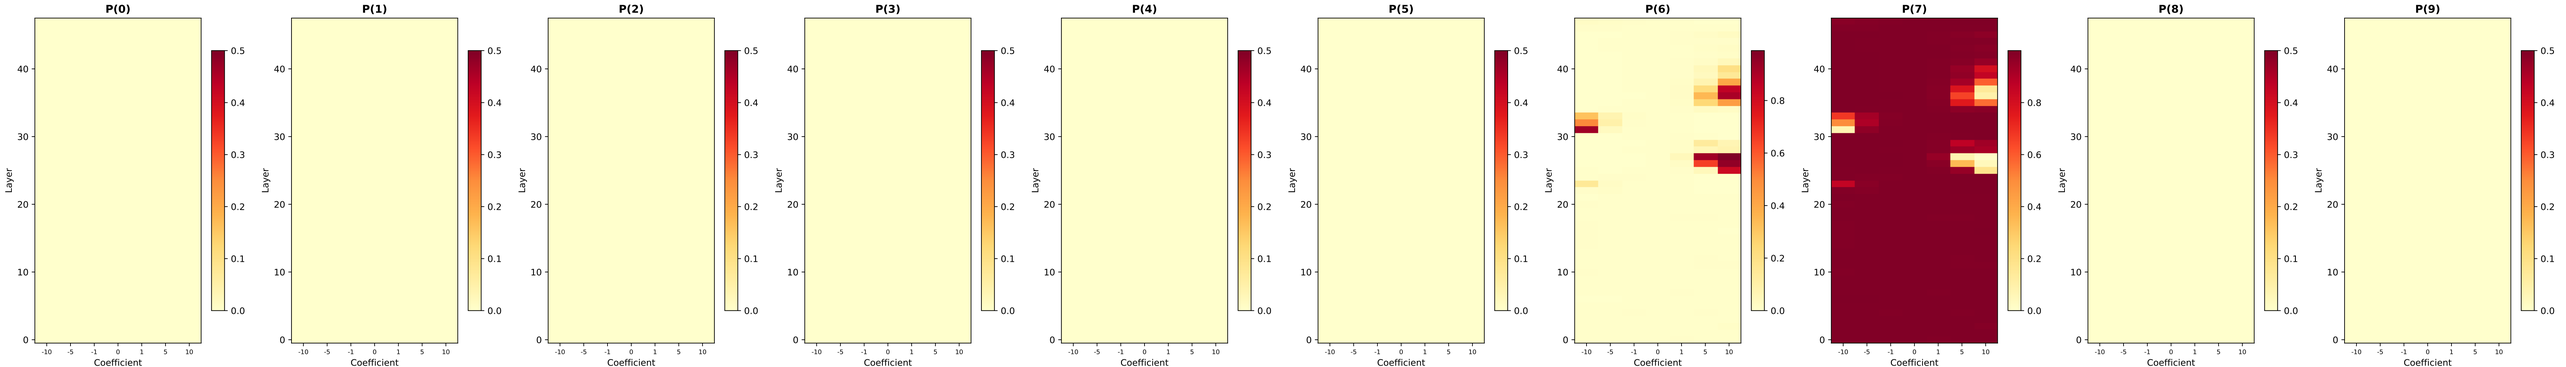

W1: Wake-up time (hour) — New Method (Matteo)
v7/exp1a/cfg3 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

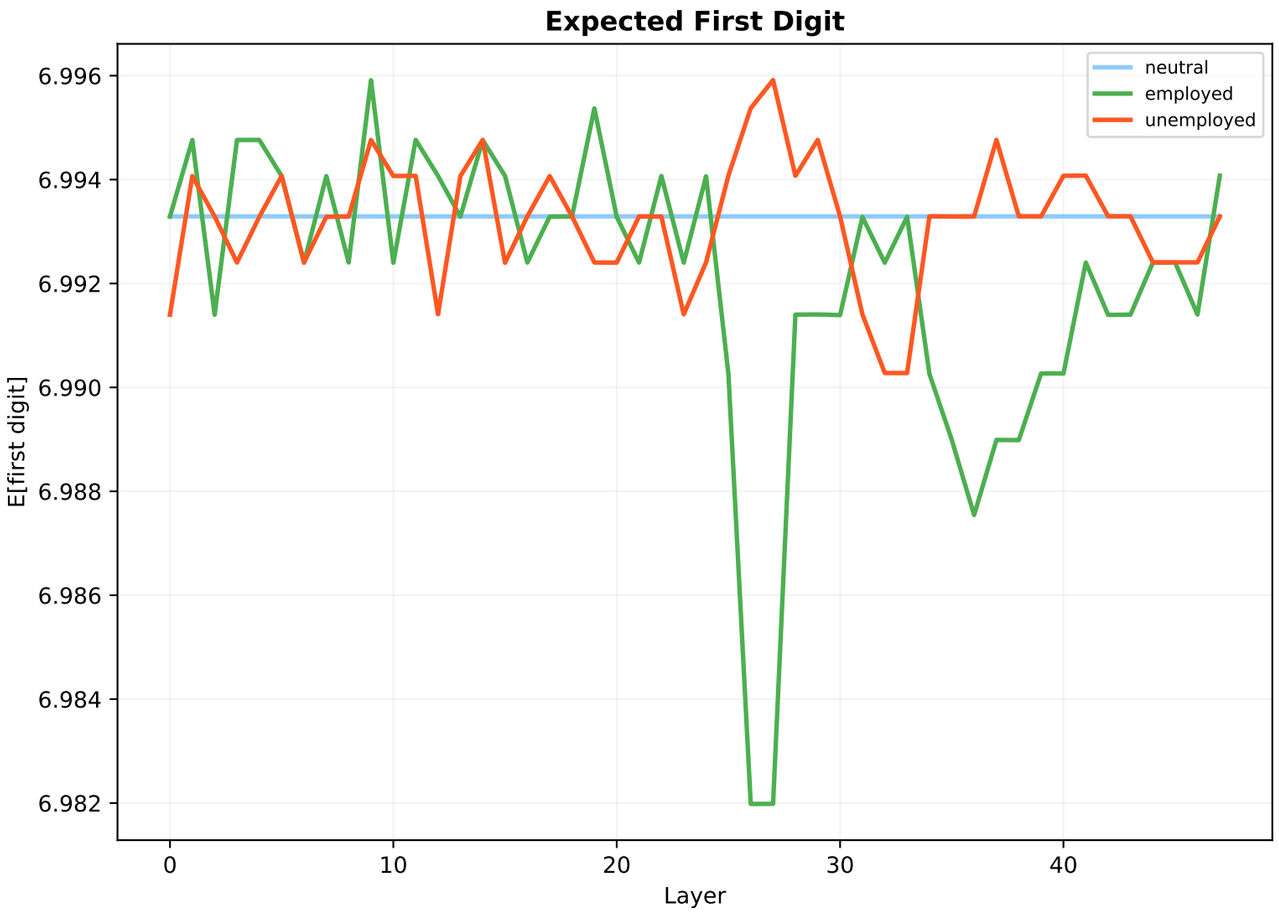

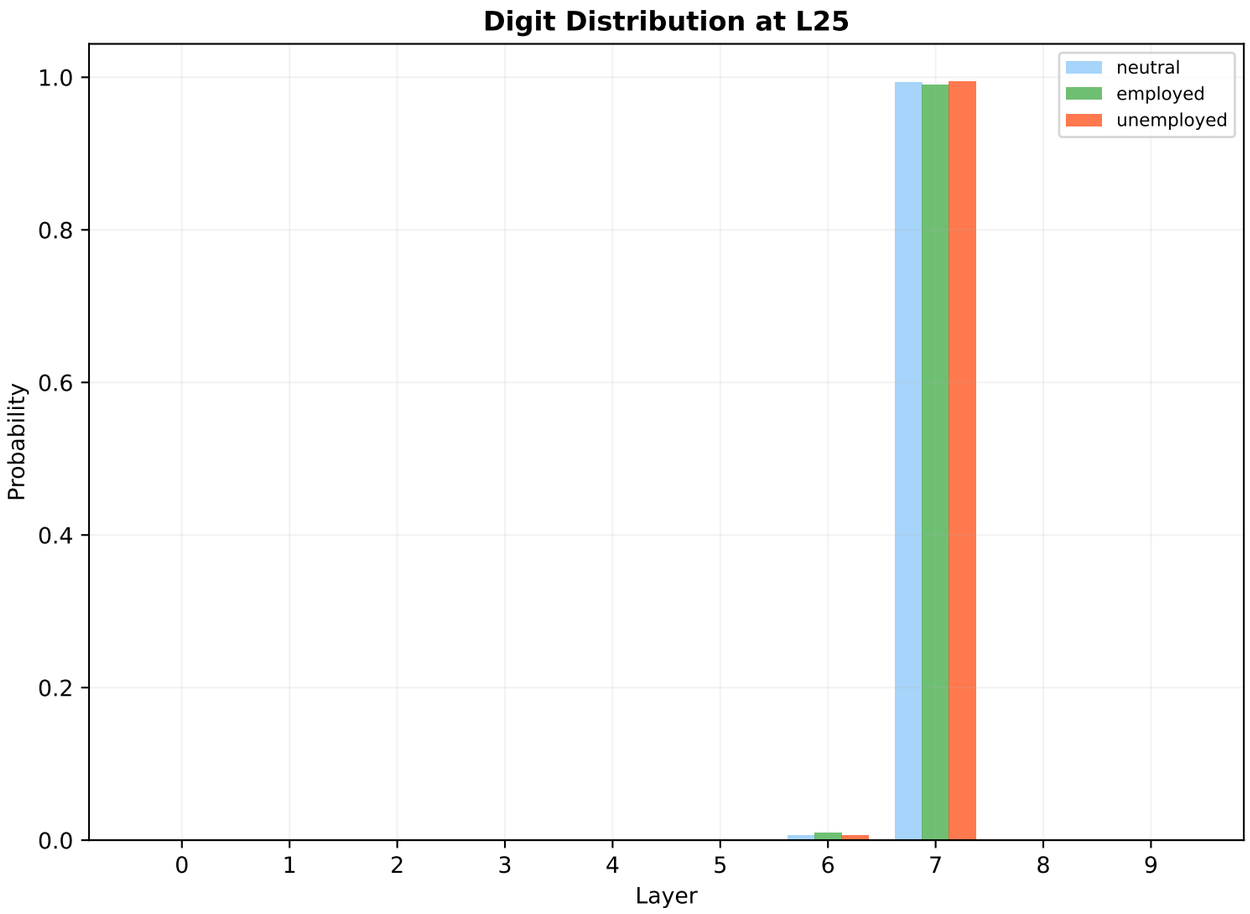

W2: Free time score (0-100) — Old Method
v7/exp1a/cfg3 | coeffs [-10, -5, -1, 0, 1, 5, 10]

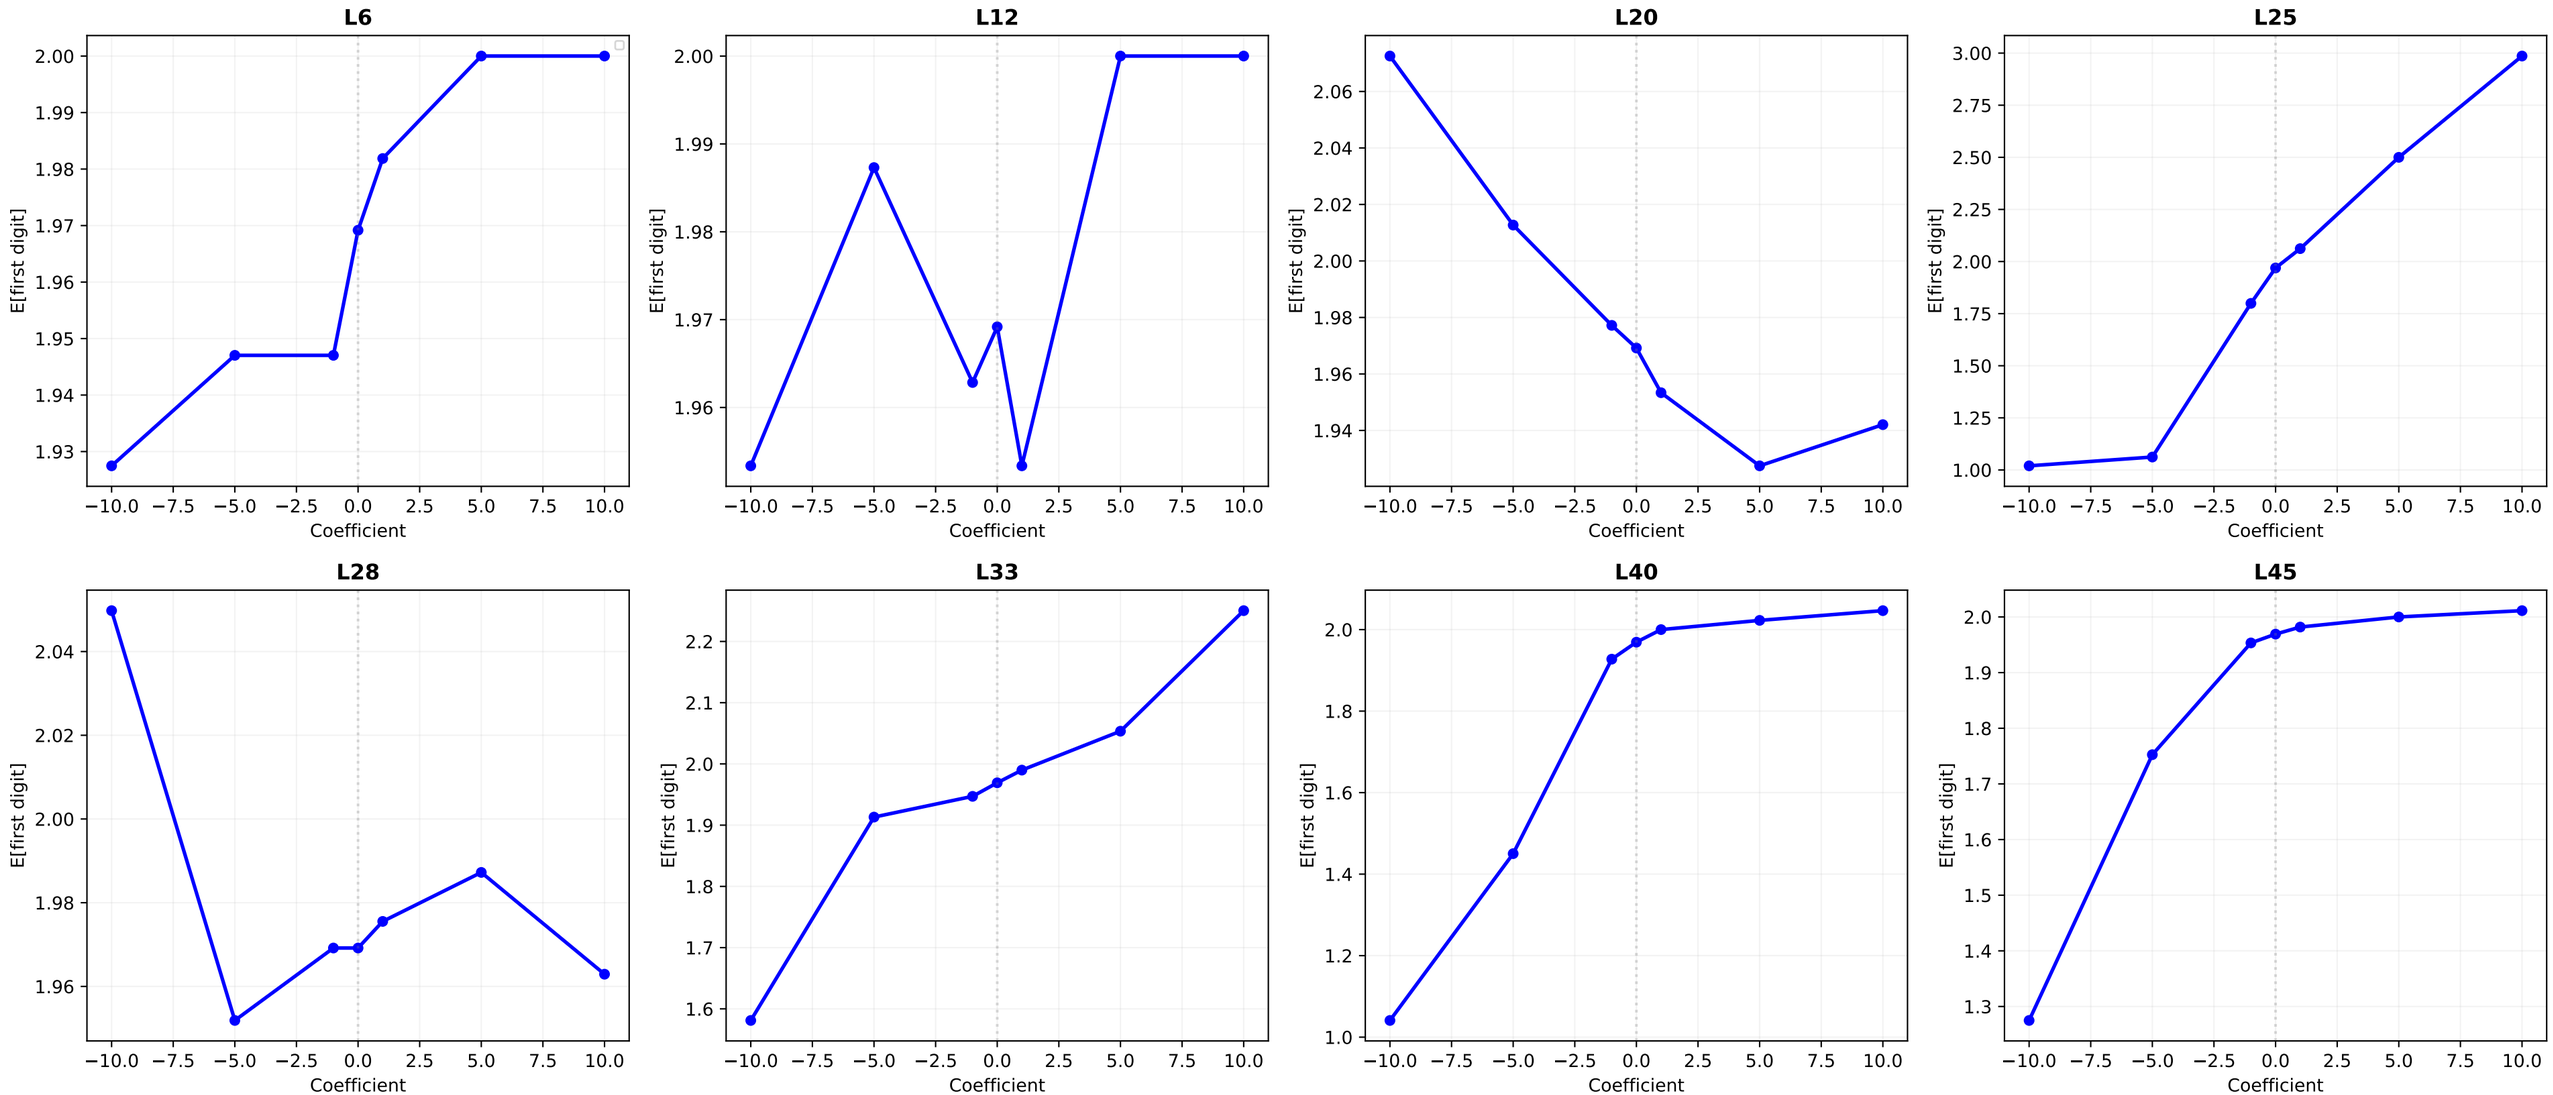

W2: Free time score (0-100) — Old Method Heatmap
v7/exp1a/cfg3

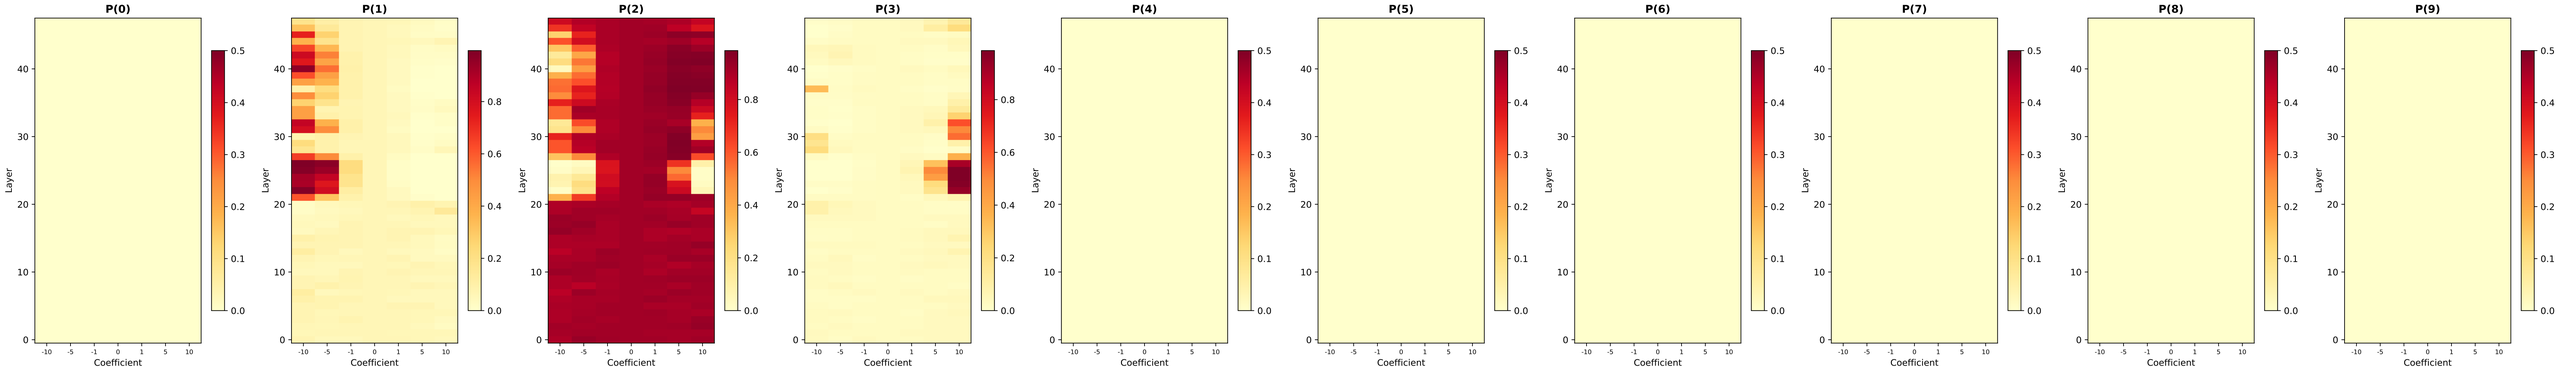

W2: Free time score (0-100) — New Method (Matteo)
v7/exp1a/cfg3 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

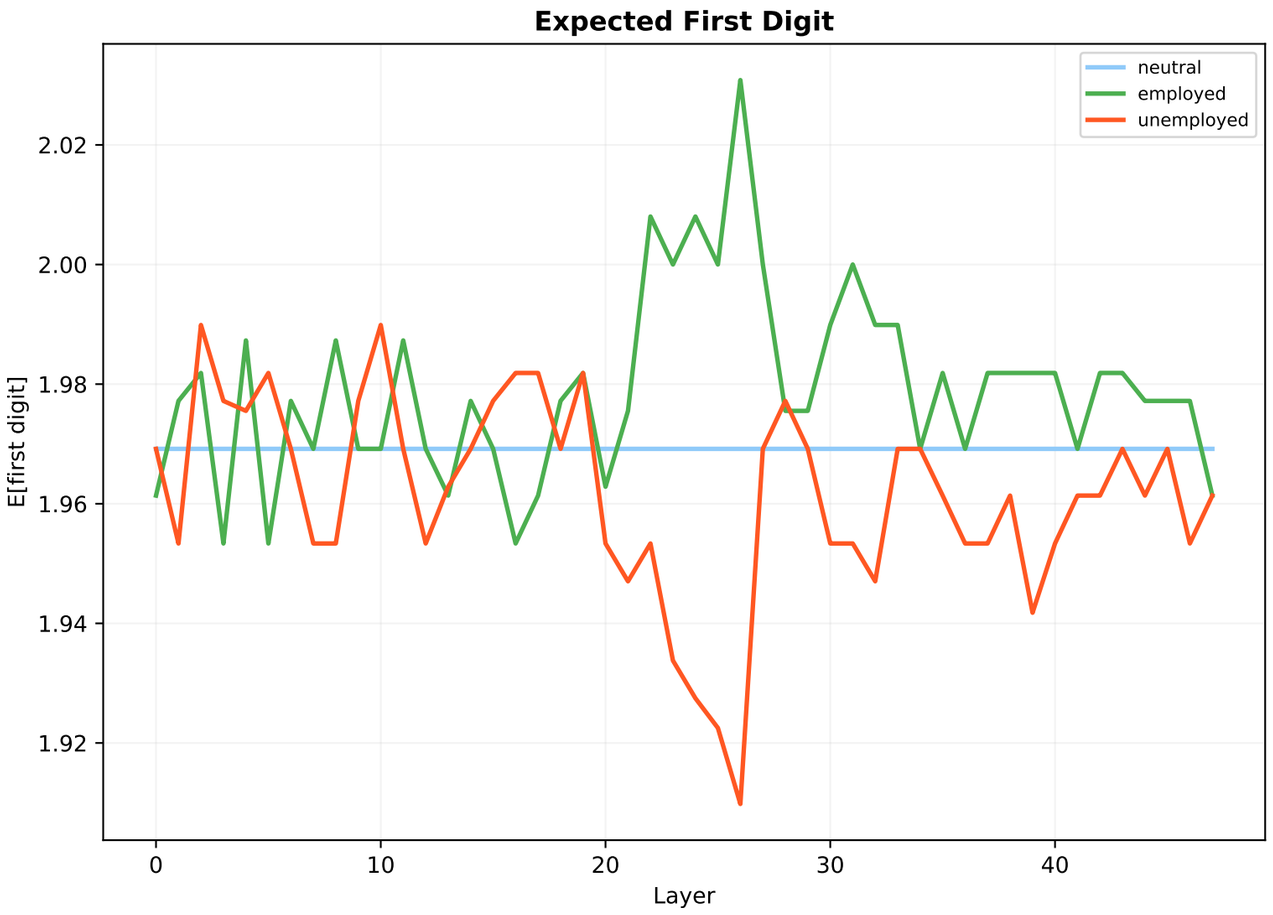

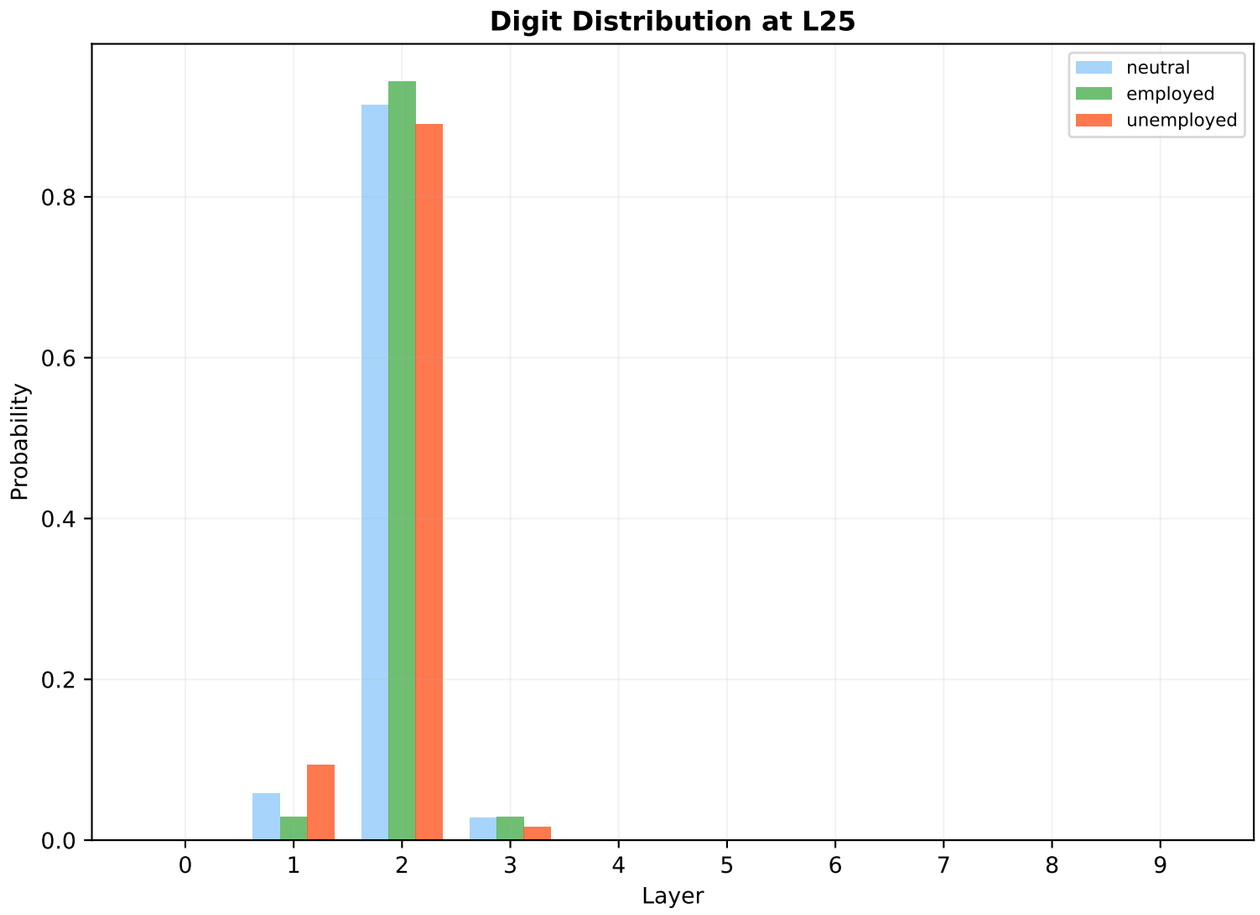

W3: 10 AM activity — Old Method
v7/exp1a/cfg3 | coeffs [-10, -5, -1, 0, 1, 5, 10]

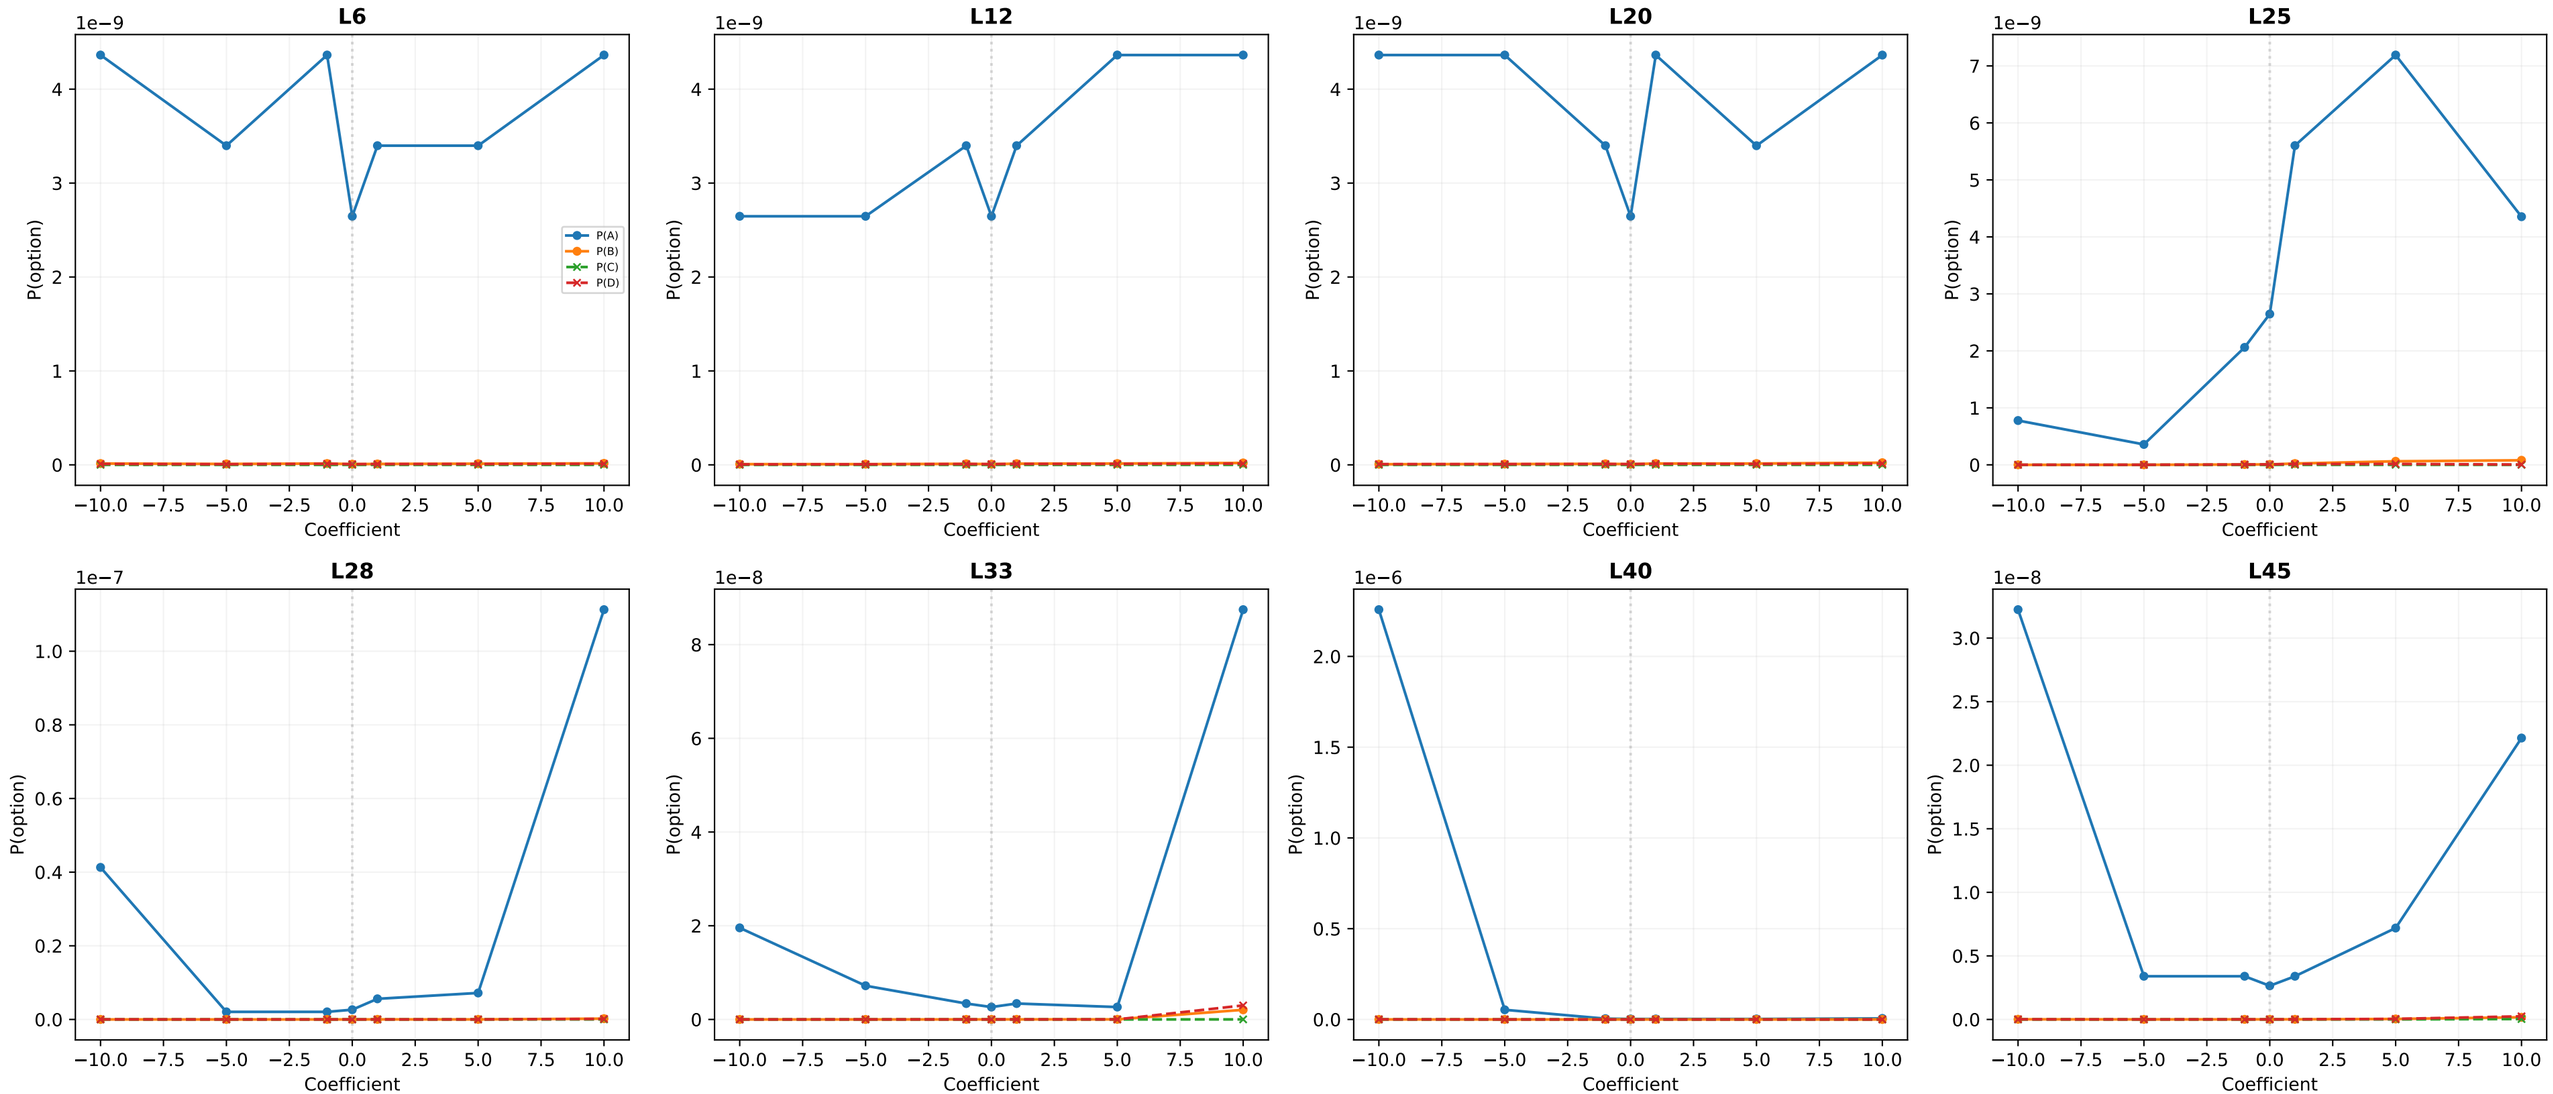

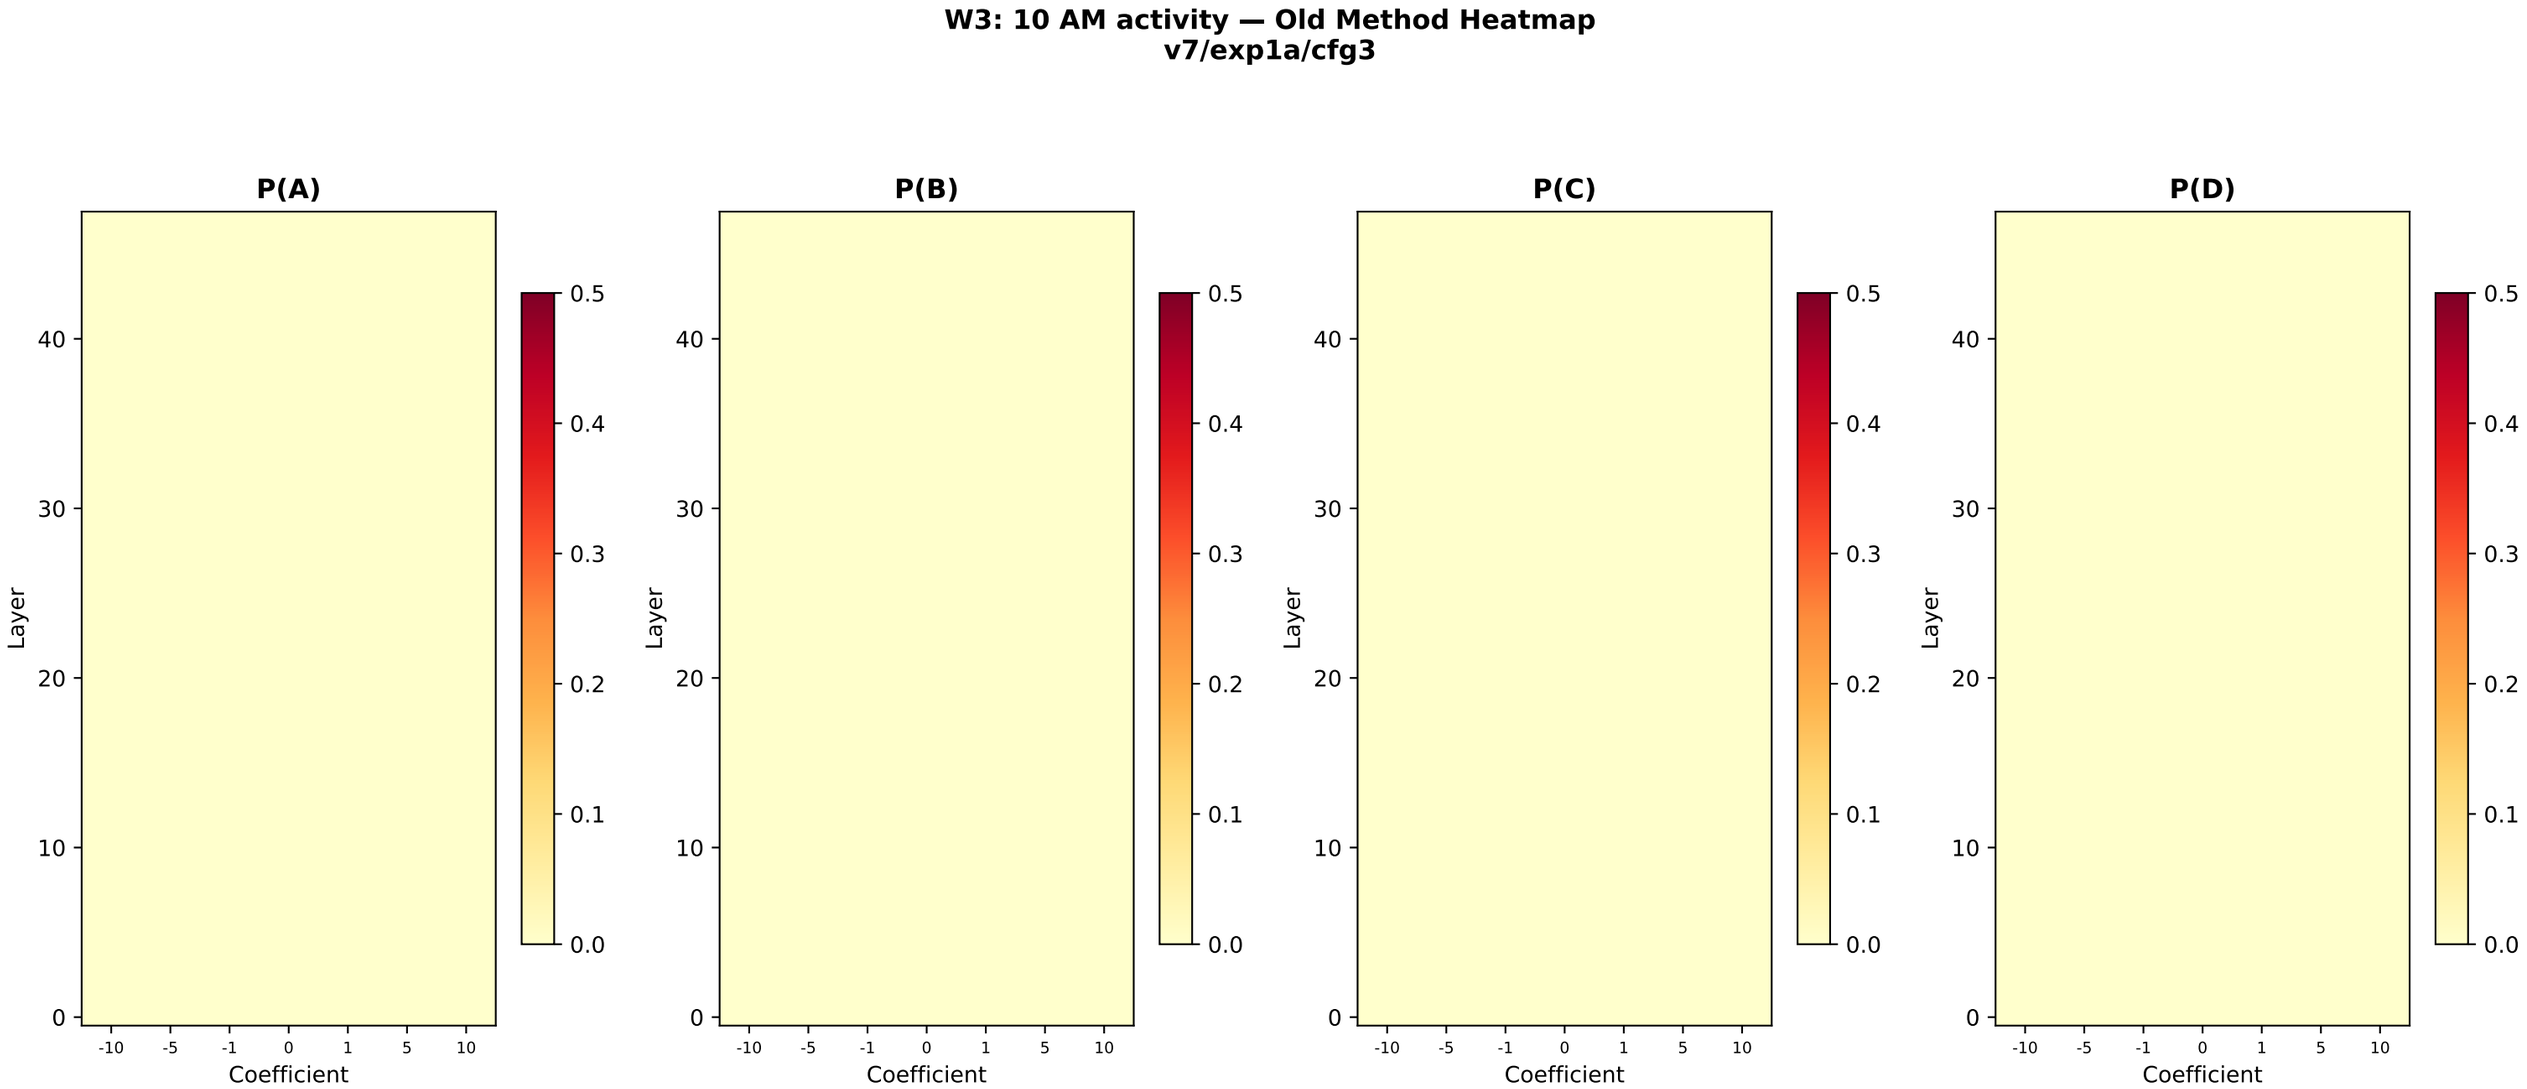
W3: 10 AM activity — Old Method Heatmap
v7/exp1a/cfg3
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

W3: 10 AM activity — New Method (Matteo)
v7/exp1a/cfg3 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

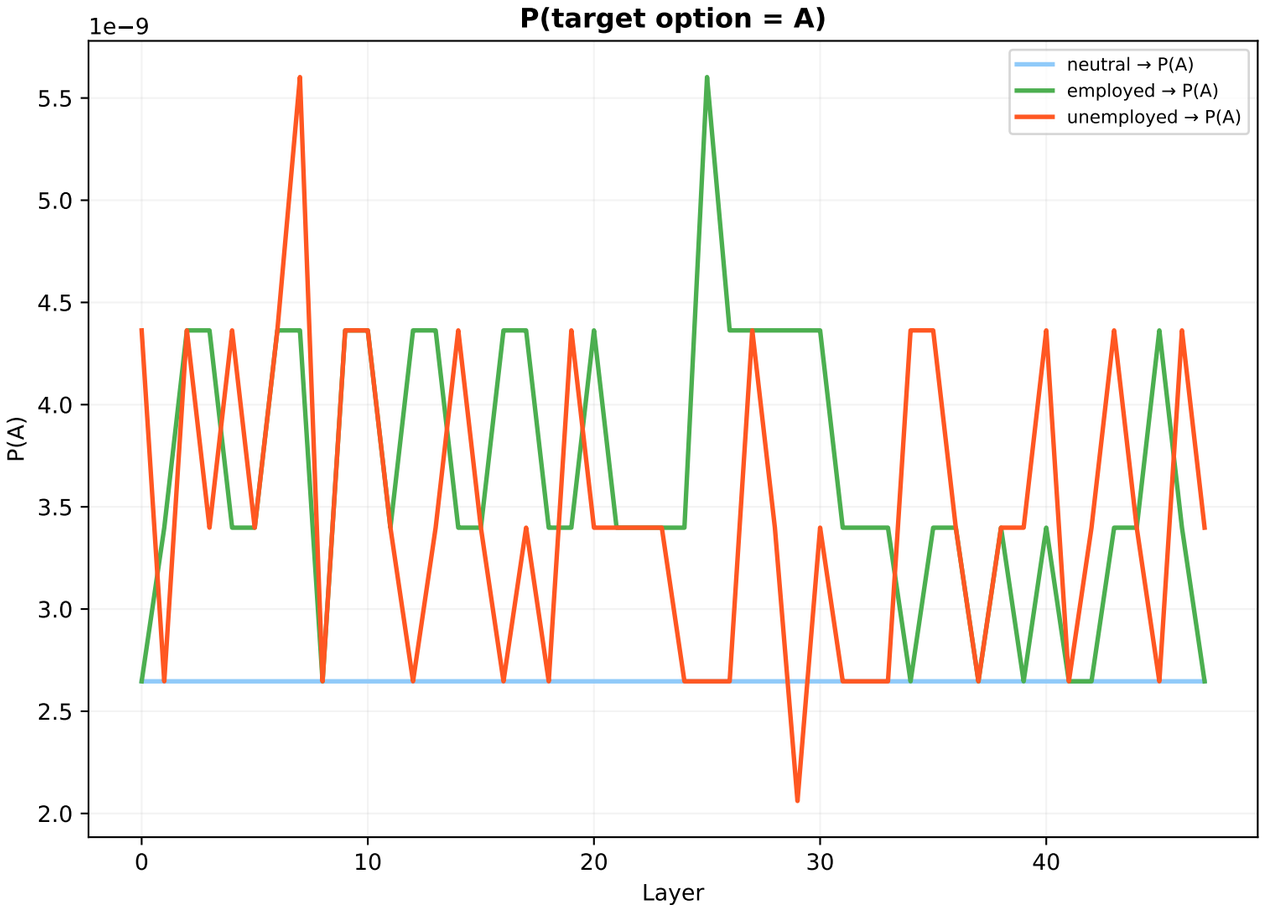

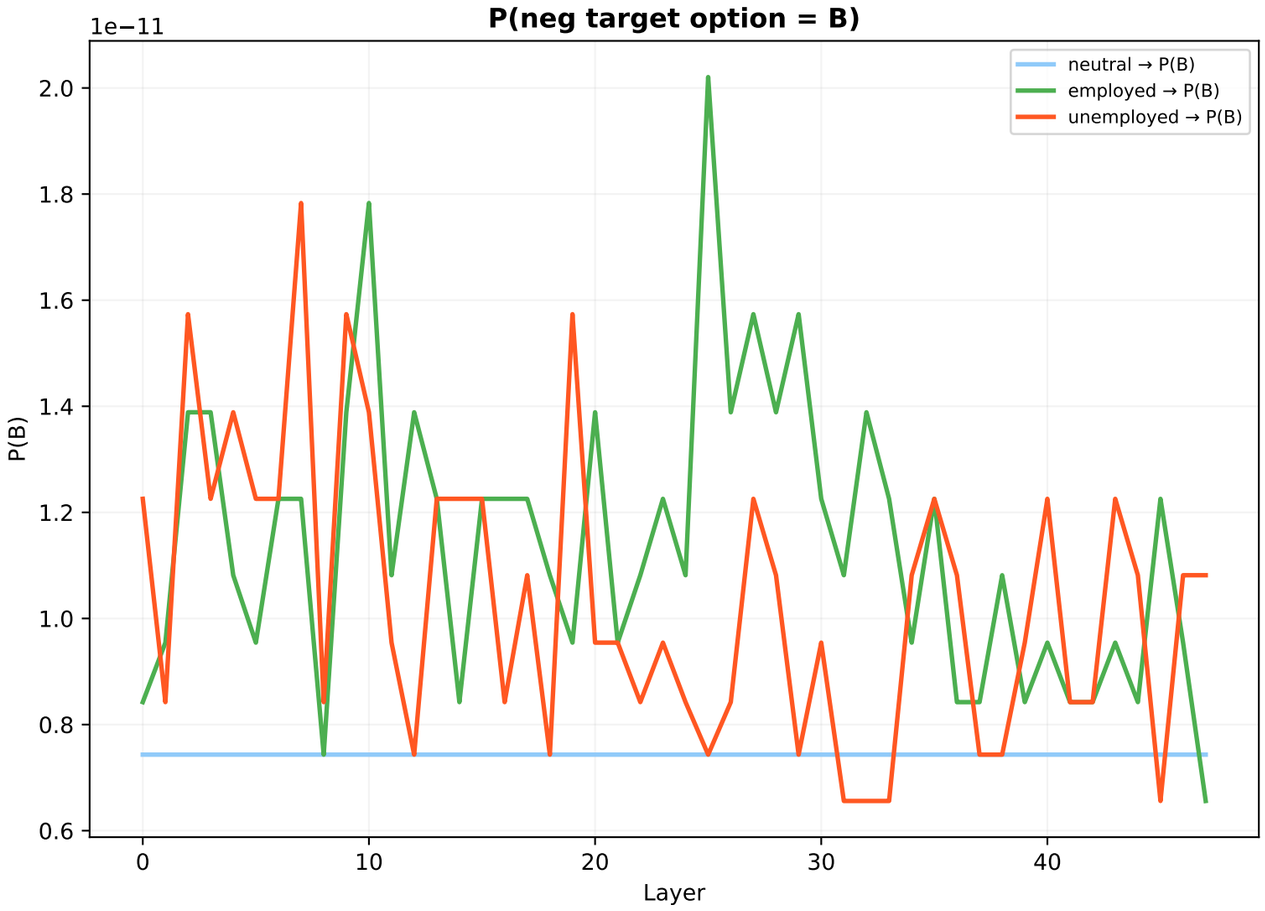

W4: 7 PM activity — Old Method
v7/exp1a/cfg3 | coeffs [-10, -5, -1, 0, 1, 5, 10]

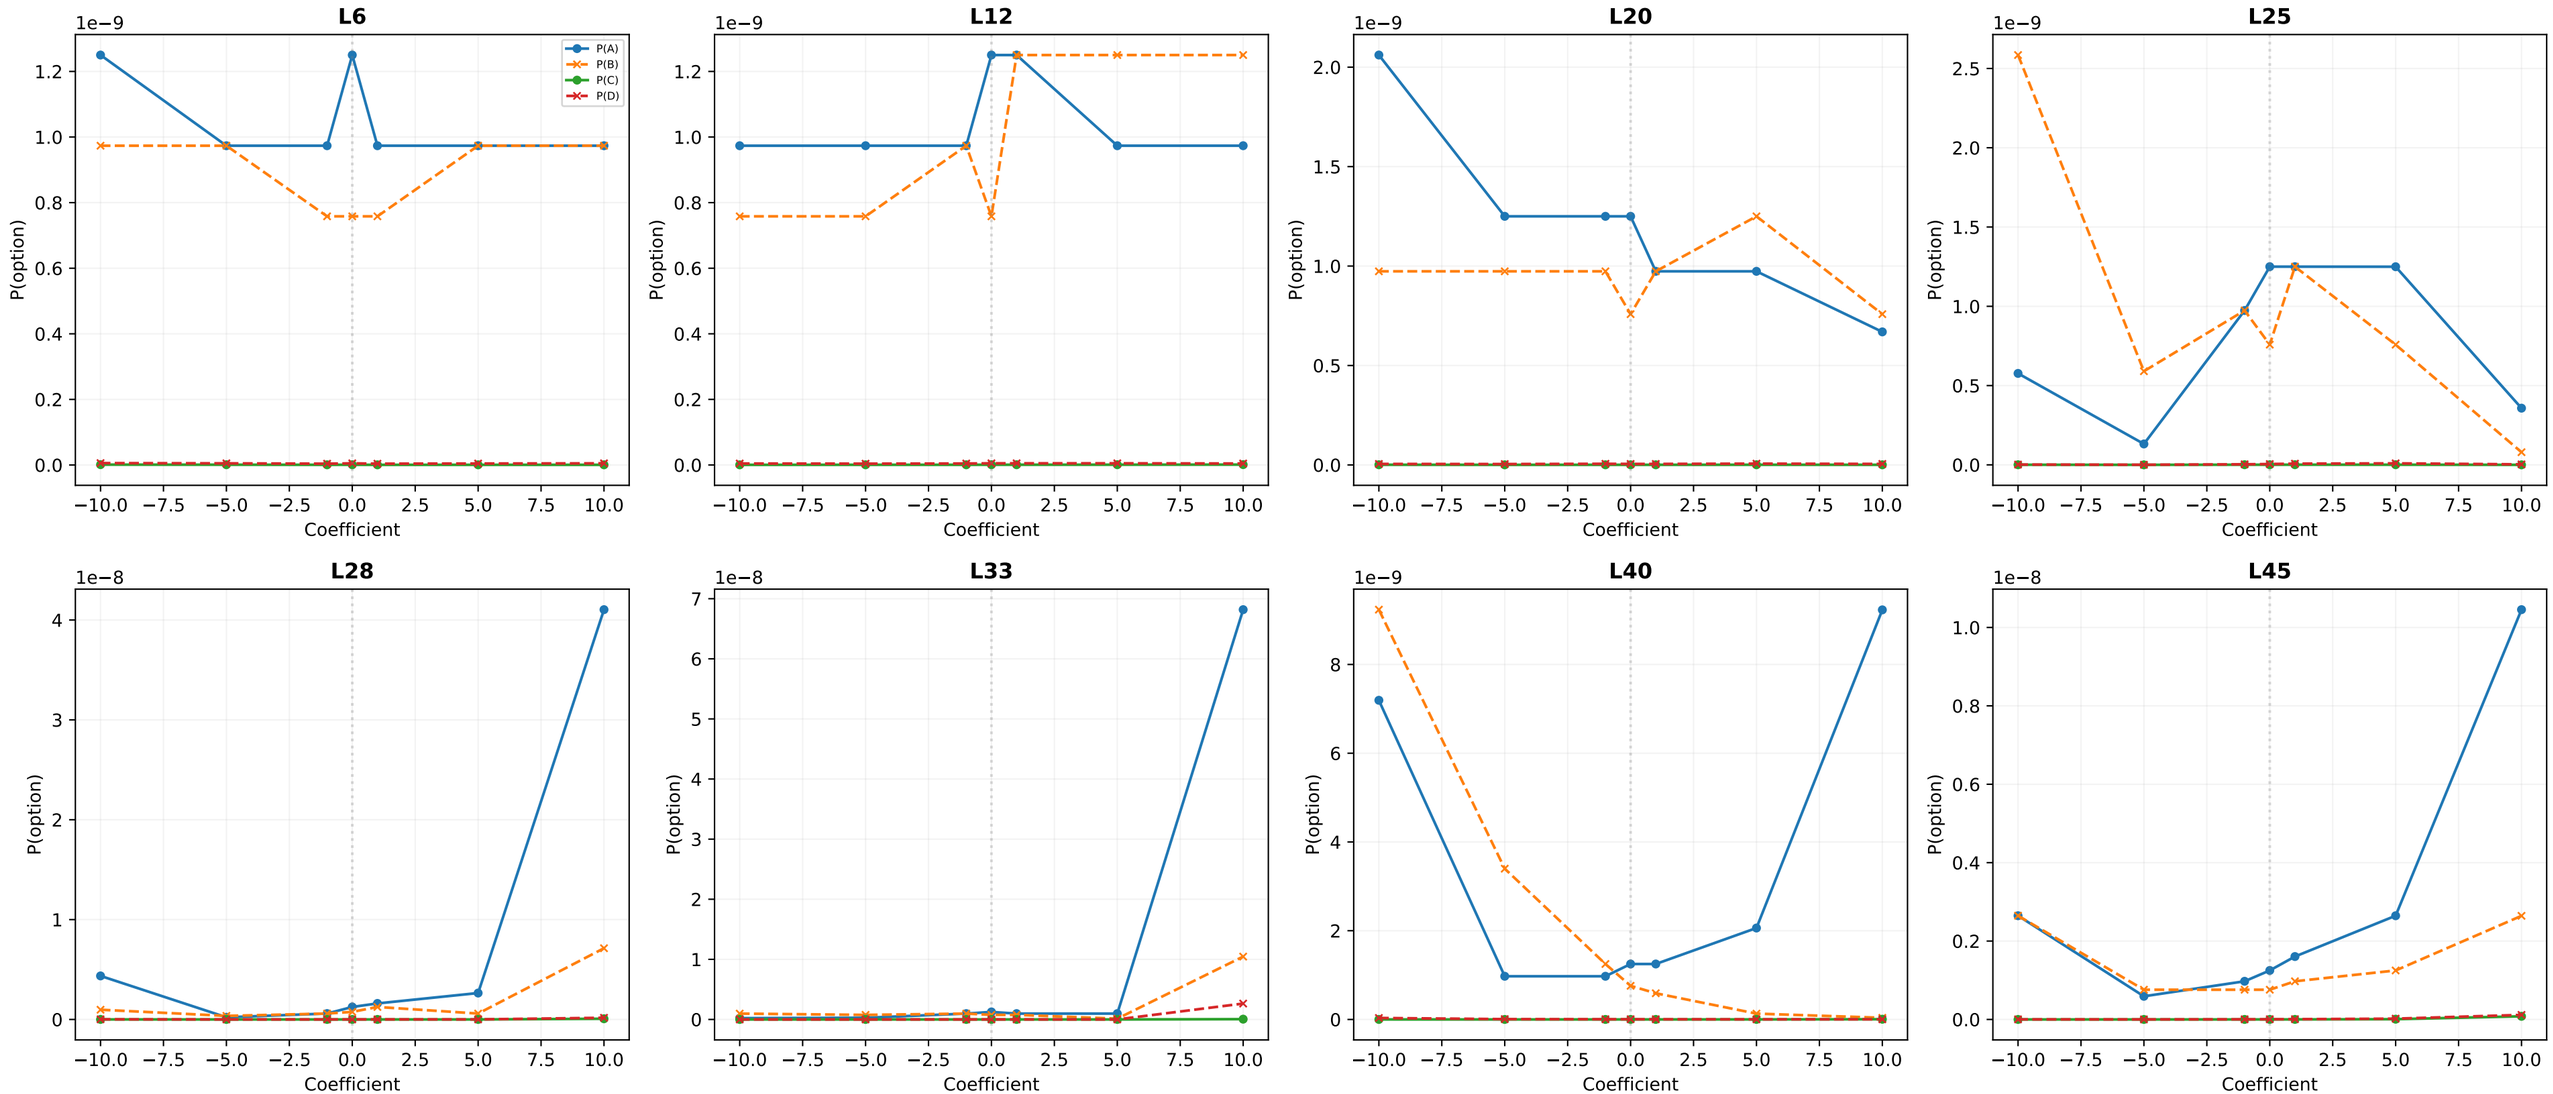

W4: 7 PM activity — Old Method Heatmap
v7/exp1a/cfg3

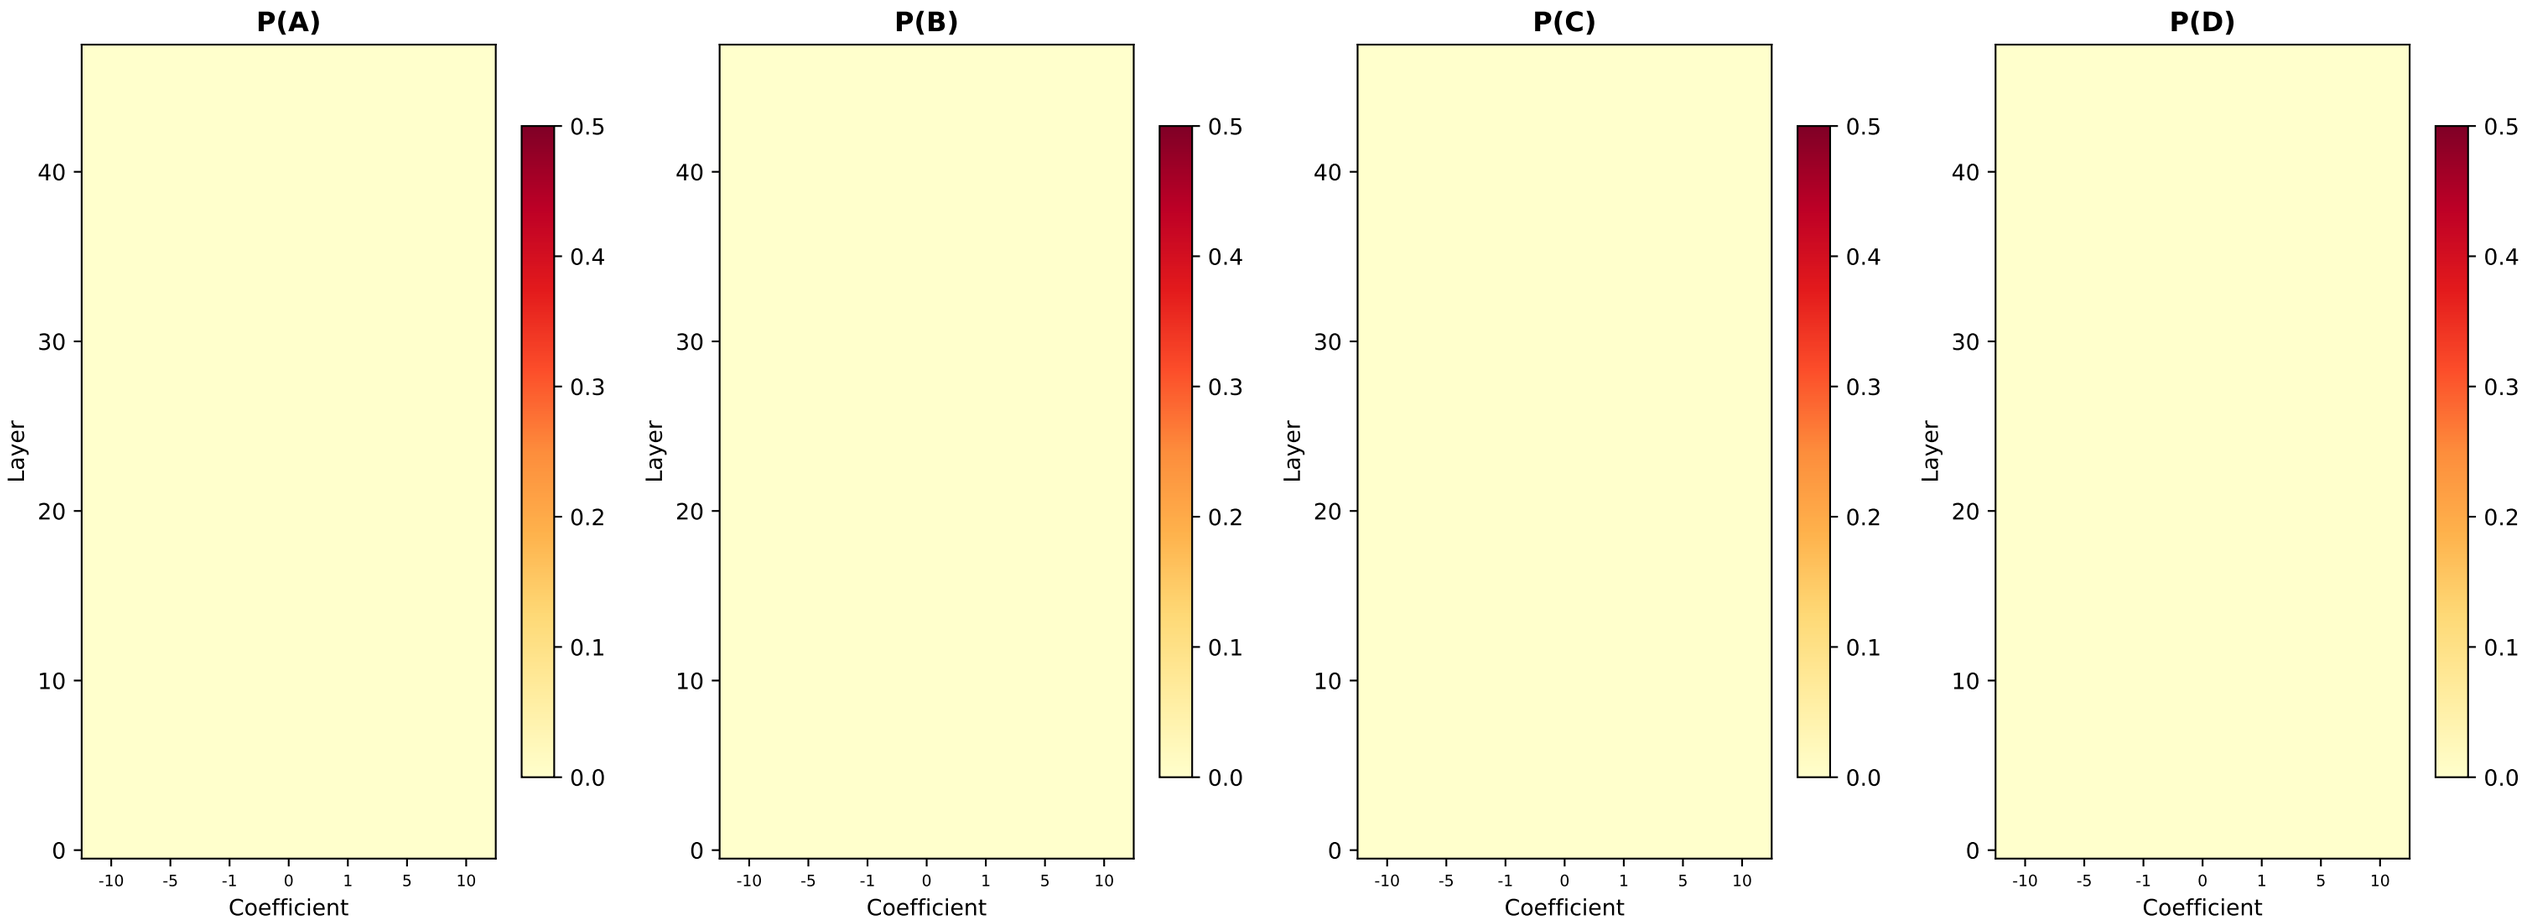

W4: 7 PM activity — New Method (Matteo)
v7/exp1a/cfg3 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

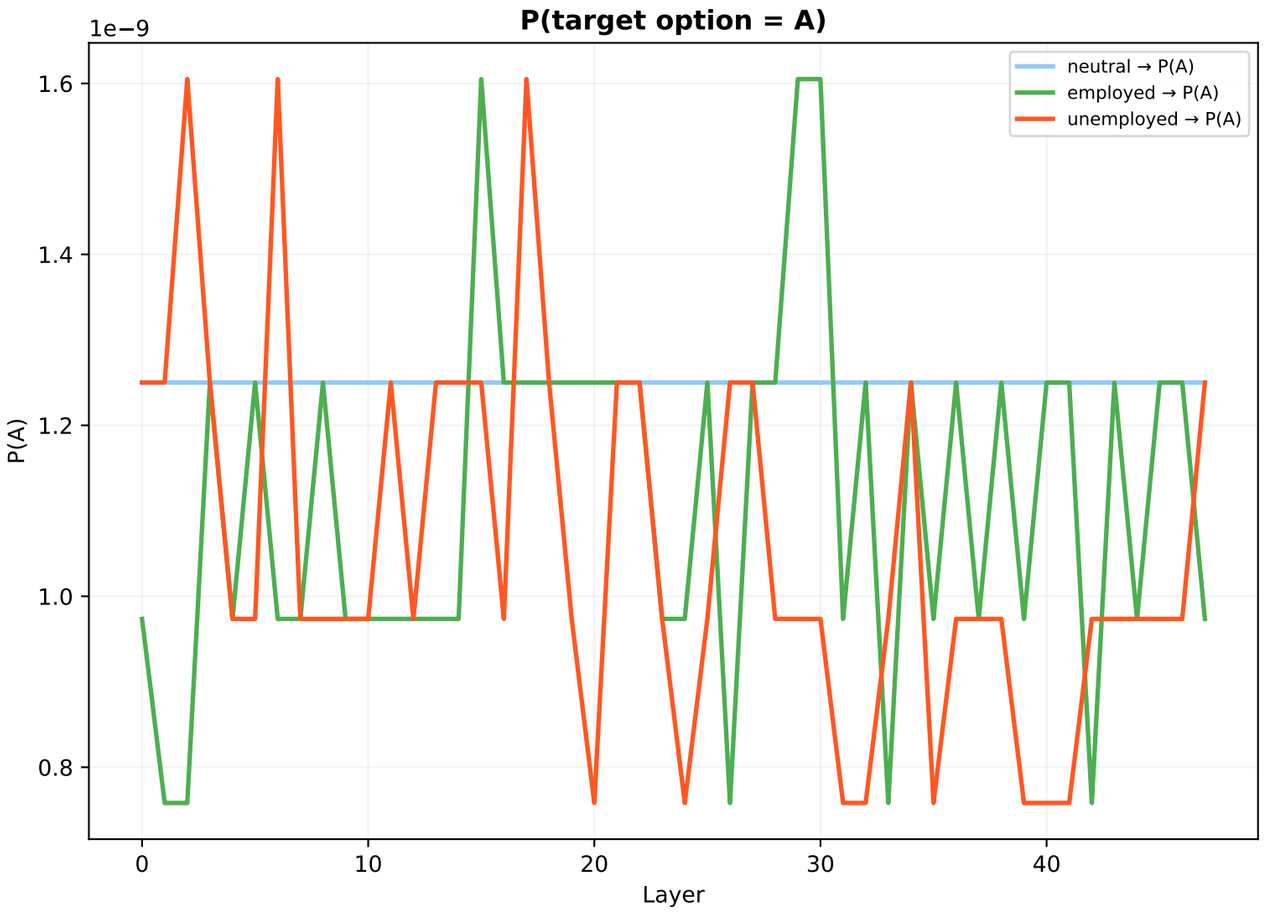

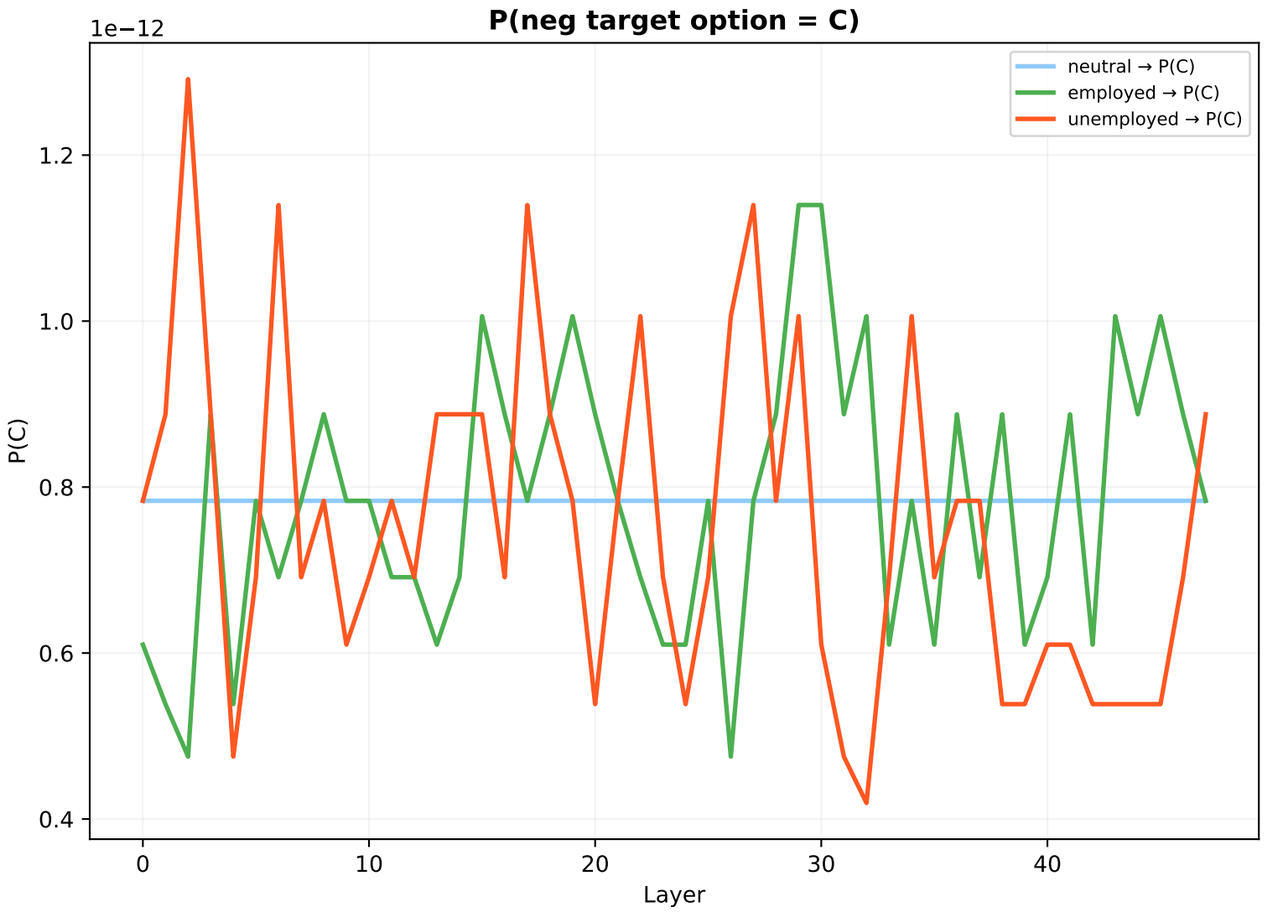

W5: CONTROL: indoor temperature — Old Method
v7/exp1a/cfg3 | coeffs [-10, -5, -1, 0, 1, 5, 10]

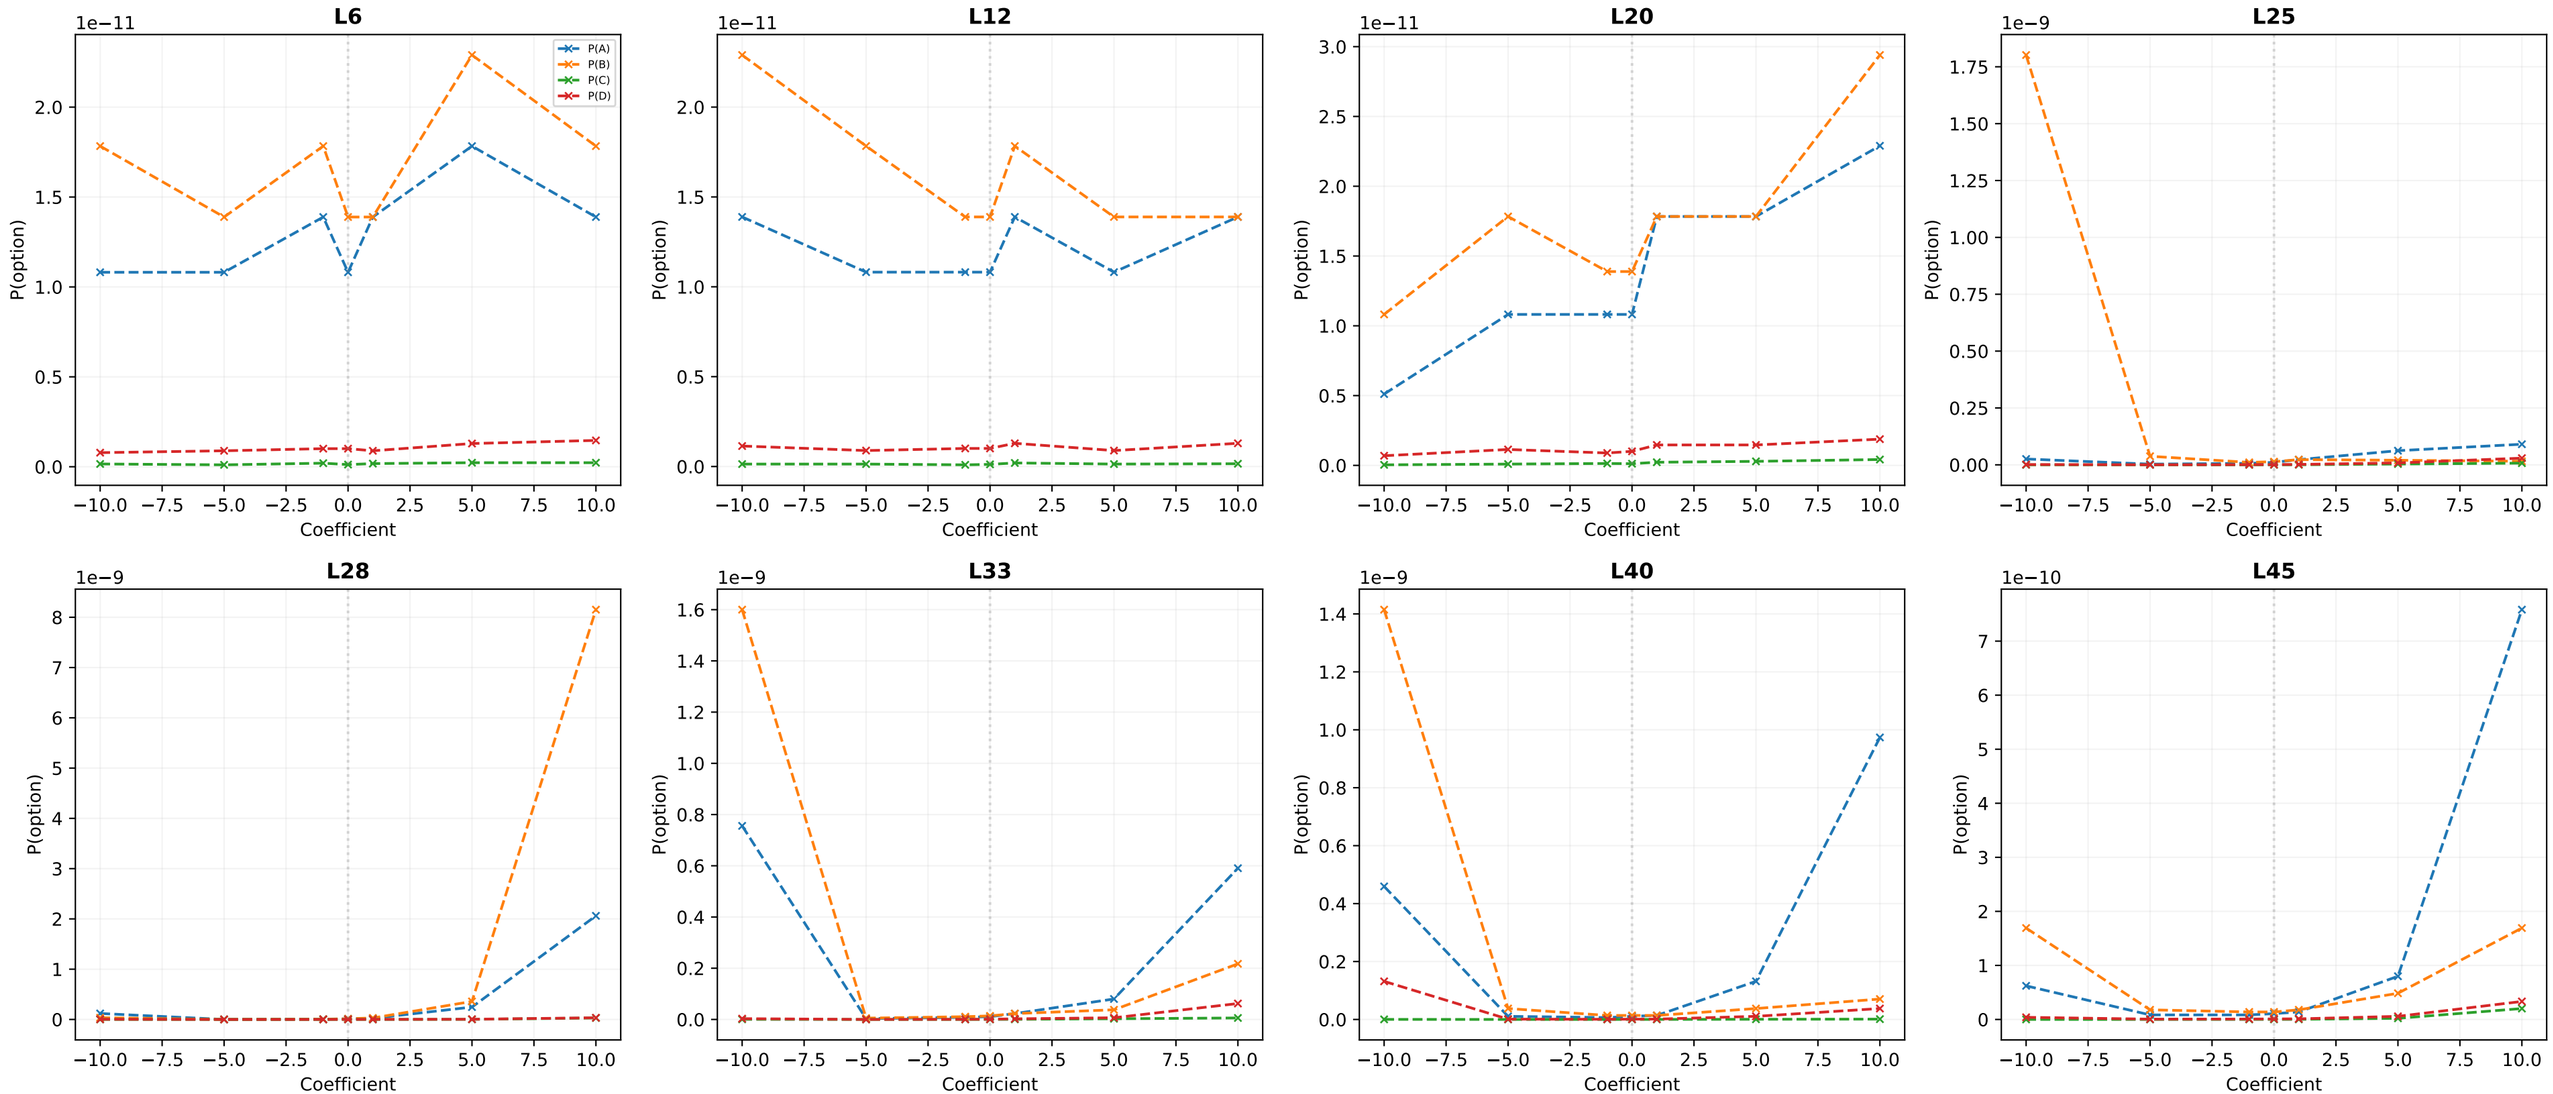

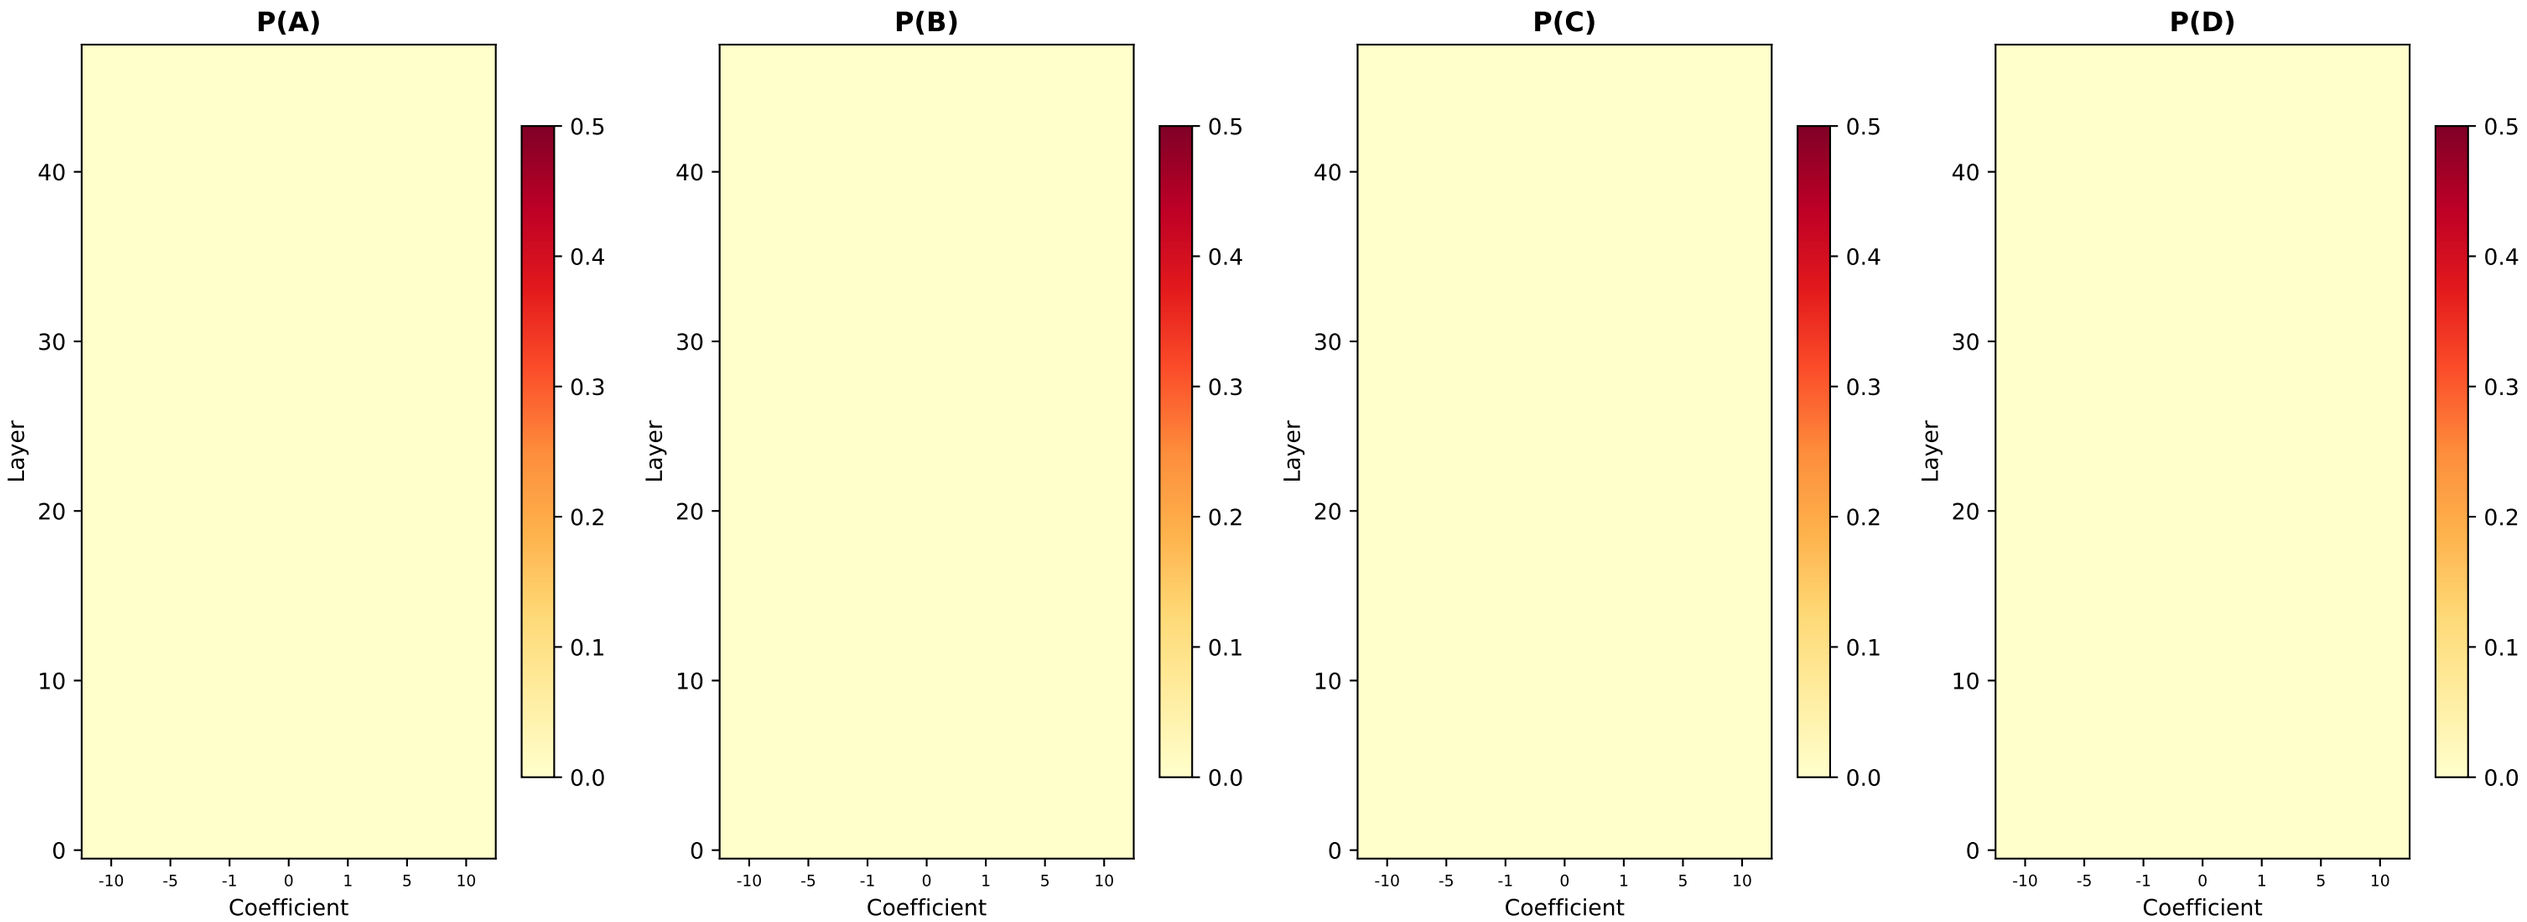
W5: CONTROL: indoor temperature — Old Method Heatmap
v7/exp1a/cfg3
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

W5: CONTROL: indoor temperature — New Method (Matteo)
v7/exp1a/cfg3 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

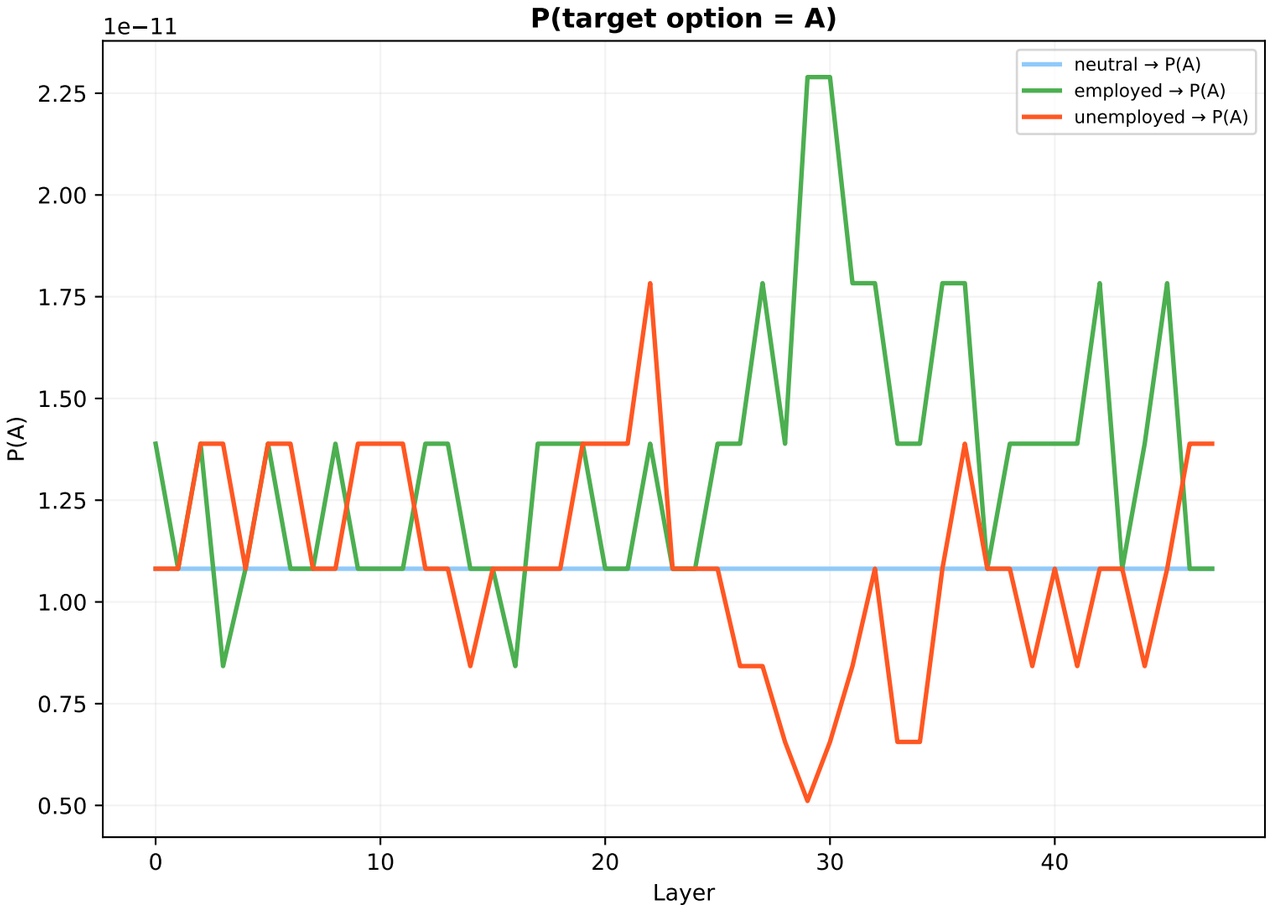

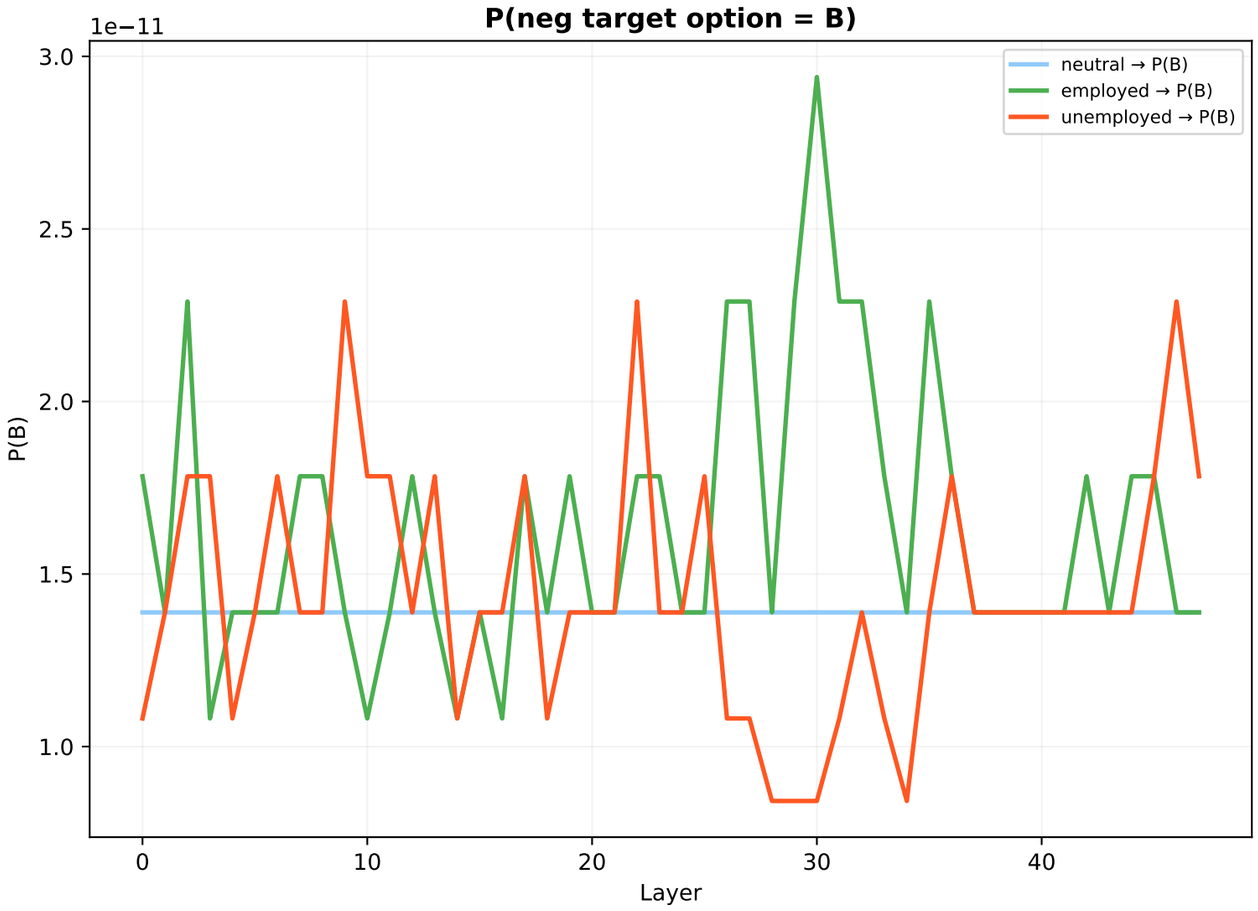

W1: Wake-up time (hour) — Old Method
v7/exp1a/cfg4 | coeffs [-10, -5, -1, 0, 1, 5, 10]

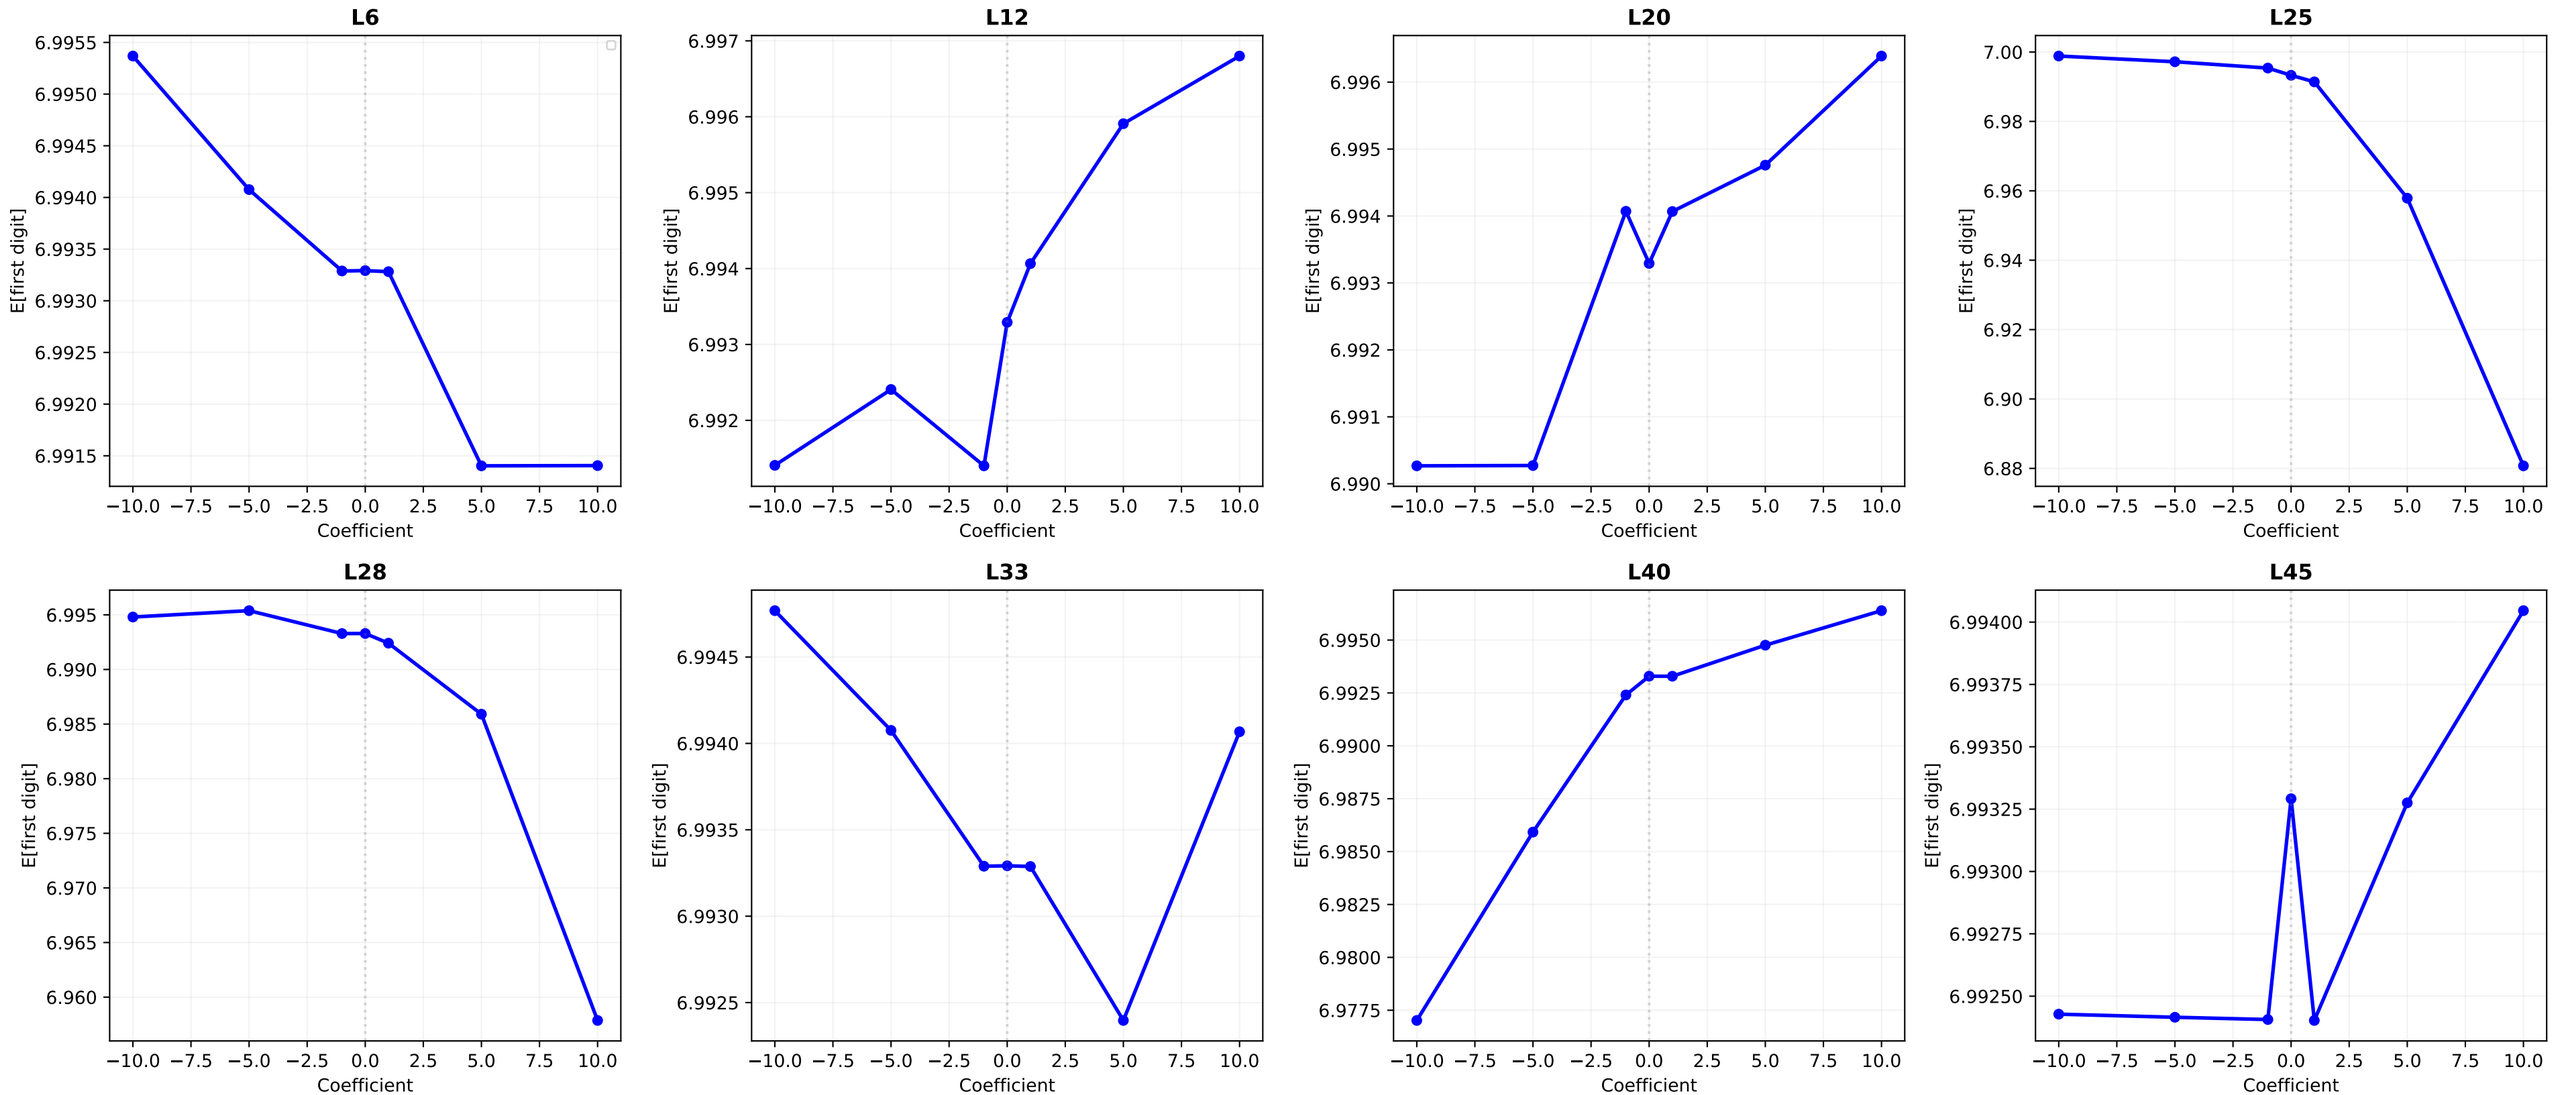

W1: Wake-up time (hour) — Old Method Heatmap
v7/exp1a/cfg4

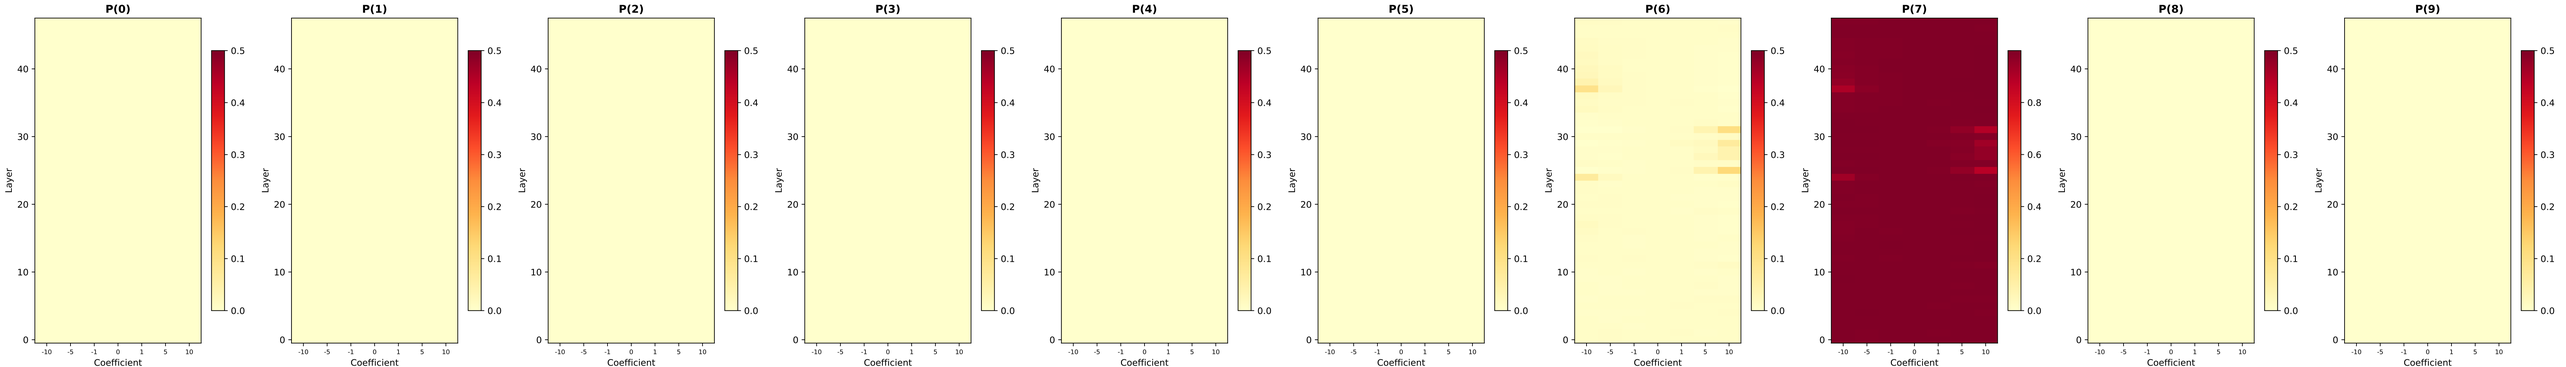

W1: Wake-up time (hour) — New Method (Matteo)
v7/exp1a/cfg4 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

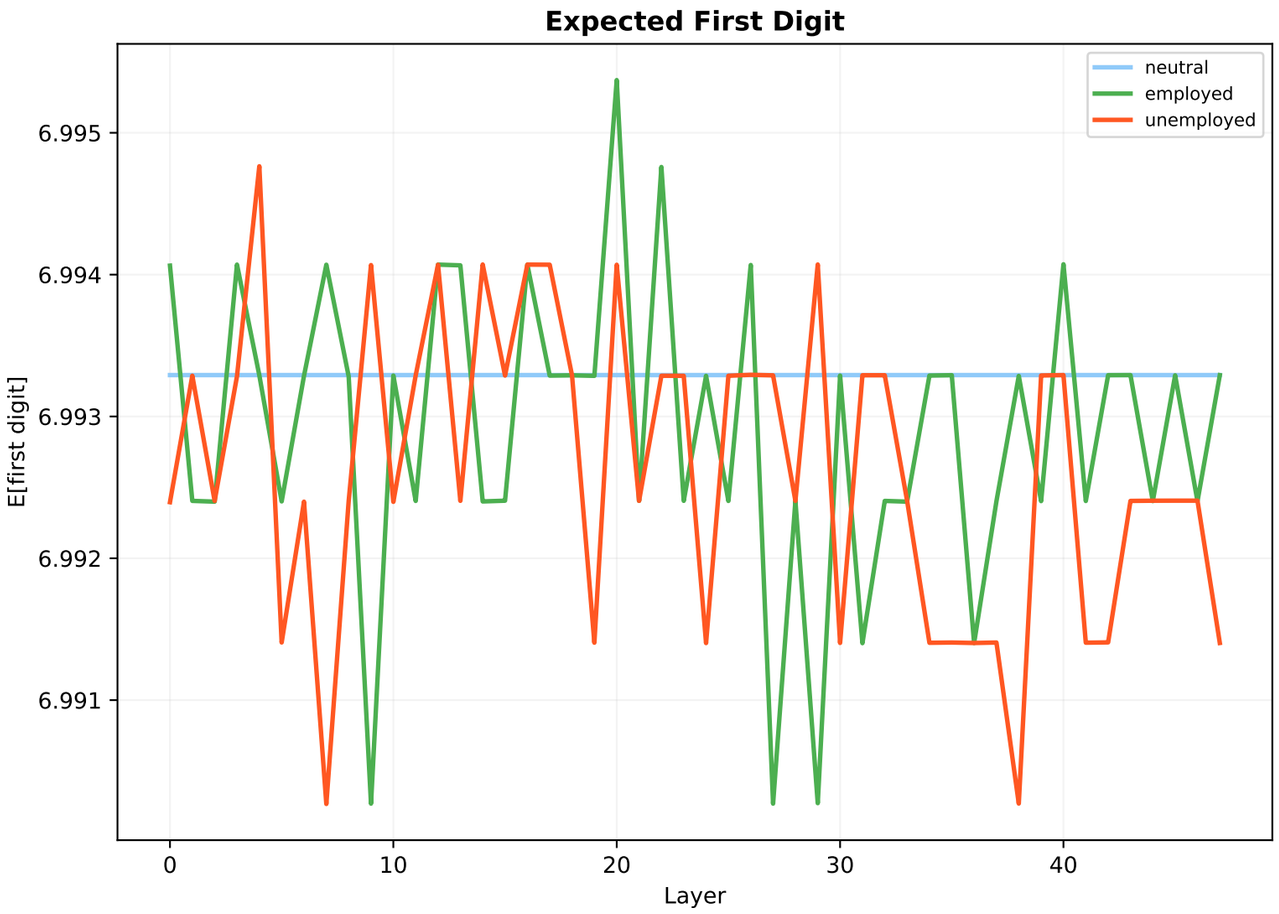

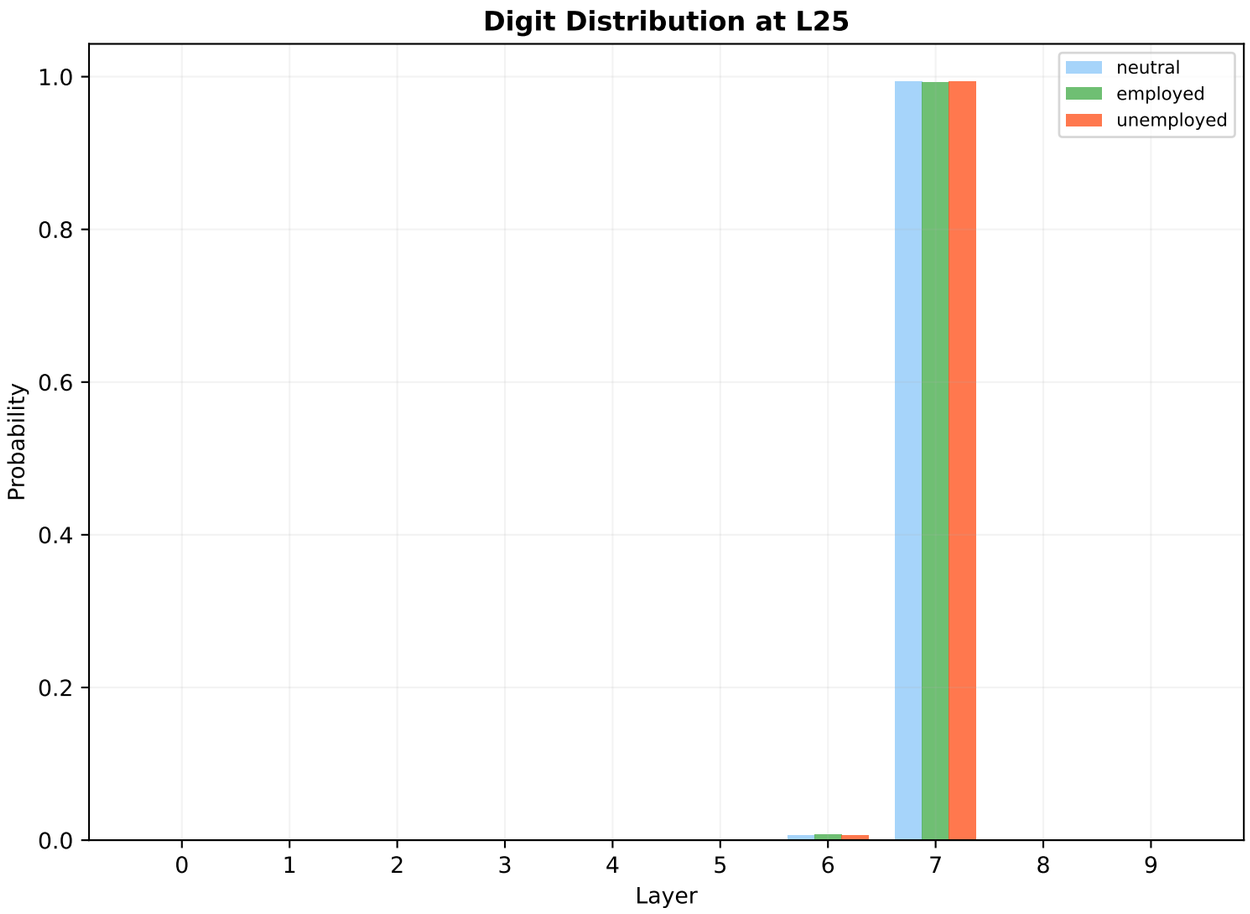

W2: Free time score (0-100) — Old Method
v7/exp1a/cfg4 | coeffs [-10, -5, -1, 0, 1, 5, 10]

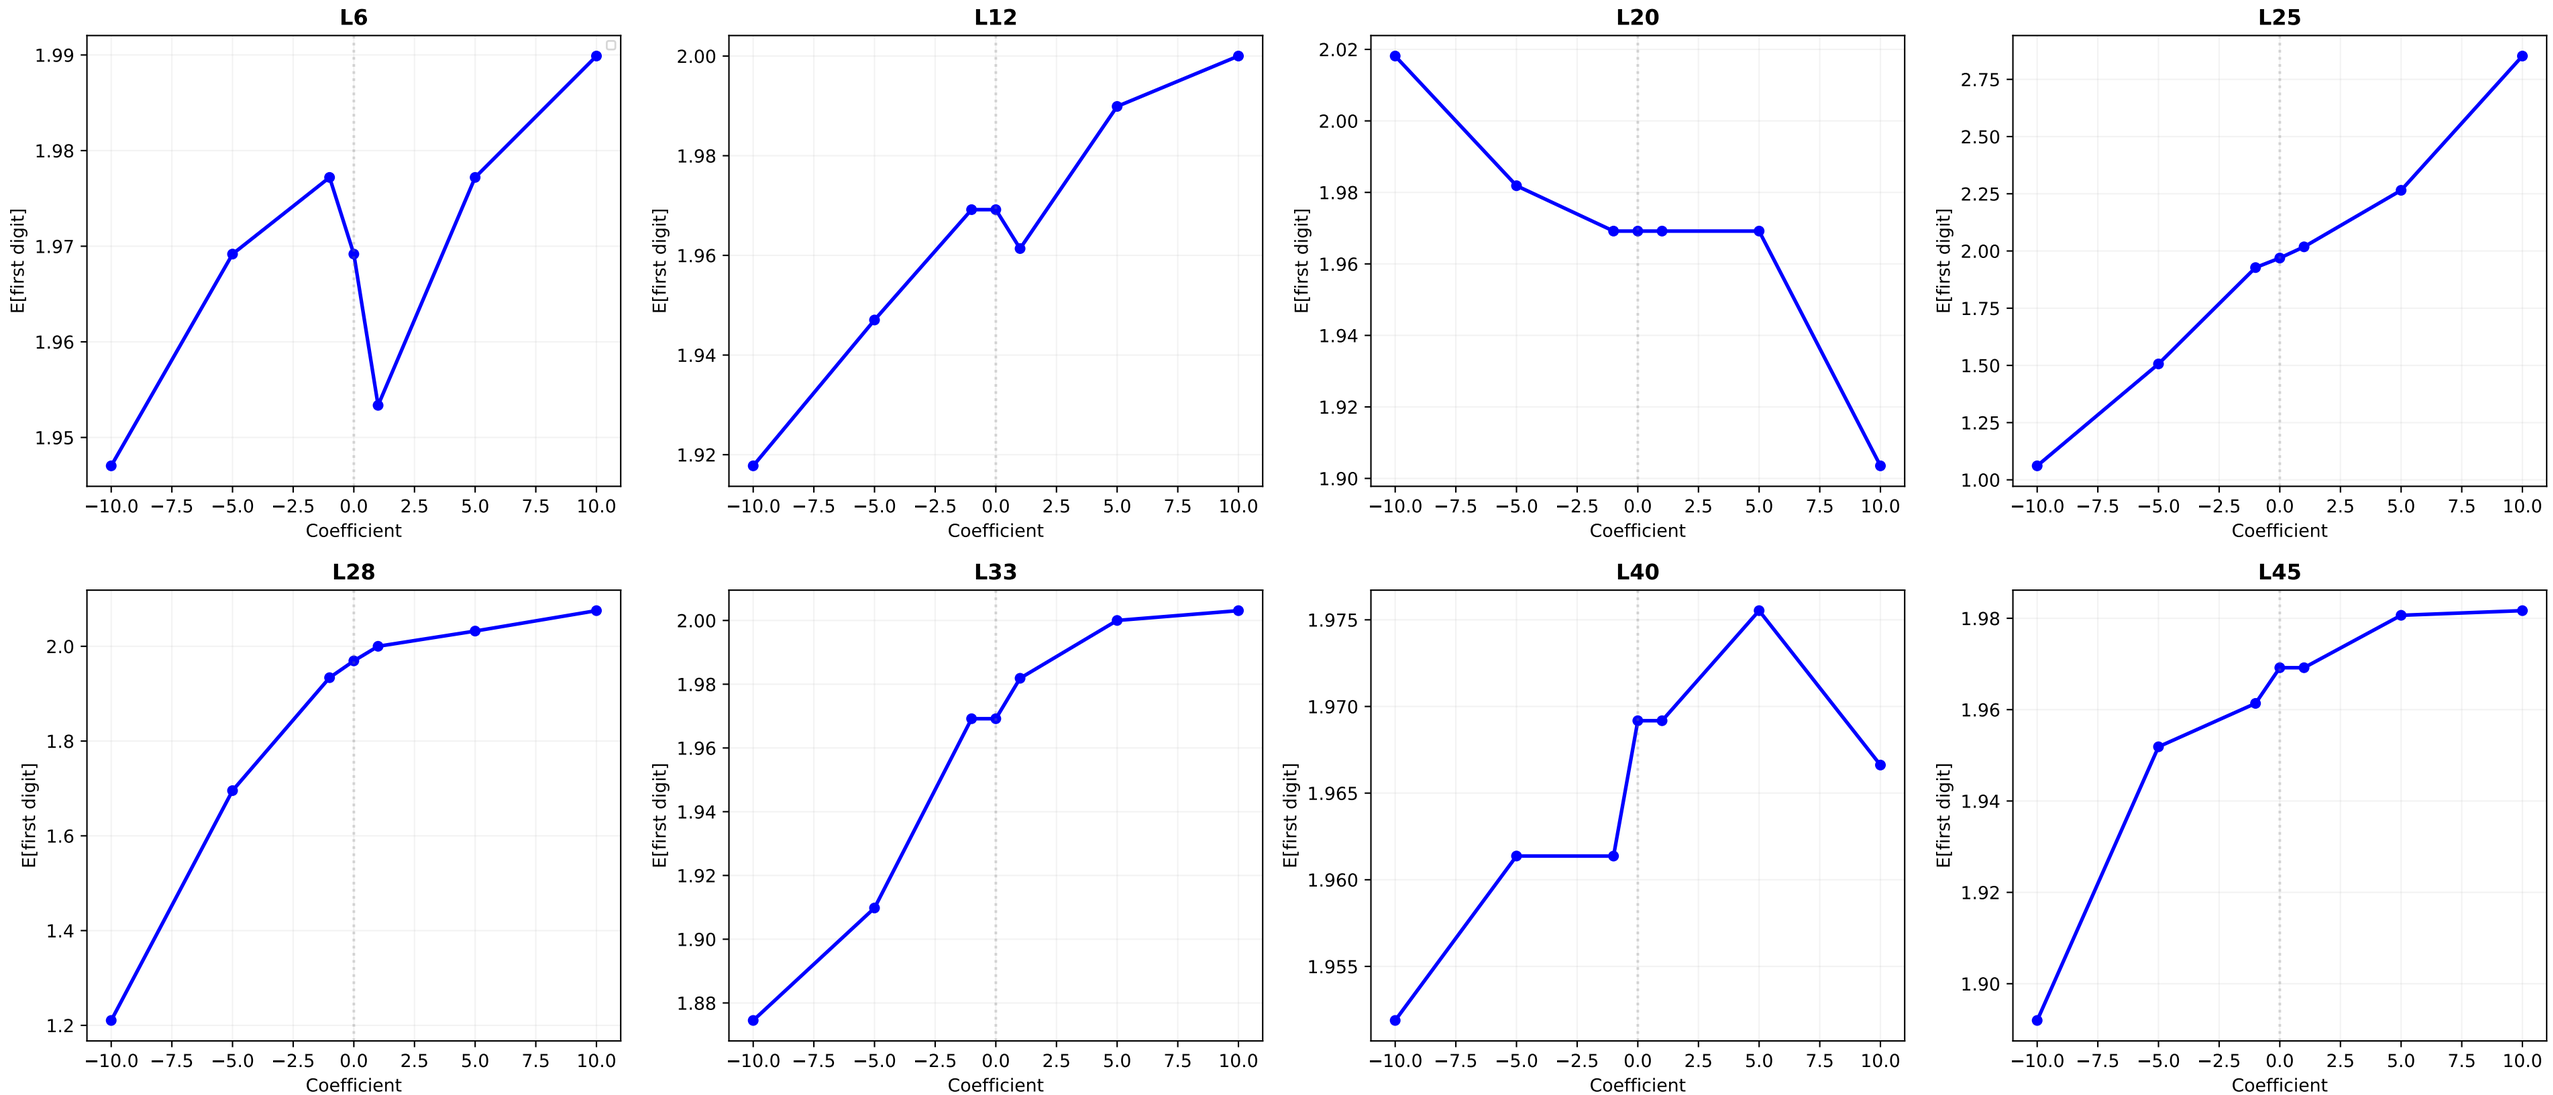

W2: Free time score (0-100) — Old Method Heatmap
v7/exp1a/cfg4

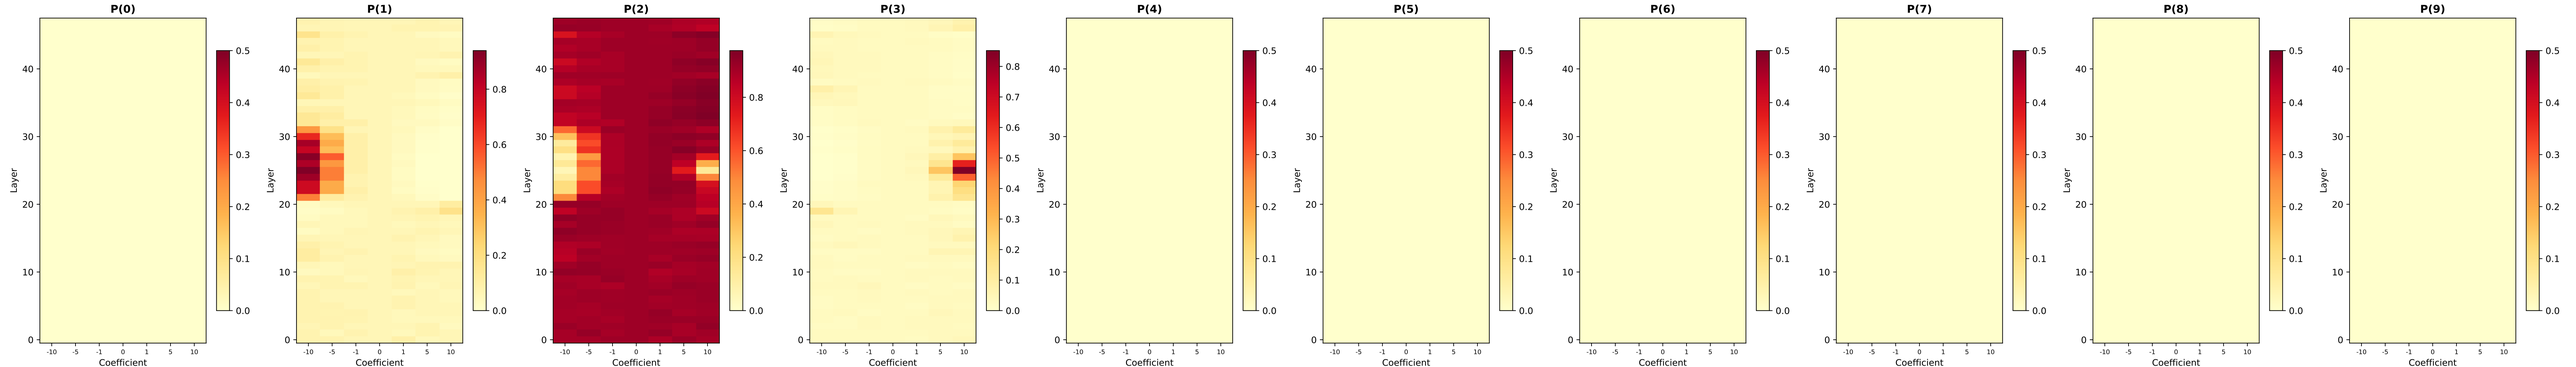

W2: Free time score (0-100) — New Method (Matteo)
v7/exp1a/cfg4 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

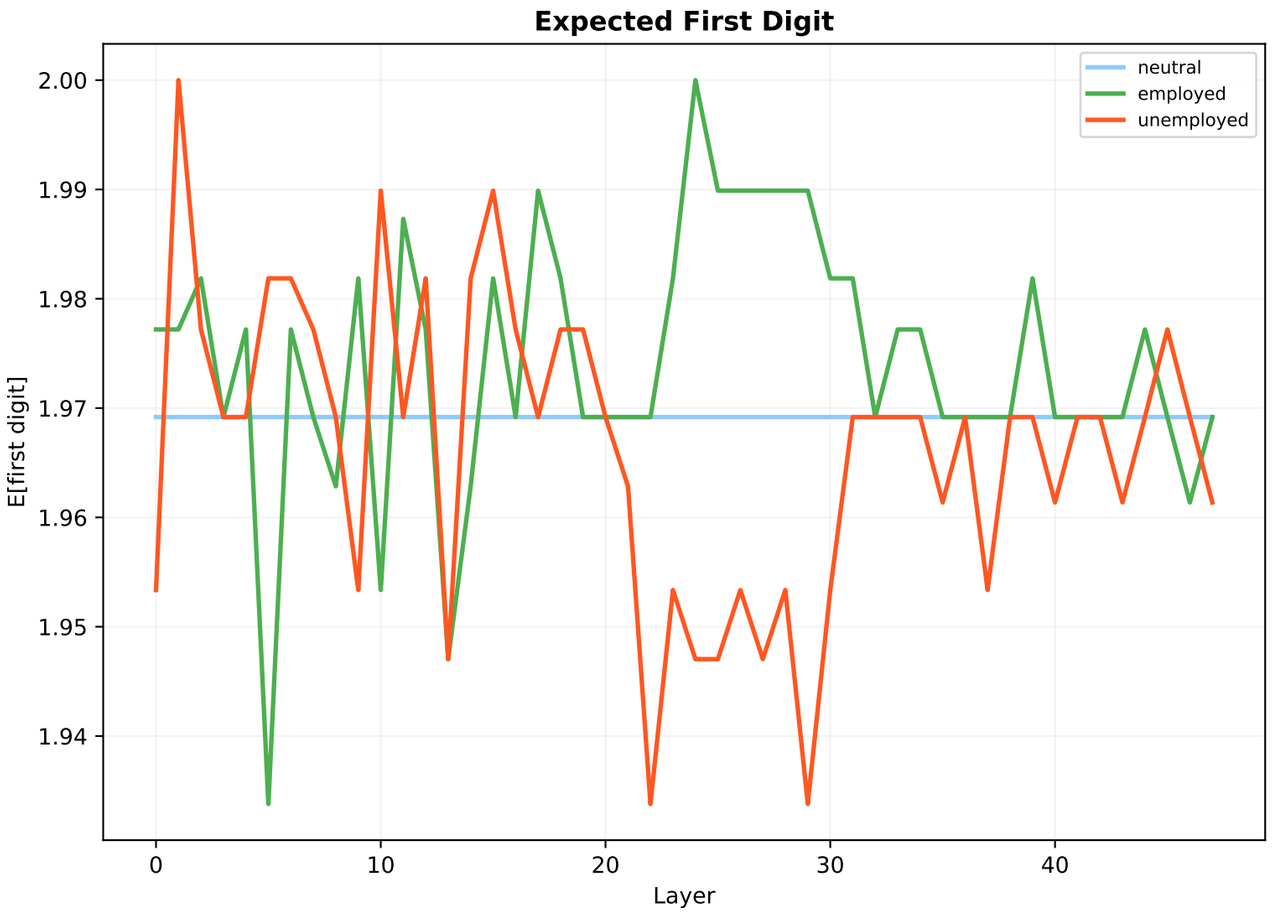

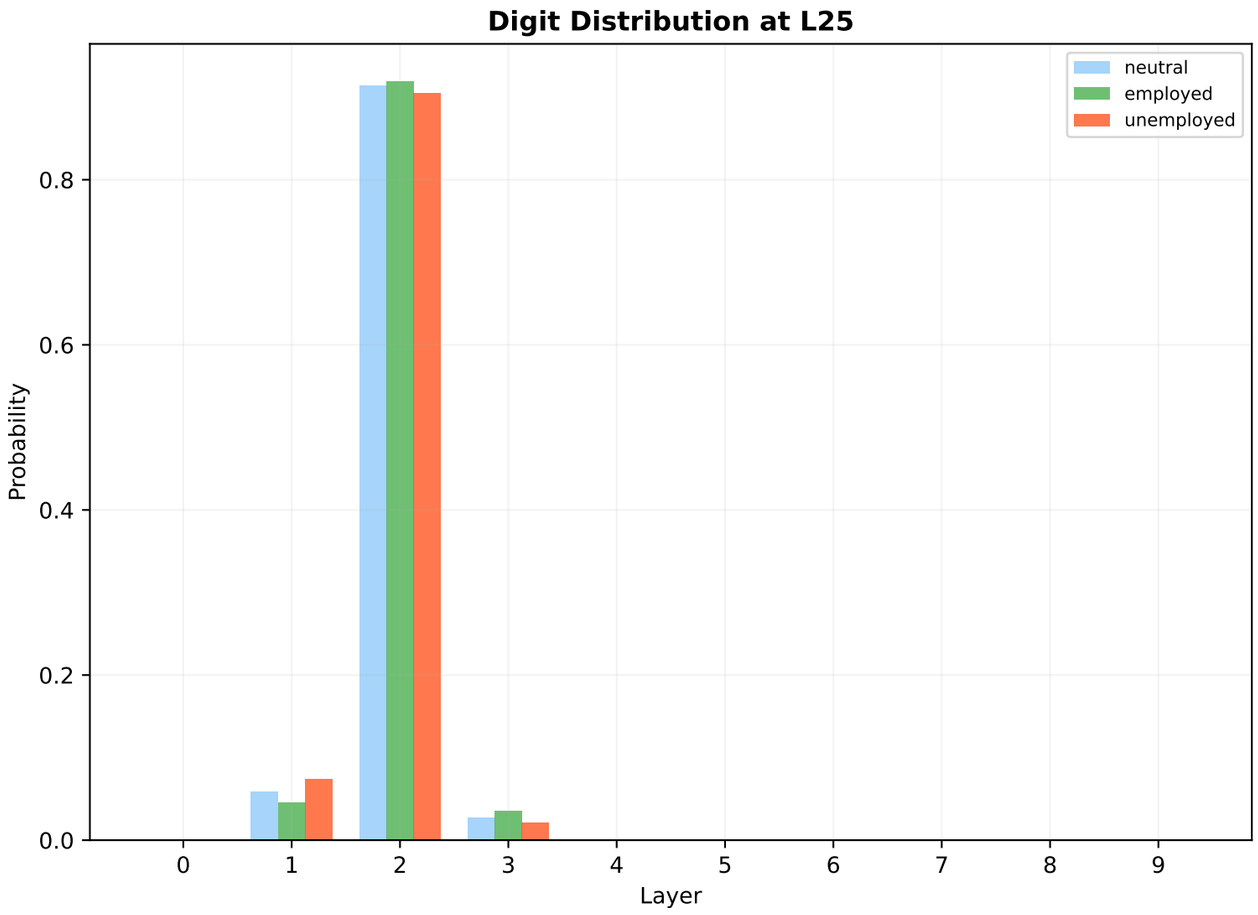

W3: 10 AM activity — Old Method
v7/exp1a/cfg4 | coeffs [-10, -5, -1, 0, 1, 5, 10]

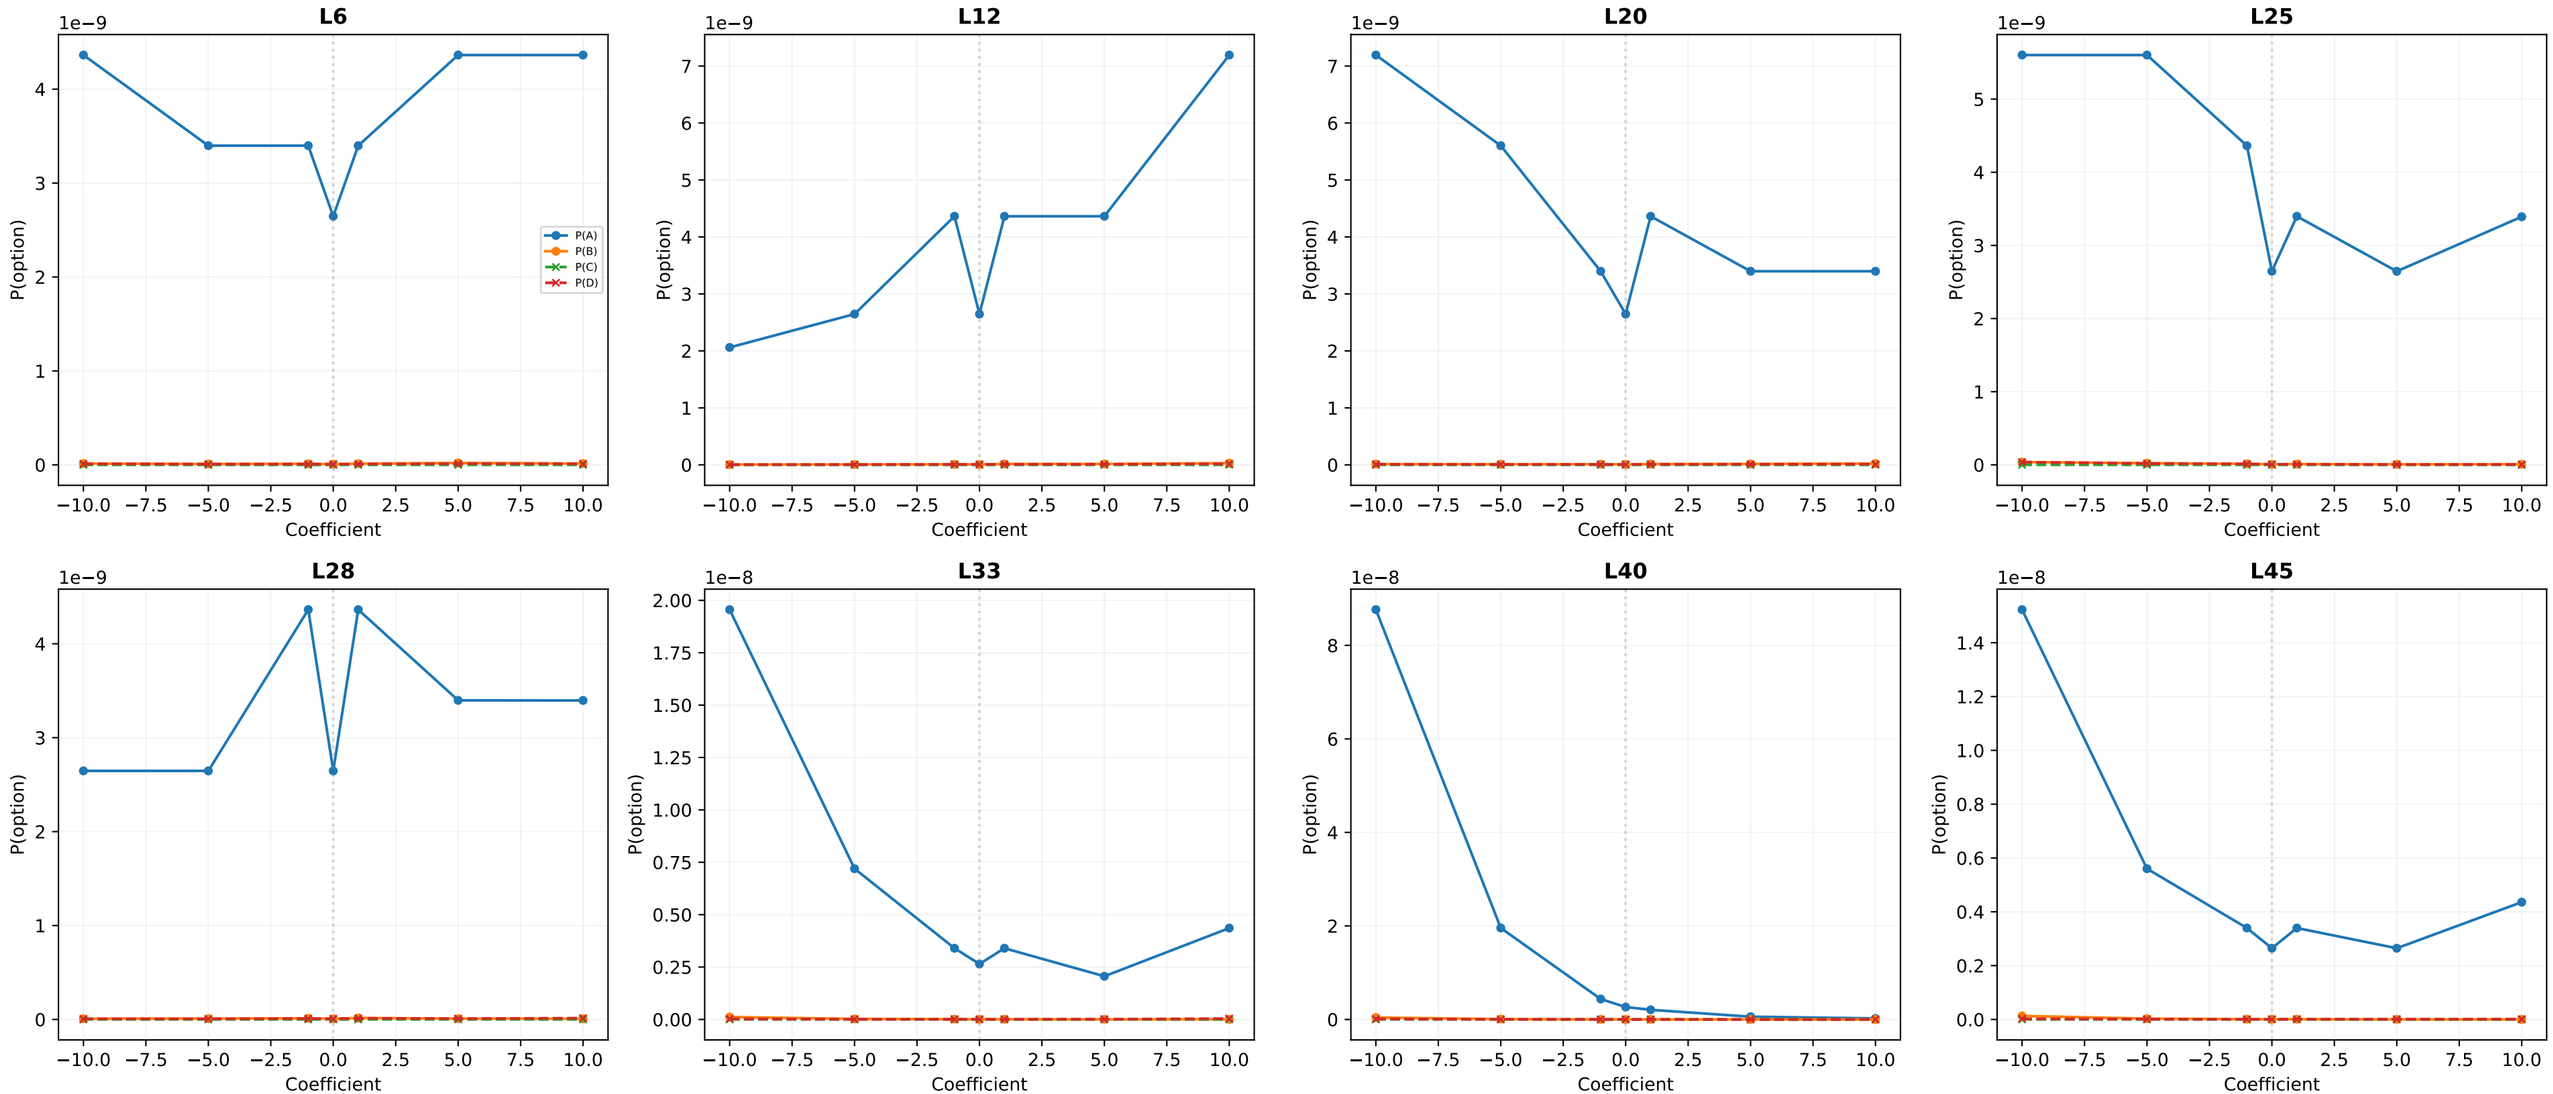

W3: 10 AM activity — Old Method Heatmap
v7/exp1a/cfg4

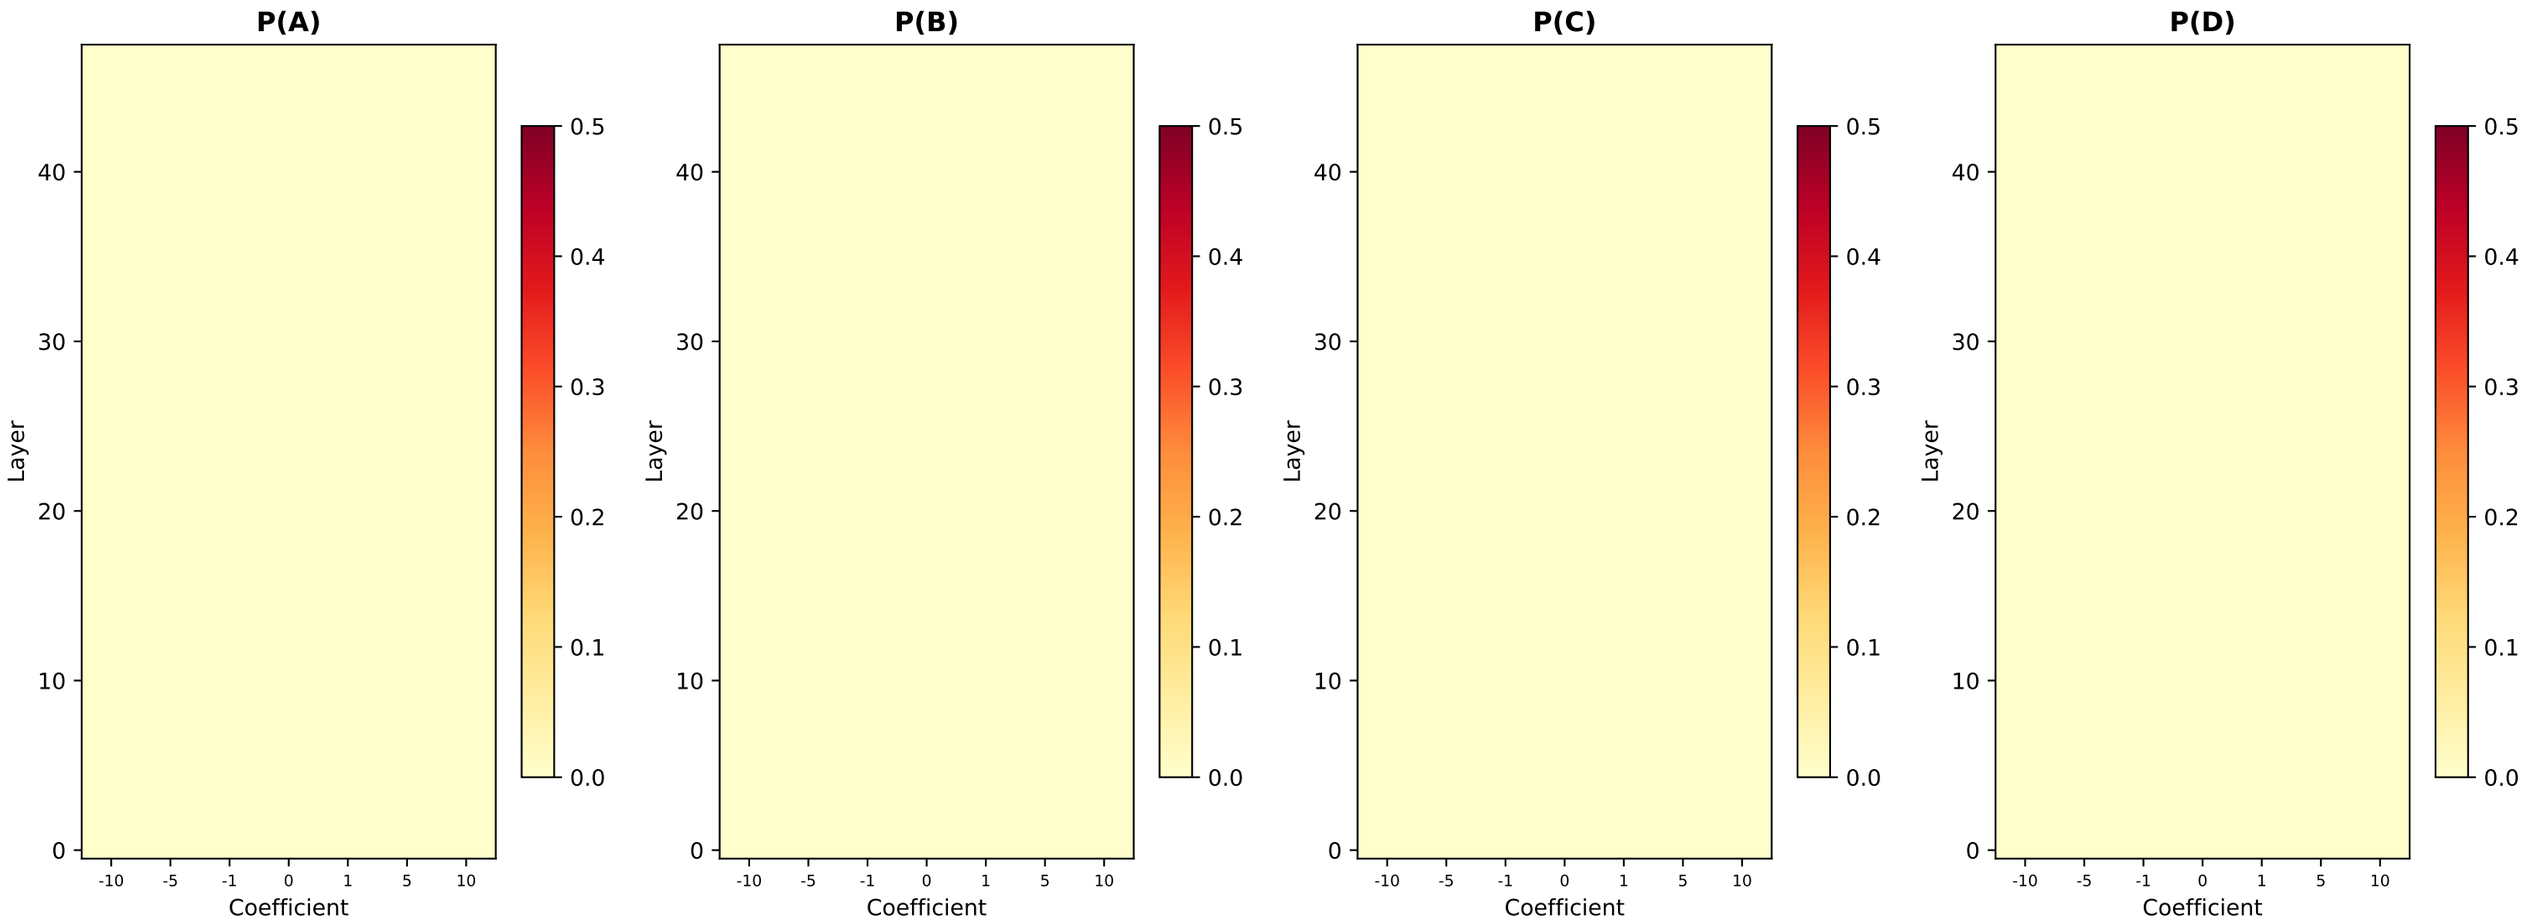

W3: 10 AM activity — New Method (Matteo)
v7/exp1a/cfg4 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

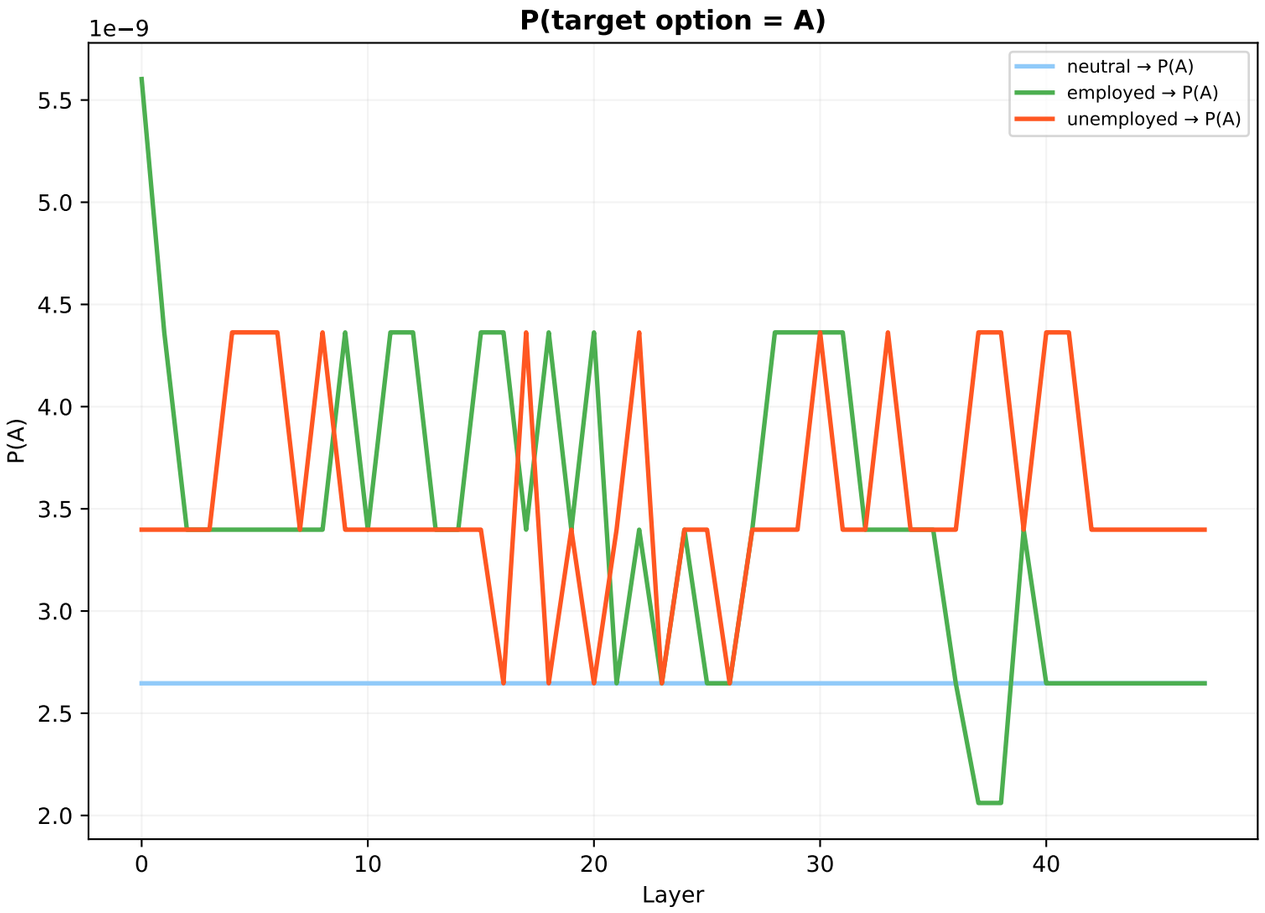

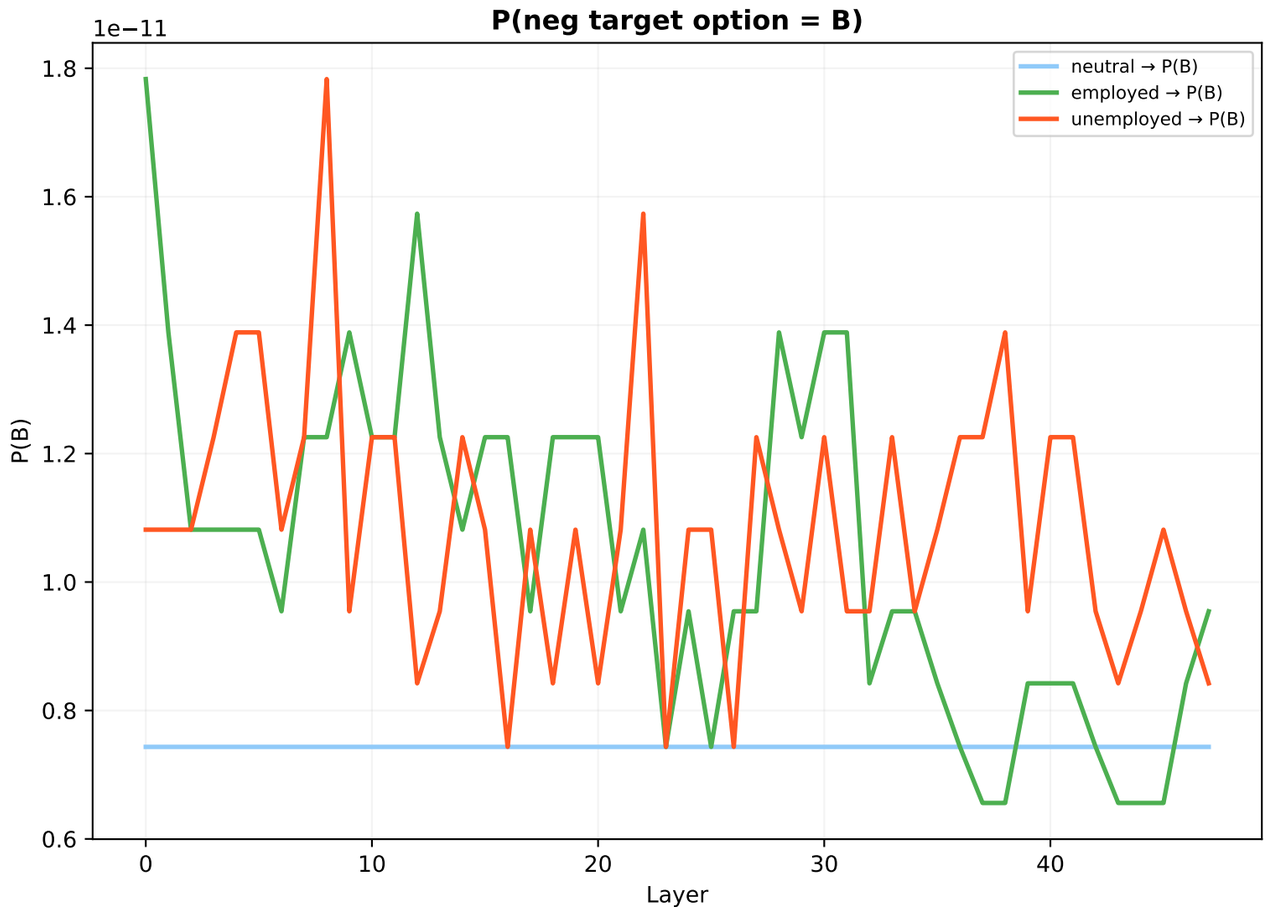

W4: 7 PM activity — Old Method
v7/exp1a/cfg4 | coeffs [-10, -5, -1, 0, 1, 5, 10]

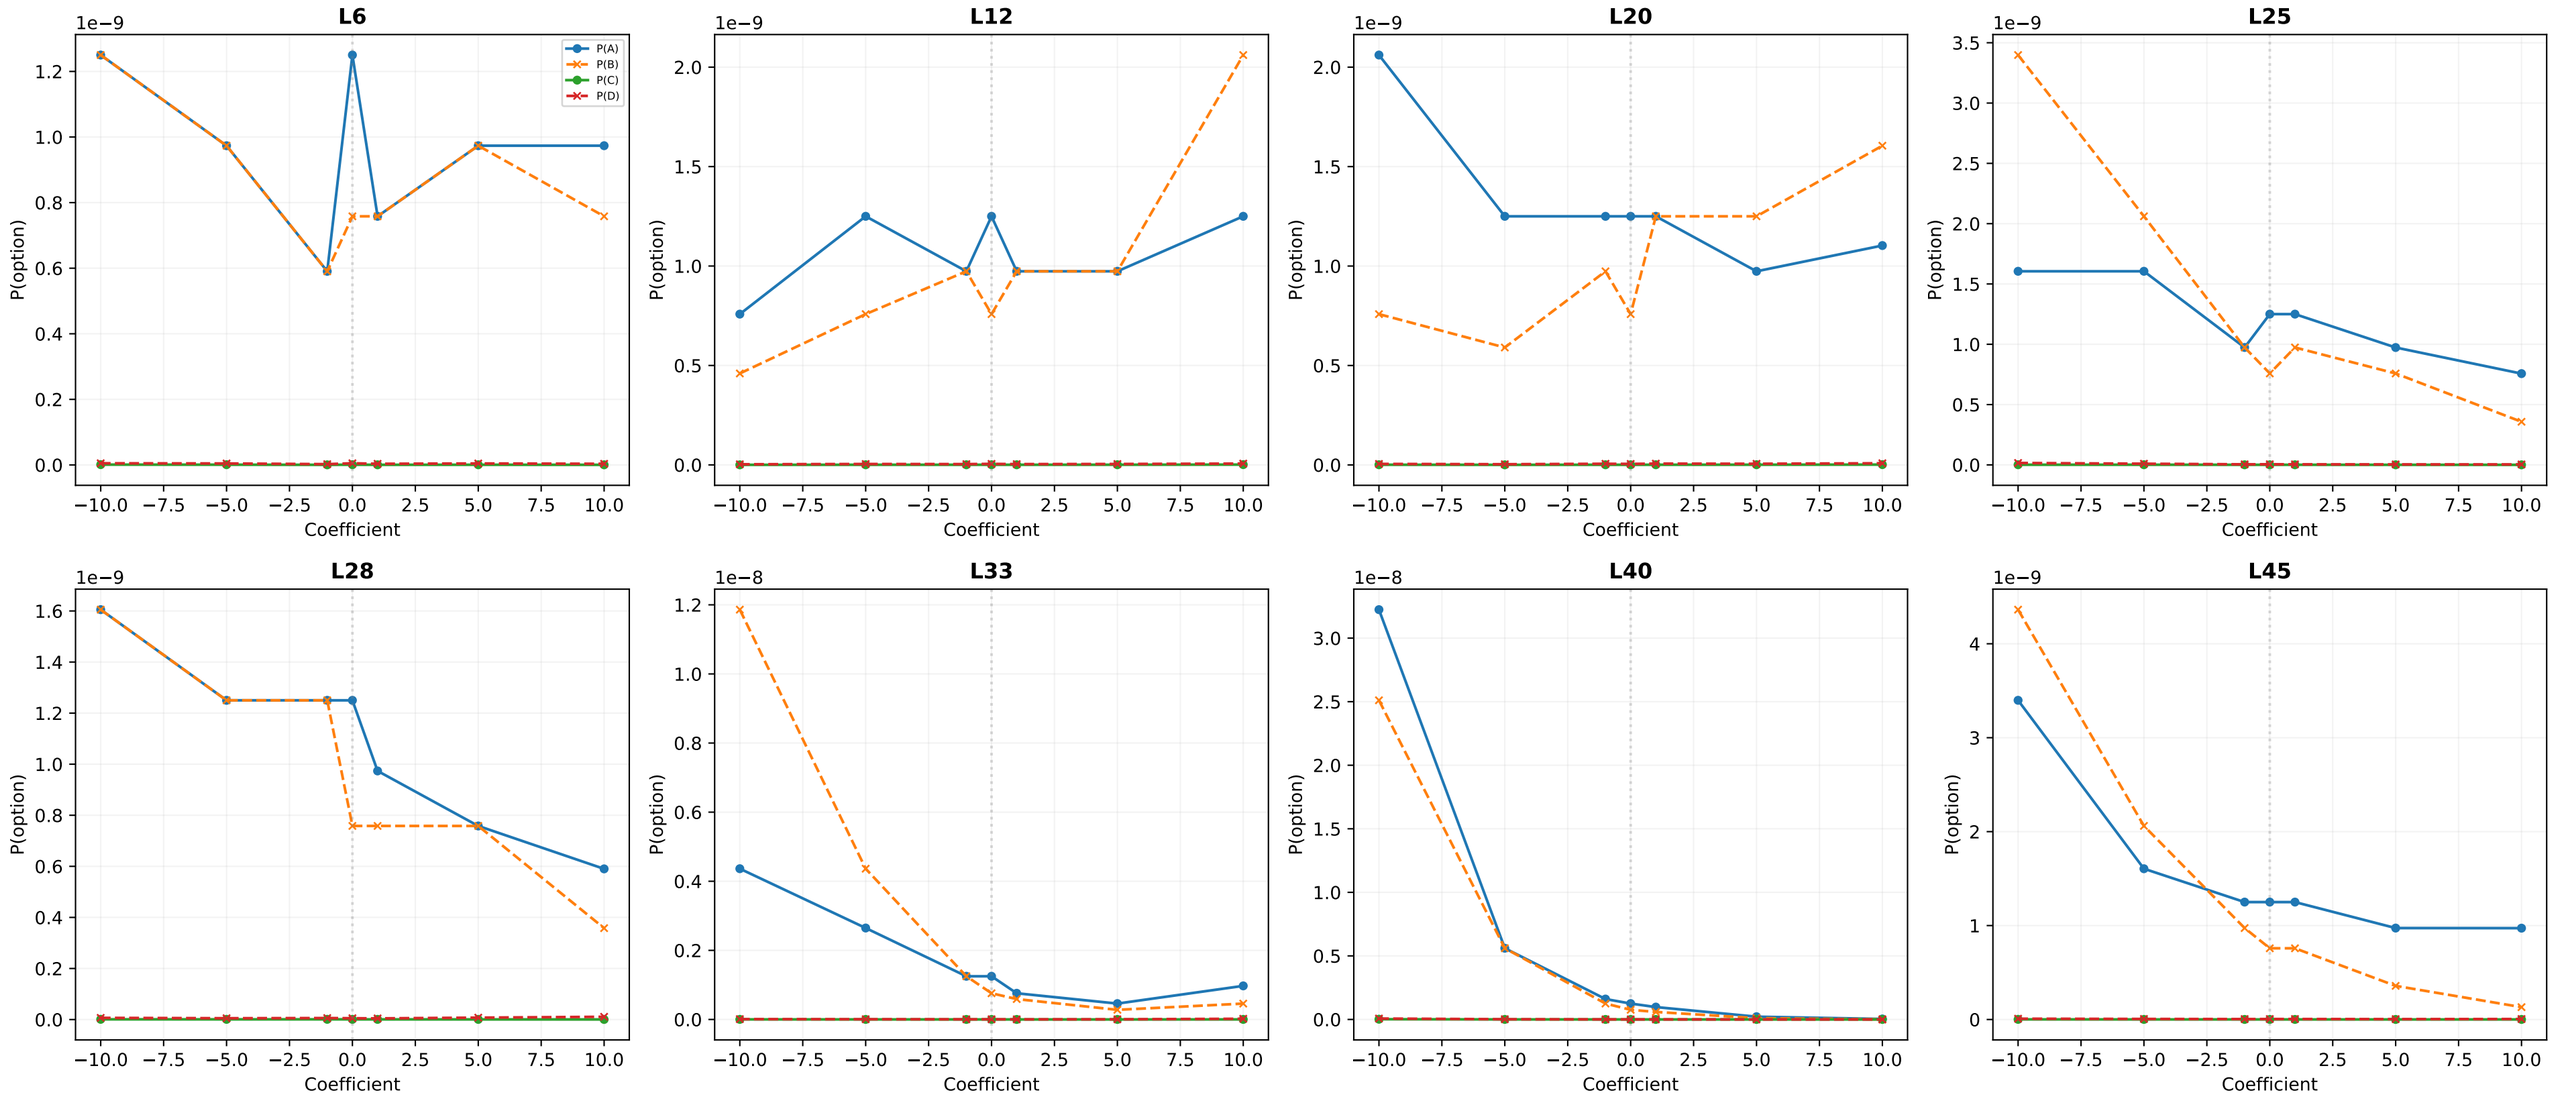

W4: 7 PM activity — Old Method Heatmap
v7/exp1a/cfg4

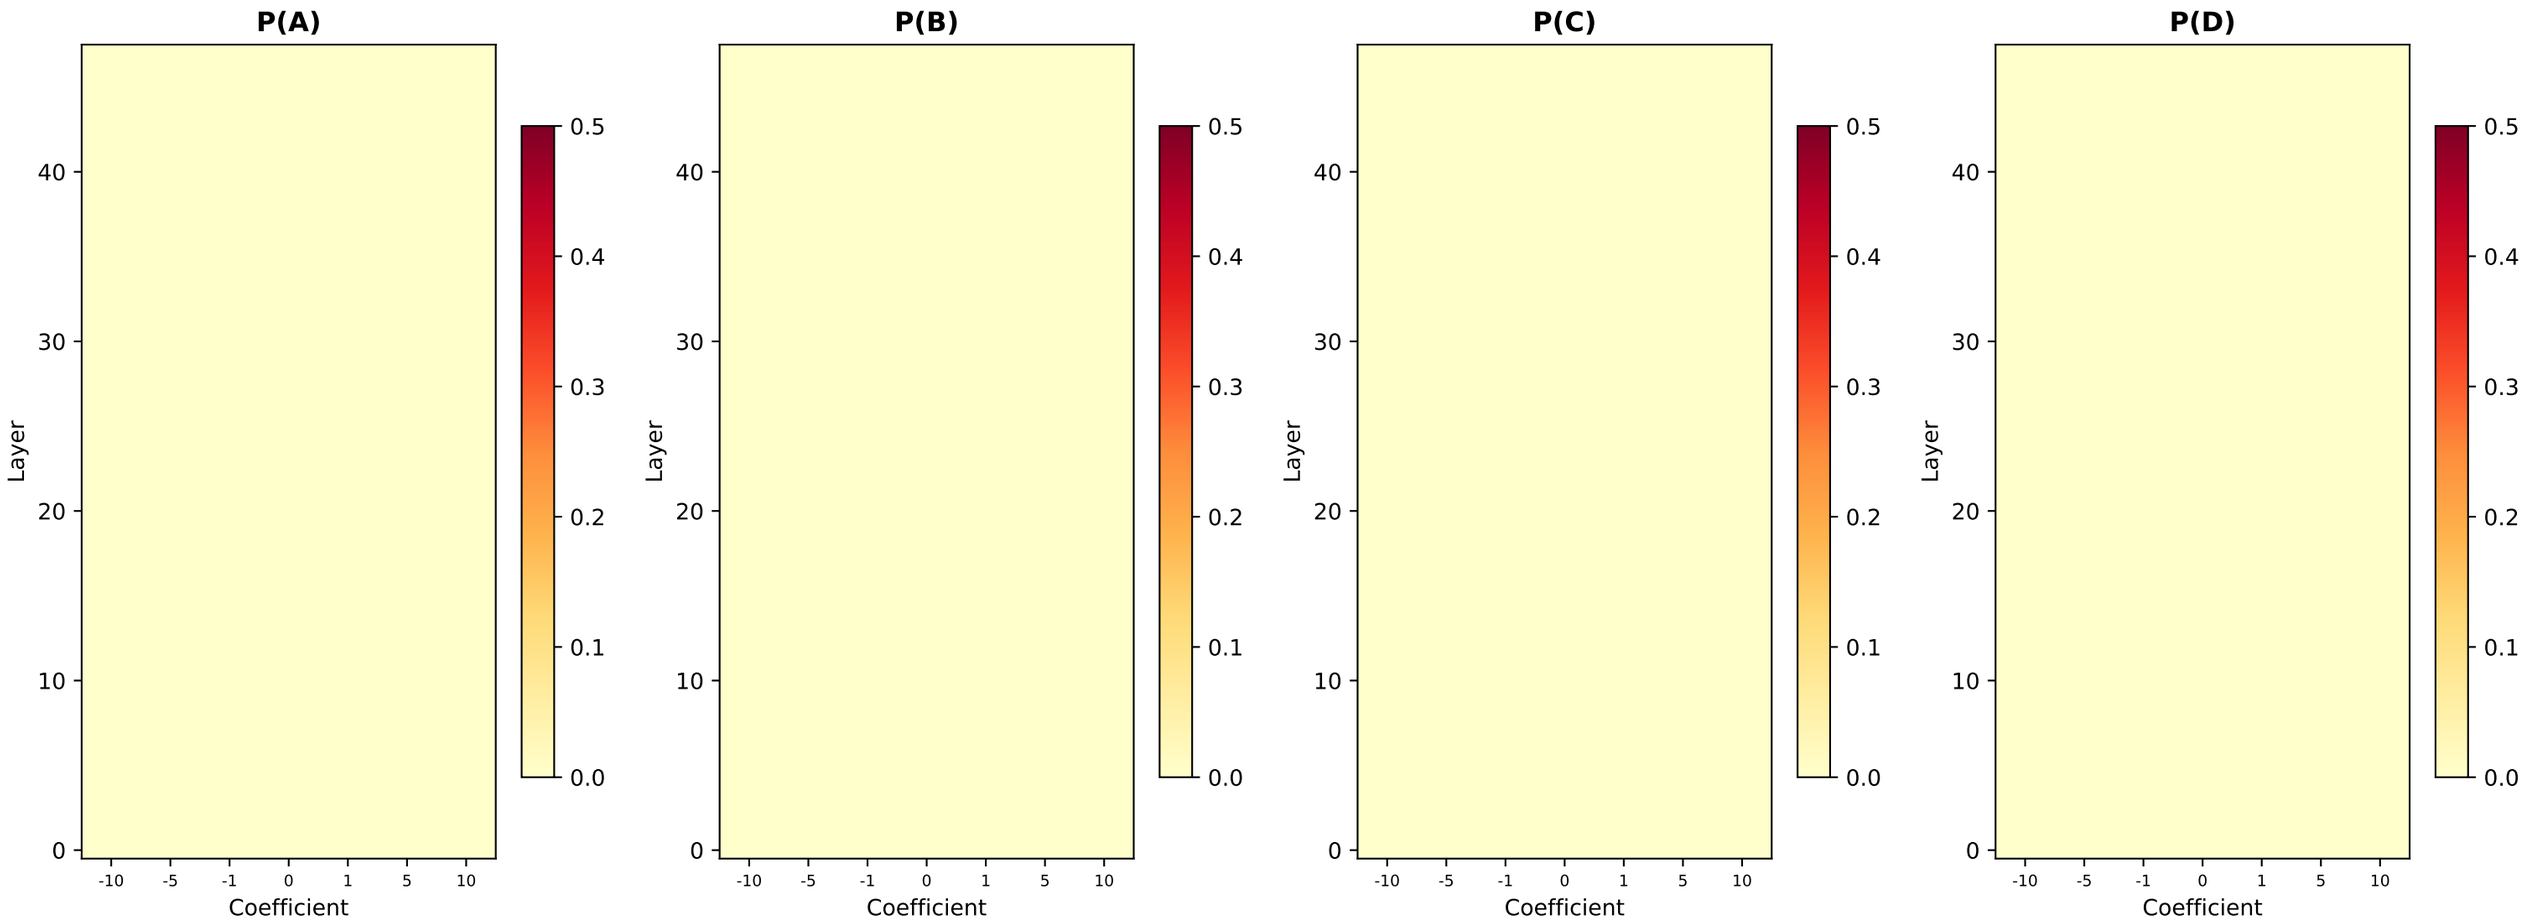

W4: 7 PM activity — New Method (Matteo)
v7/exp1a/cfg4 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

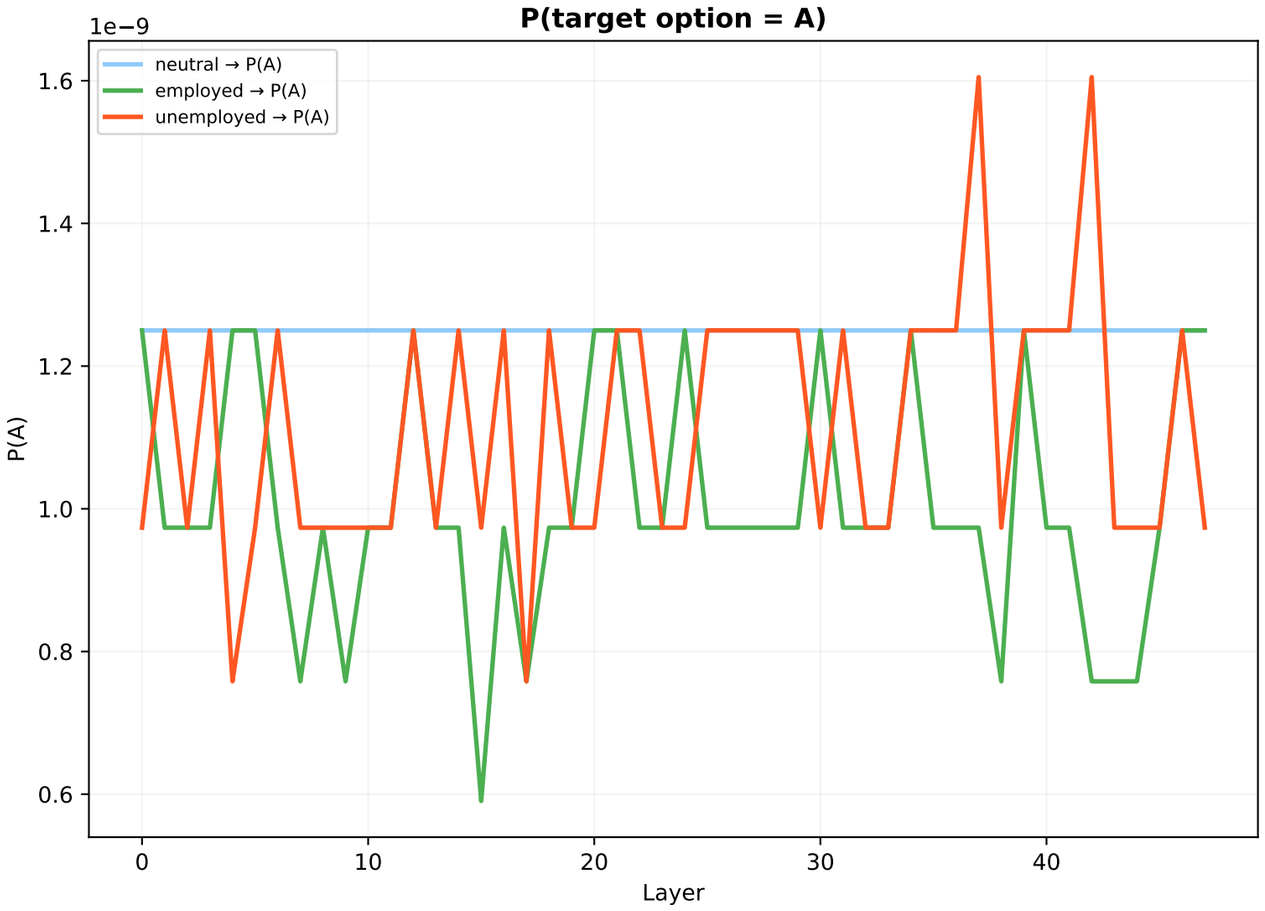

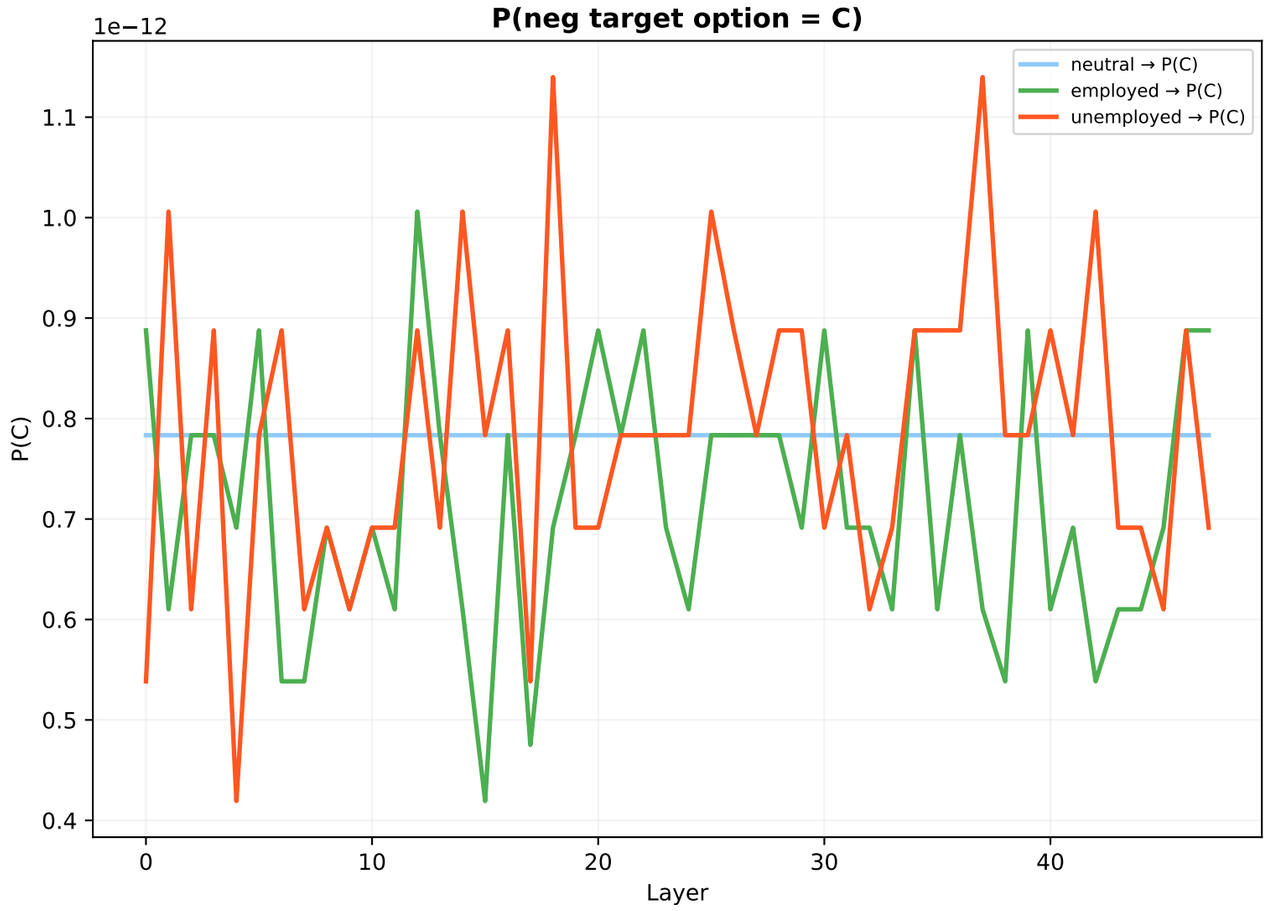

W5: CONTROL: indoor temperature — Old Method
v7/exp1a/cfg4 | coeffs [-10, -5, -1, 0, 1, 5, 10]

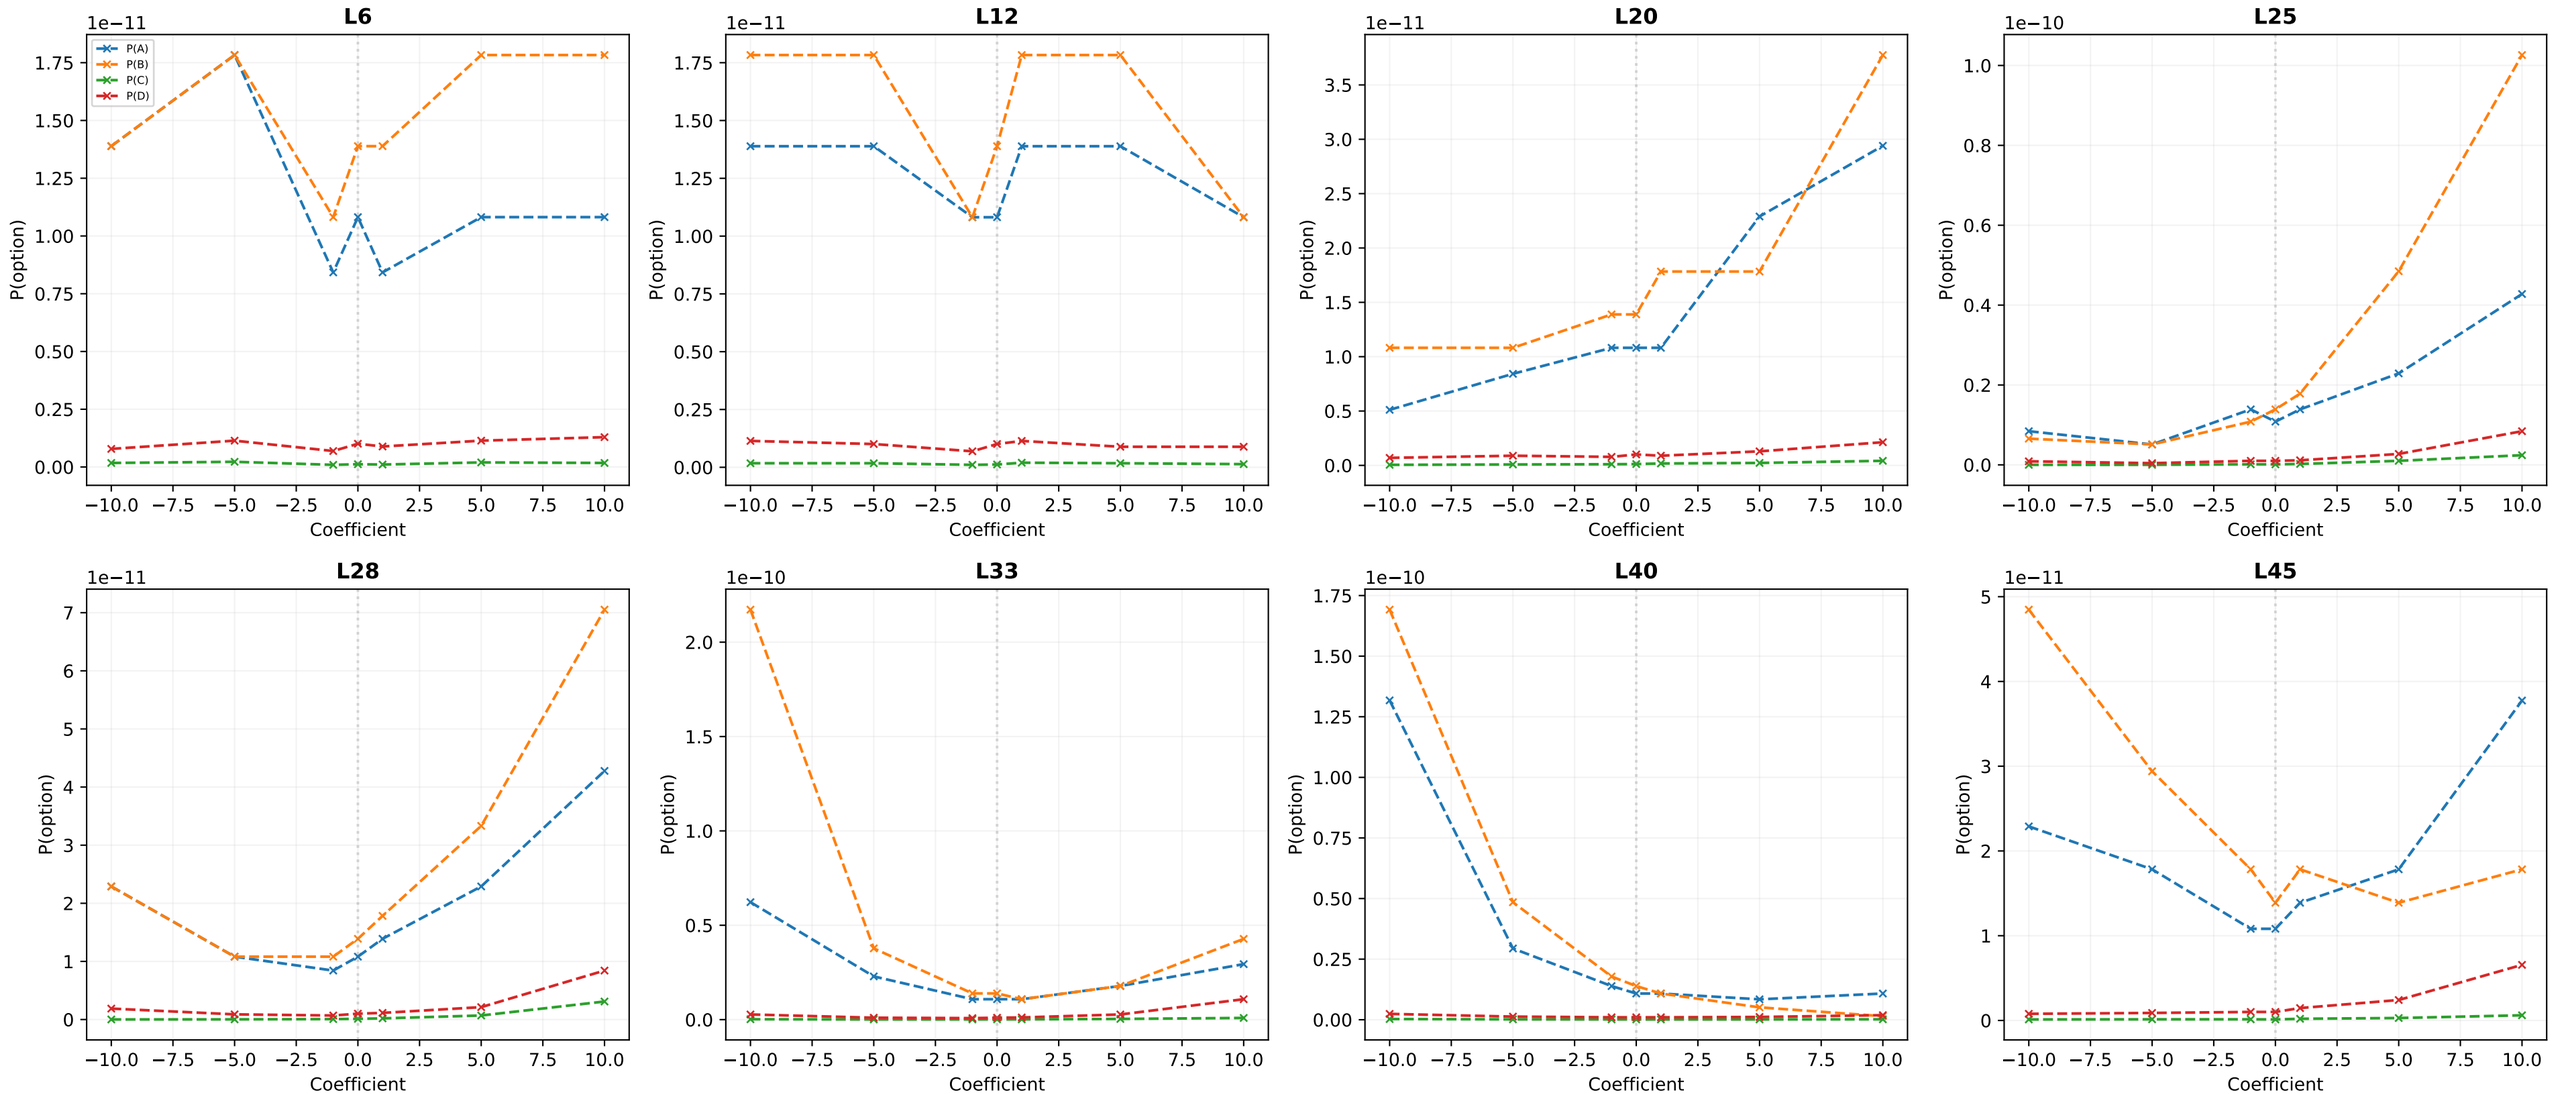

W5: CONTROL: indoor temperature — Old Method Heatmap
v7/exp1a/cfg4

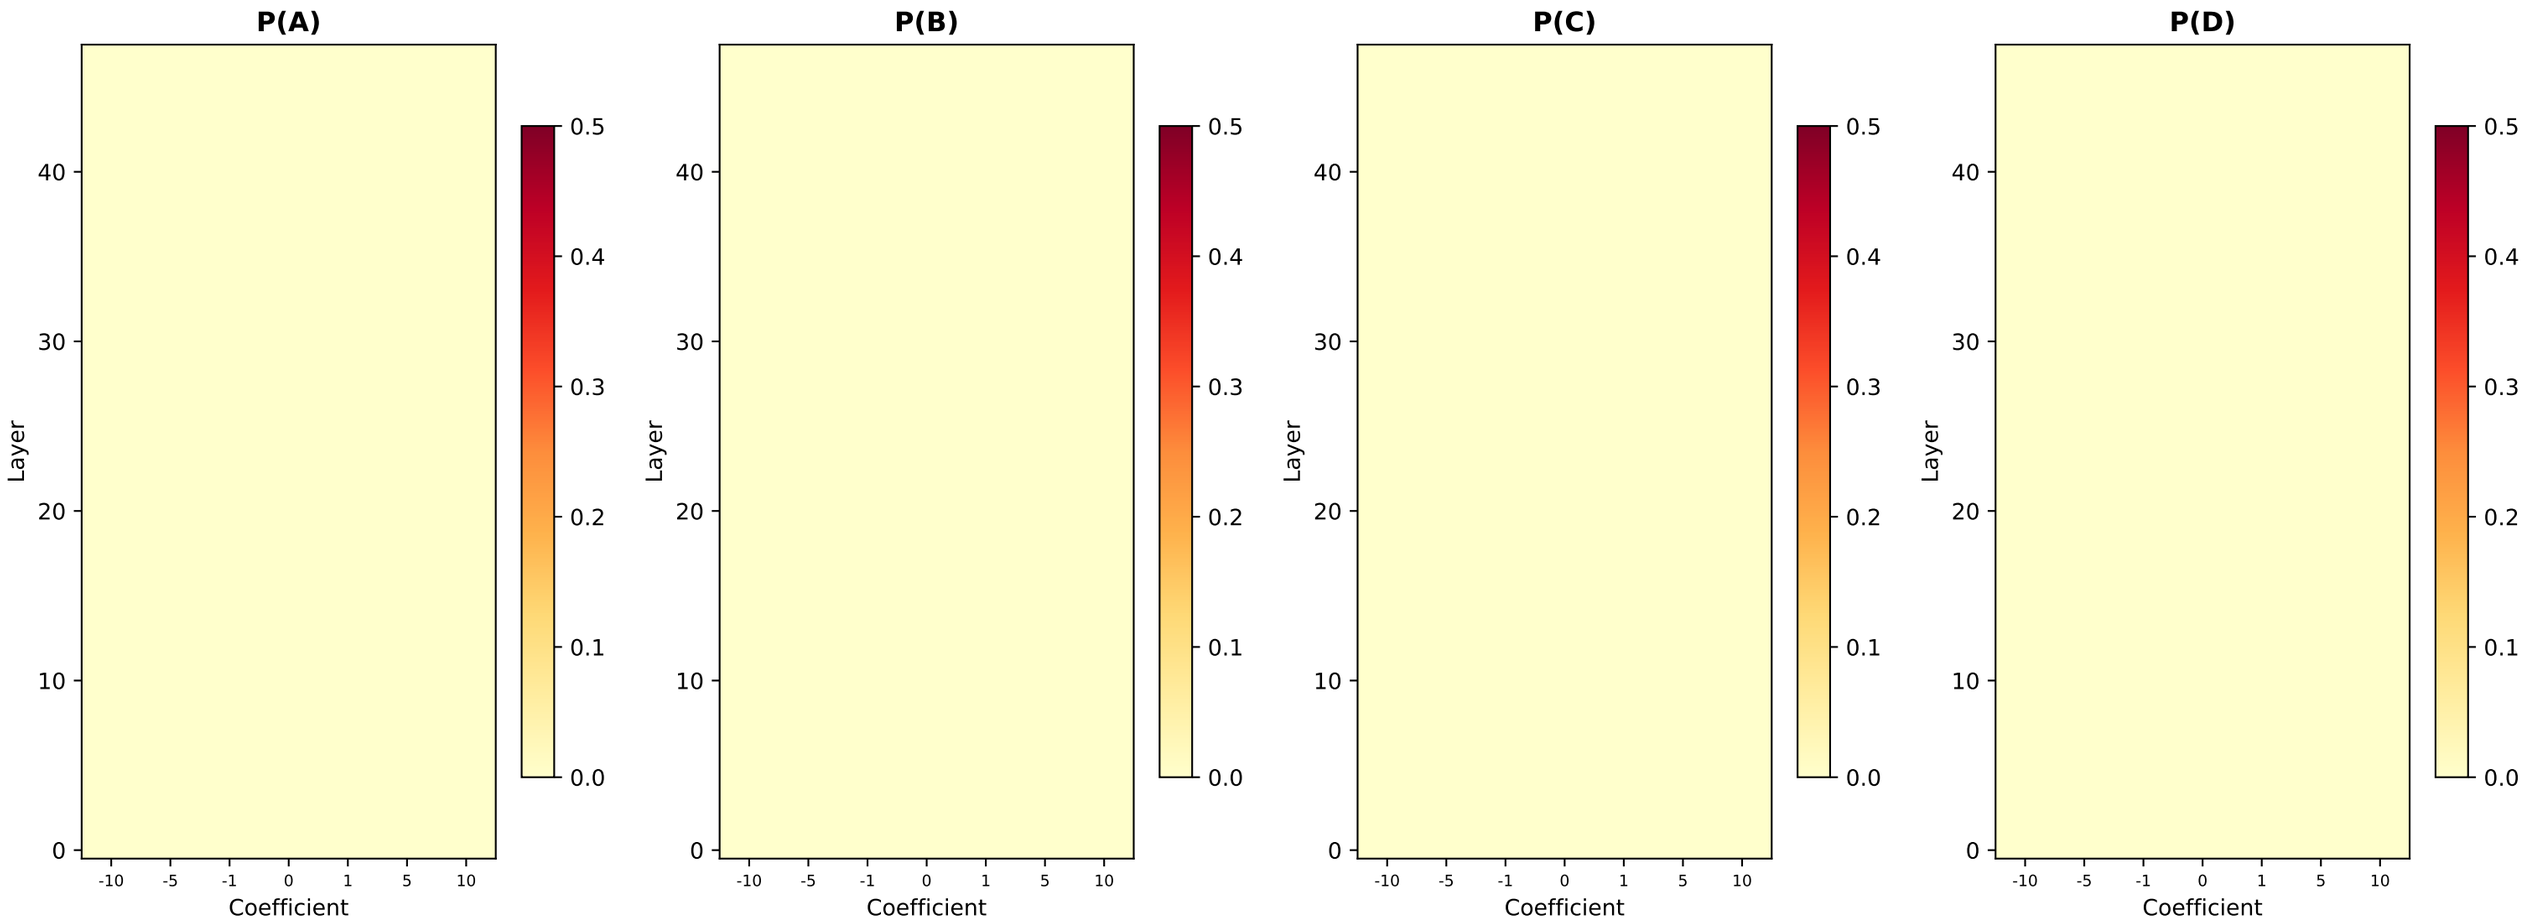

W5: CONTROL: indoor temperature — New Method (Matteo)
v7/exp1a/cfg4 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

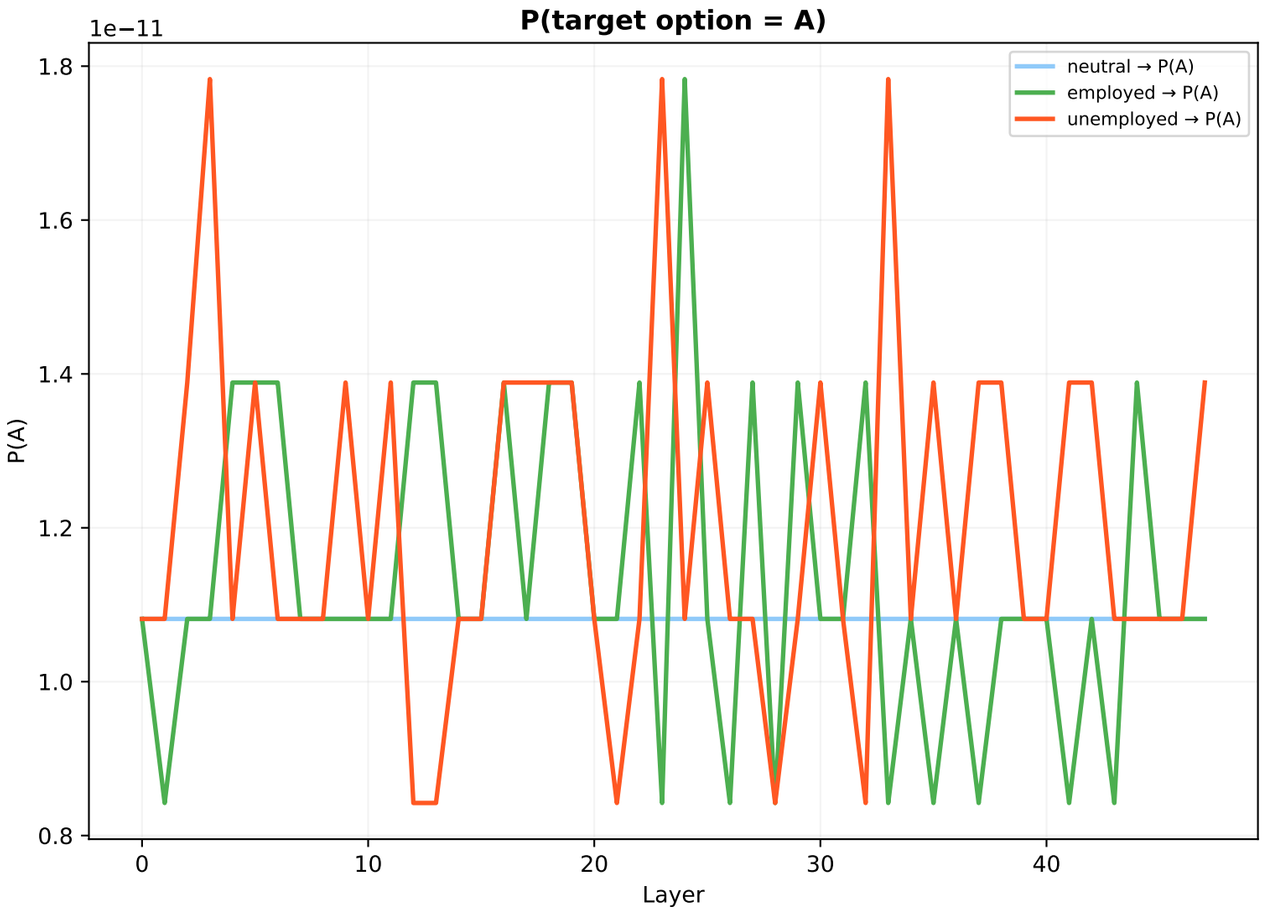

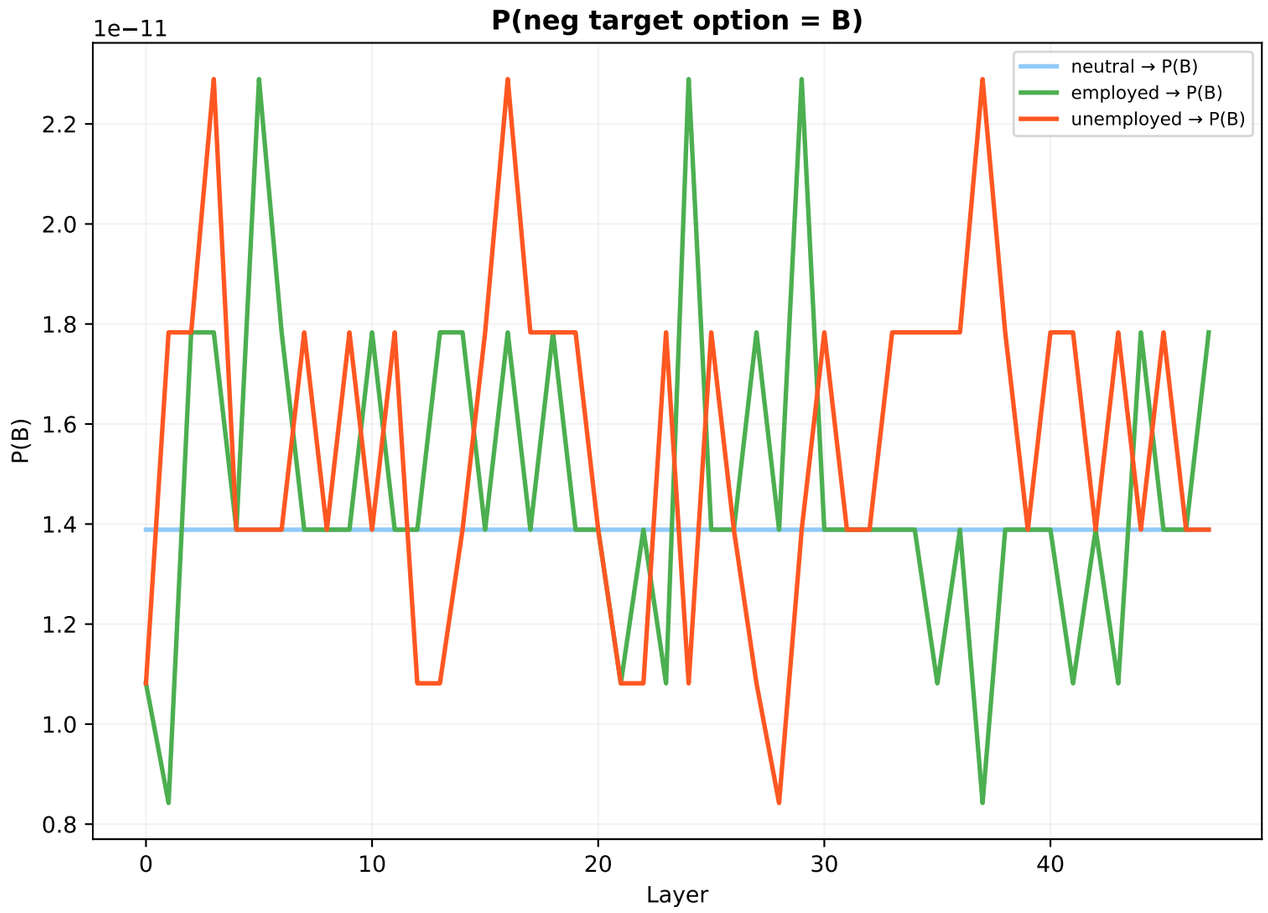

E1: Monthly lunch spending — Old Method
v7/exp2/cfg5 | coeffs [-10, -5, -1, 0, 1, 5, 10]

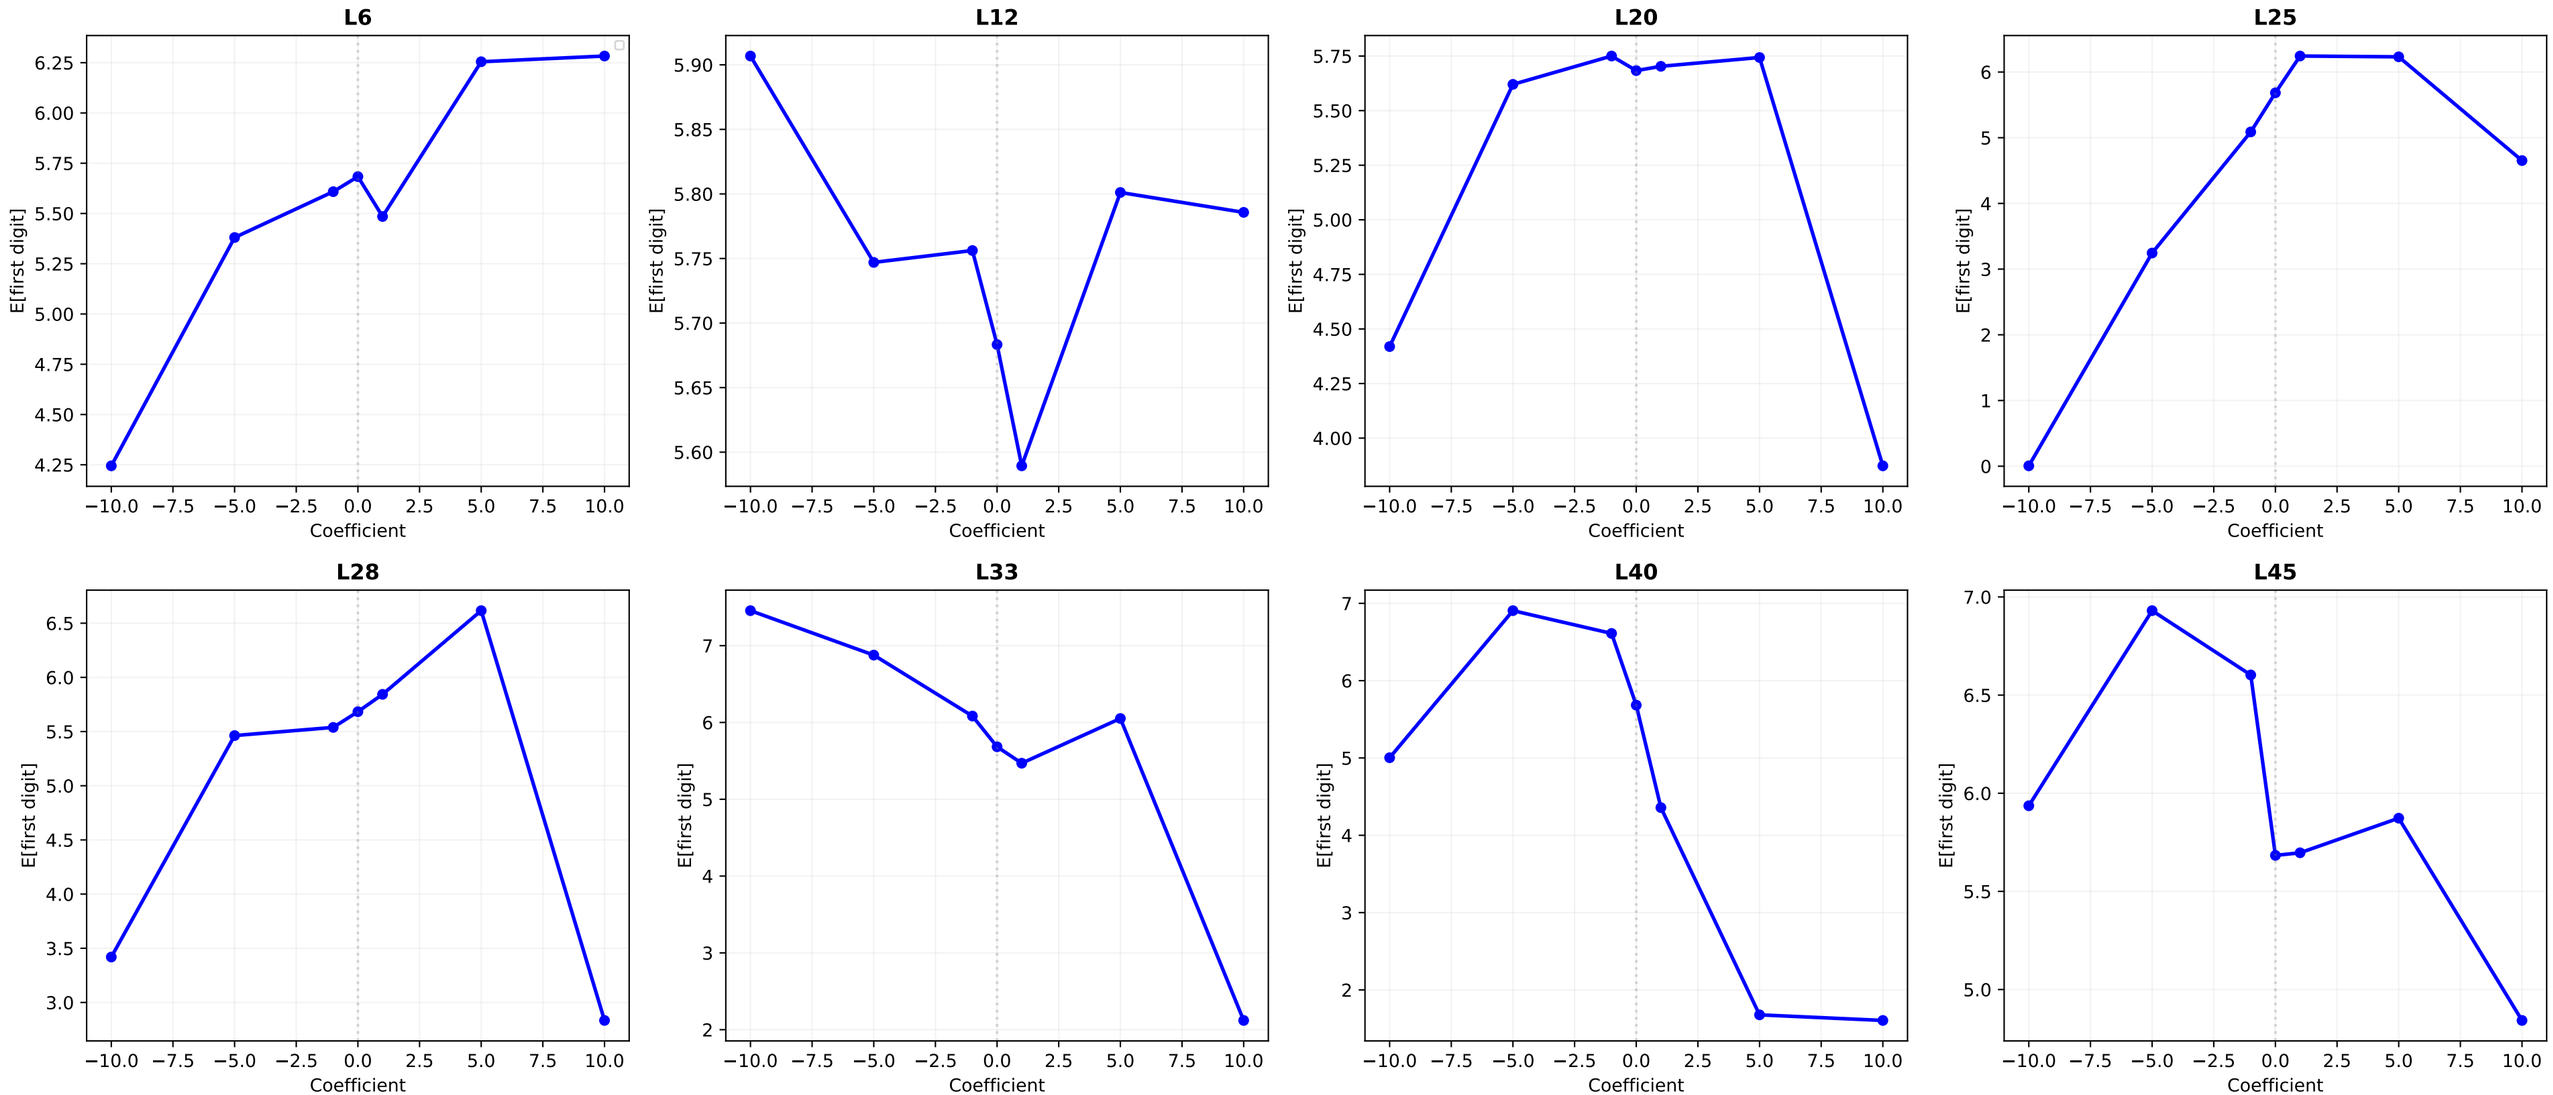

E1: Monthly lunch spending — Old Method Heatmap
v7/exp2/cfg5

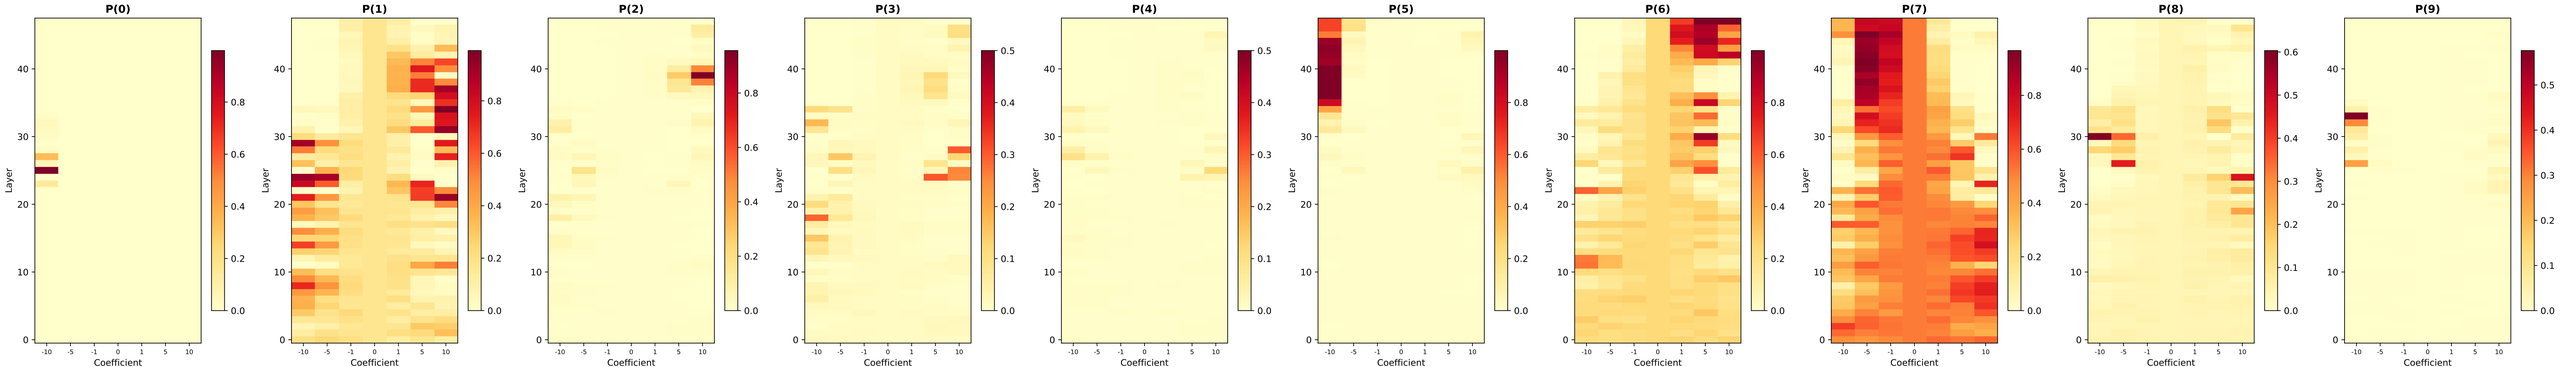

E1: Monthly lunch spending — New Method (Matteo)
v7/exp2/cfg5 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

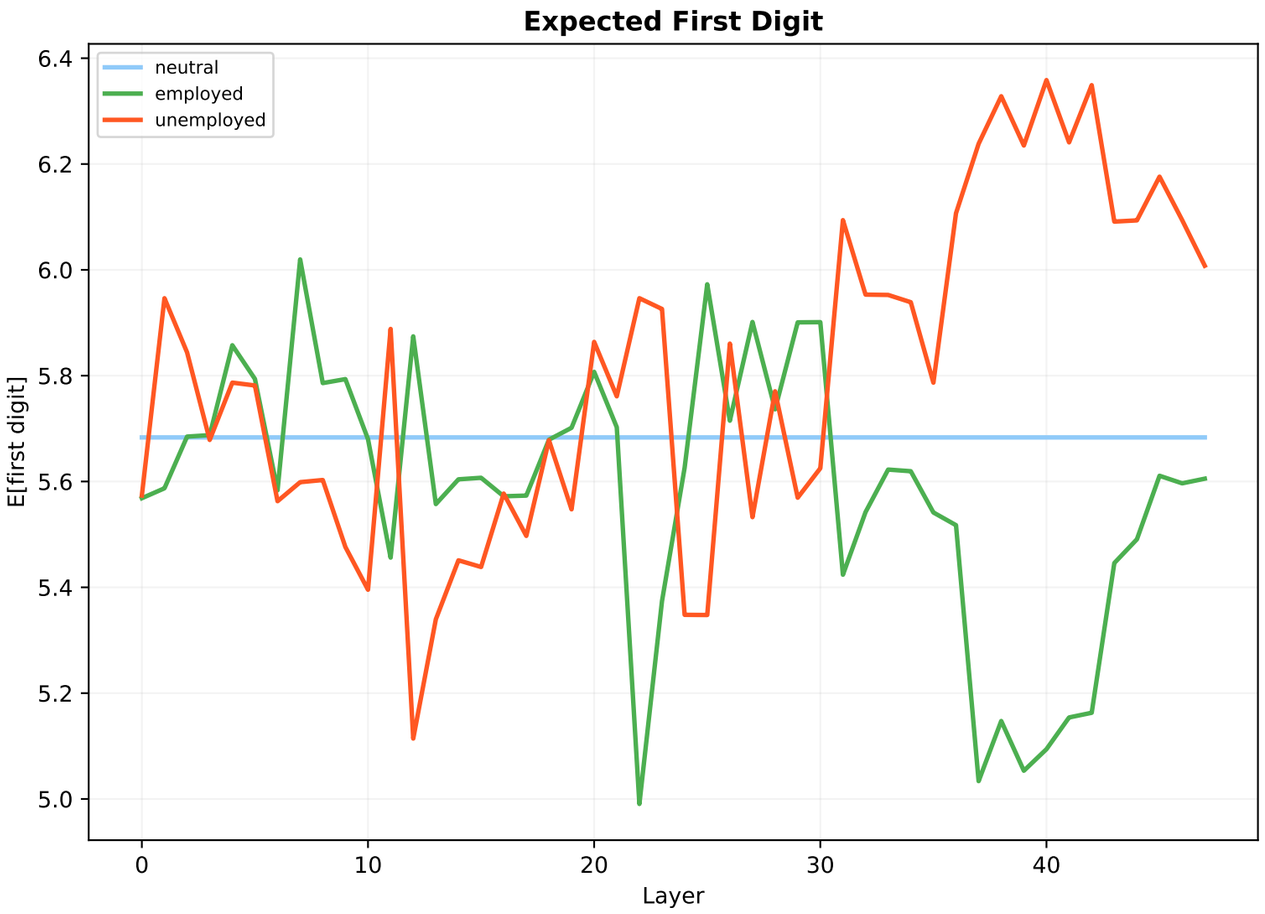

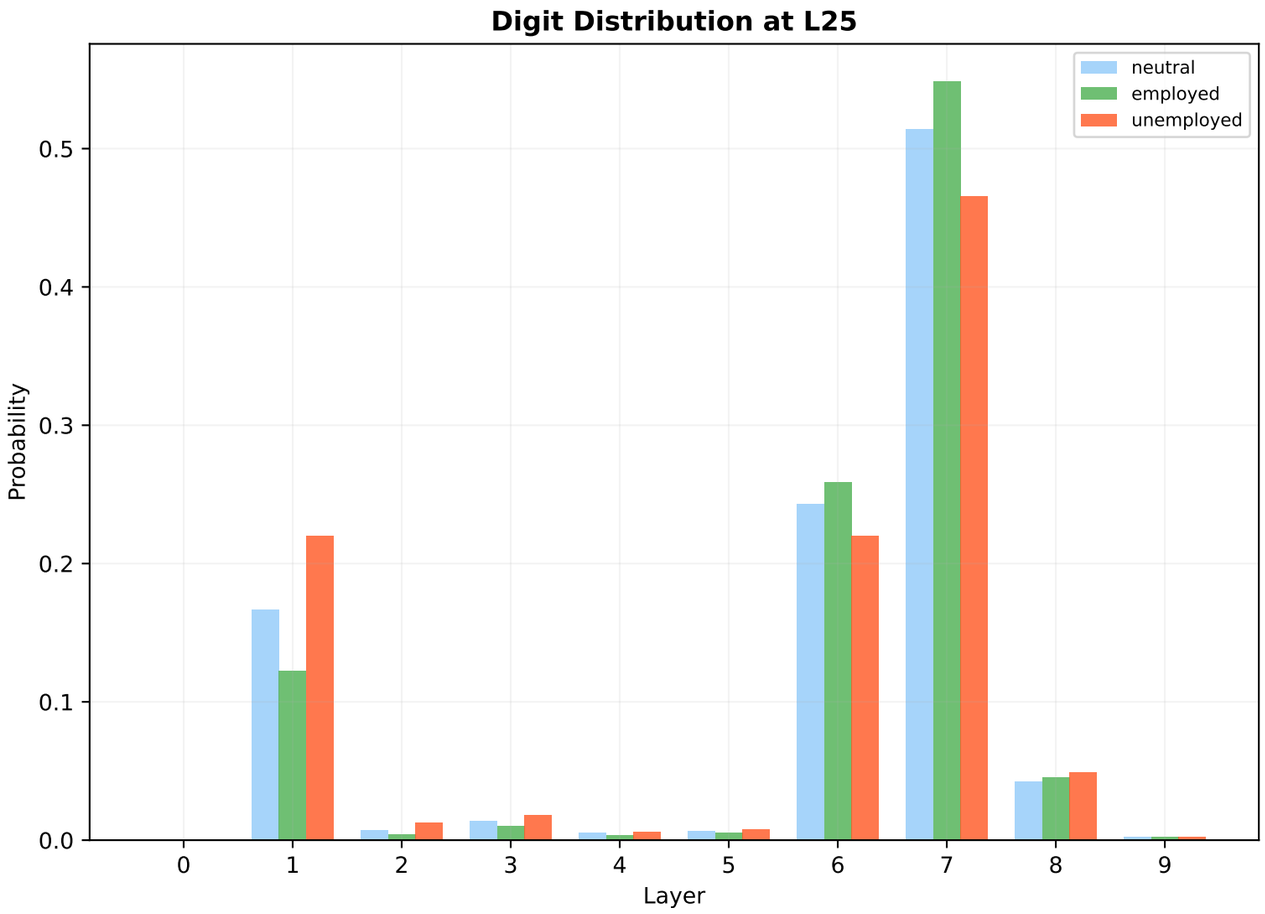

E2: Monthly commute cost — Old Method
v7/exp2/cfg5 | coeffs [-10, -5, -1, 0, 1, 5, 10]

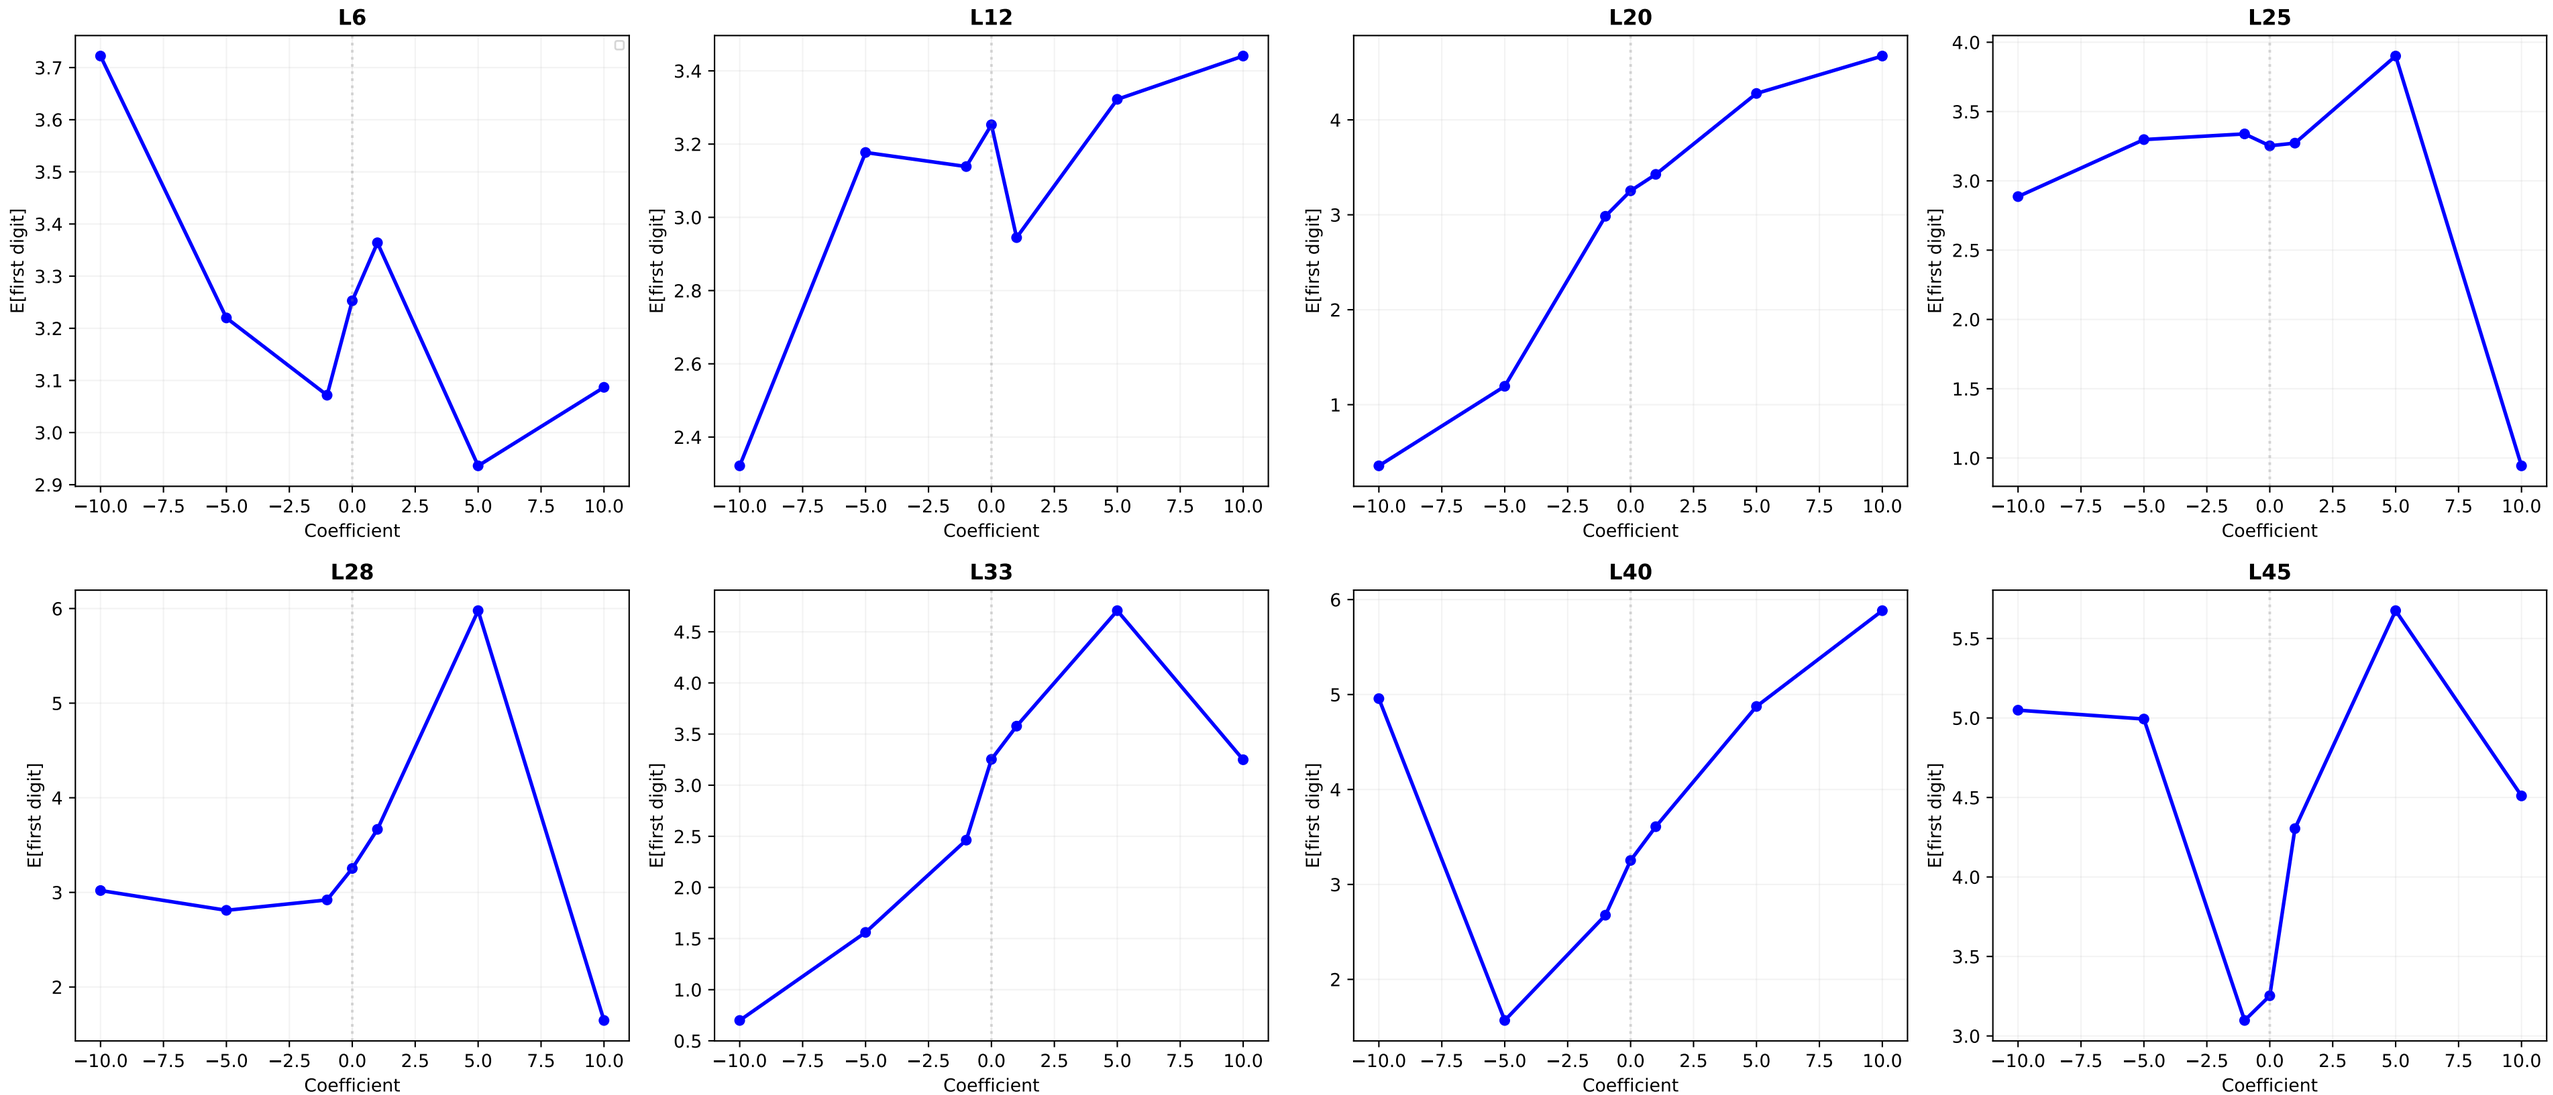

E2: Monthly commute cost — Old Method Heatmap
v7/exp2/cfg5

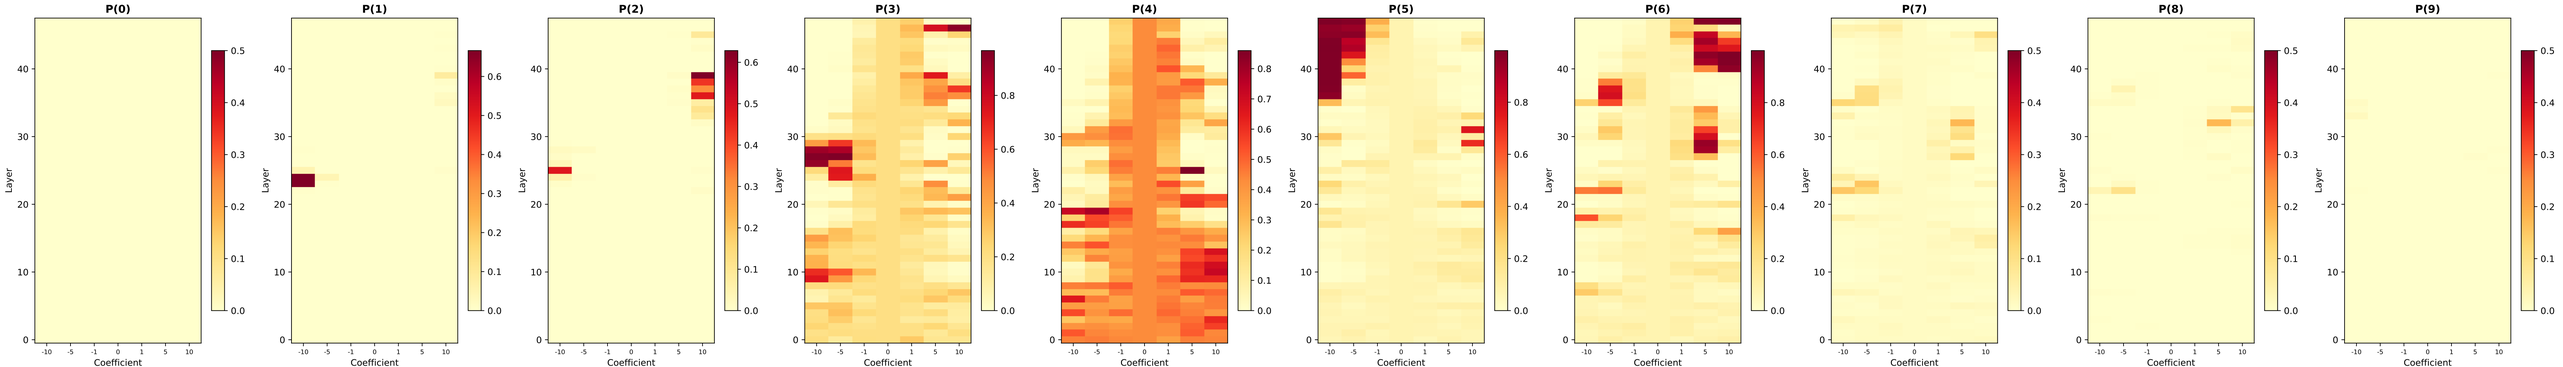

E2: Monthly commute cost — New Method (Matteo)
v7/exp2/cfg5 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

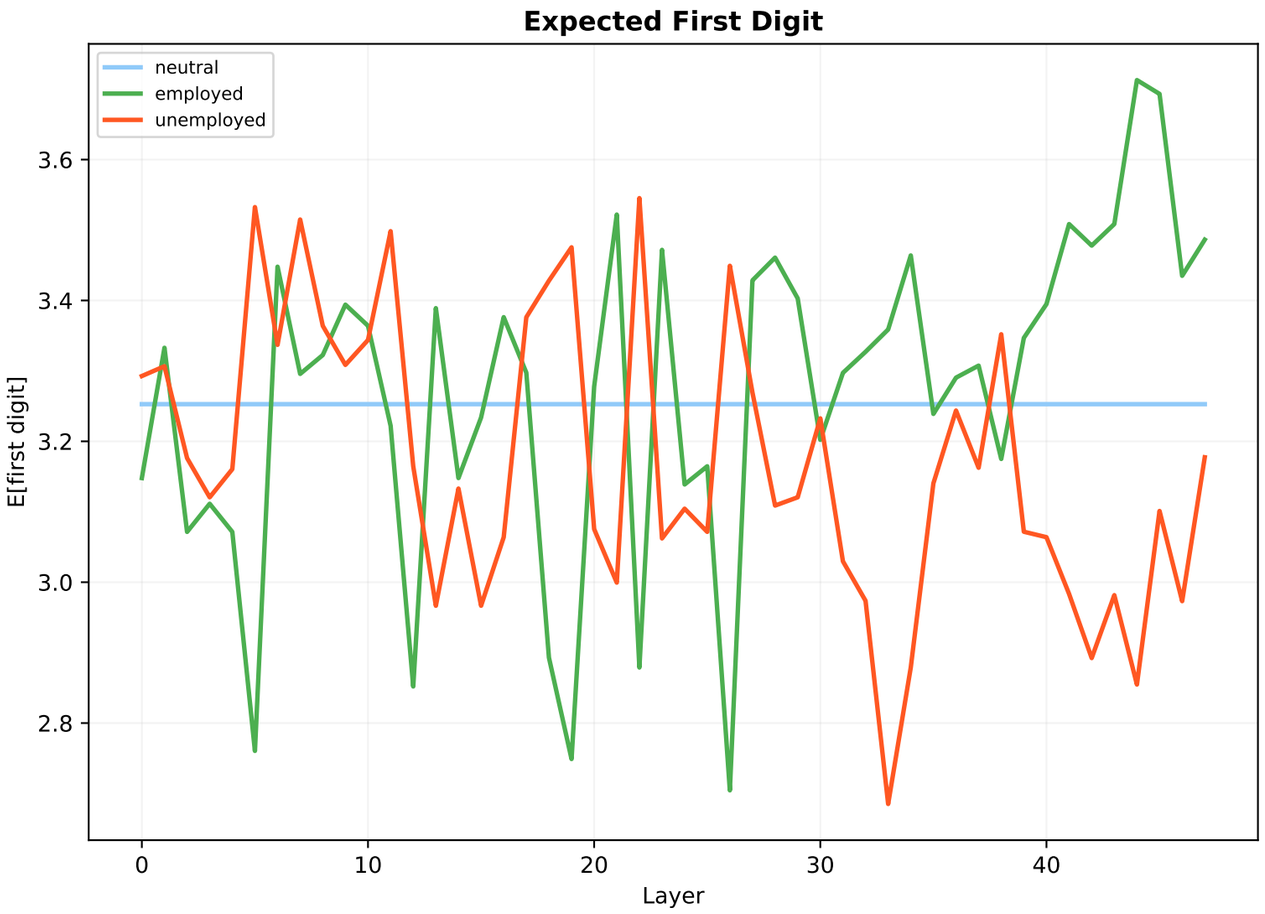

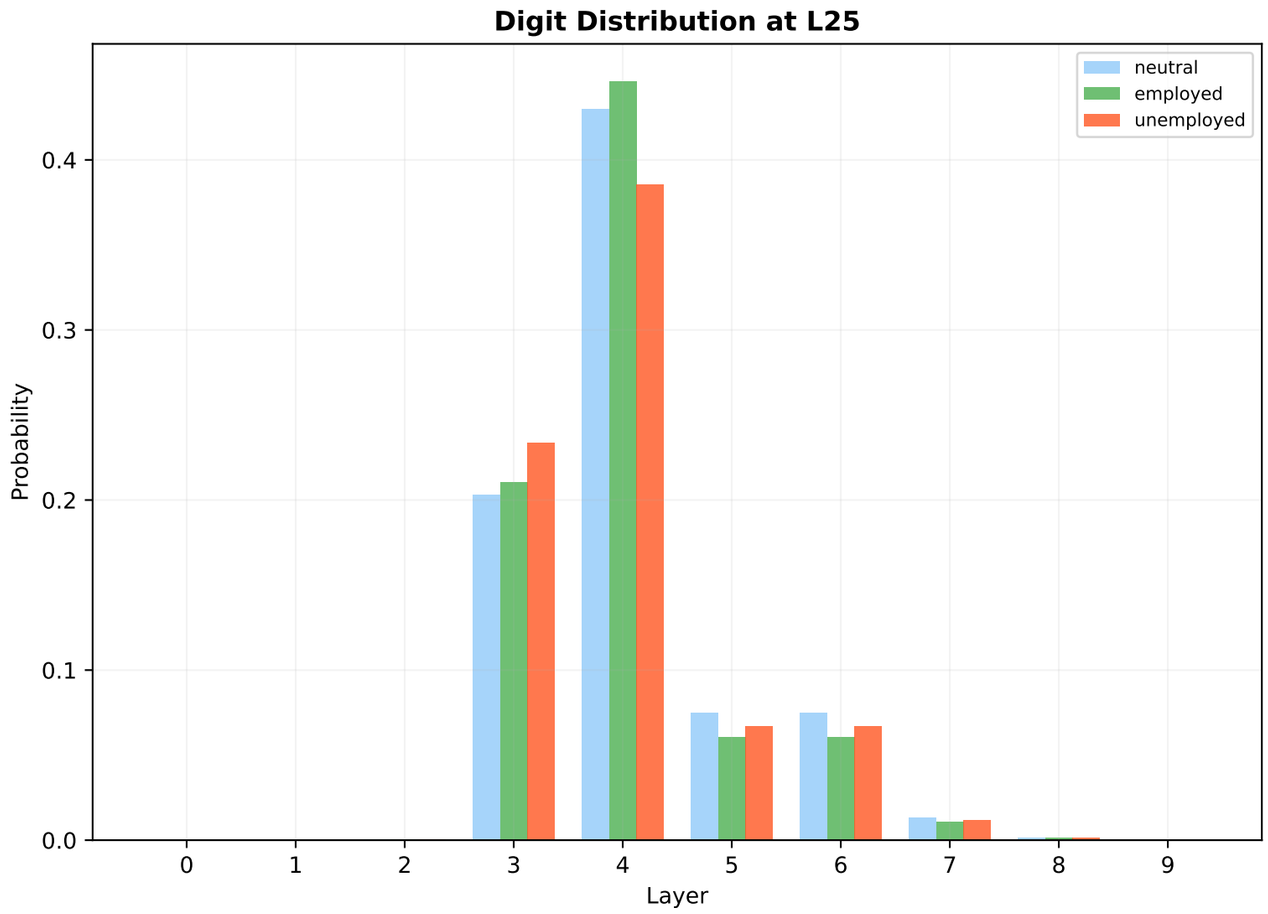

E3: Noon location — Old Method
v7/exp2/cfg5 | coeffs [-10, -5, -1, 0, 1, 5, 10]

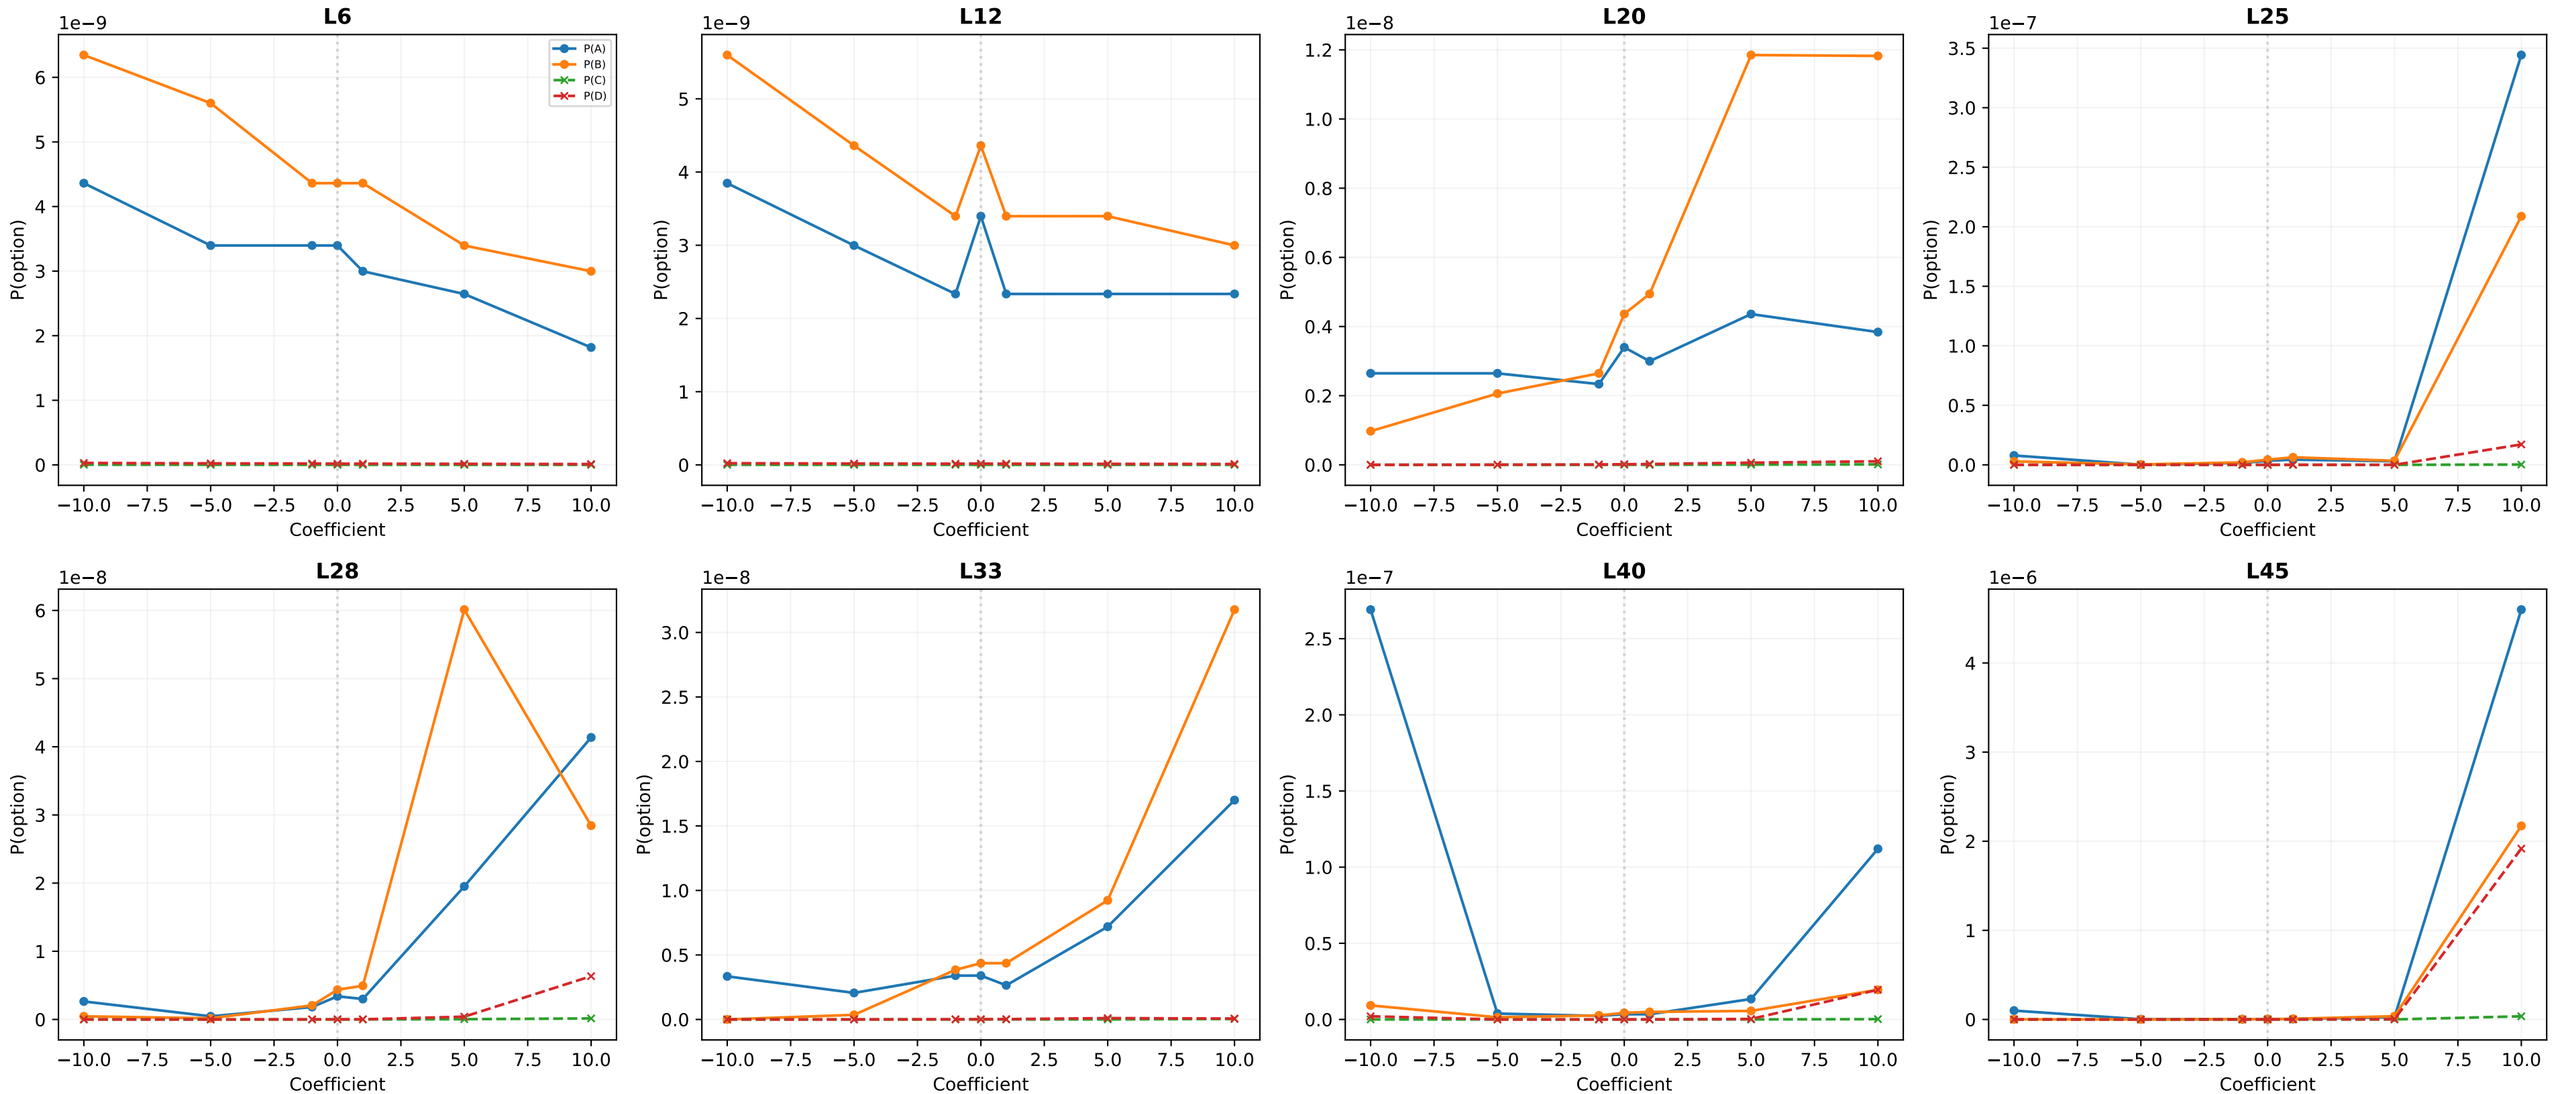

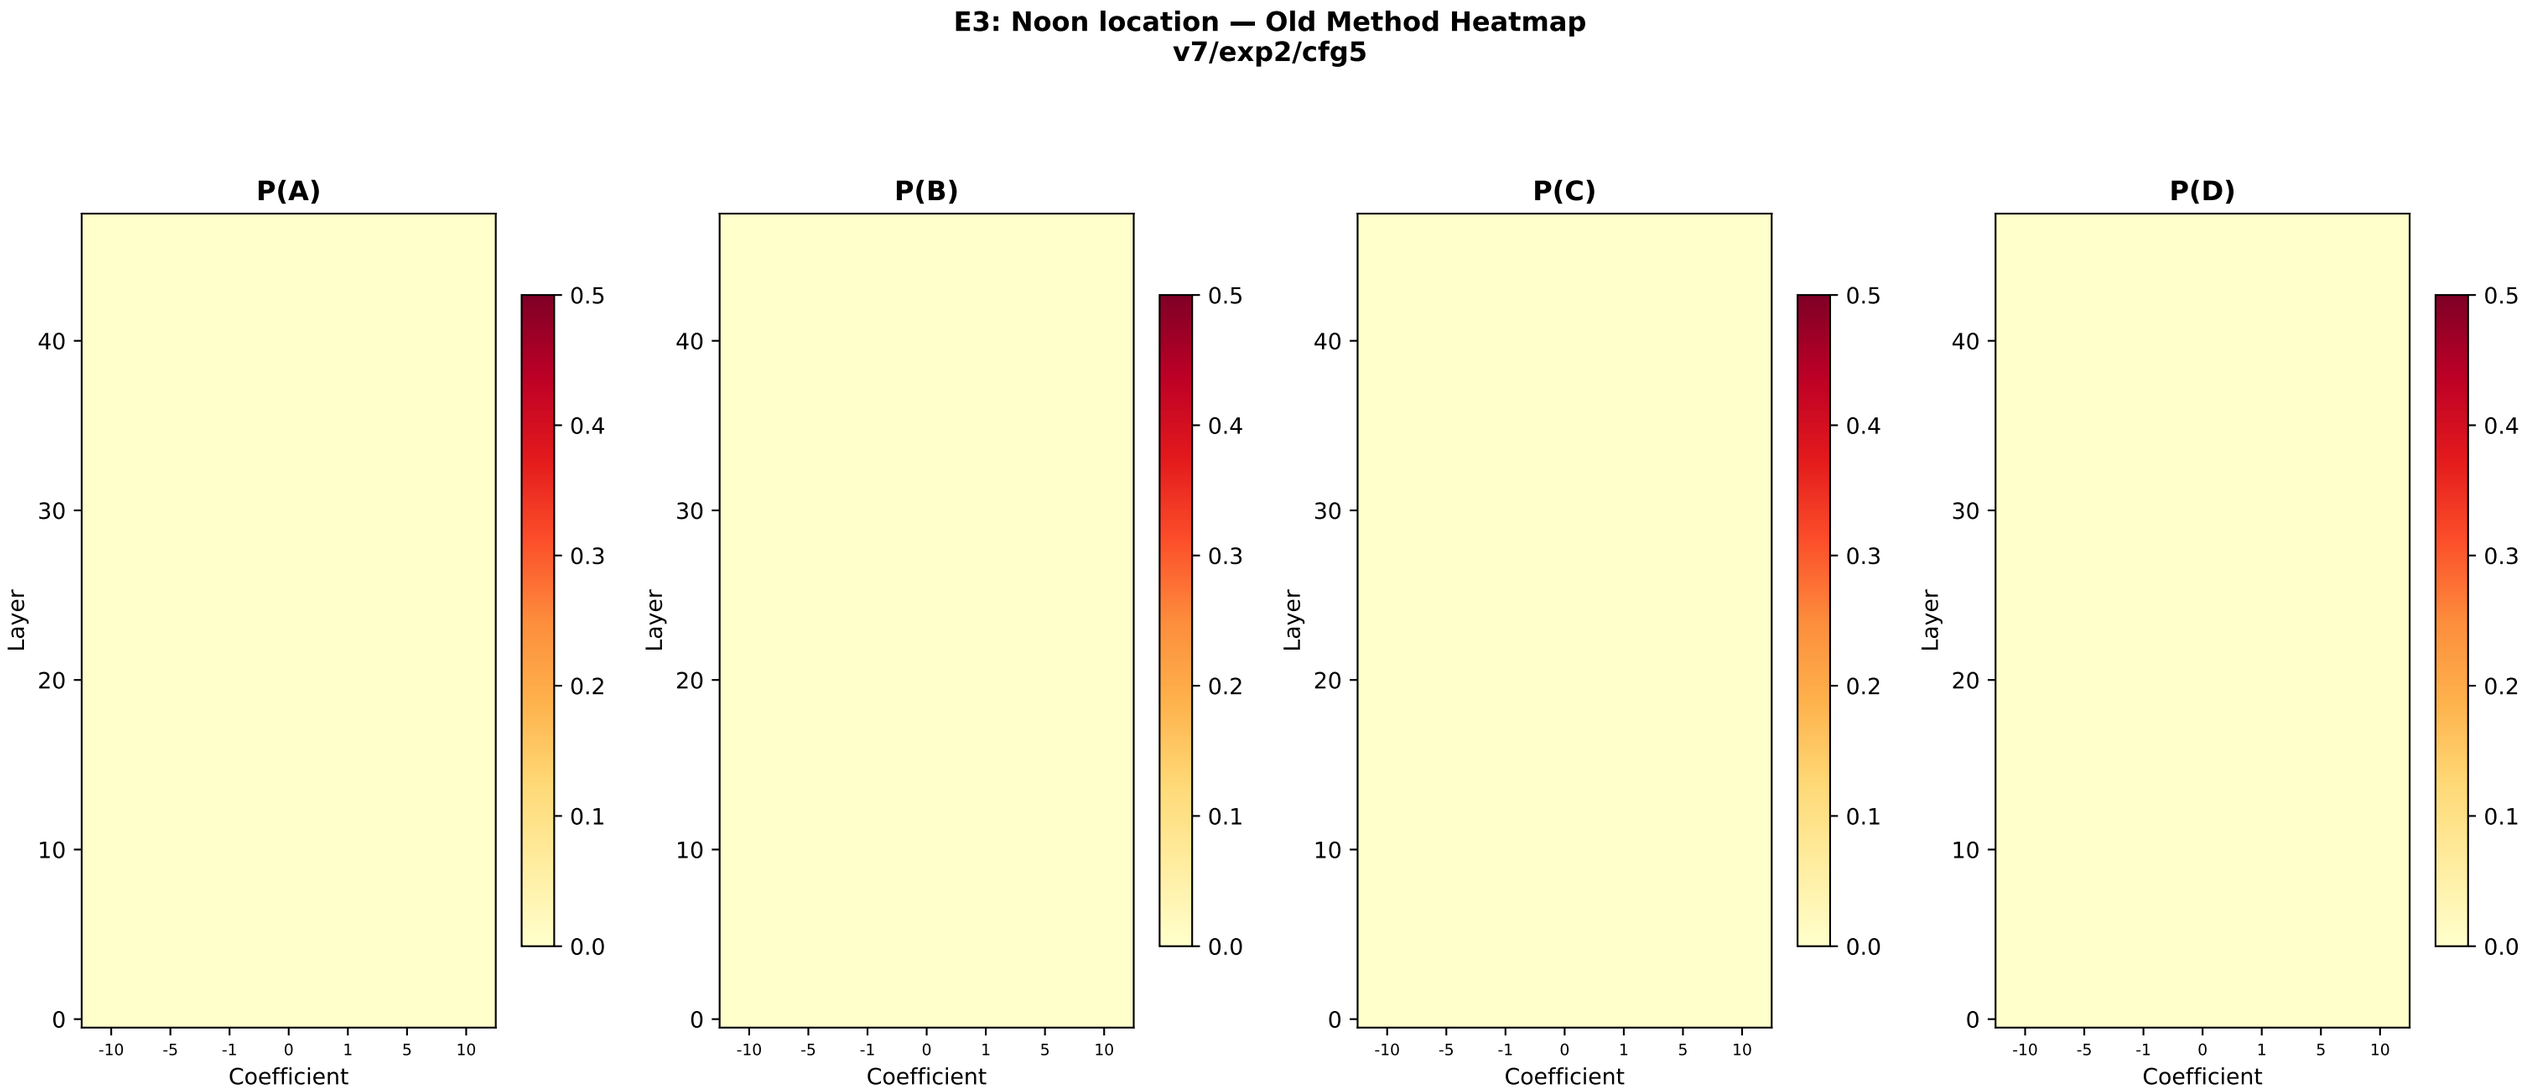
E3: Noon location — Old Method Heatmap
v7/exp2/cfg5
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E3: Noon location — New Method (Matteo)
v7/exp2/cfg5 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

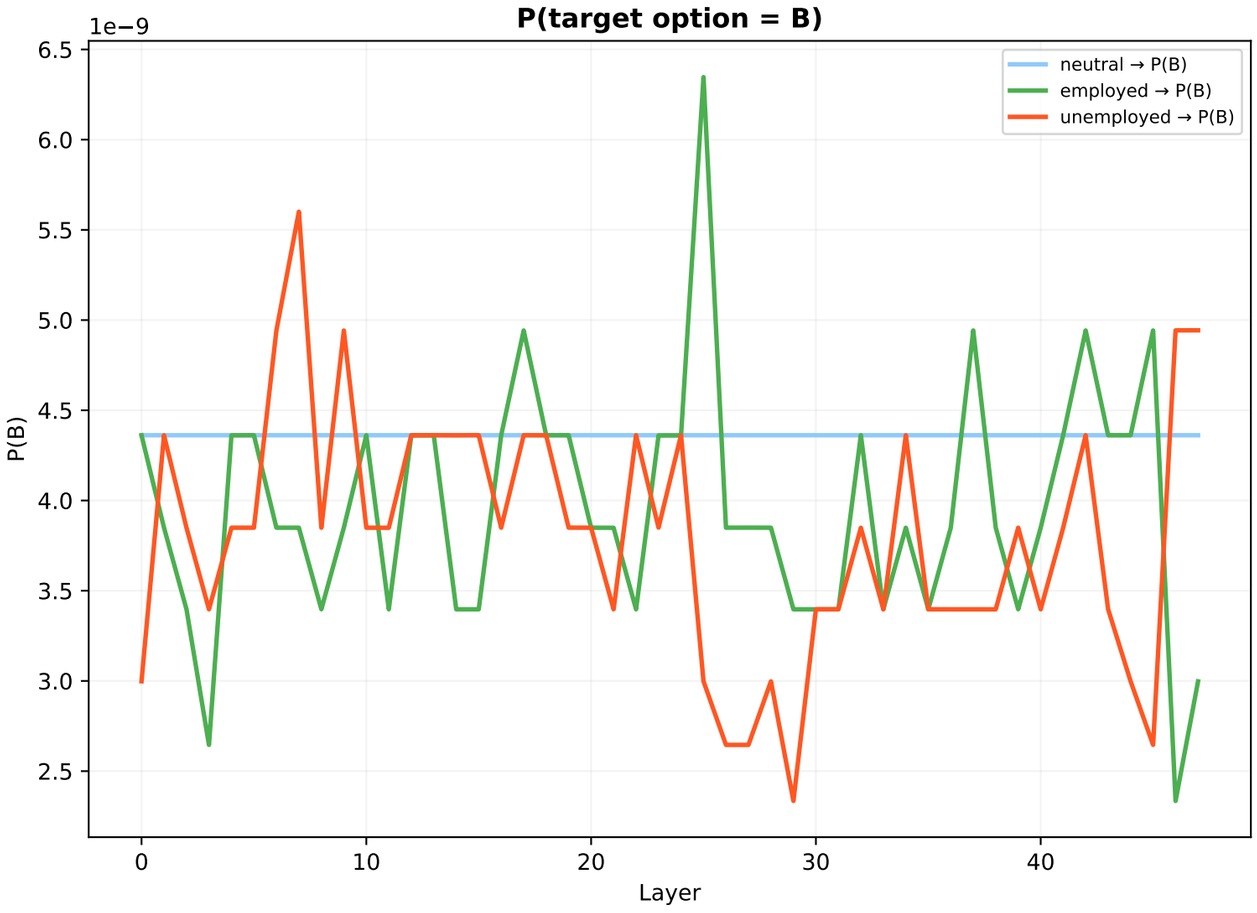

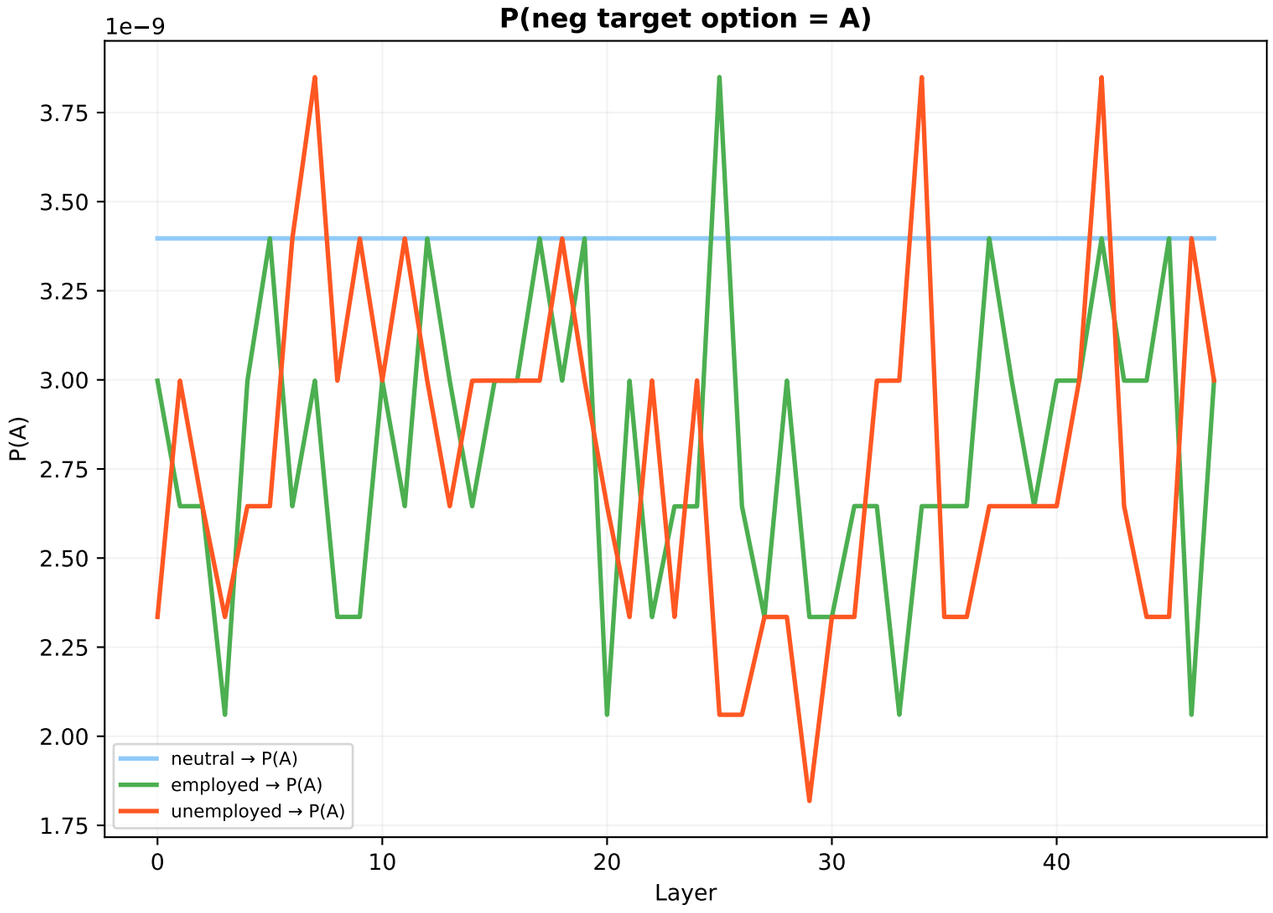

E4: Routine predictability — Old Method
v7/exp2/cfg5 | coeffs [-10, -5, -1, 0, 1, 5, 10]

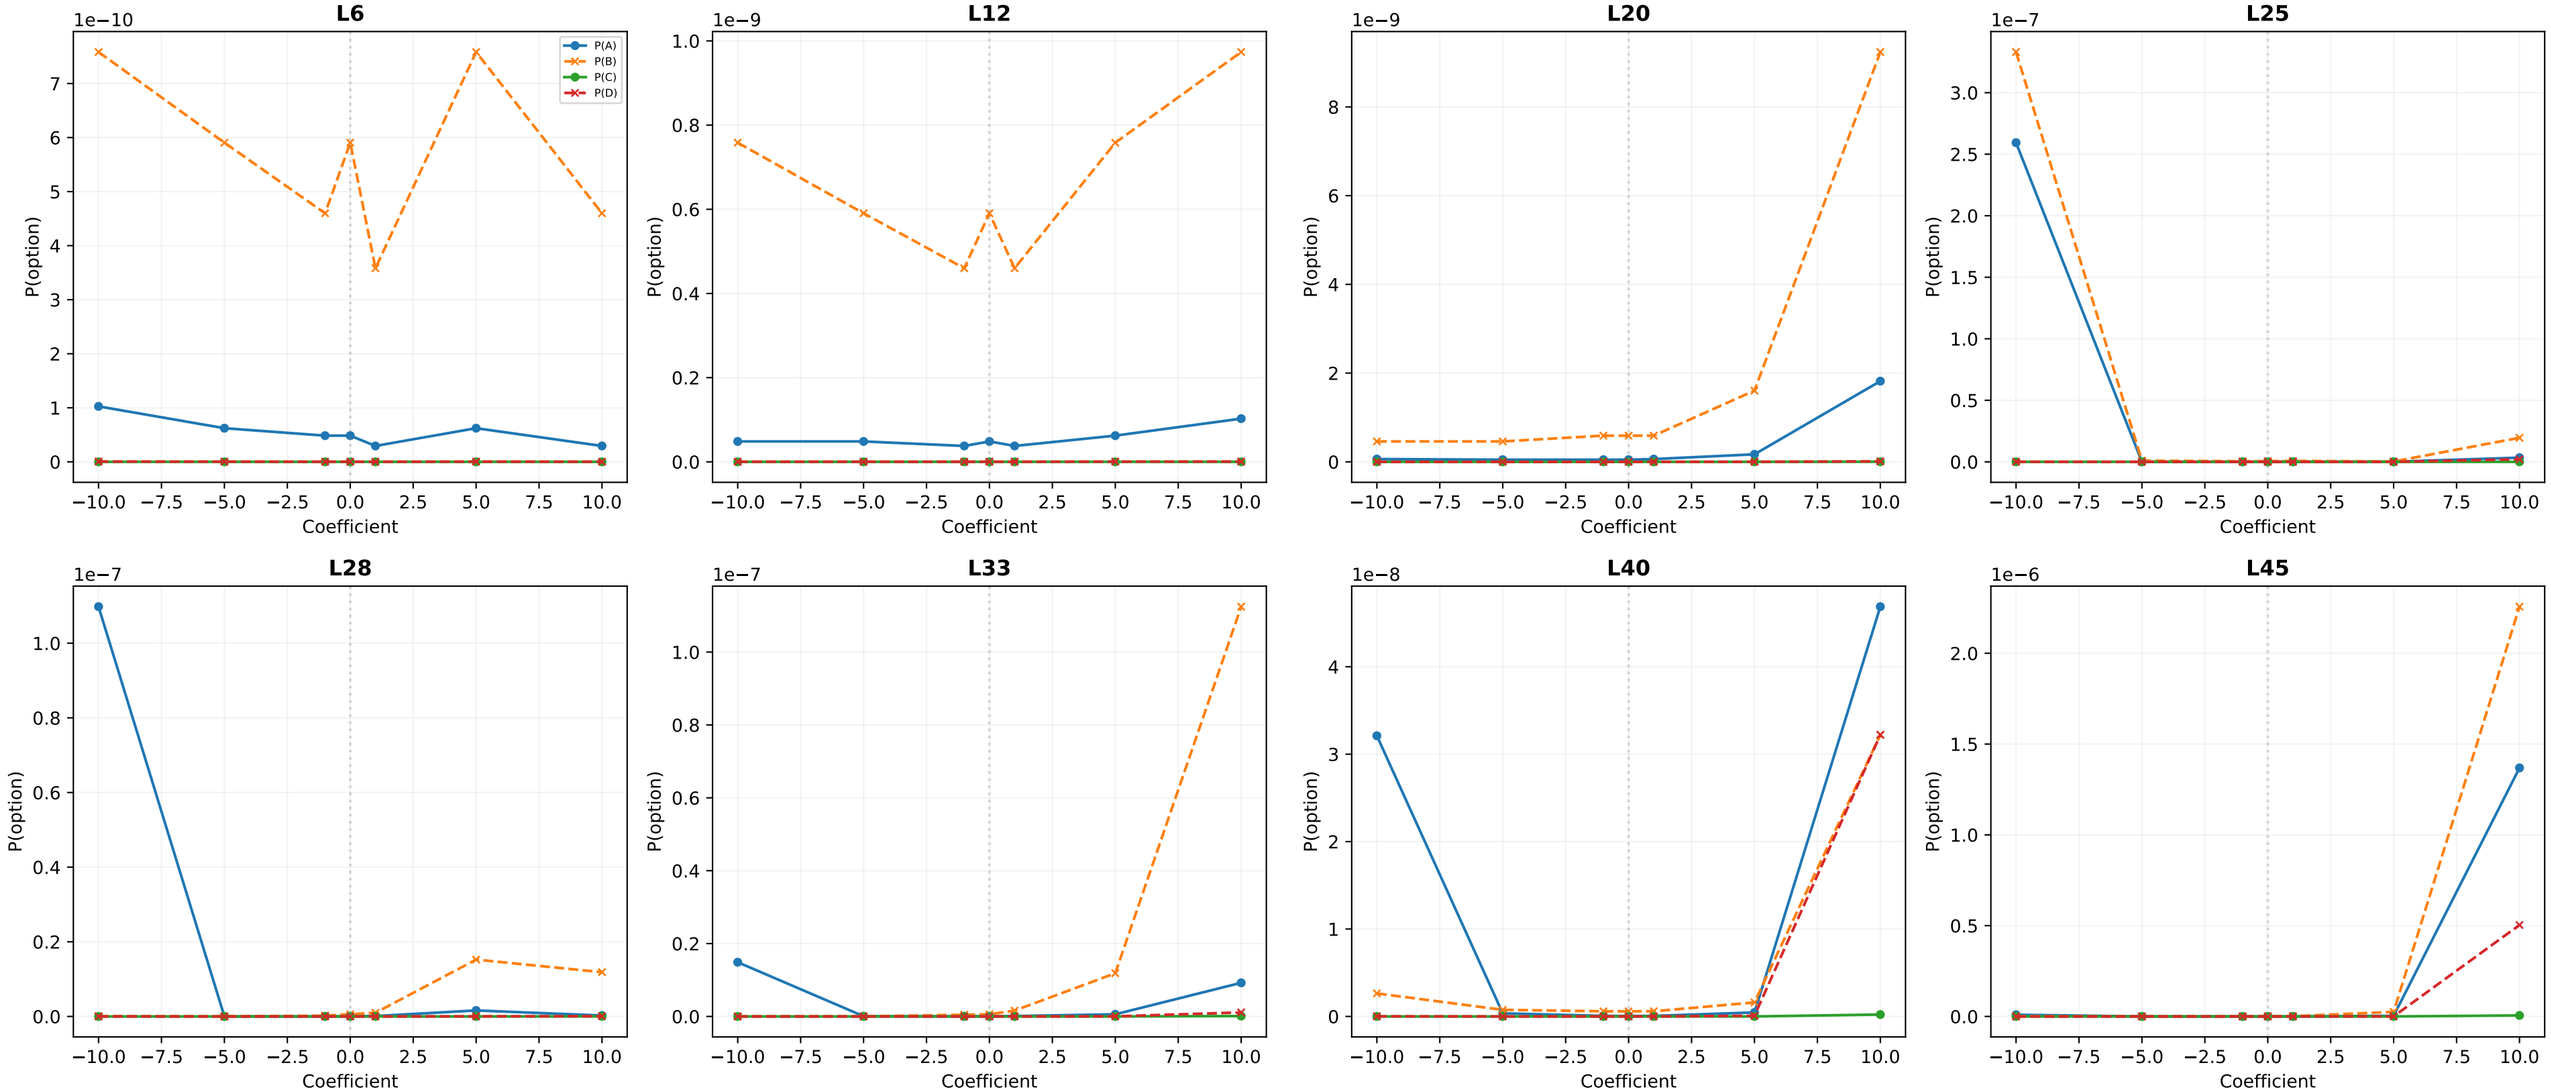

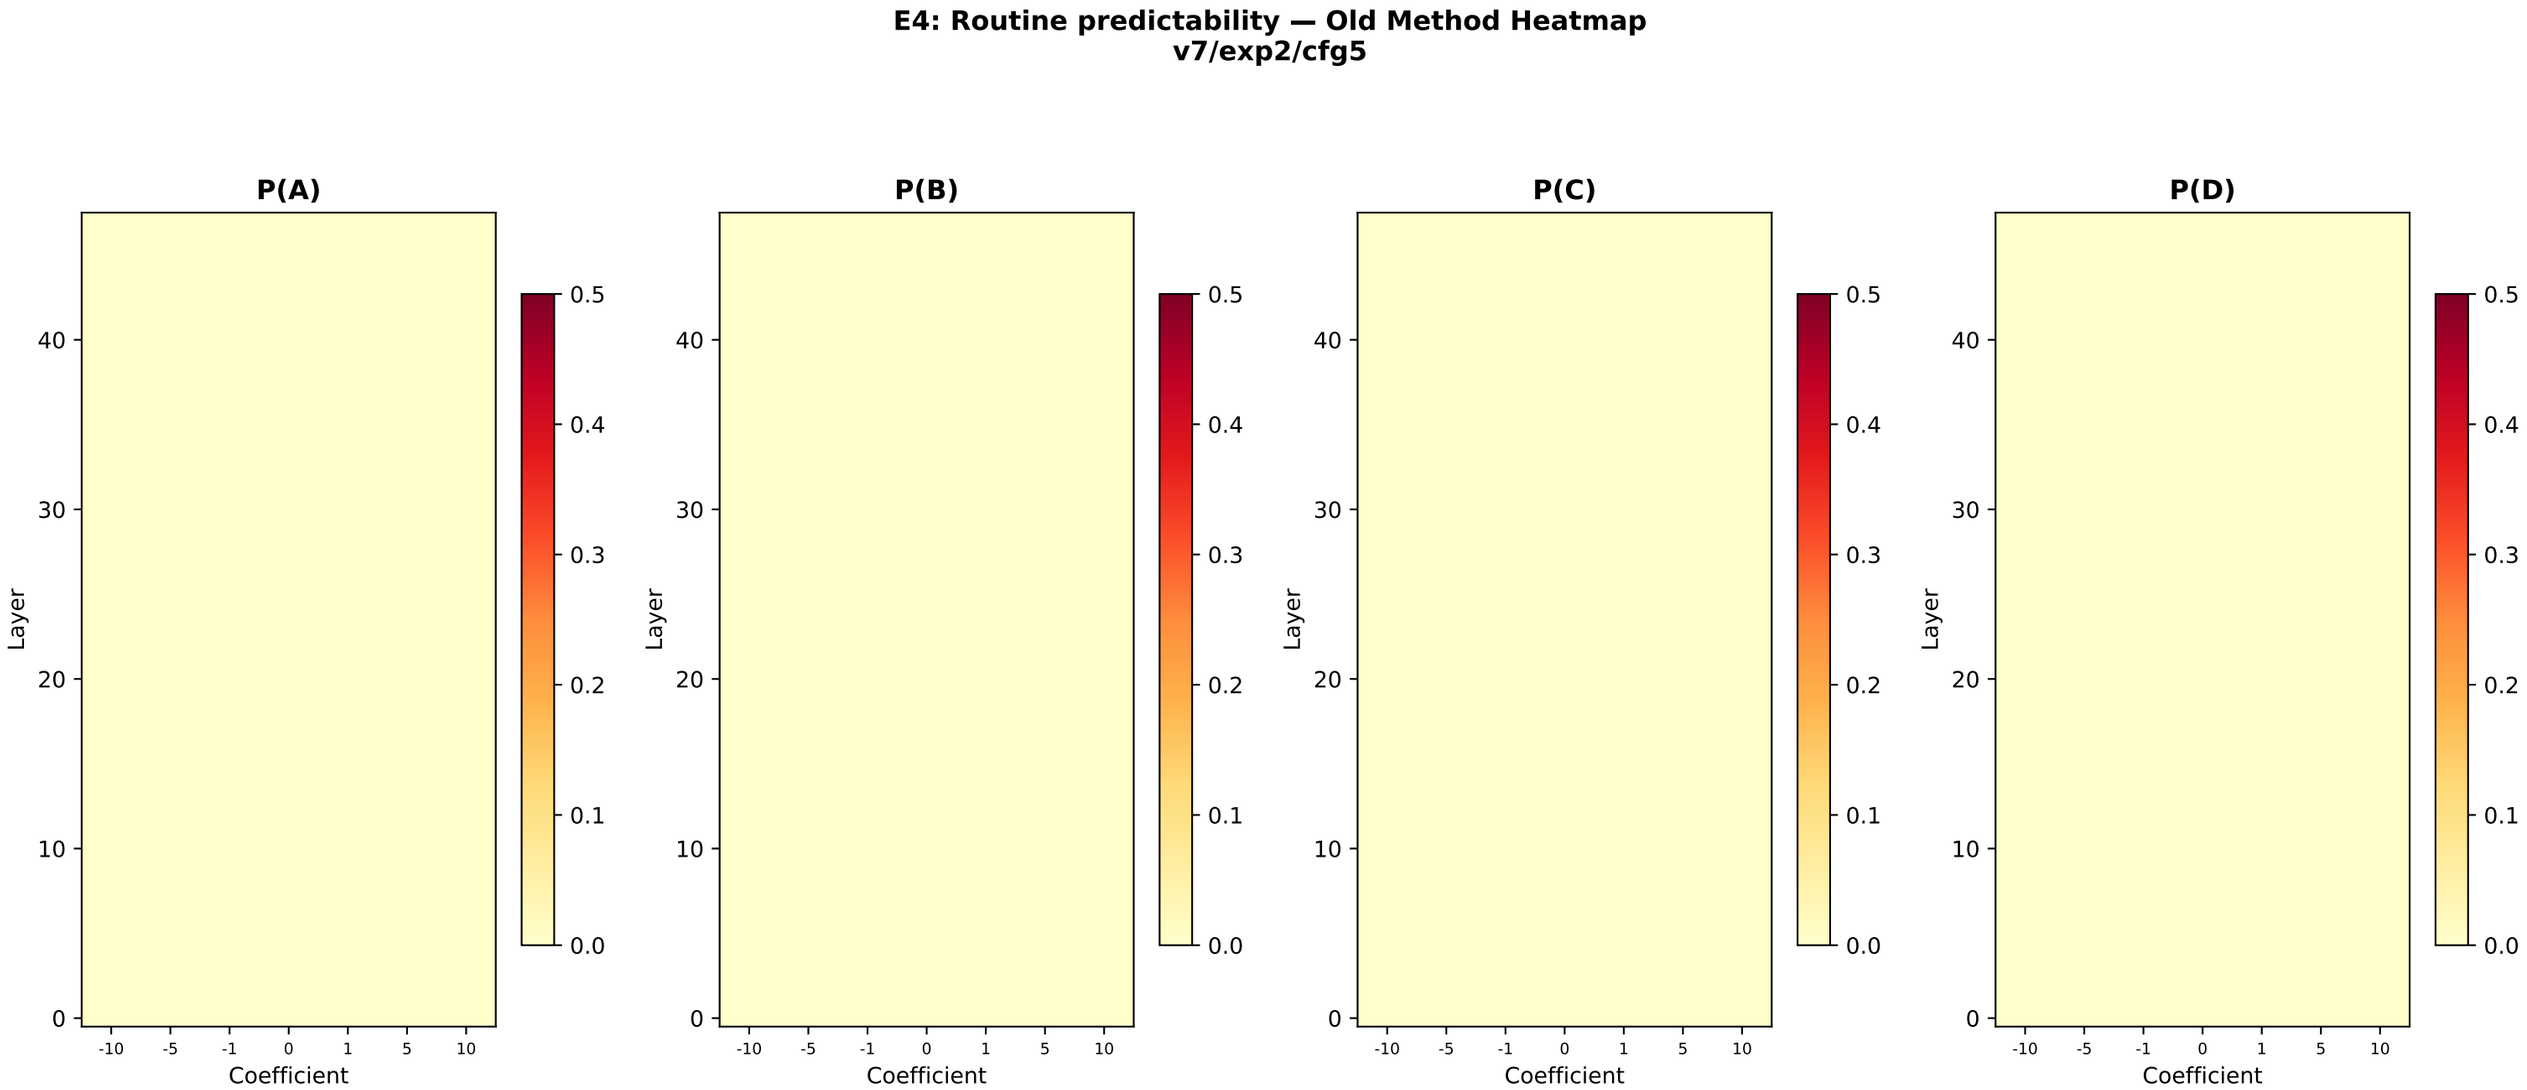
E4: Routine predictability — Old Method Heatmap
v7/exp2/cfg5
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E4: Routine predictability — New Method (Matteo)
v7/exp2/cfg5 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

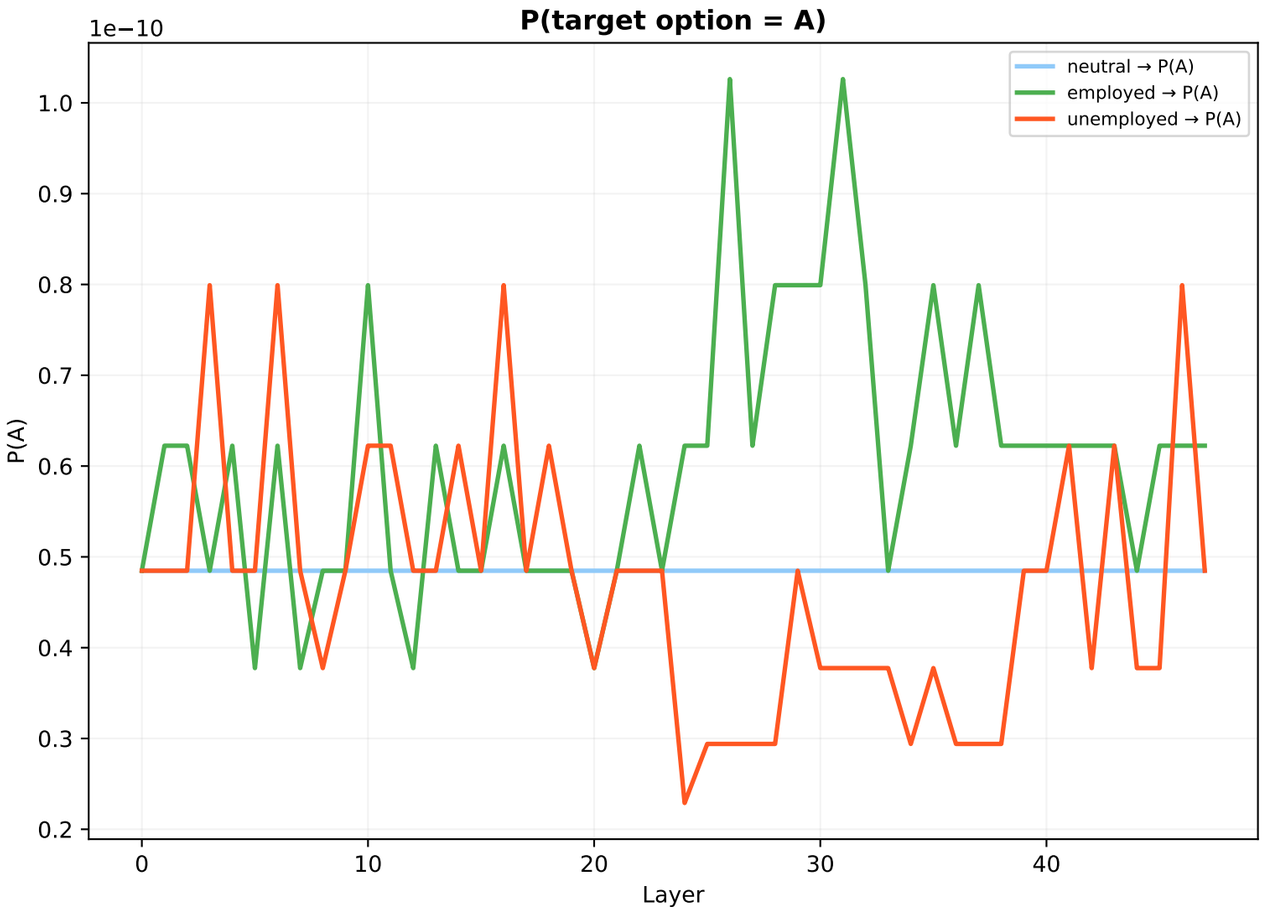

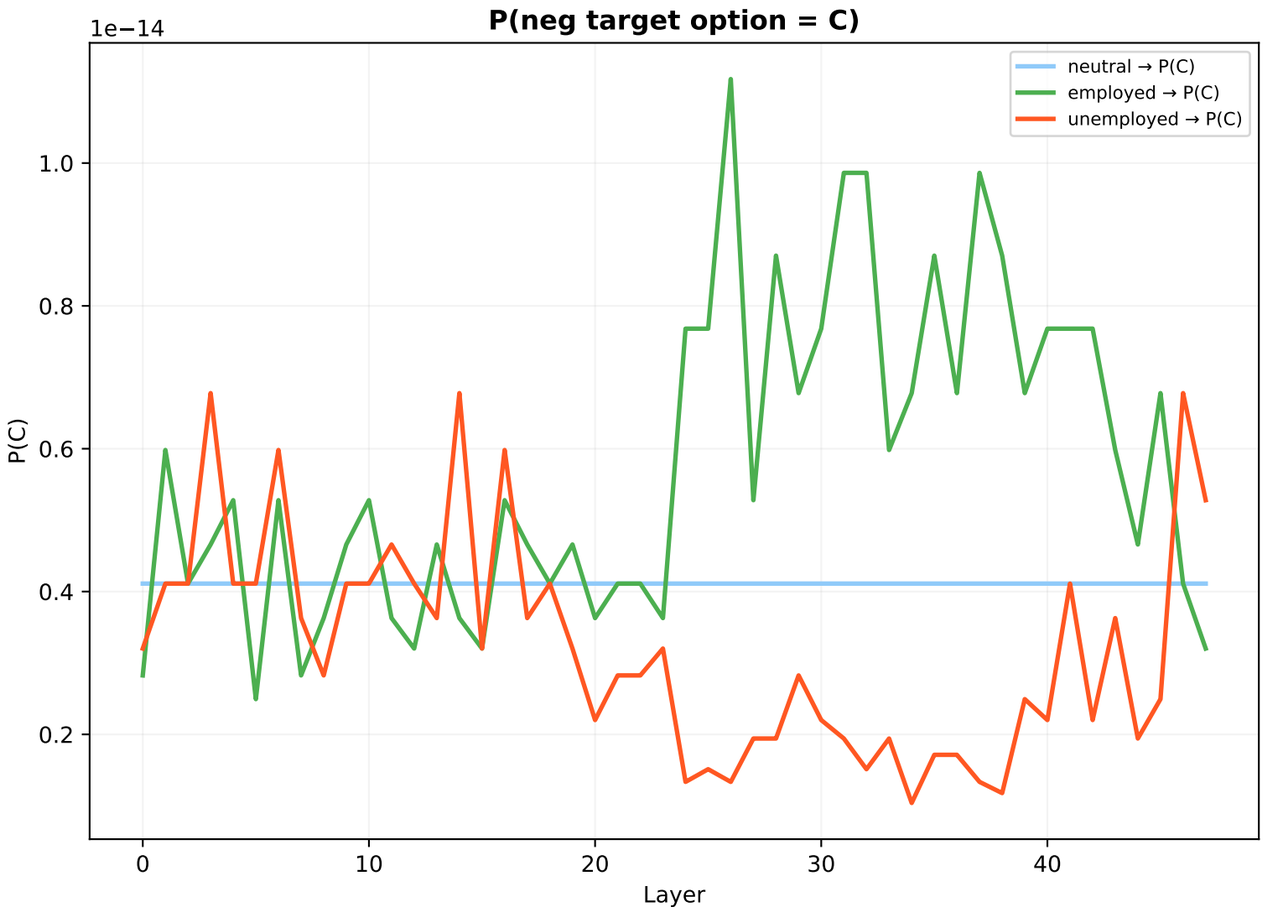

E5: CONTROL: housing type — Old Method
v7/exp2/cfg5 | coeffs [-10, -5, -1, 0, 1, 5, 10]

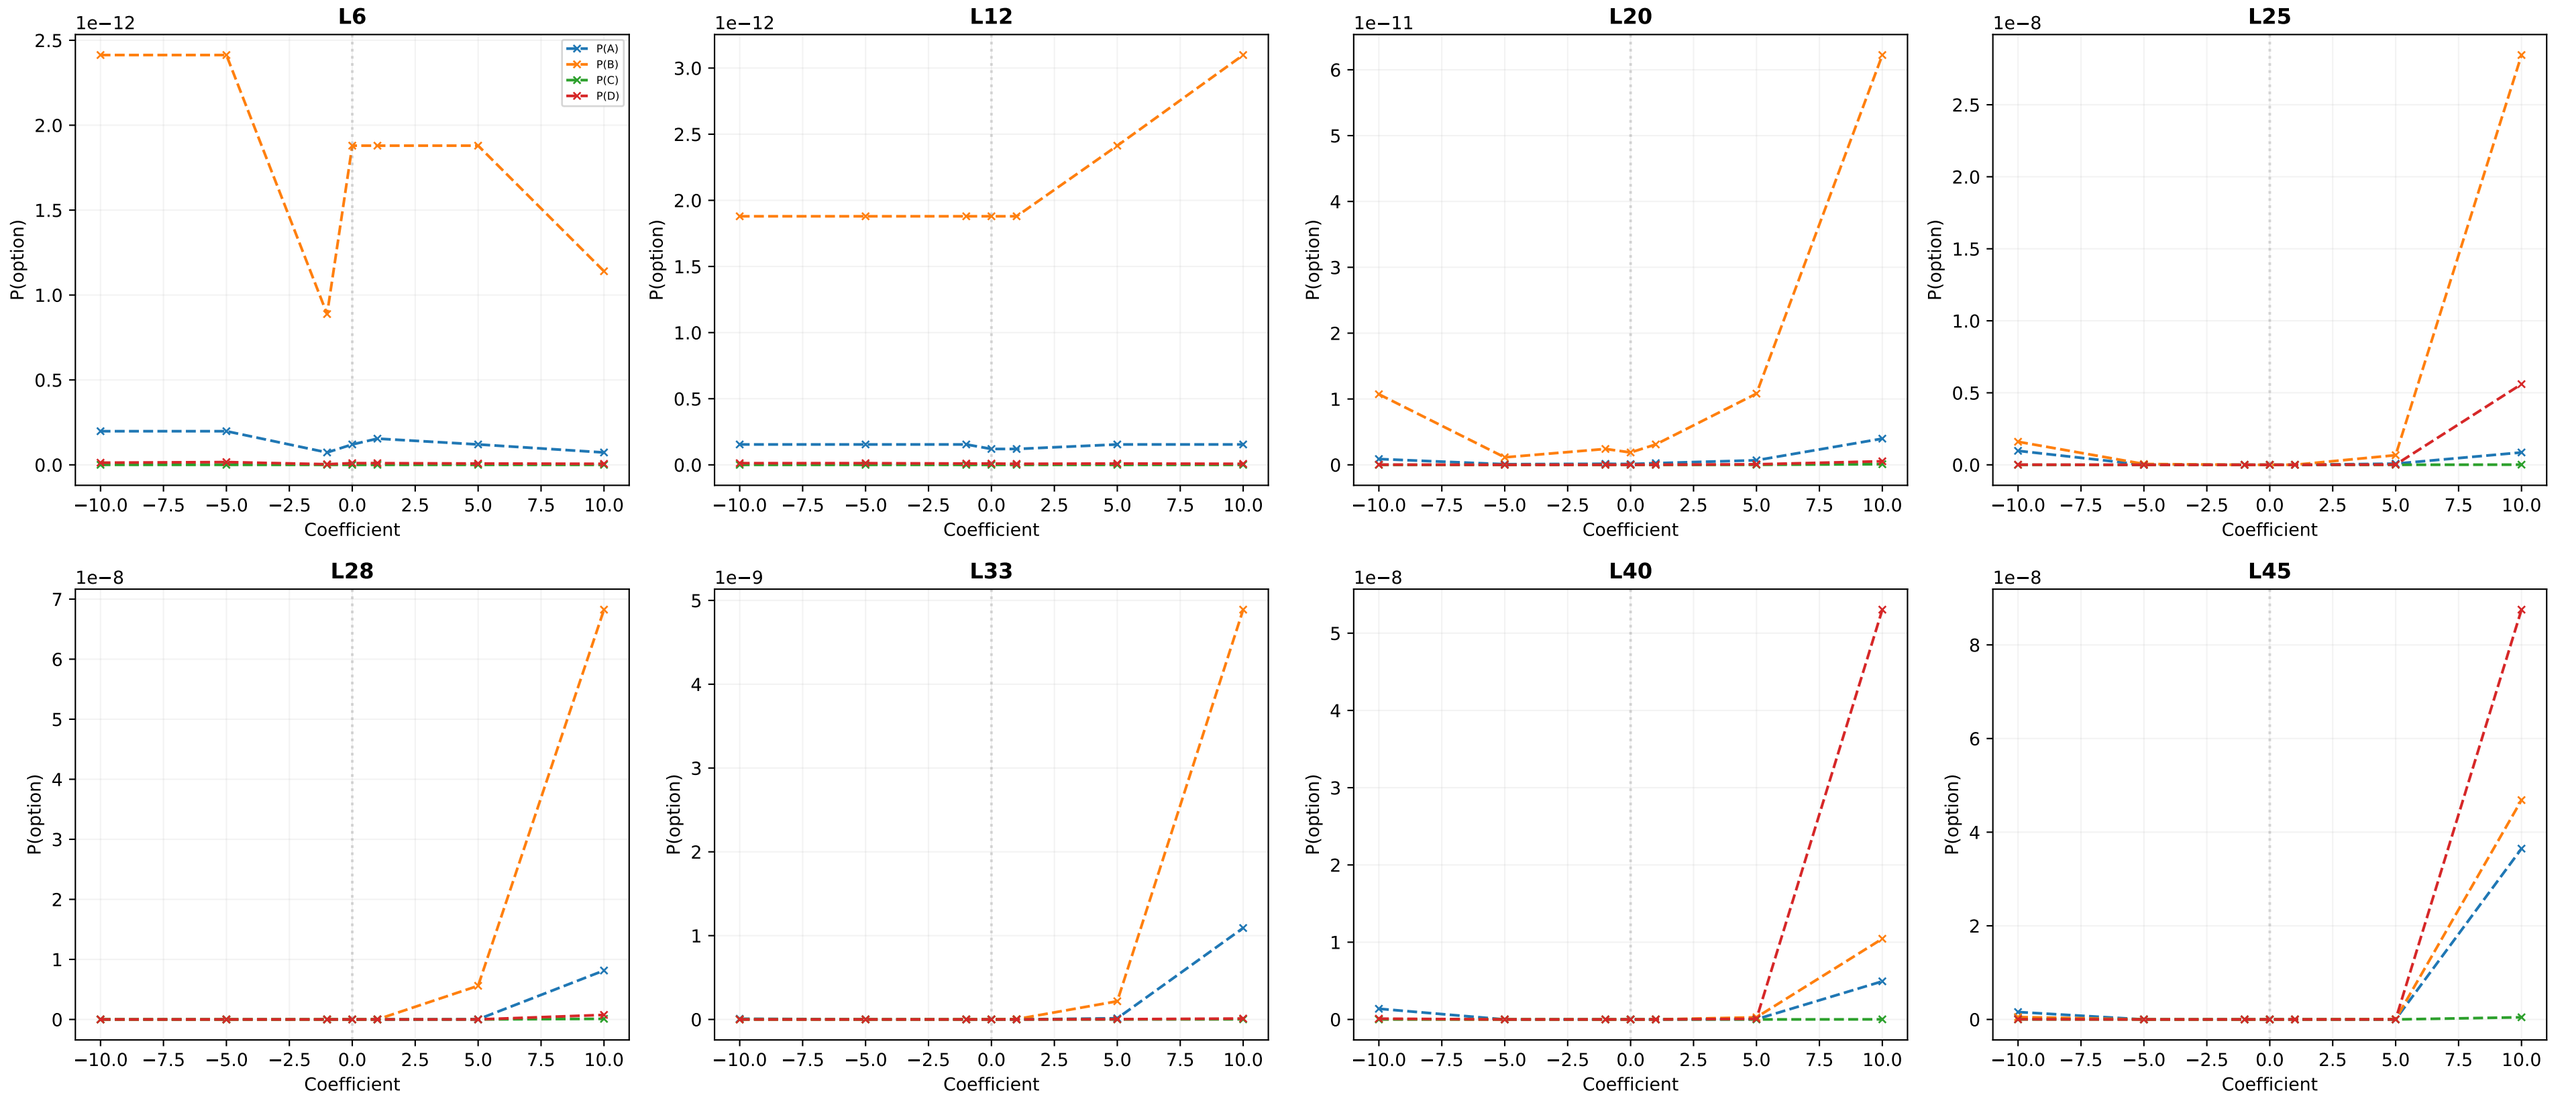

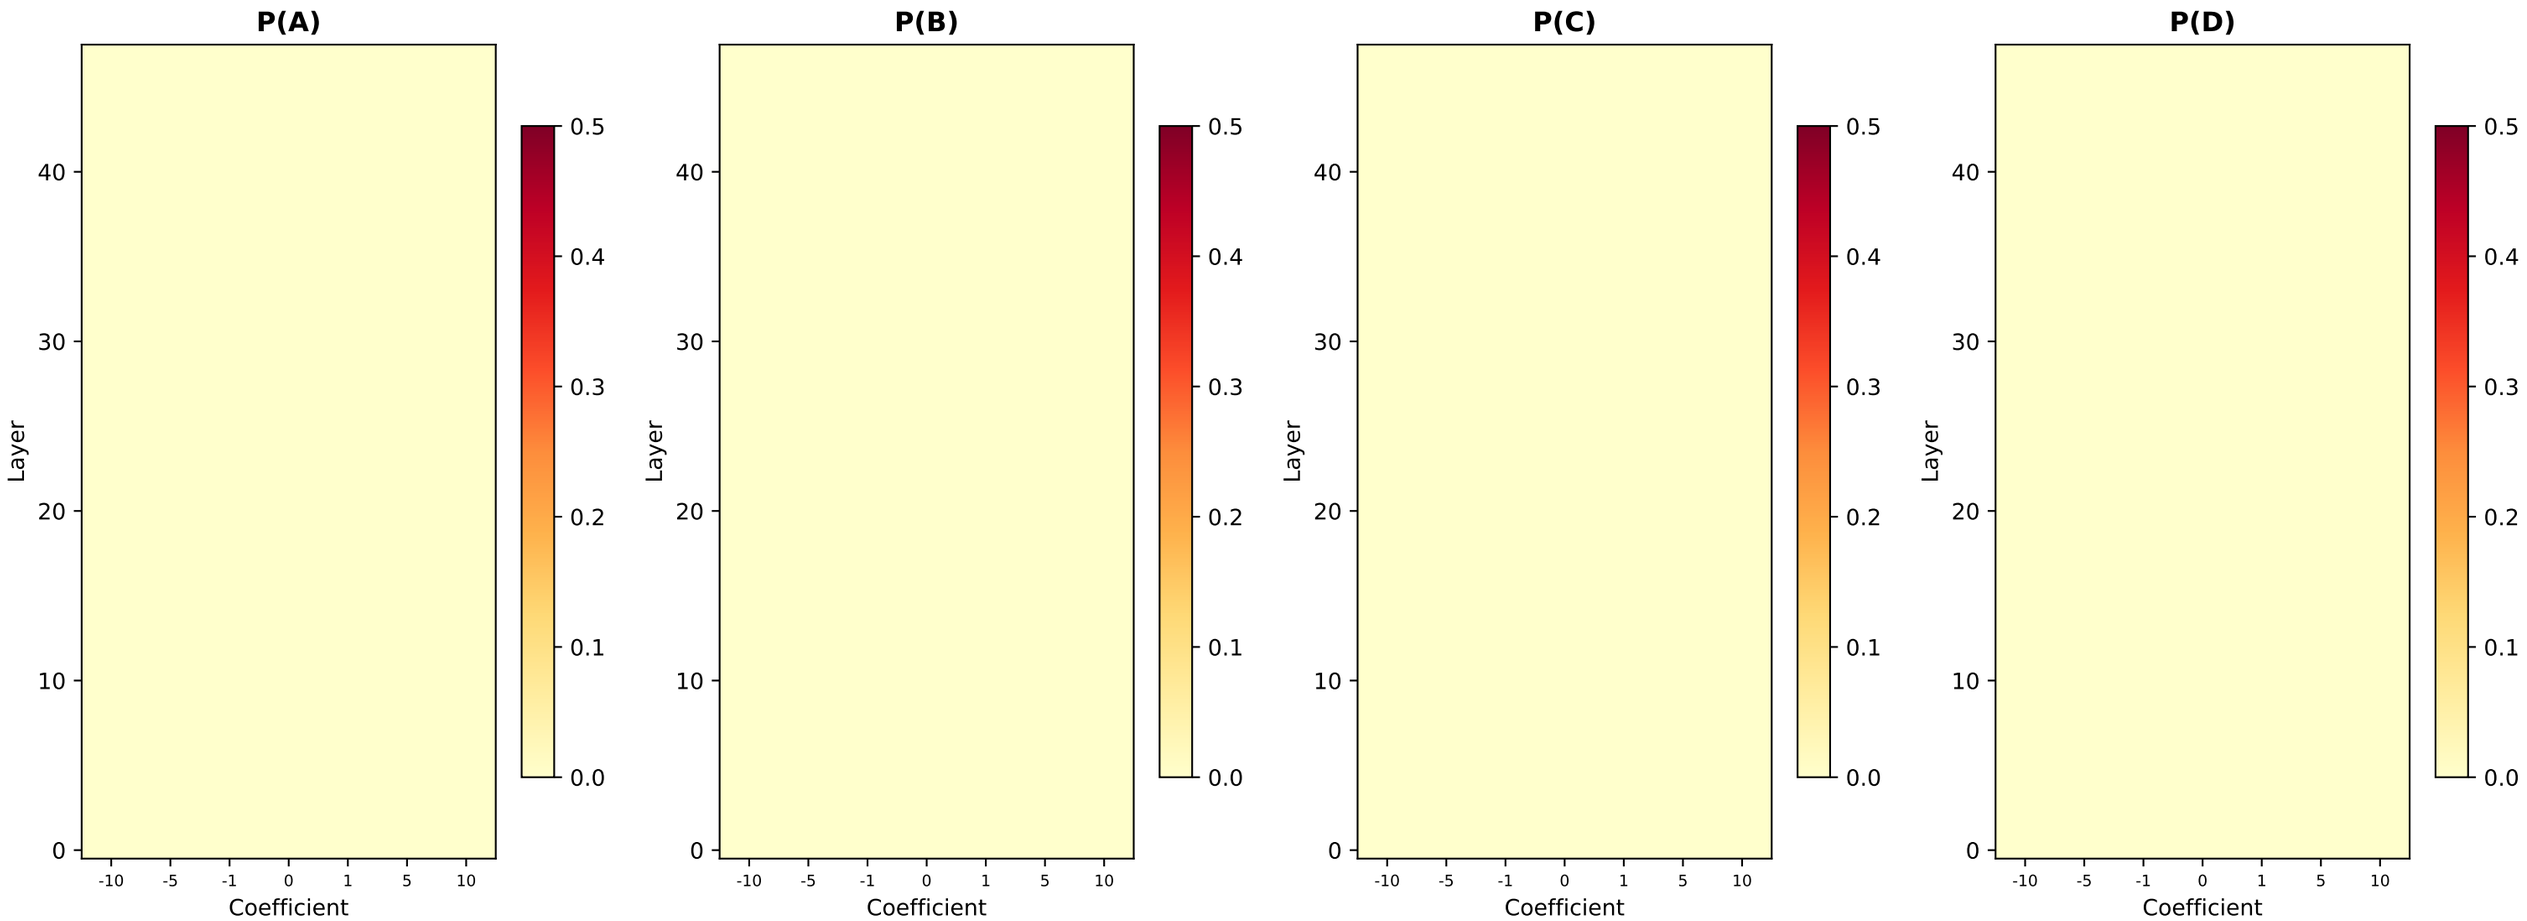
E5: CONTROL: housing type — Old Method Heatmap
v7/exp2/cfg5
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E5: CONTROL: housing type — New Method (Matteo)
v7/exp2/cfg5 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

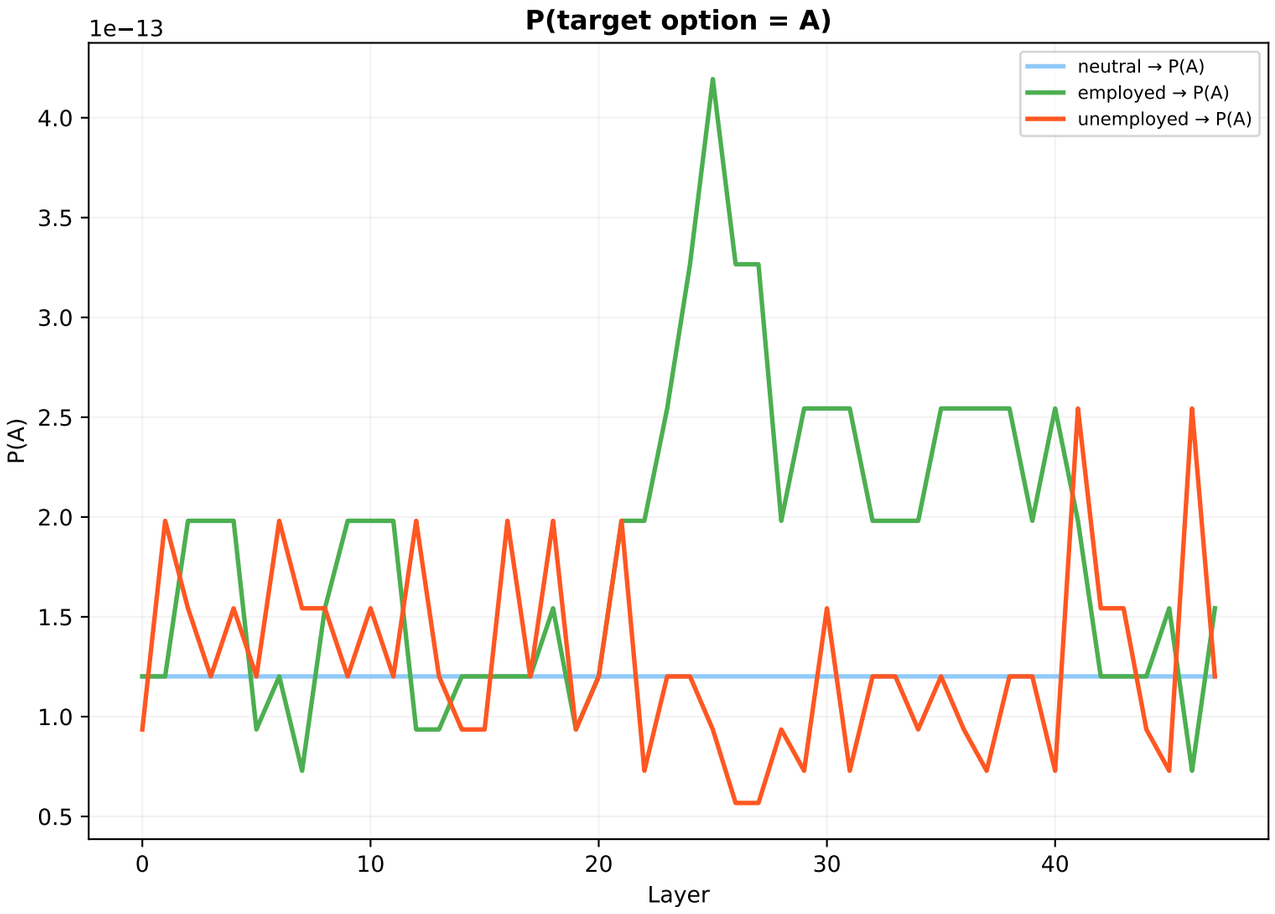

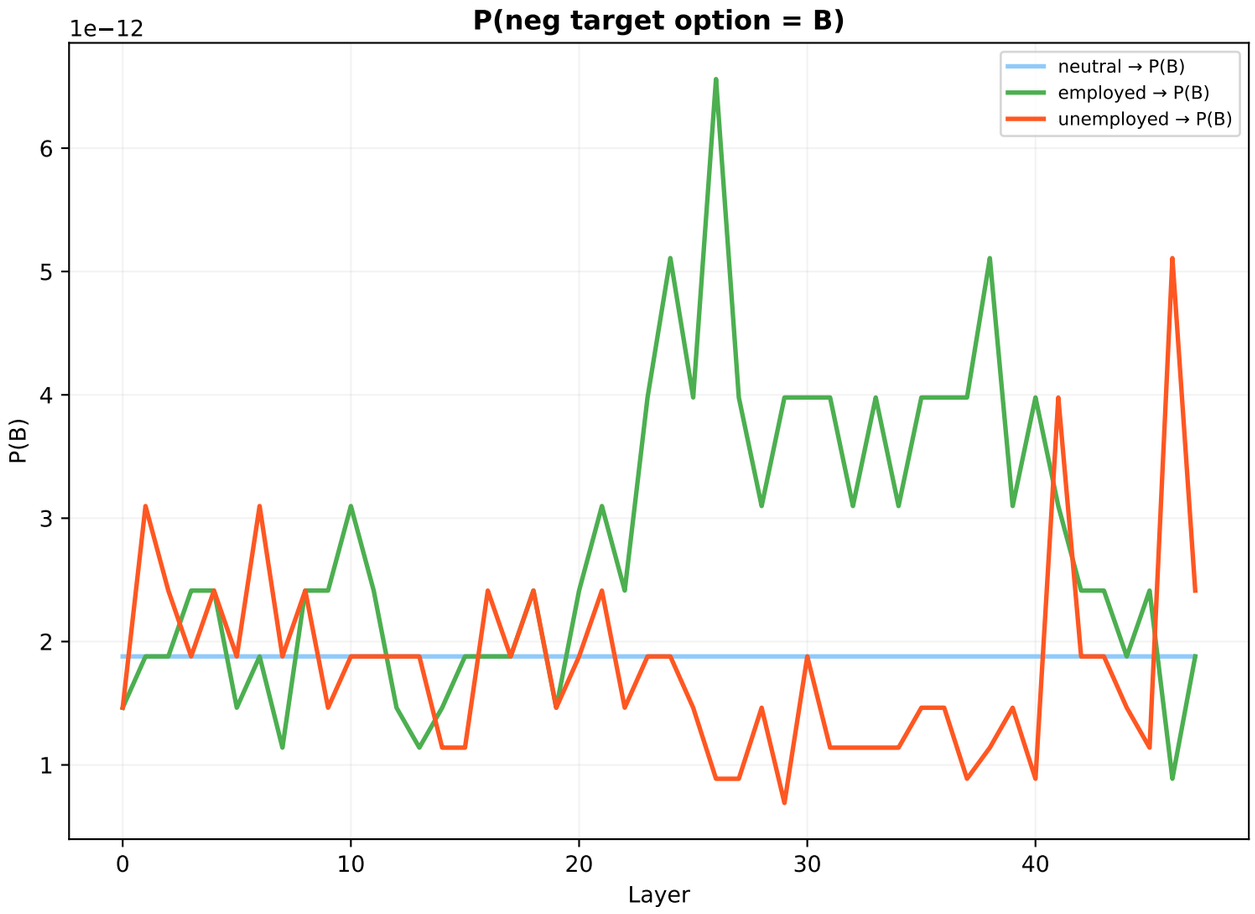

E1: Monthly lunch spending — Old Method
v7/exp2/cfg6 | coeffs [-10, -5, -1, 0, 1, 5, 10]

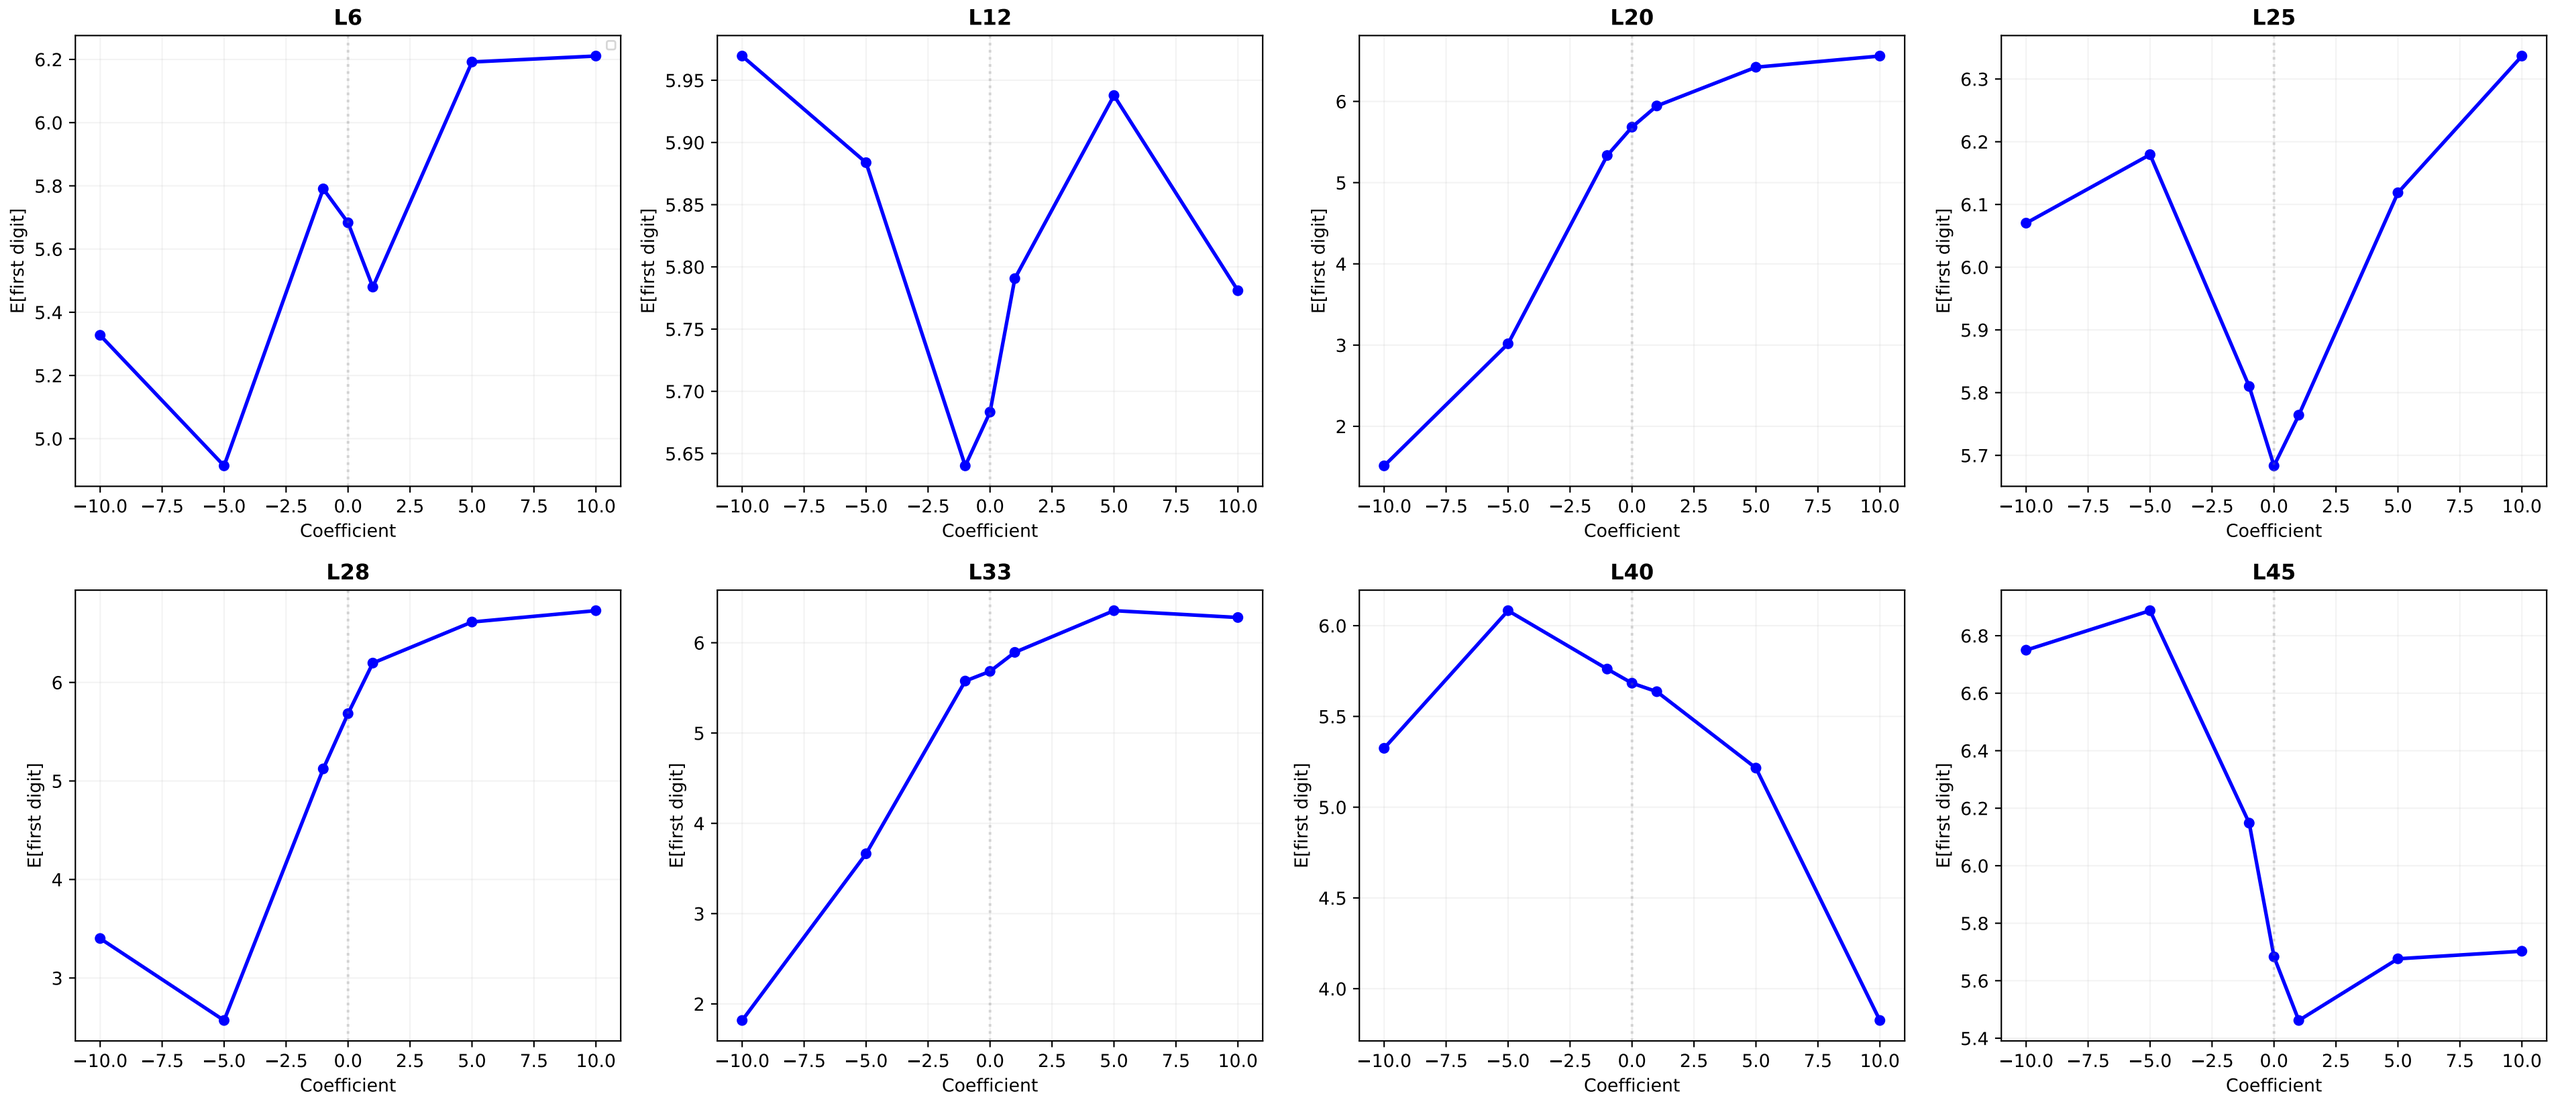

E1: Monthly lunch spending — Old Method Heatmap
v7/exp2/cfg6

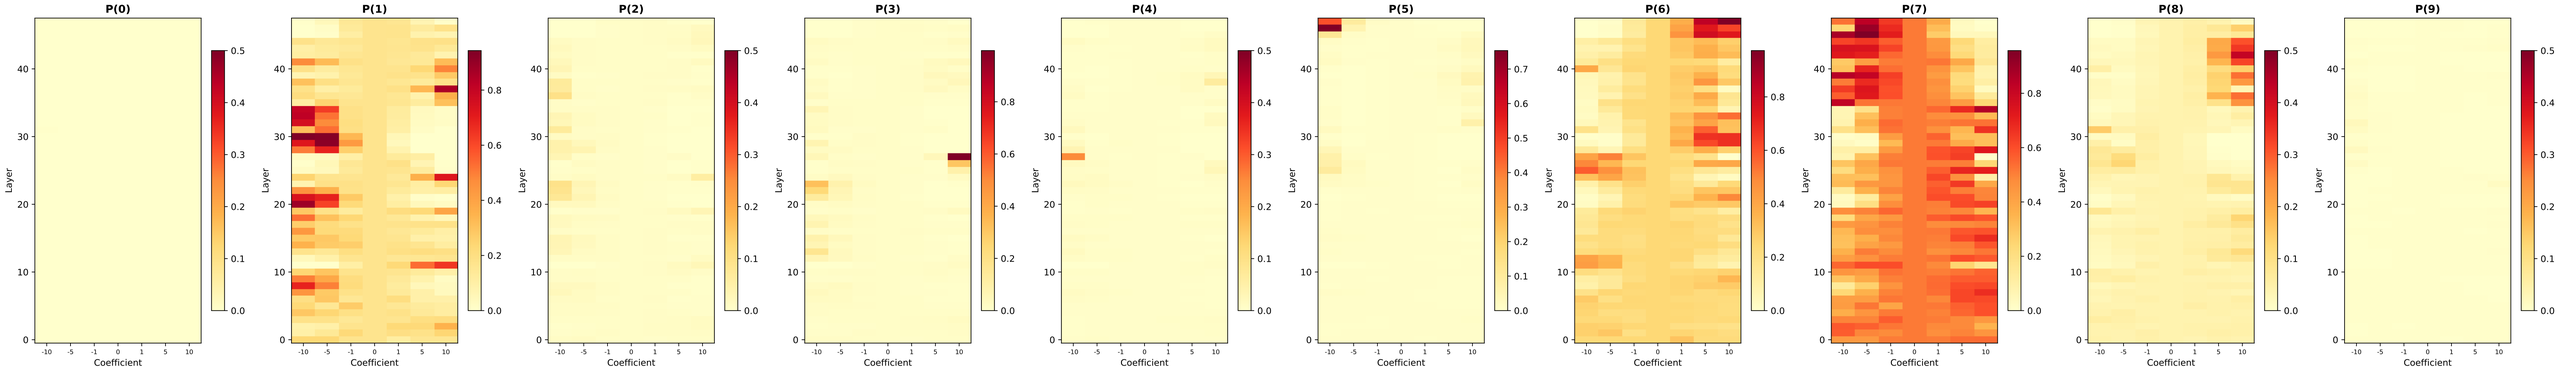

E1: Monthly lunch spending — New Method (Matteo)
v7/exp2/cfg6 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

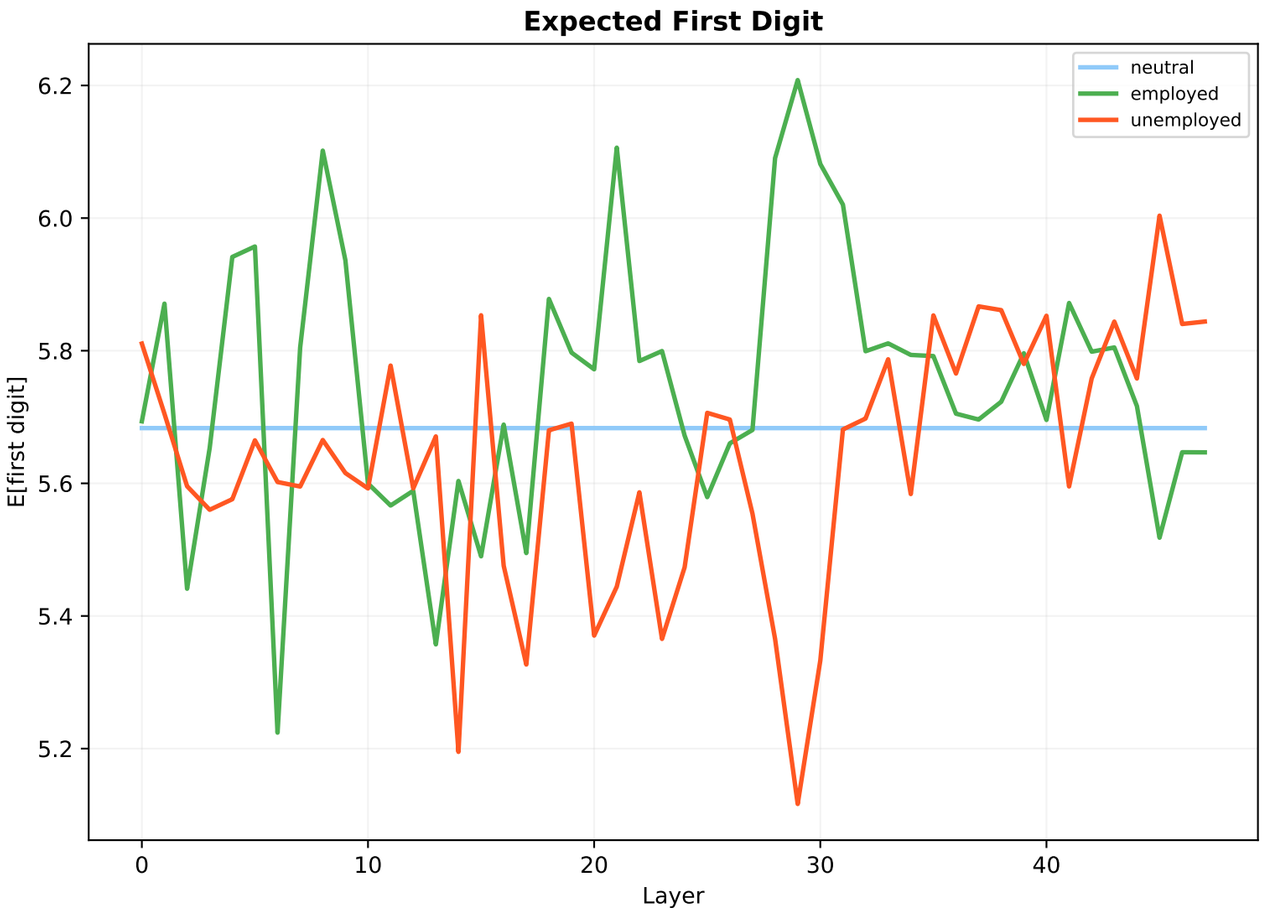

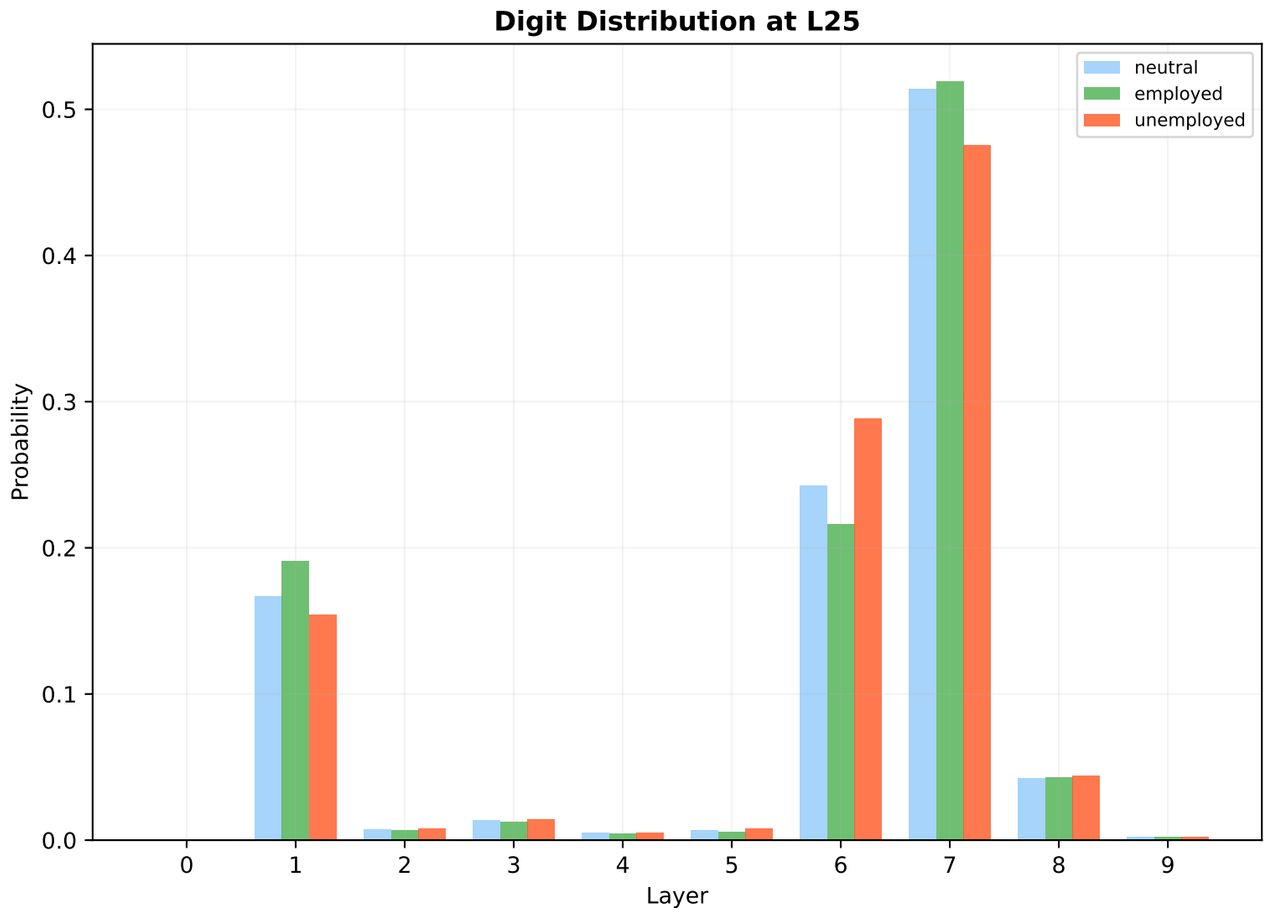

E2: Monthly commute cost — Old Method
v7/exp2/cfg6 | coeffs [-10, -5, -1, 0, 1, 5, 10]

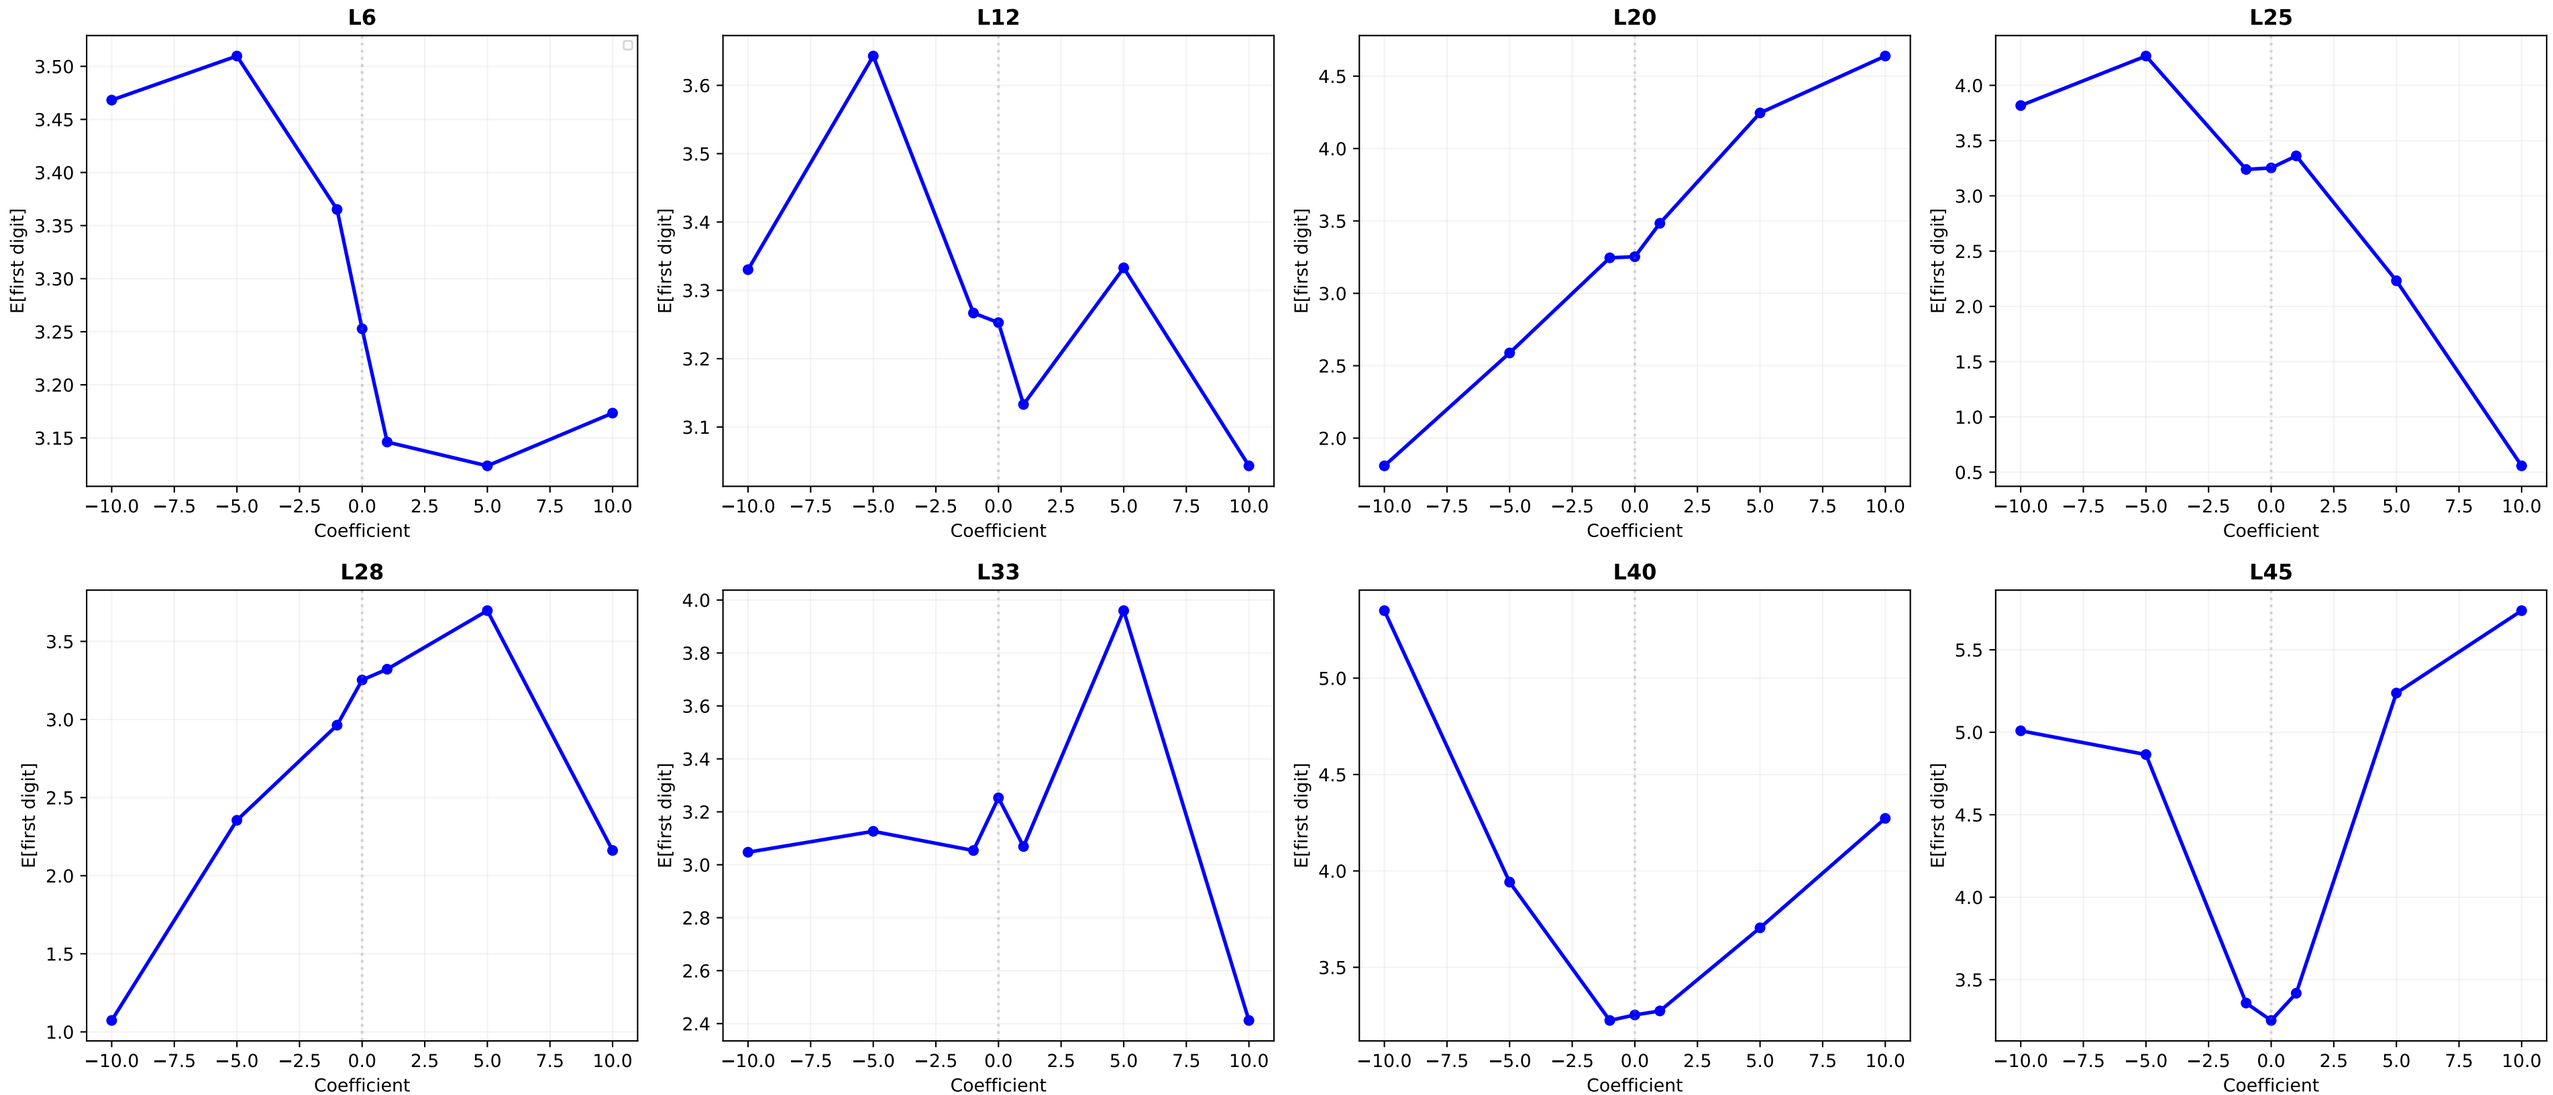

E2: Monthly commute cost — Old Method Heatmap
v7/exp2/cfg6

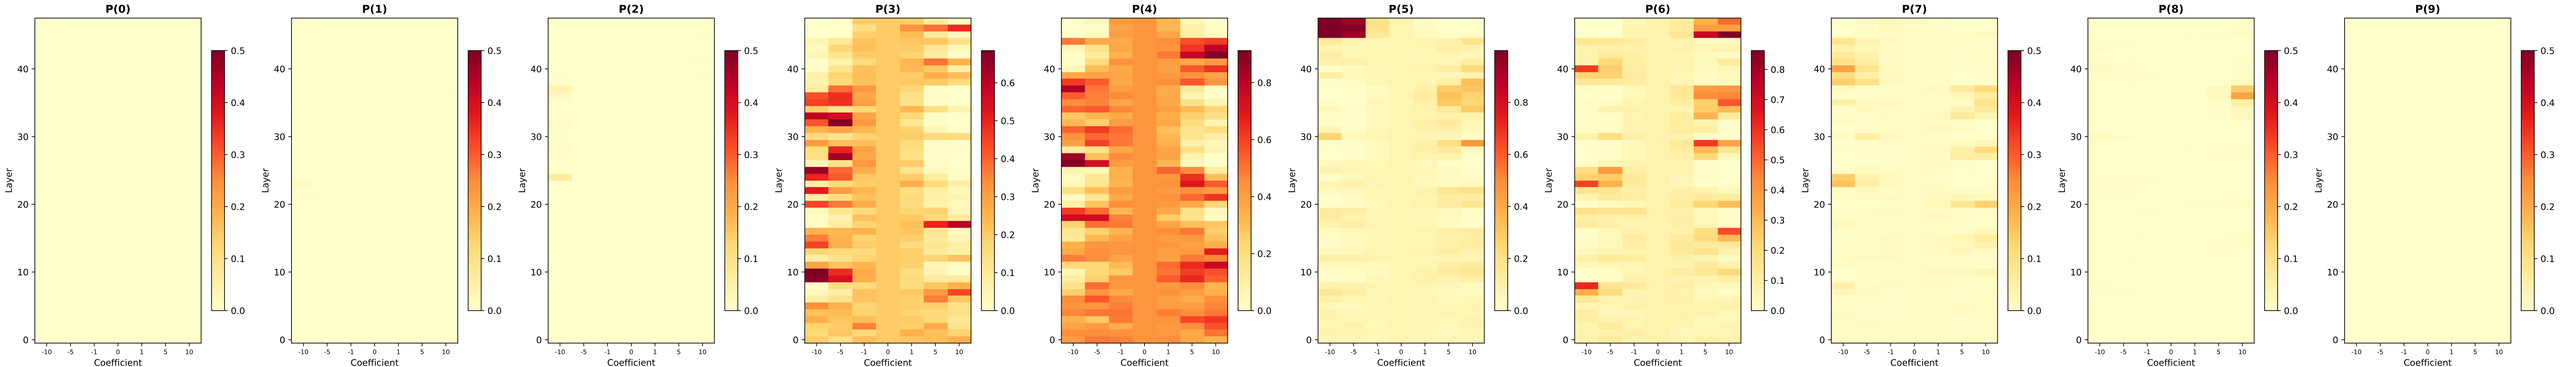

E2: Monthly commute cost — New Method (Matteo)
v7/exp2/cfg6 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

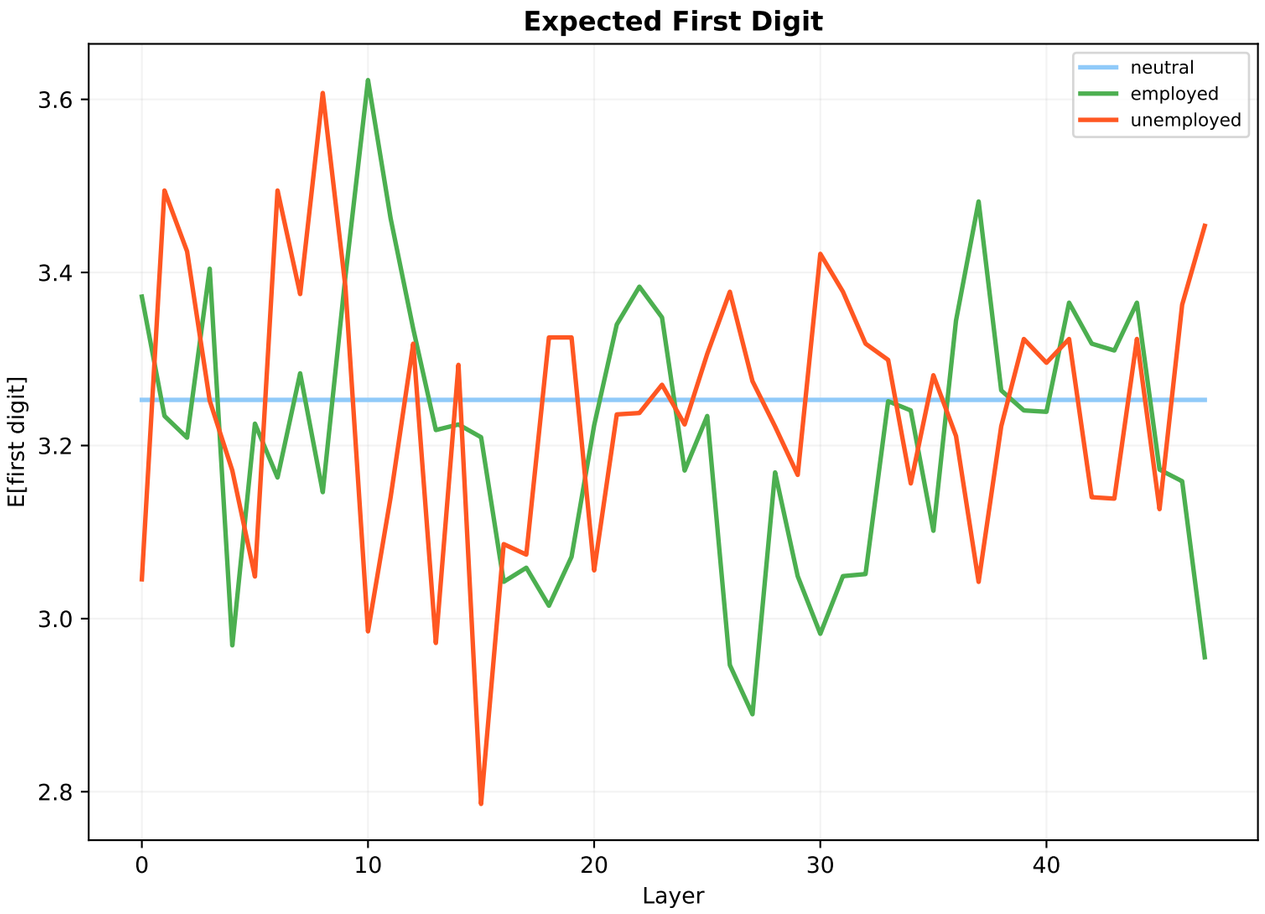

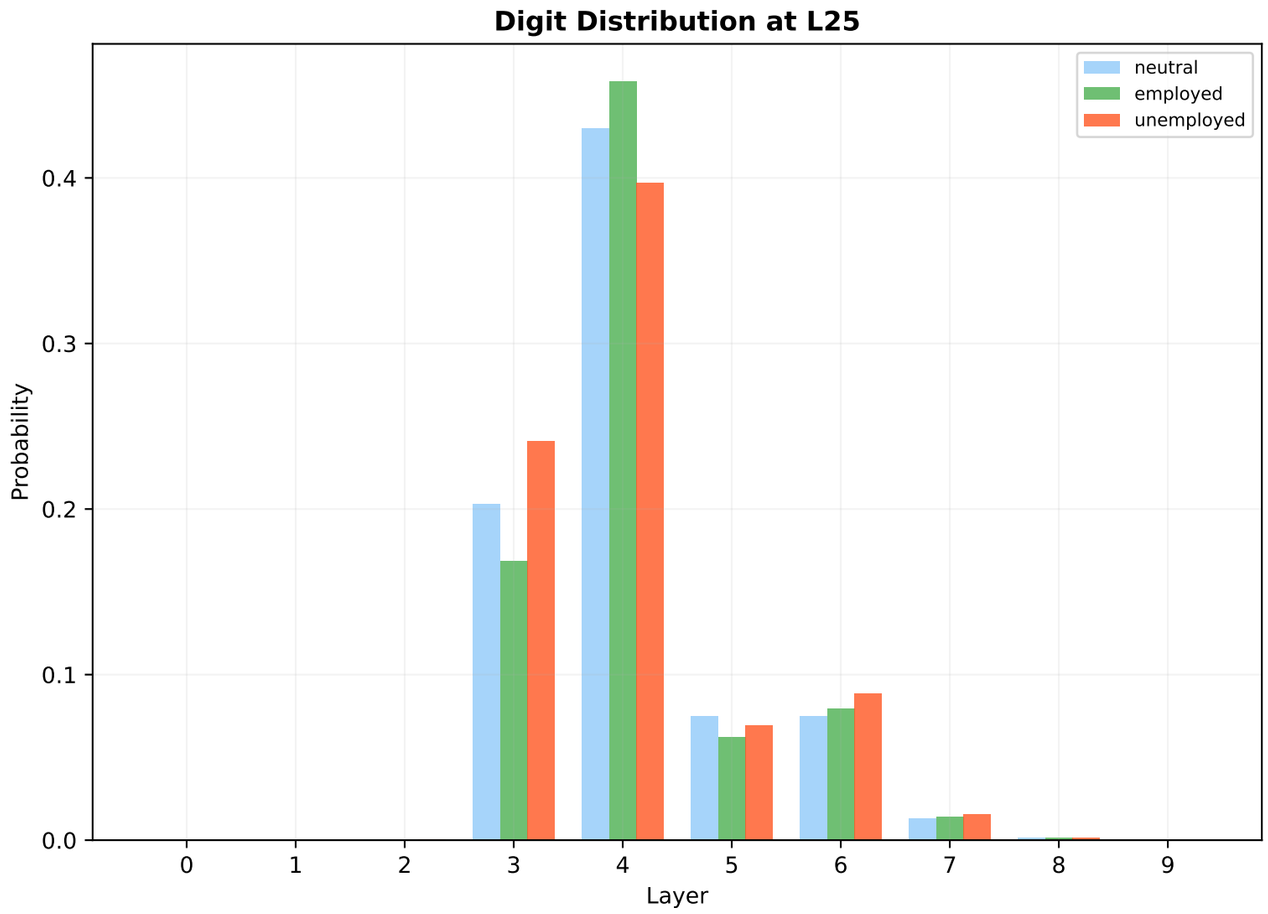

E3: Noon location — Old Method
v7/exp2/cfg6 | coeffs [-10, -5, -1, 0, 1, 5, 10]

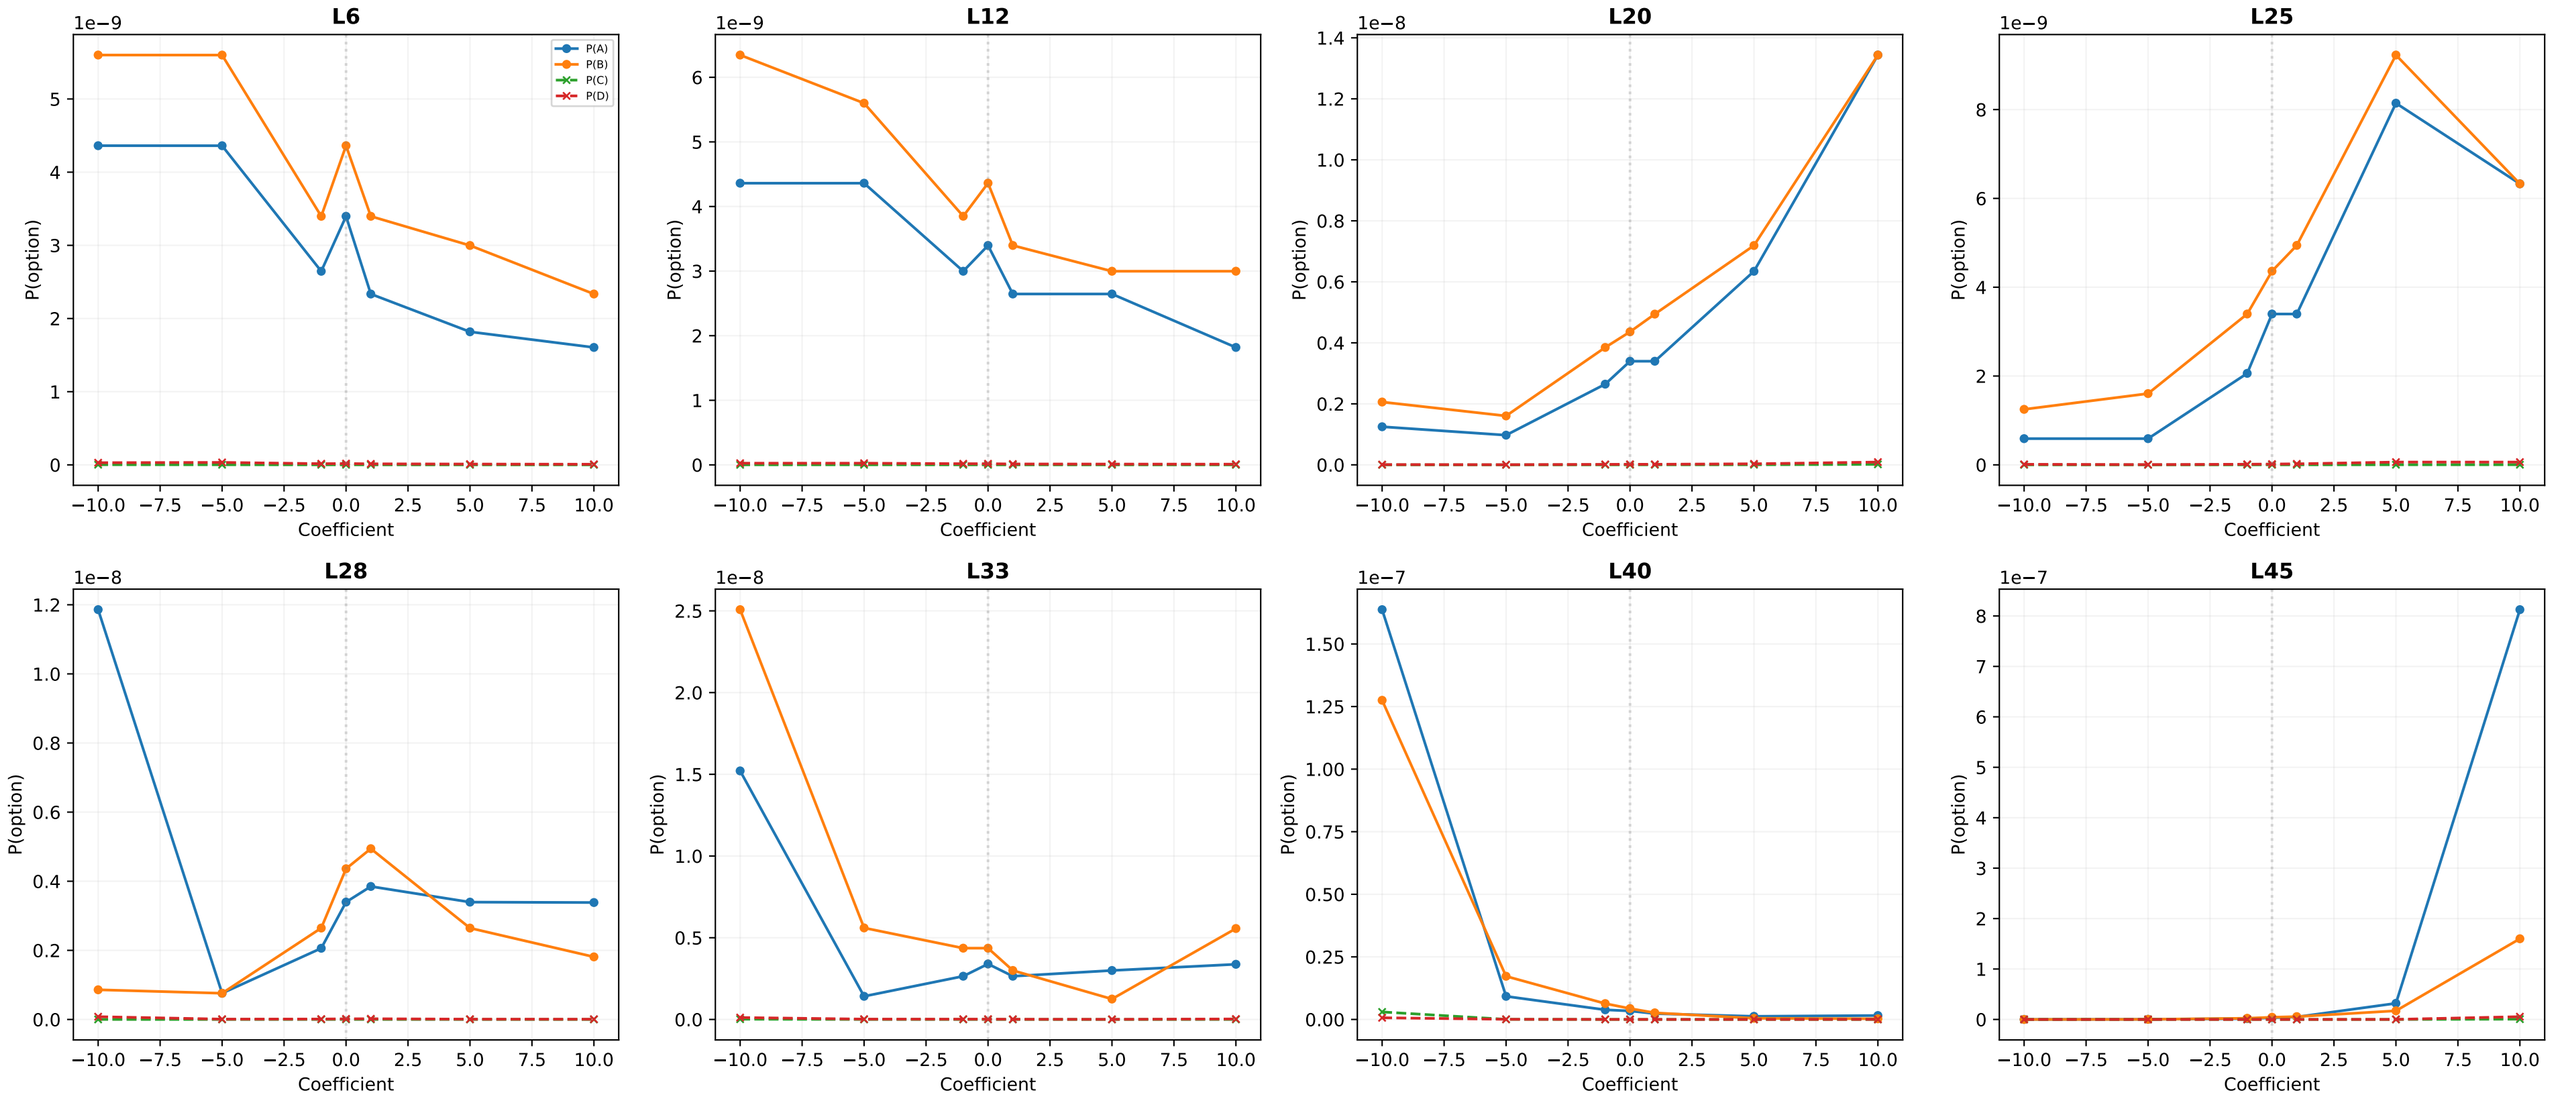

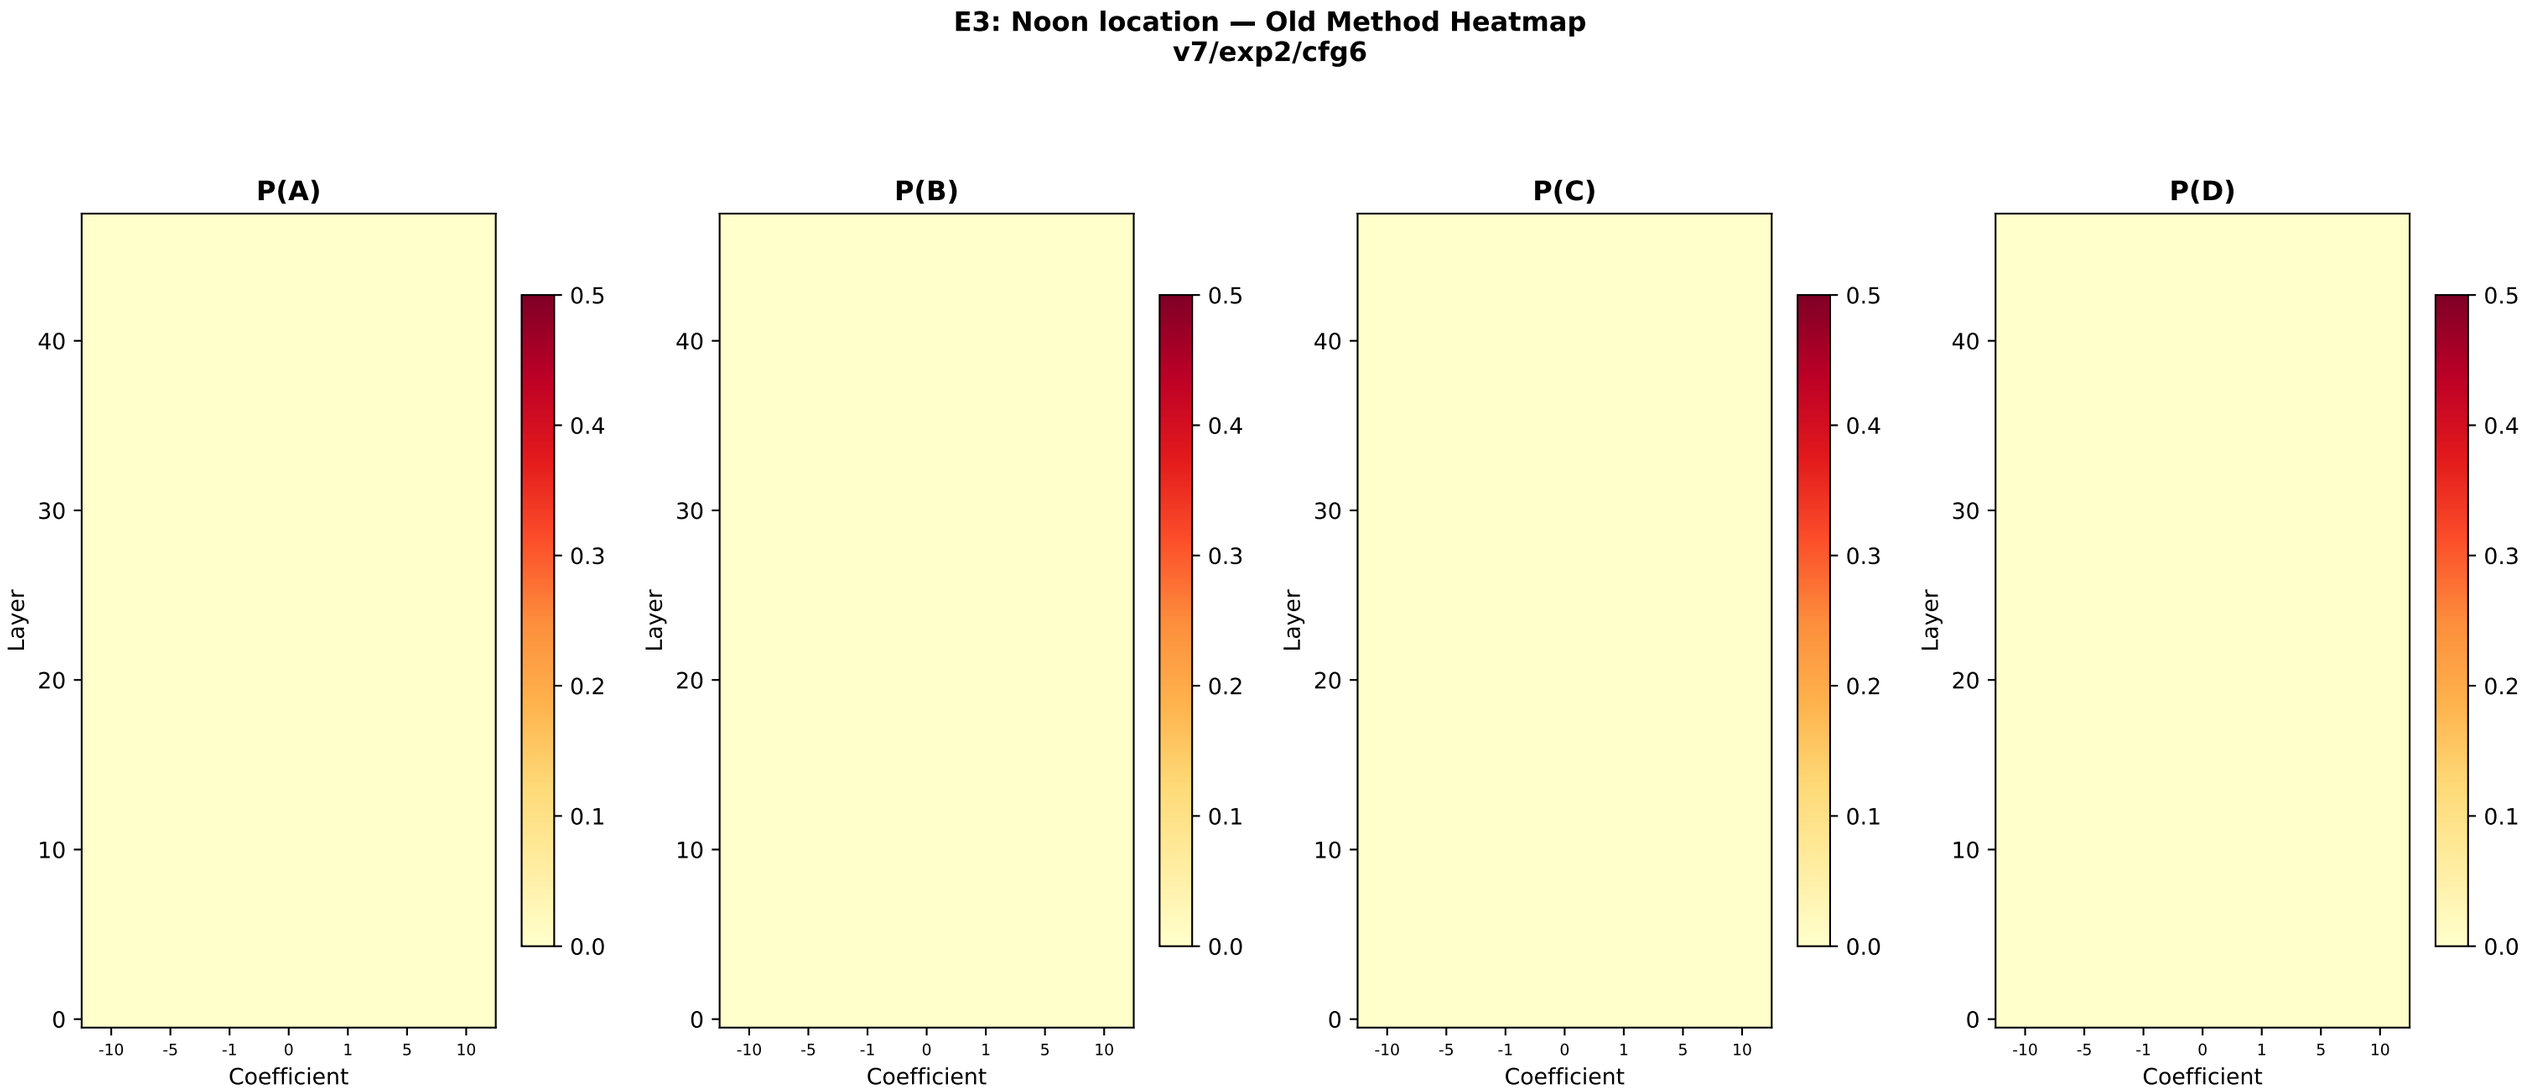
E3: Noon location — Old Method Heatmap
v7/exp2/cfg6
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E3: Noon location — New Method (Matteo)
v7/exp2/cfg6 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

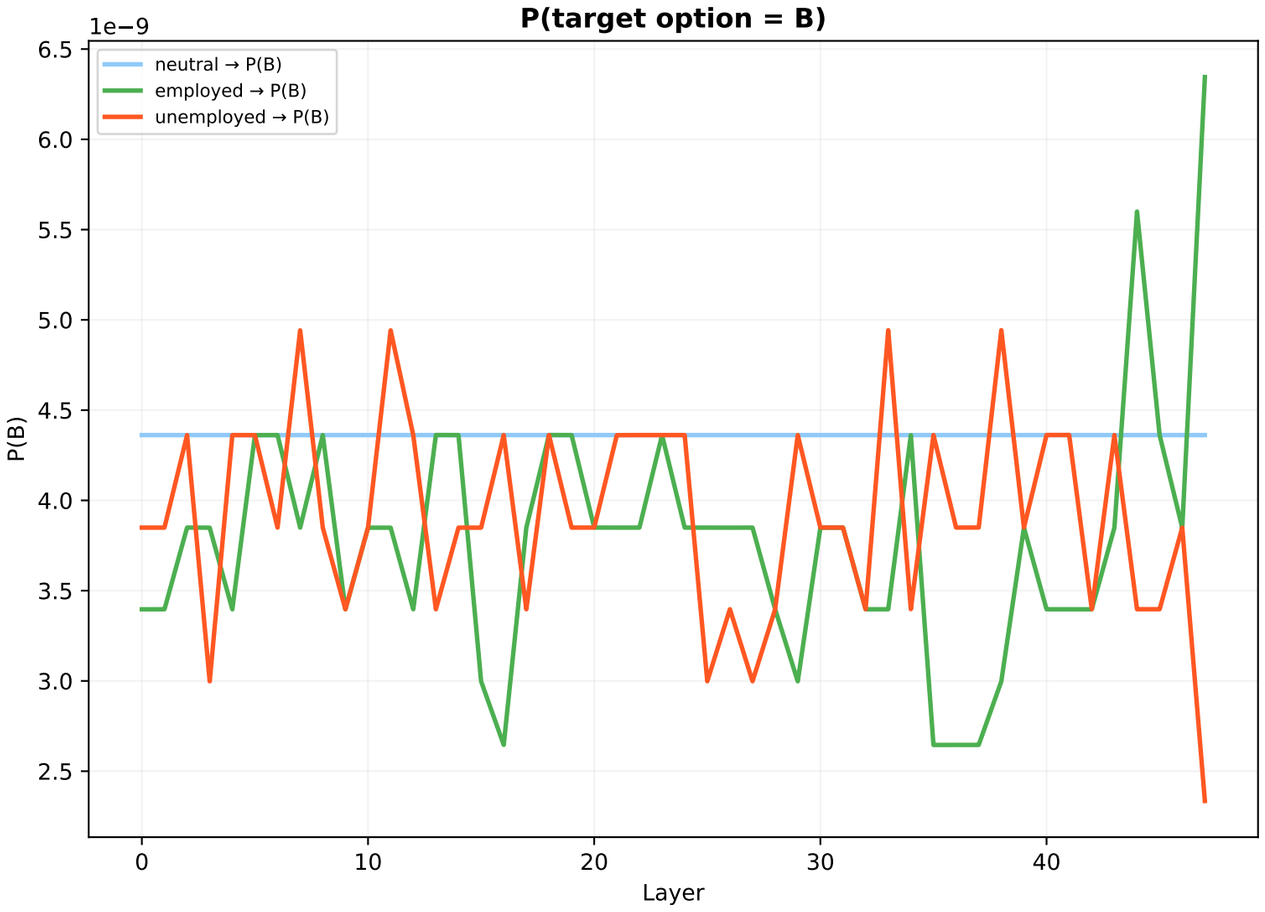

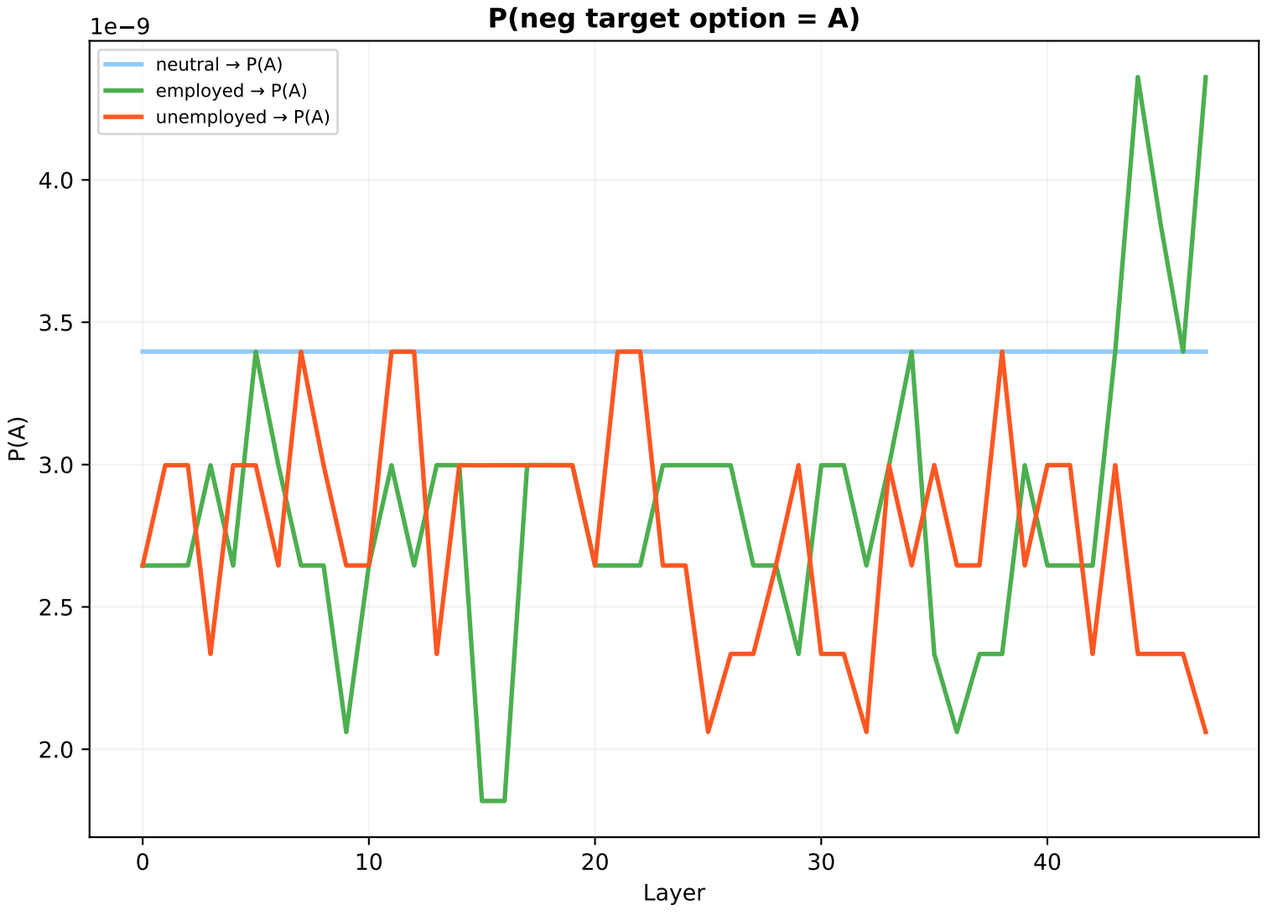

E4: Routine predictability — Old Method
v7/exp2/cfg6 | coeffs [-10, -5, -1, 0, 1, 5, 10]

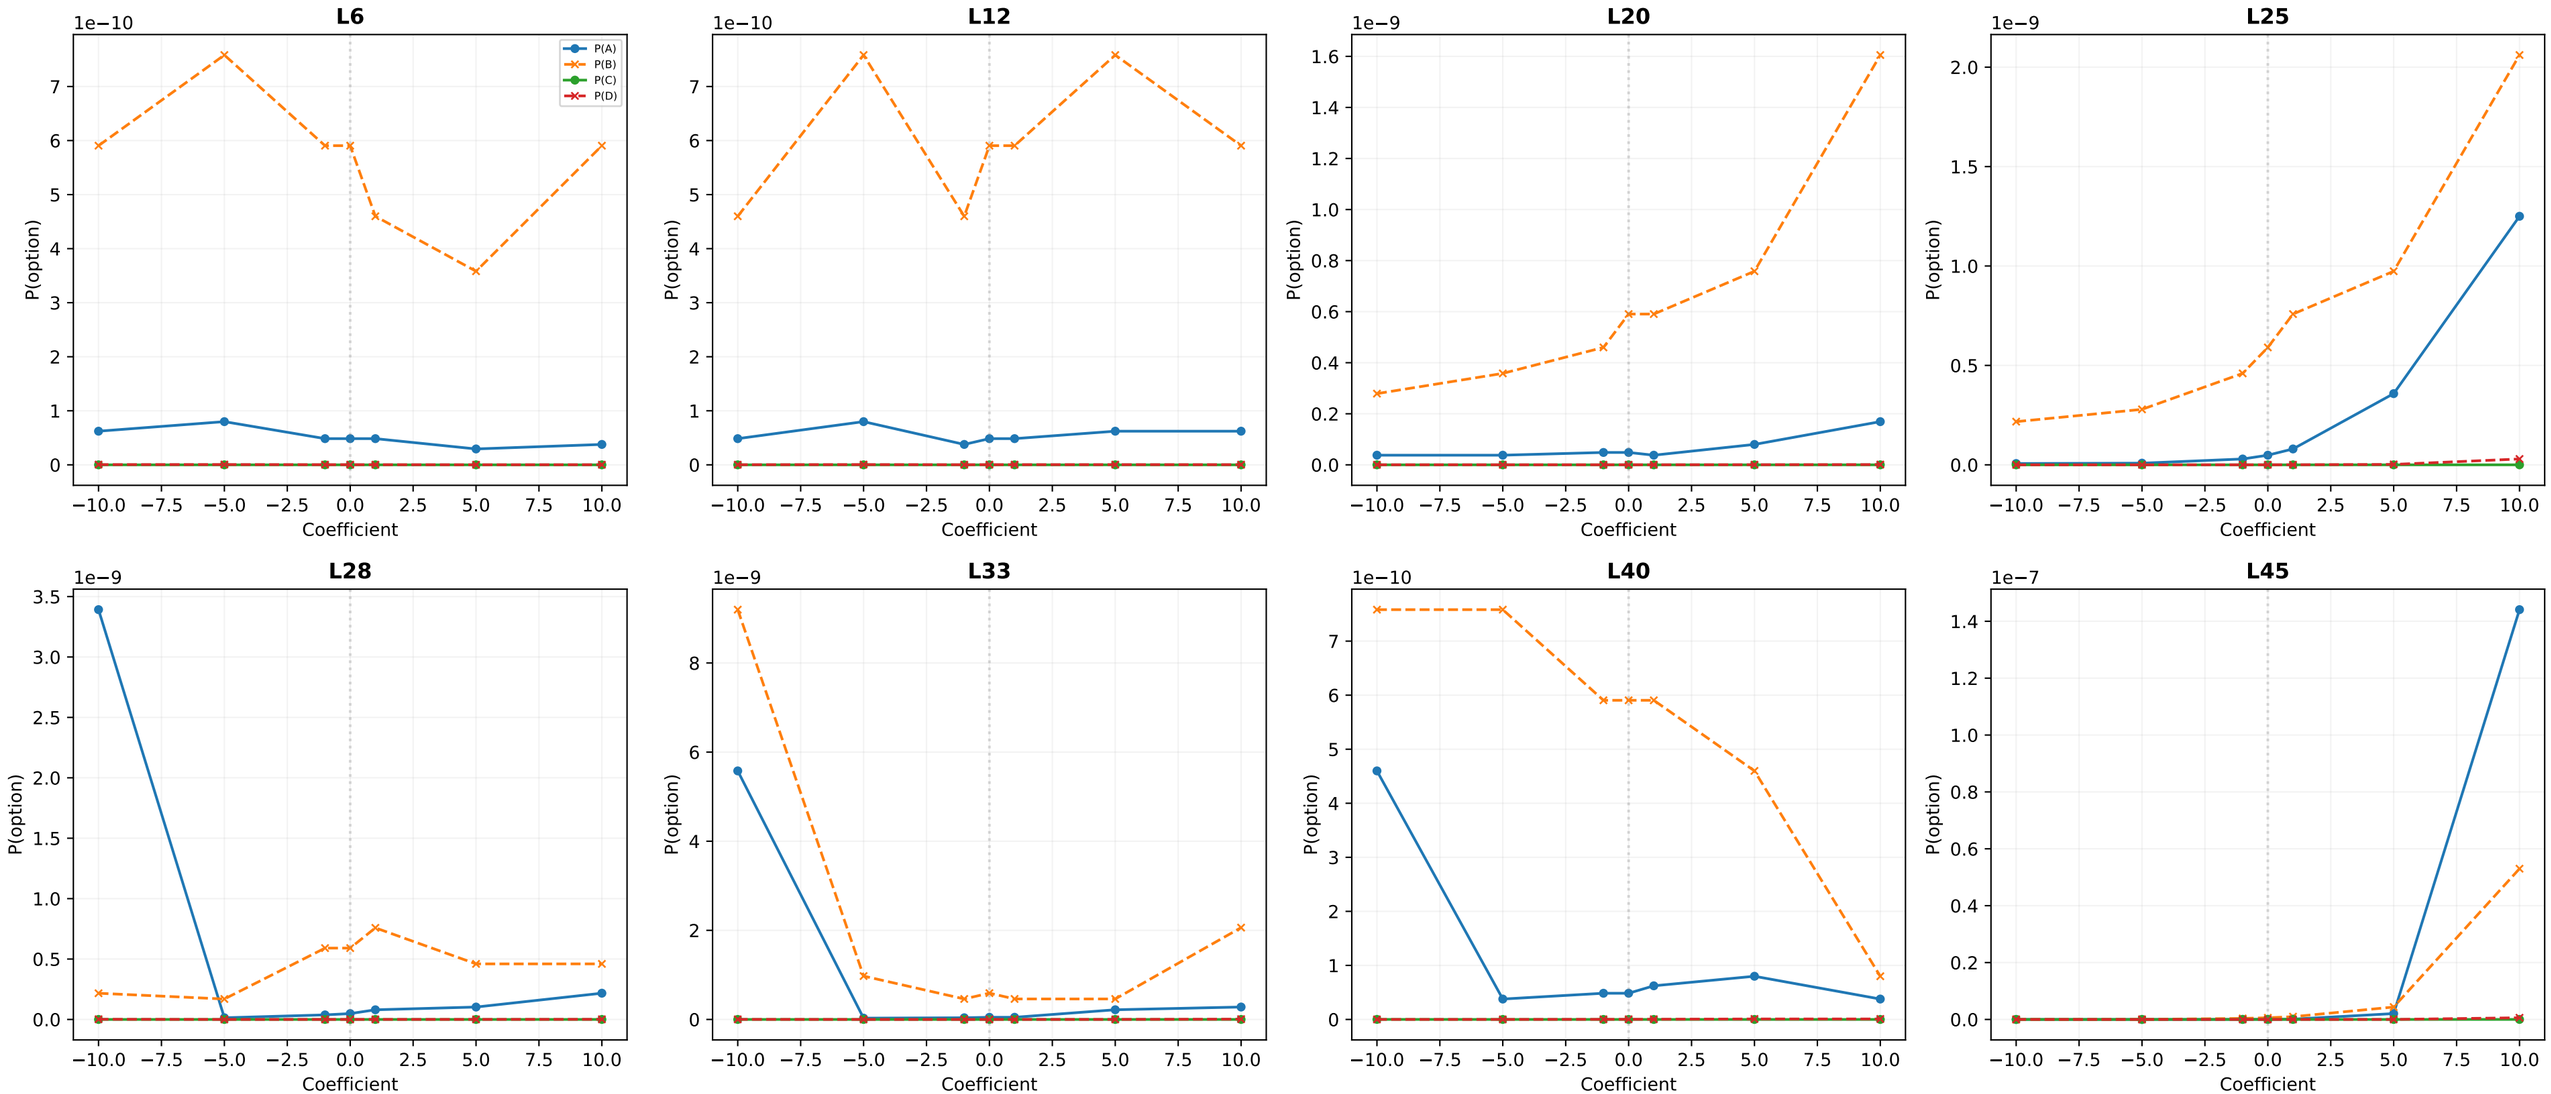

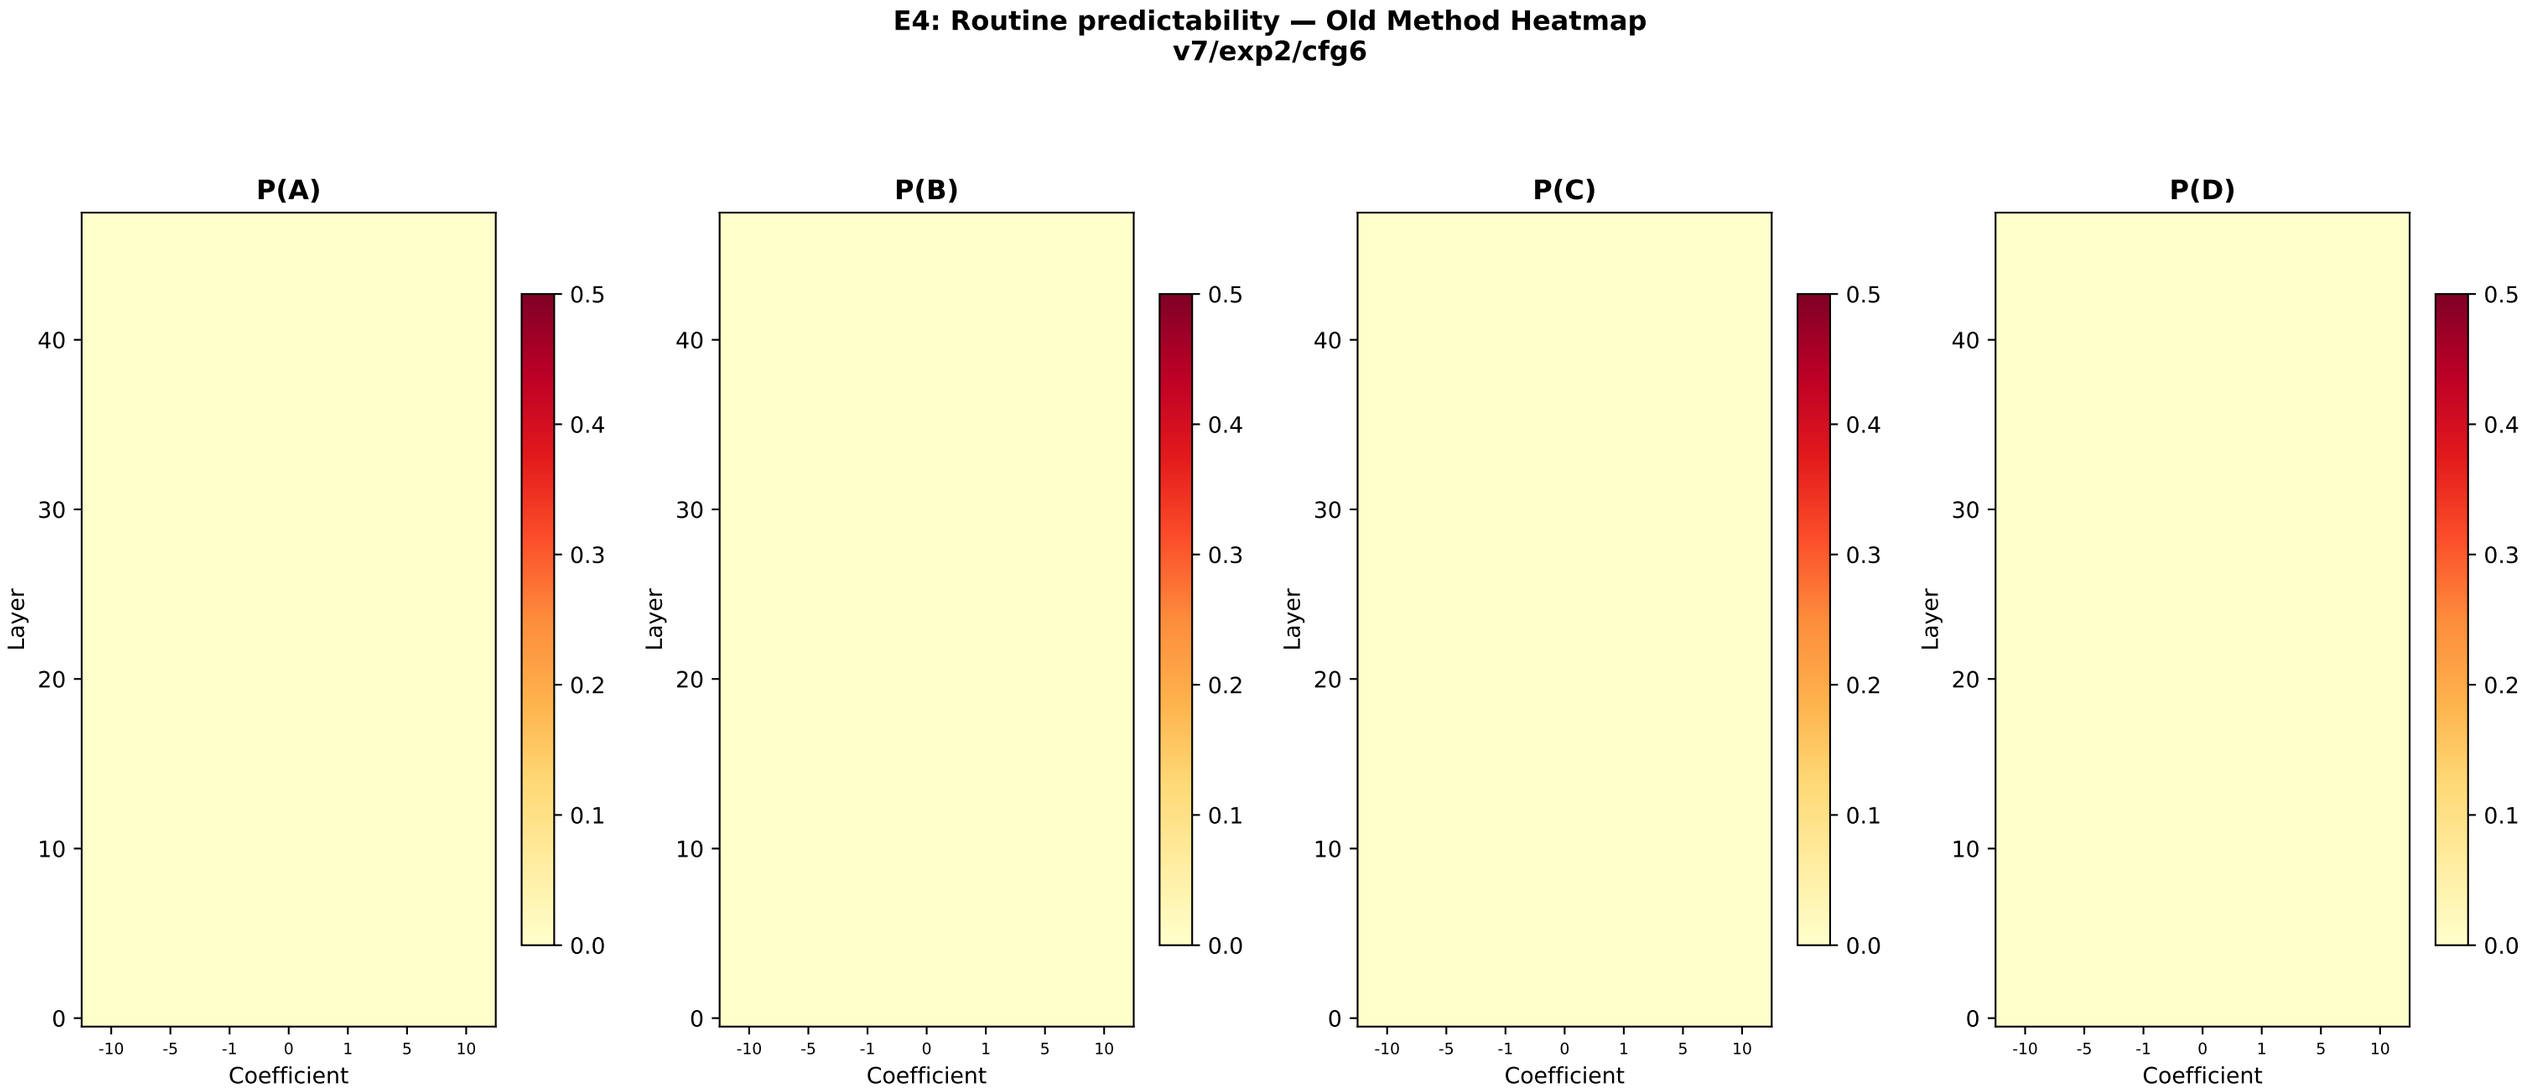
E4: Routine predictability — Old Method Heatmap
v7/exp2/cfg6
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E4: Routine predictability — New Method (Matteo)
v7/exp2/cfg6 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

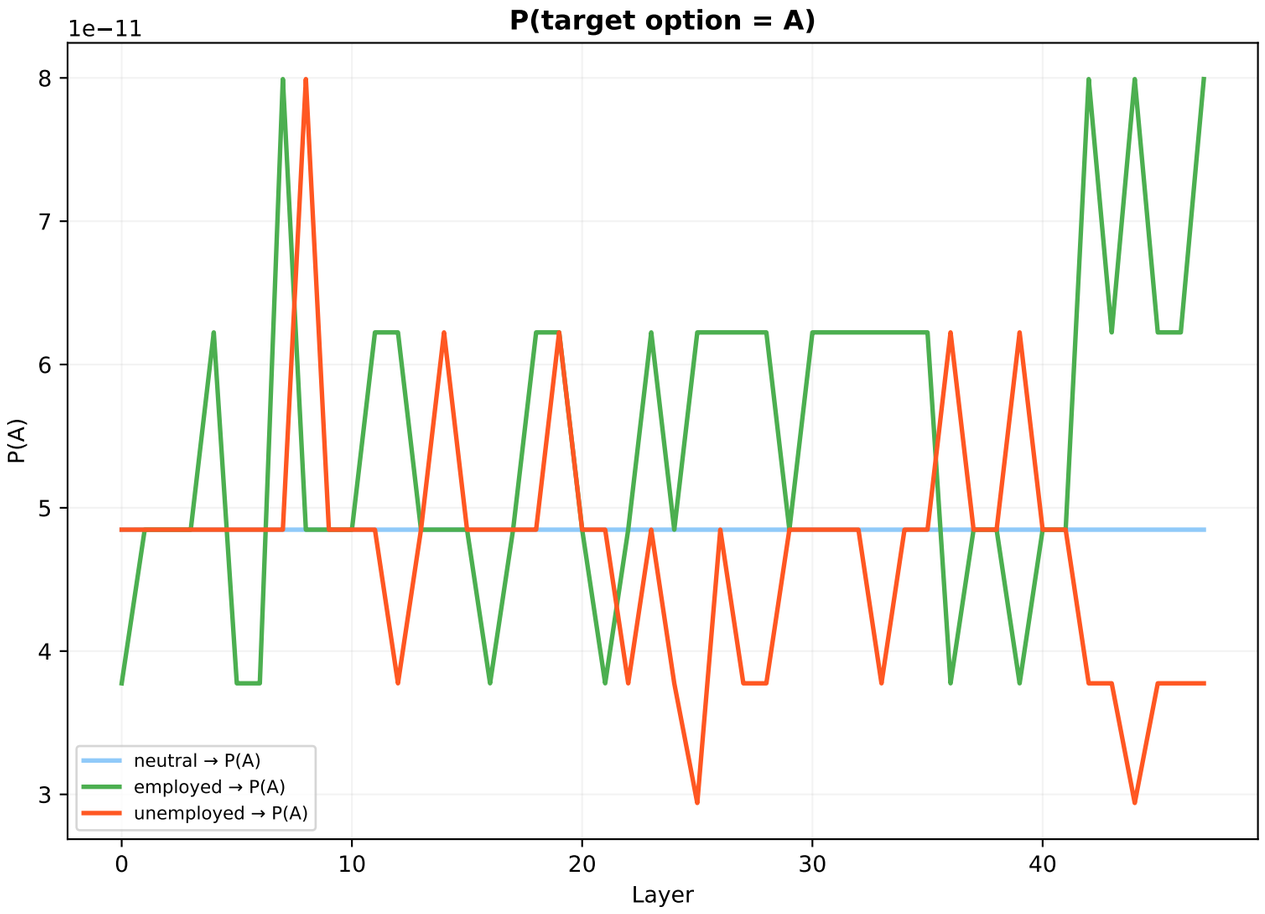

E5: CONTROL: housing type — Old Method
v7/exp2/cfg6 | coeffs [-10, -5, -1, 0, 1, 5, 10]

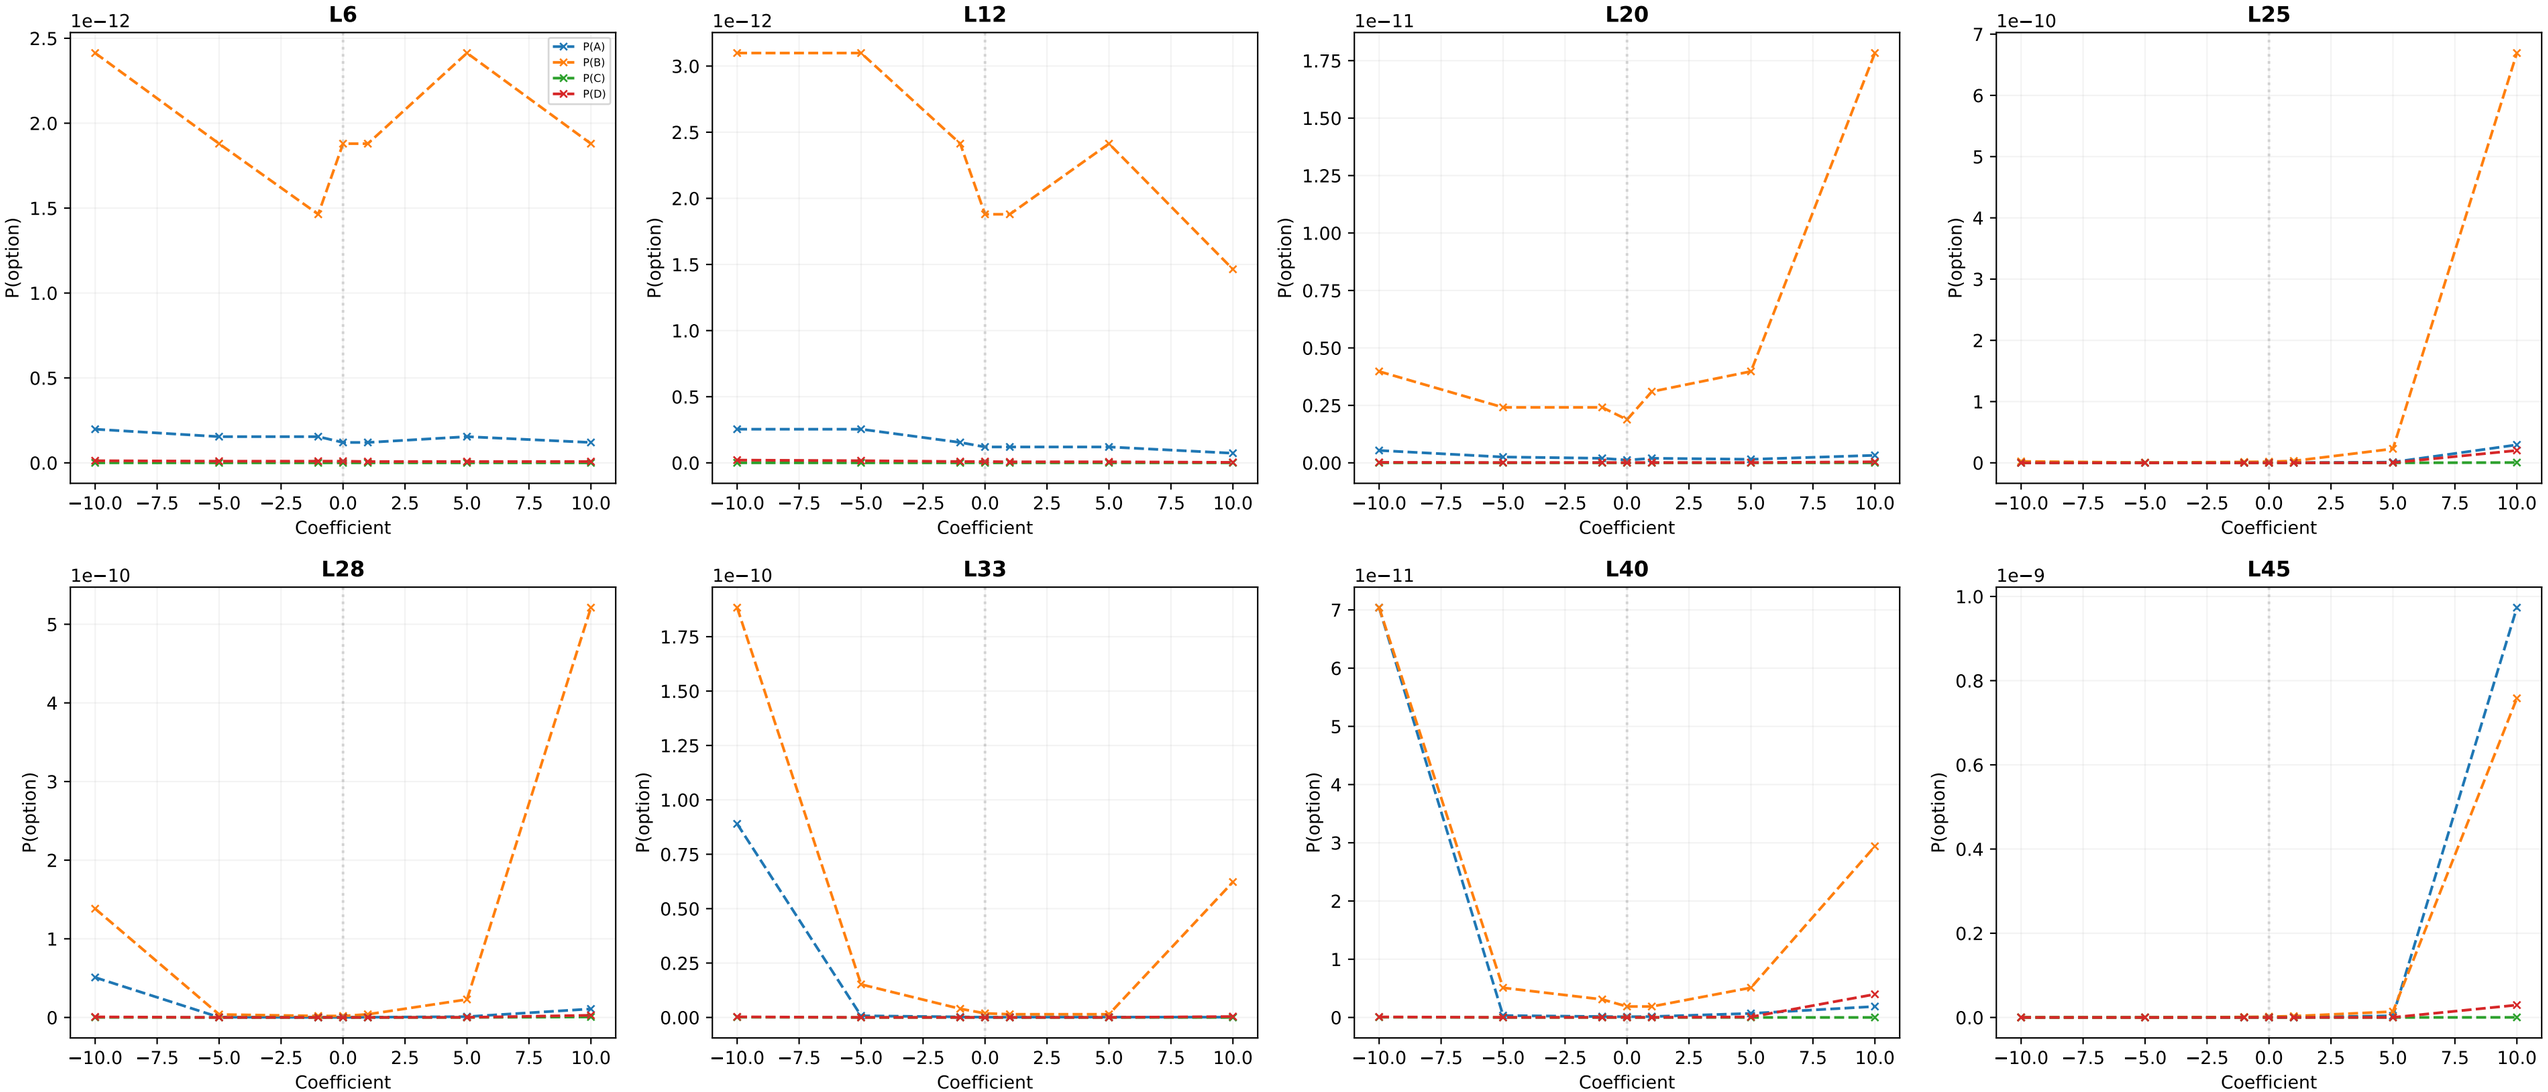

E5: CONTROL: housing type — Old Method Heatmap
v7/exp2/cfg6

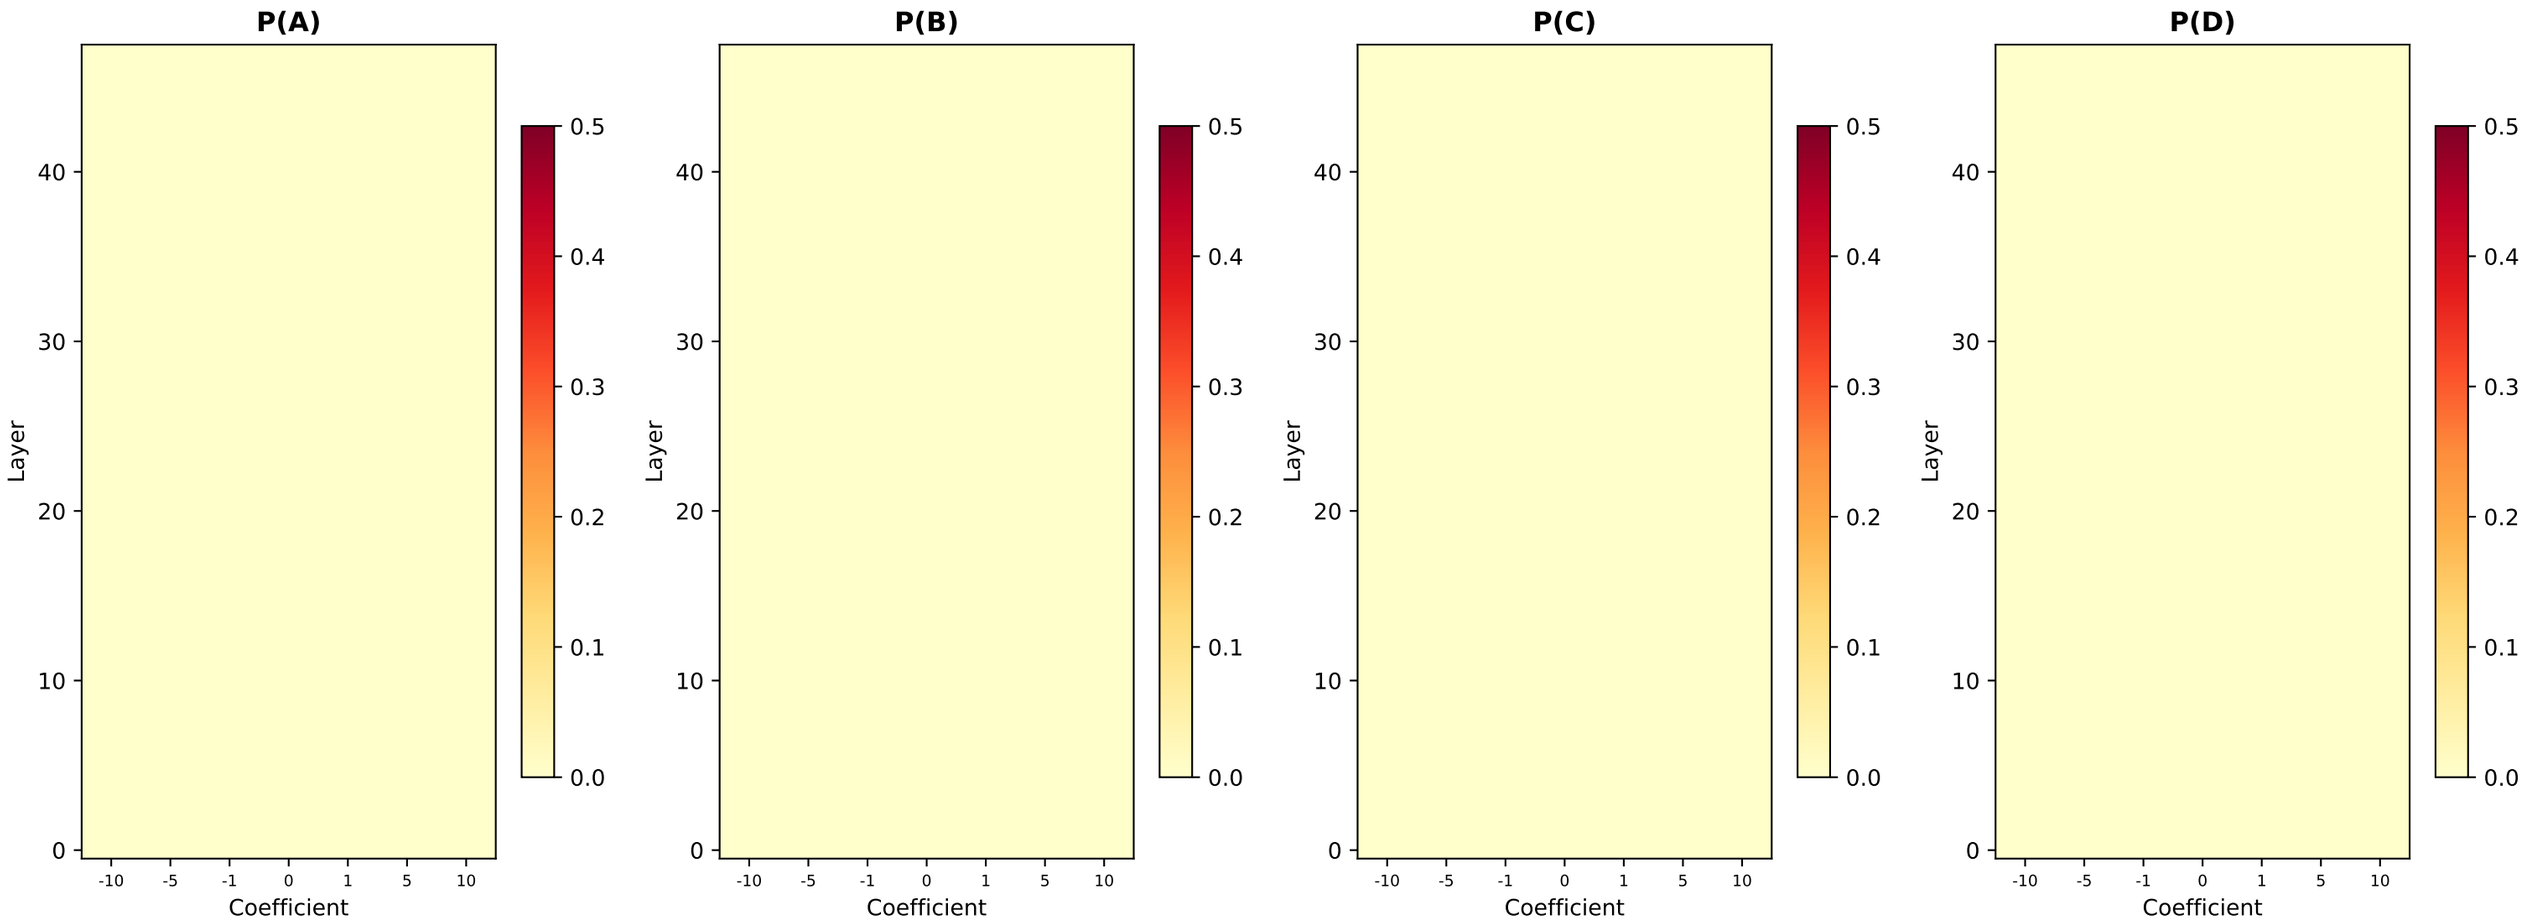

E5: CONTROL: housing type — New Method (Matteo)
v7/exp2/cfg6 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

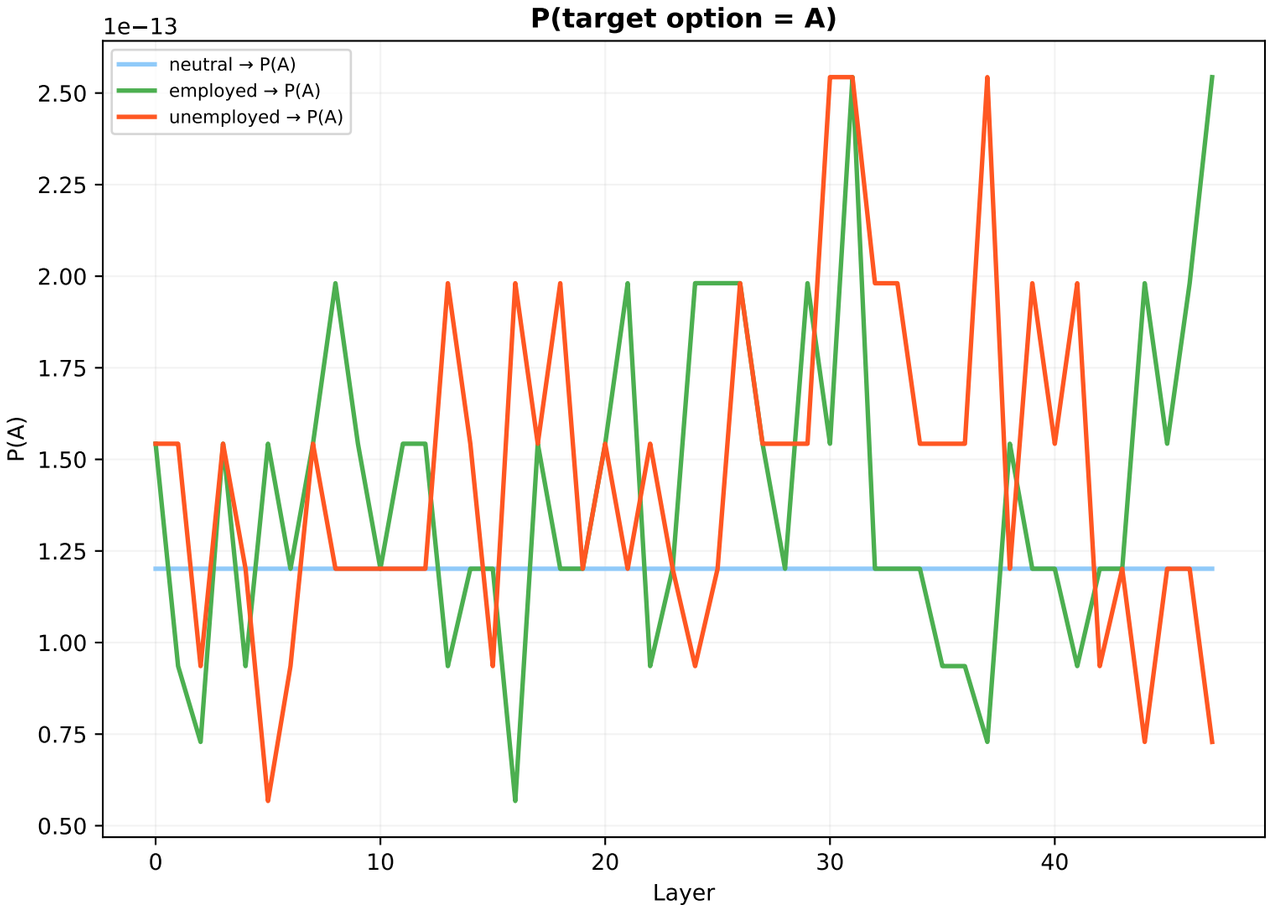

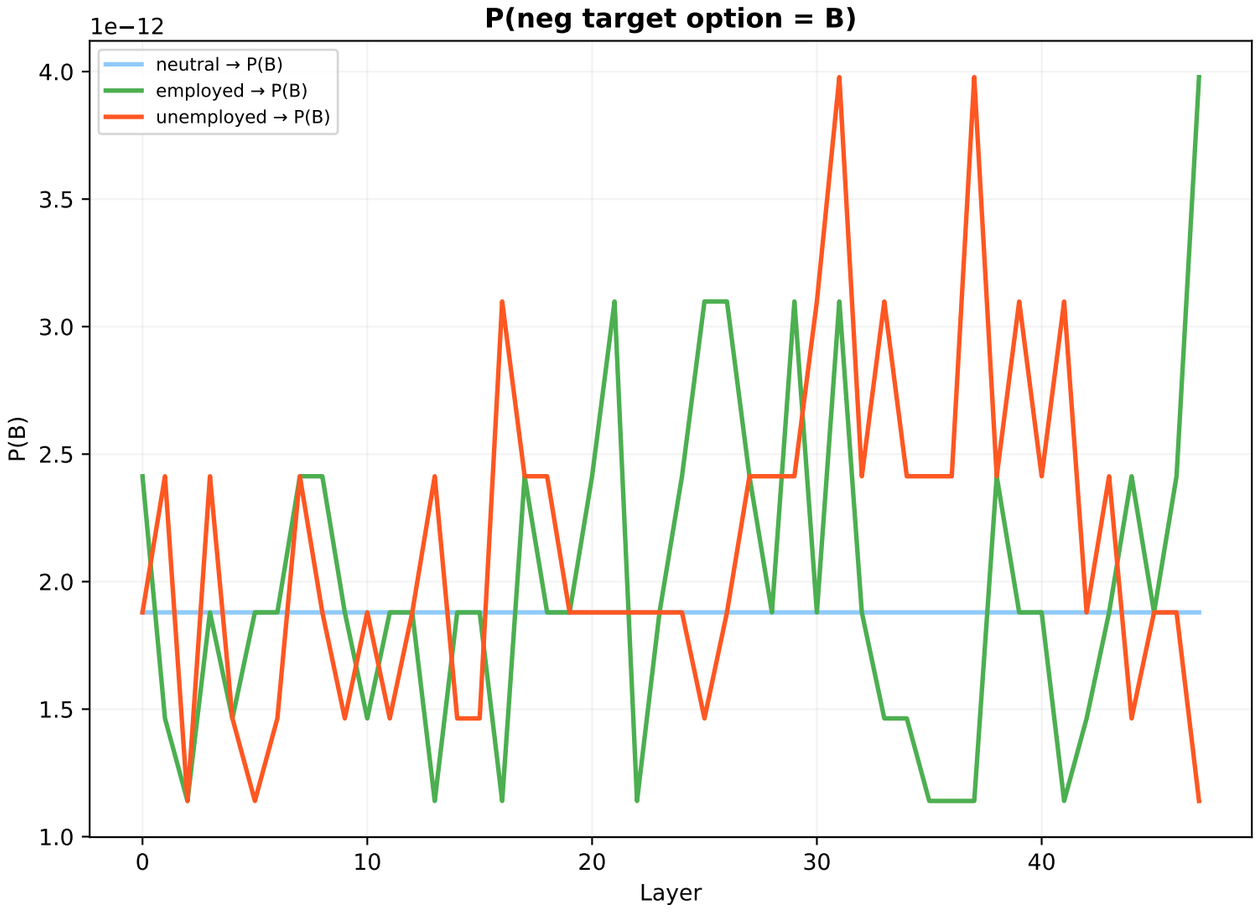

W1: Wake-up time (hour) — Old Method
v8/exp1a/cfg3 | coeffs [-10, -5, -1, 0, 1, 5, 10]

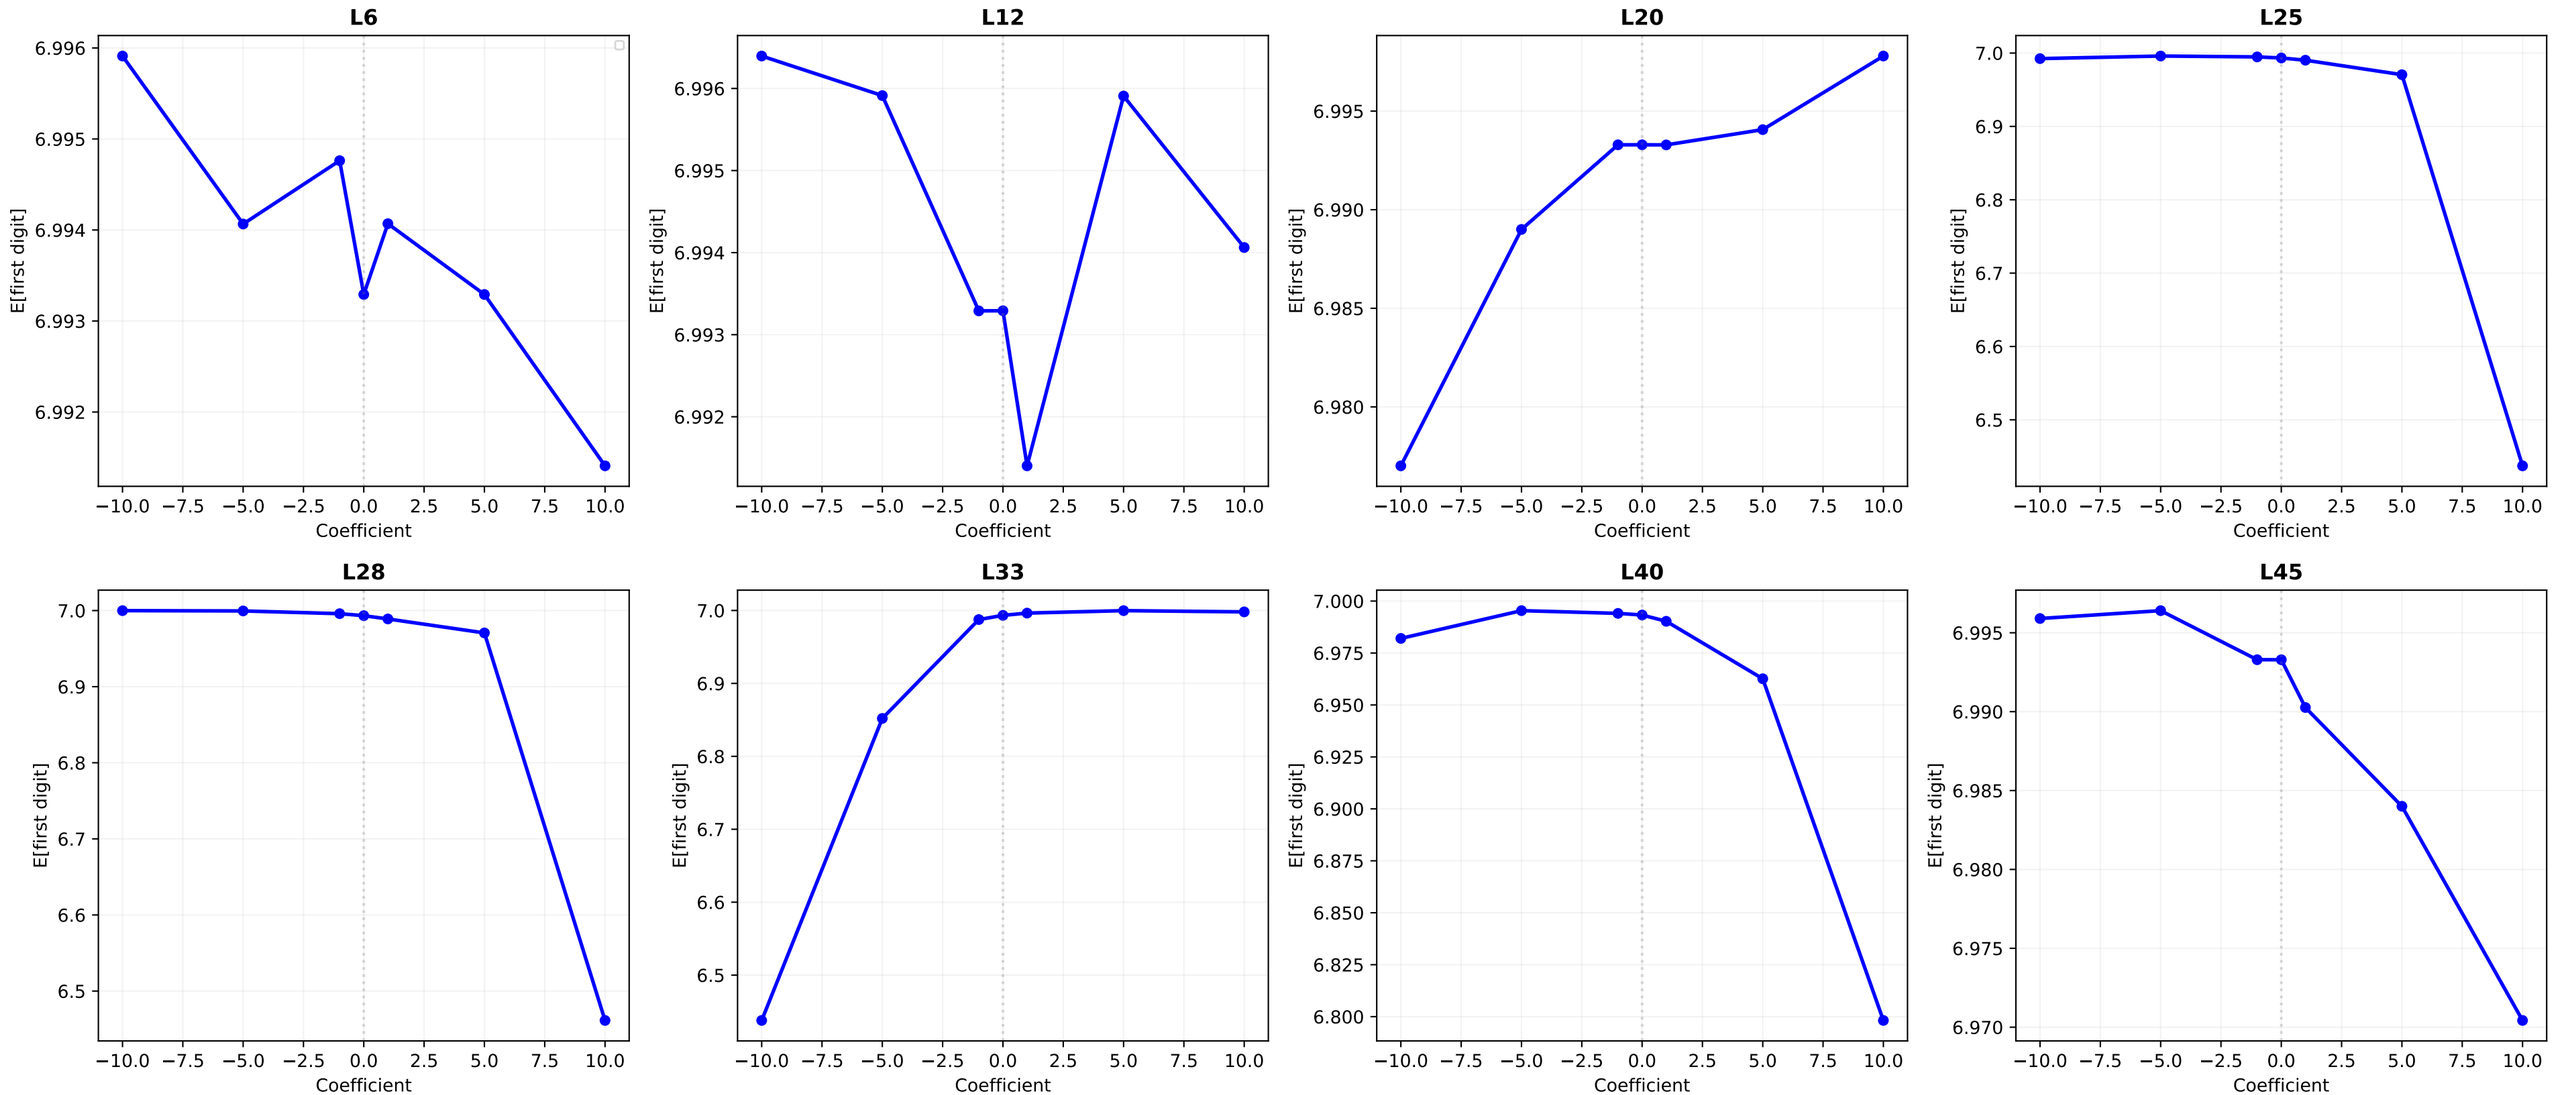

W1: Wake-up time (hour) — Old Method Heatmap
v8/exp1a/cfg3

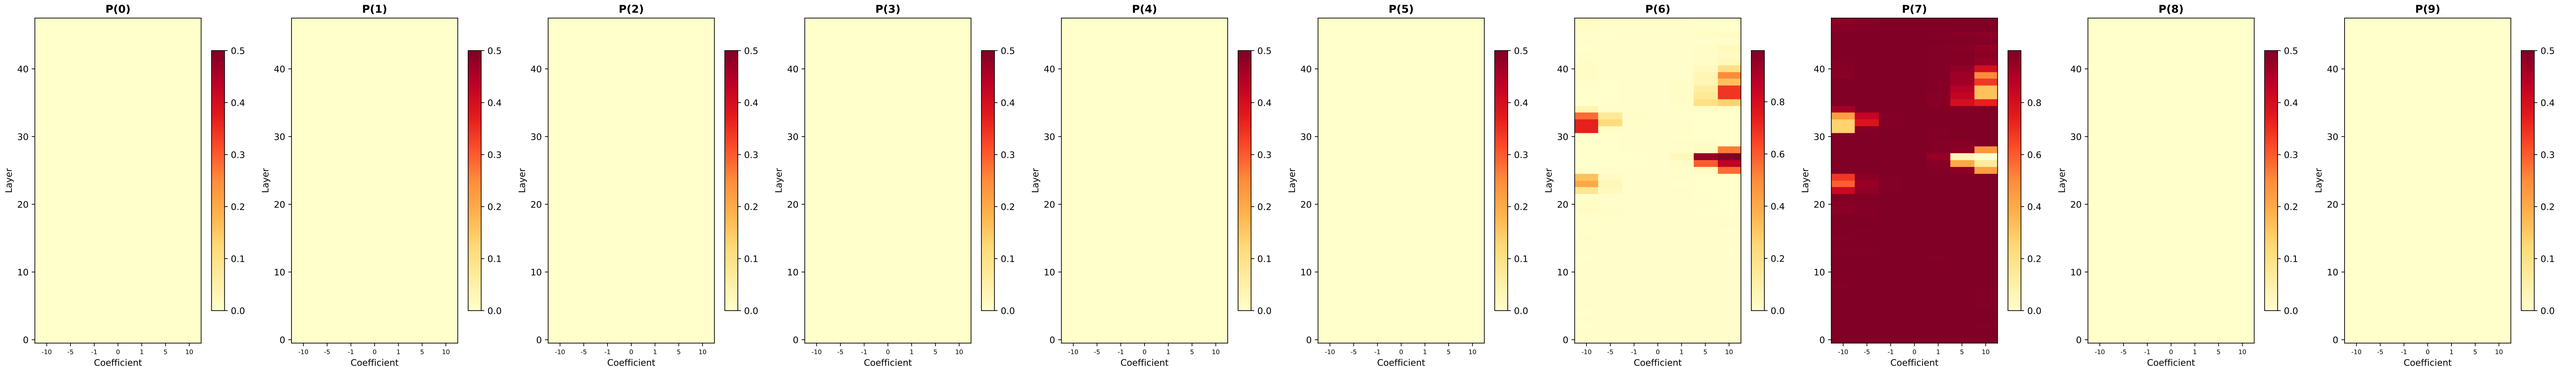

W1: Wake-up time (hour) — New Method (Matteo)
v8/exp1a/cfg3 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

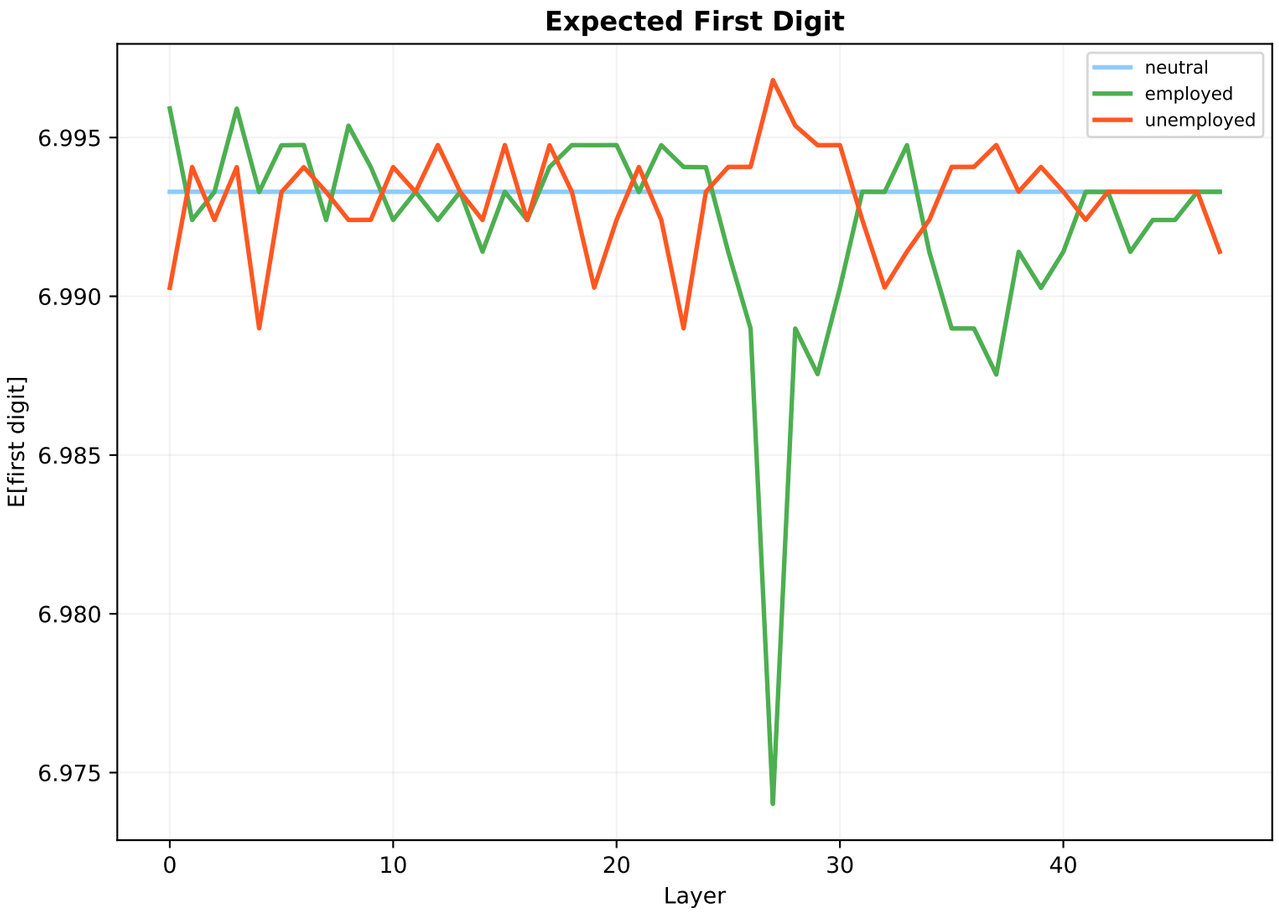

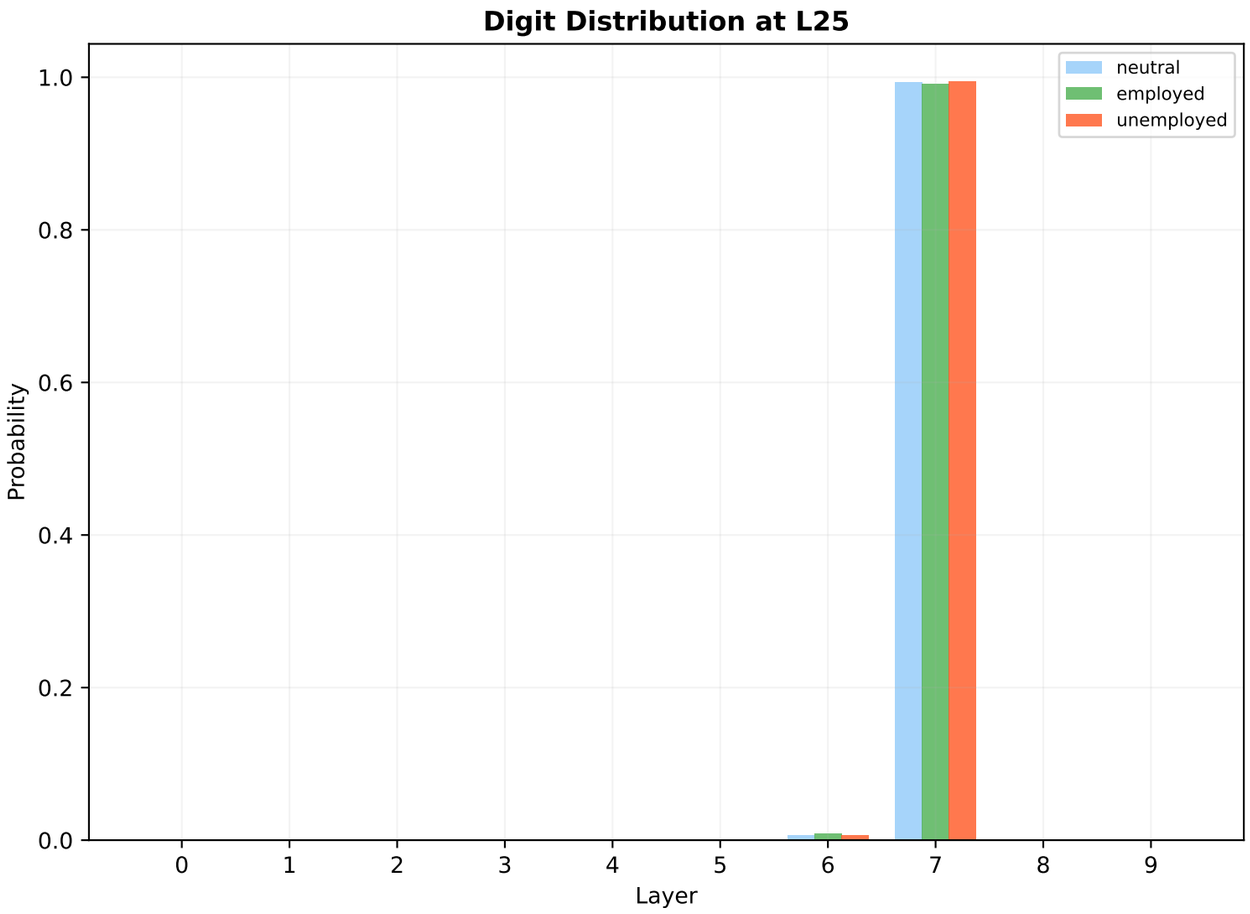

W2: Free time score (0-100) — Old Method
v8/exp1a/cfg3 | coeffs [-10, -5, -1, 0, 1, 5, 10]

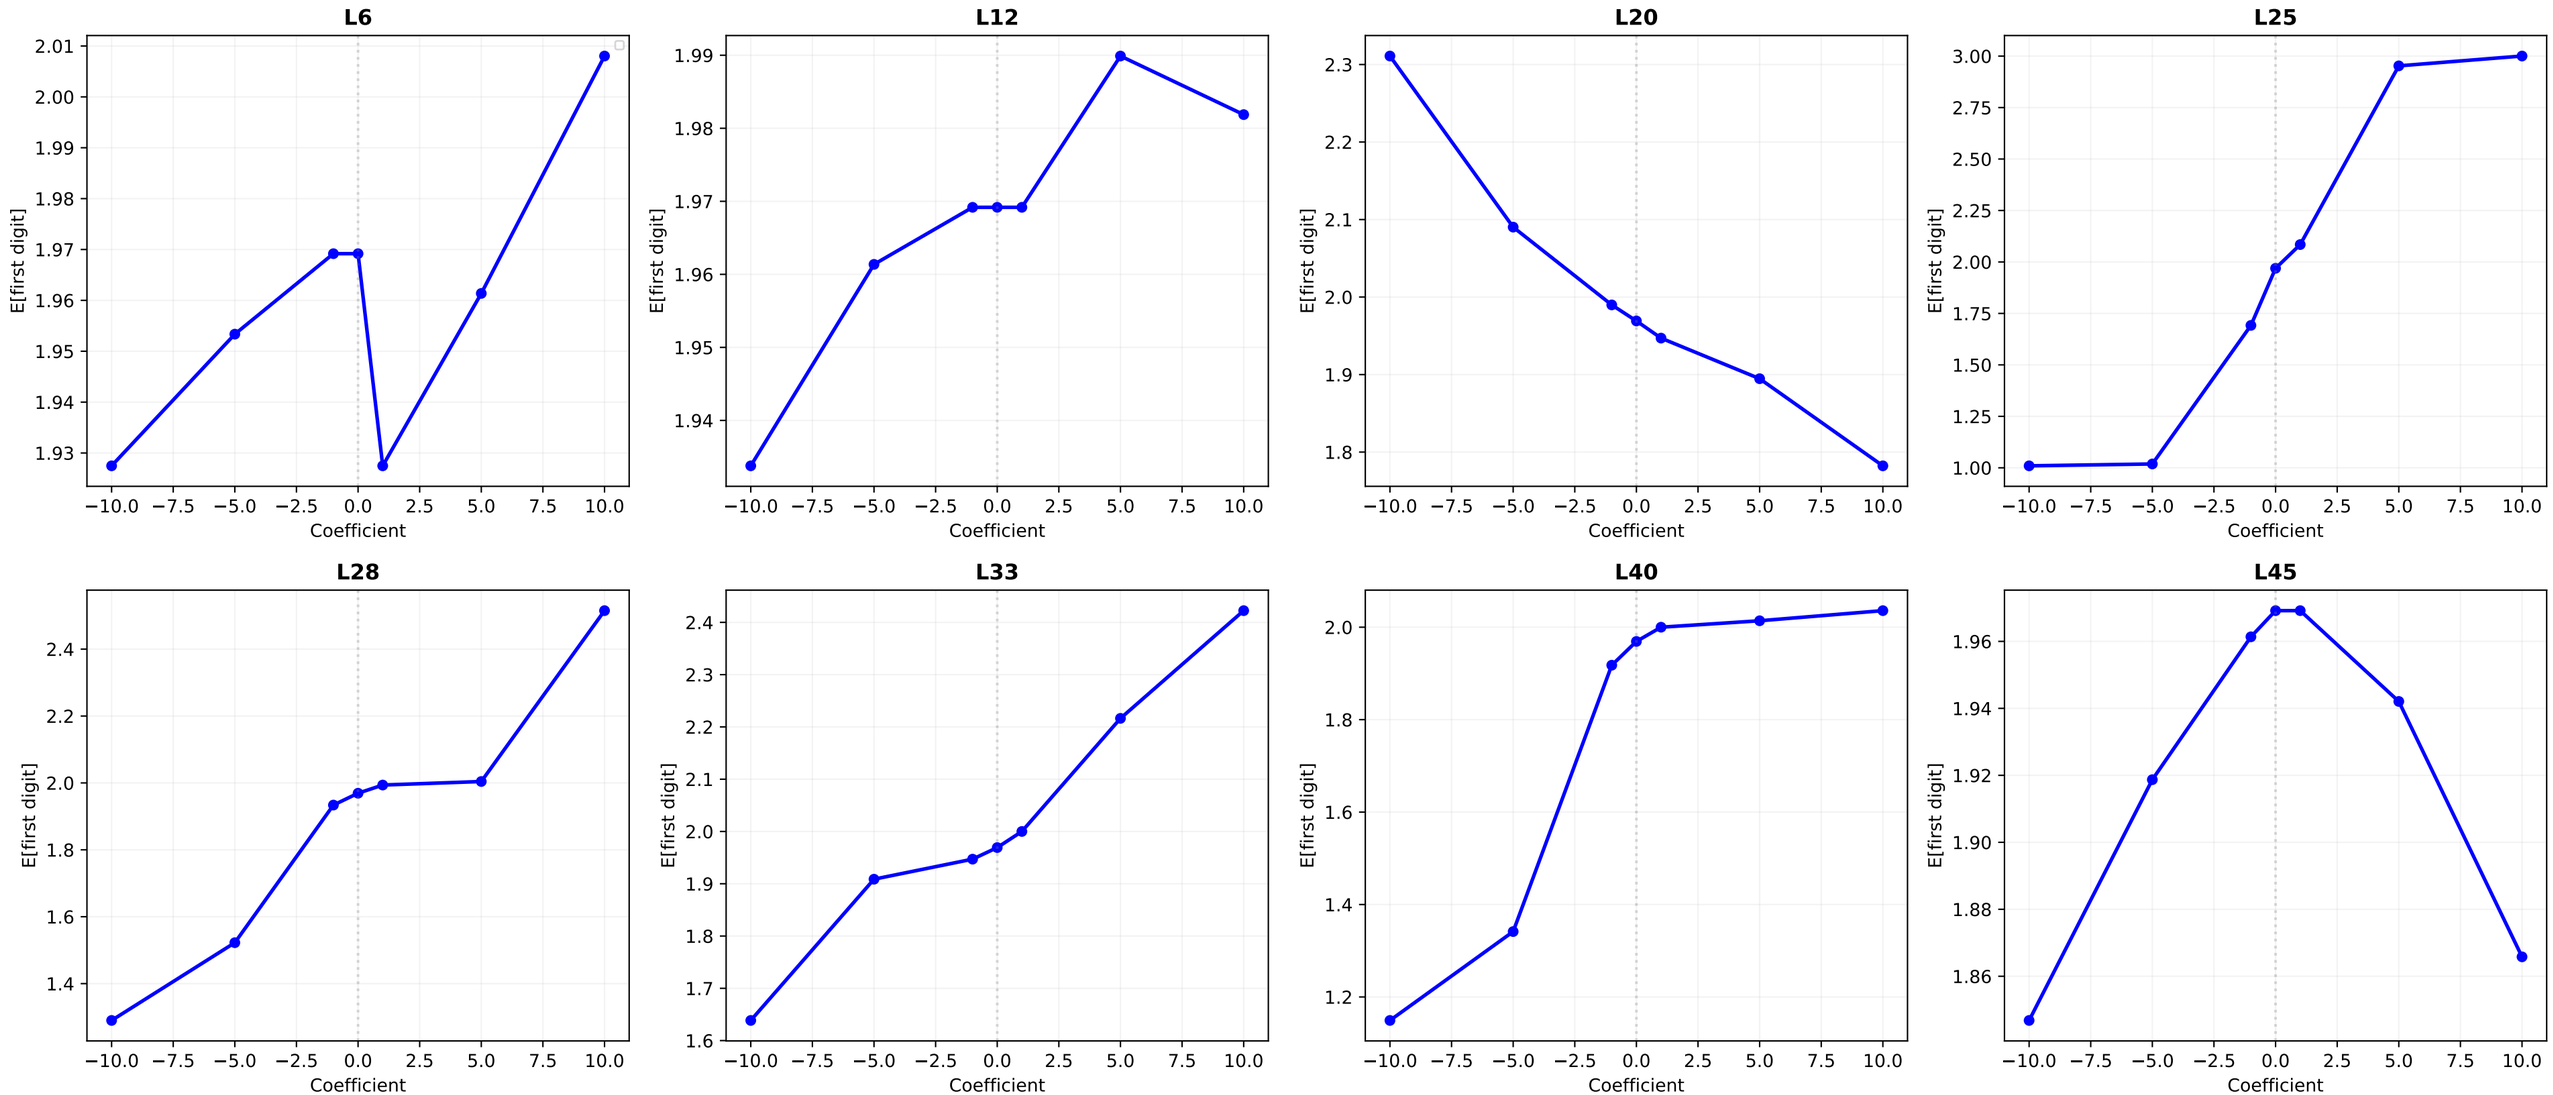

W2: Free time score (0-100) — Old Method Heatmap
v8/exp1a/cfg3

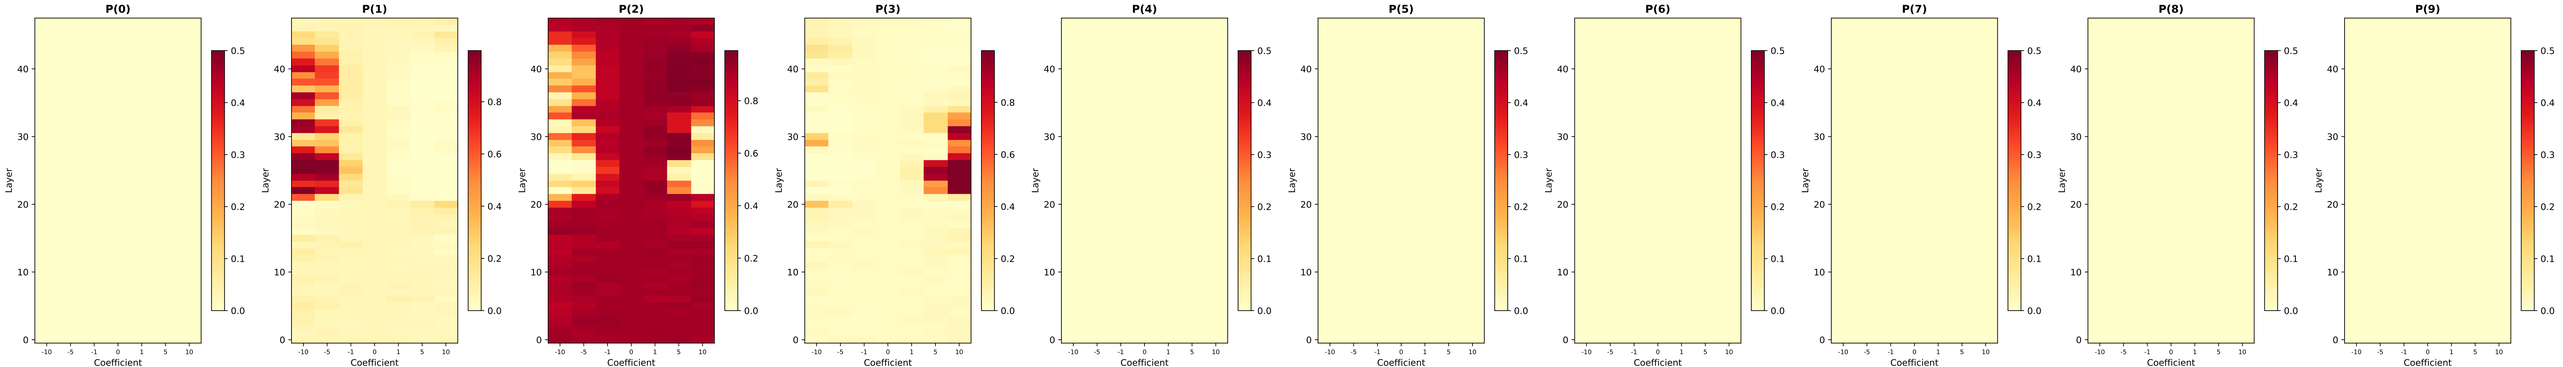

W2: Free time score (0-100) — New Method (Matteo)
v8/exp1a/cfg3 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

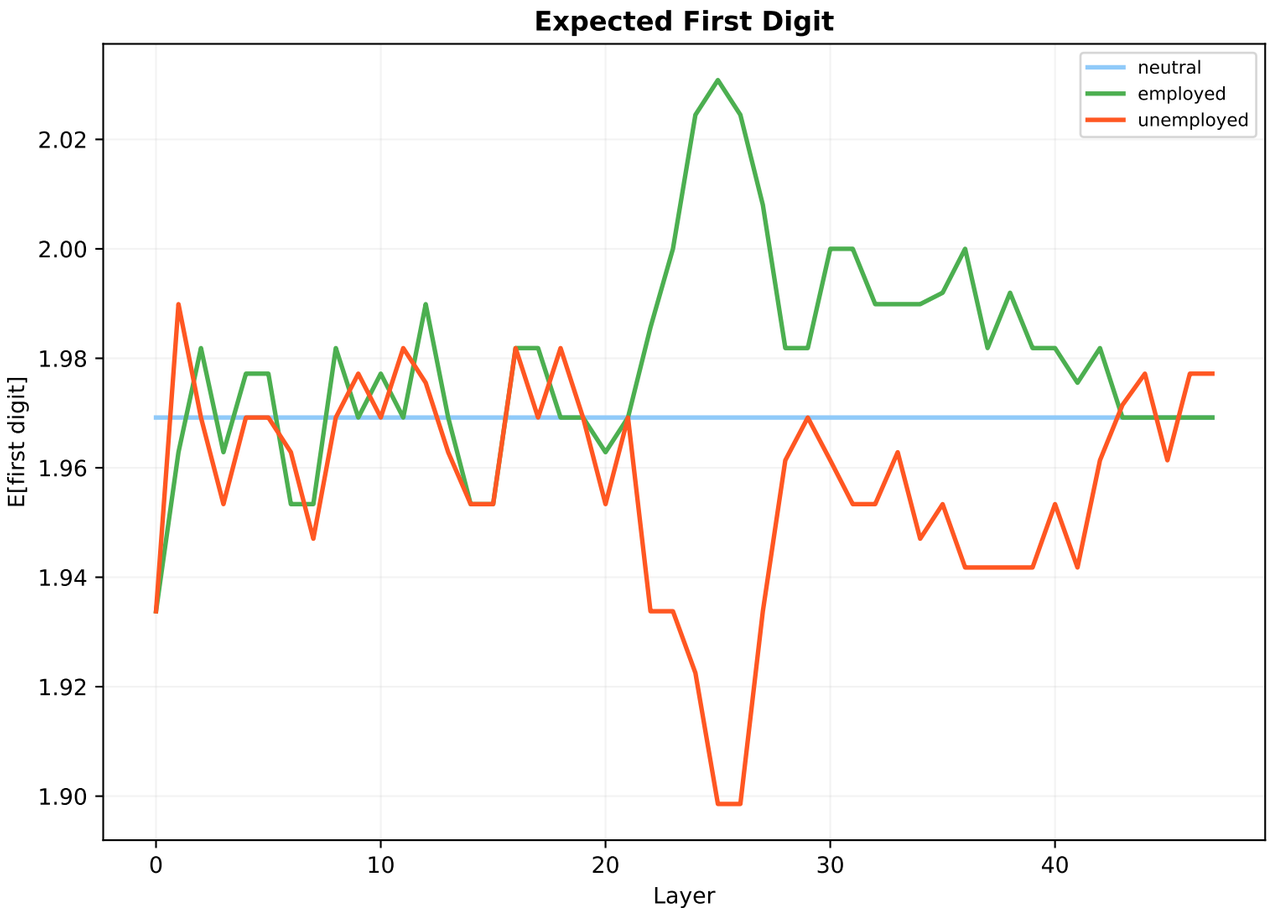

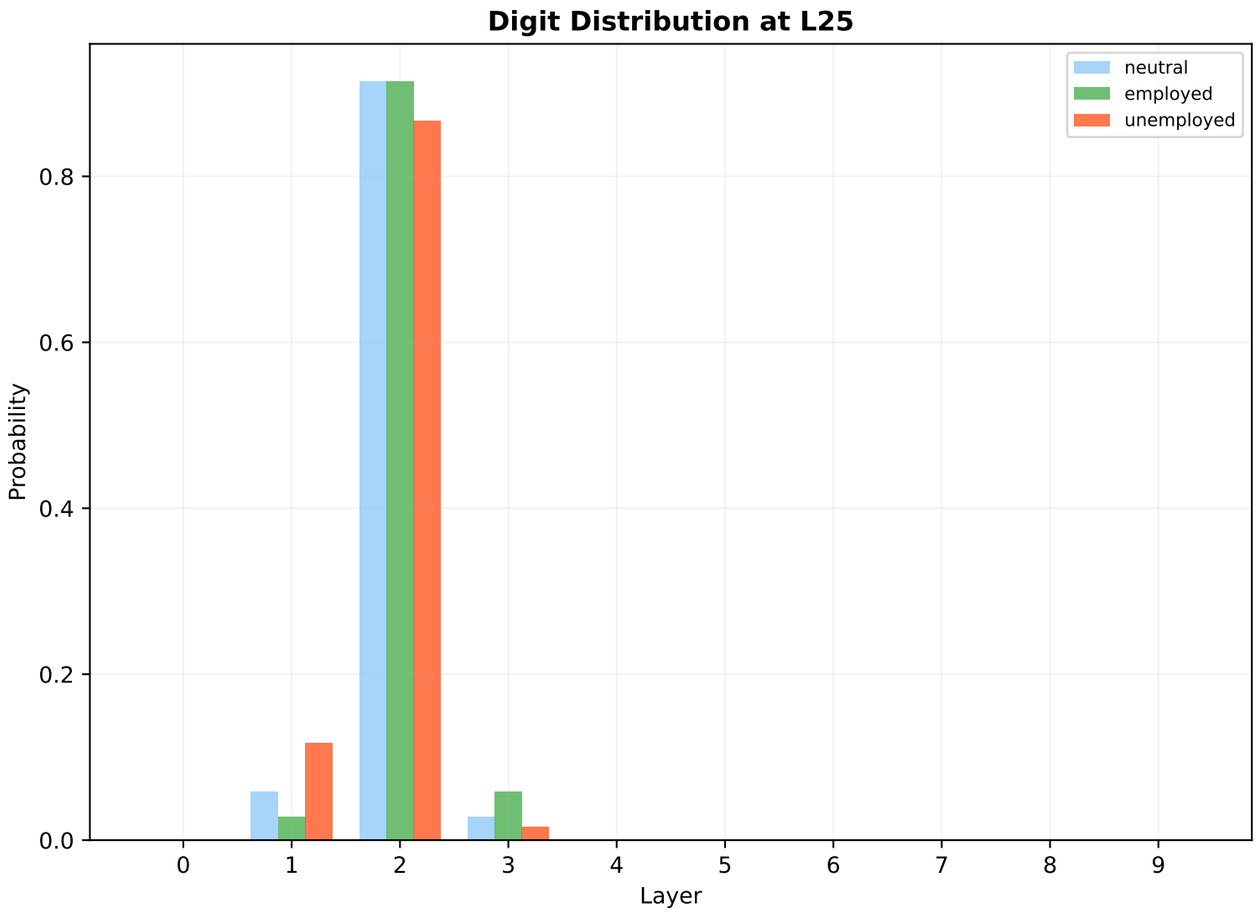

W3: 10 AM activity — Old Method
v8/exp1a/cfg3 | coeffs [-10, -5, -1, 0, 1, 5, 10]

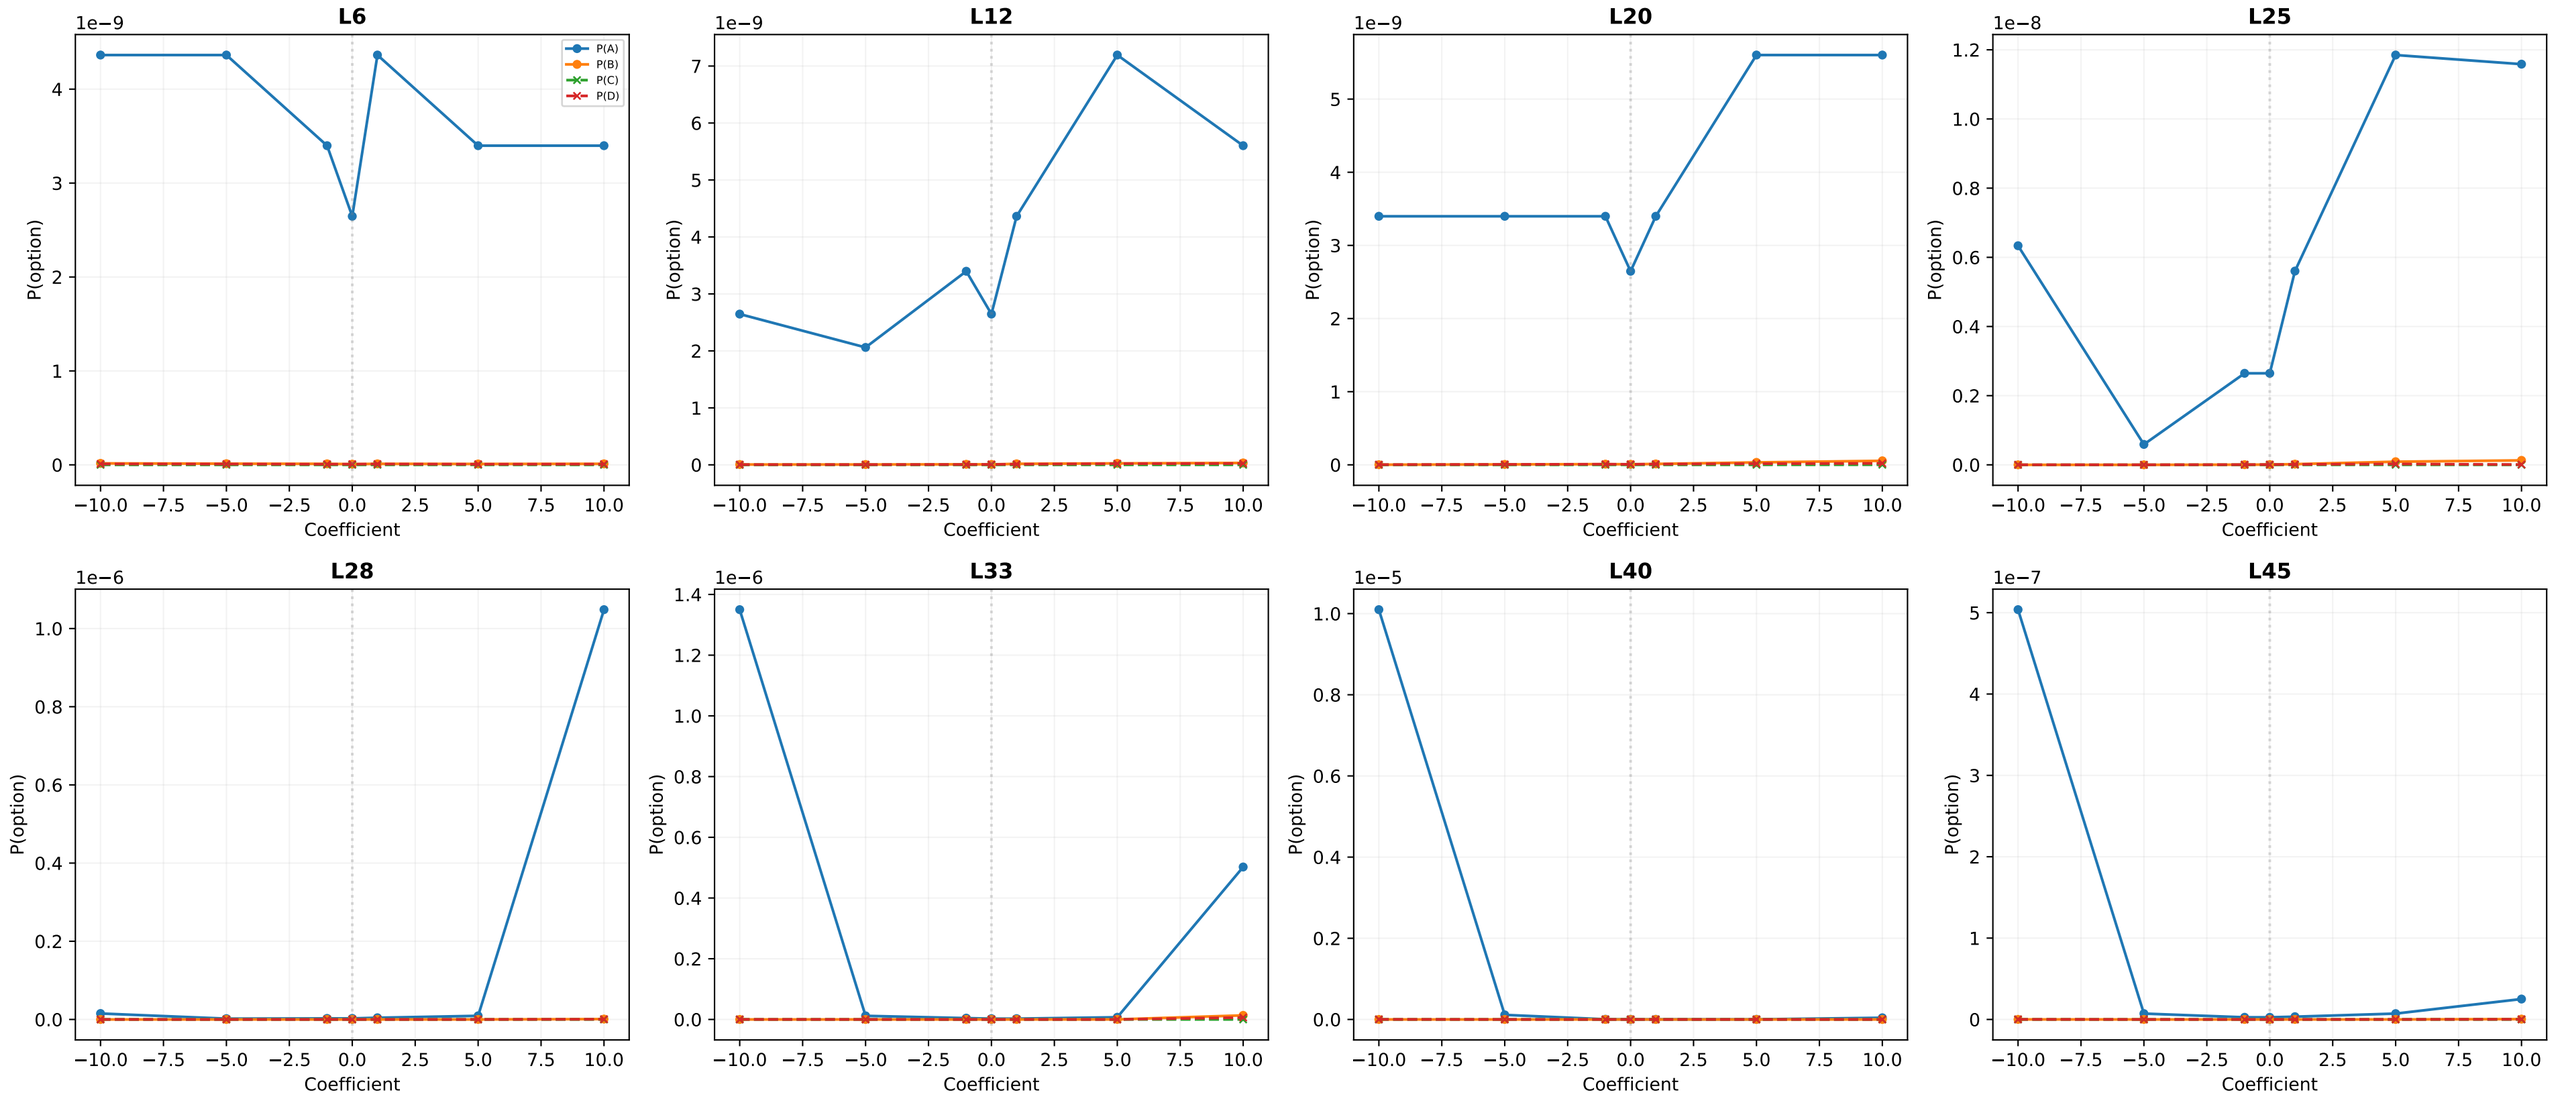

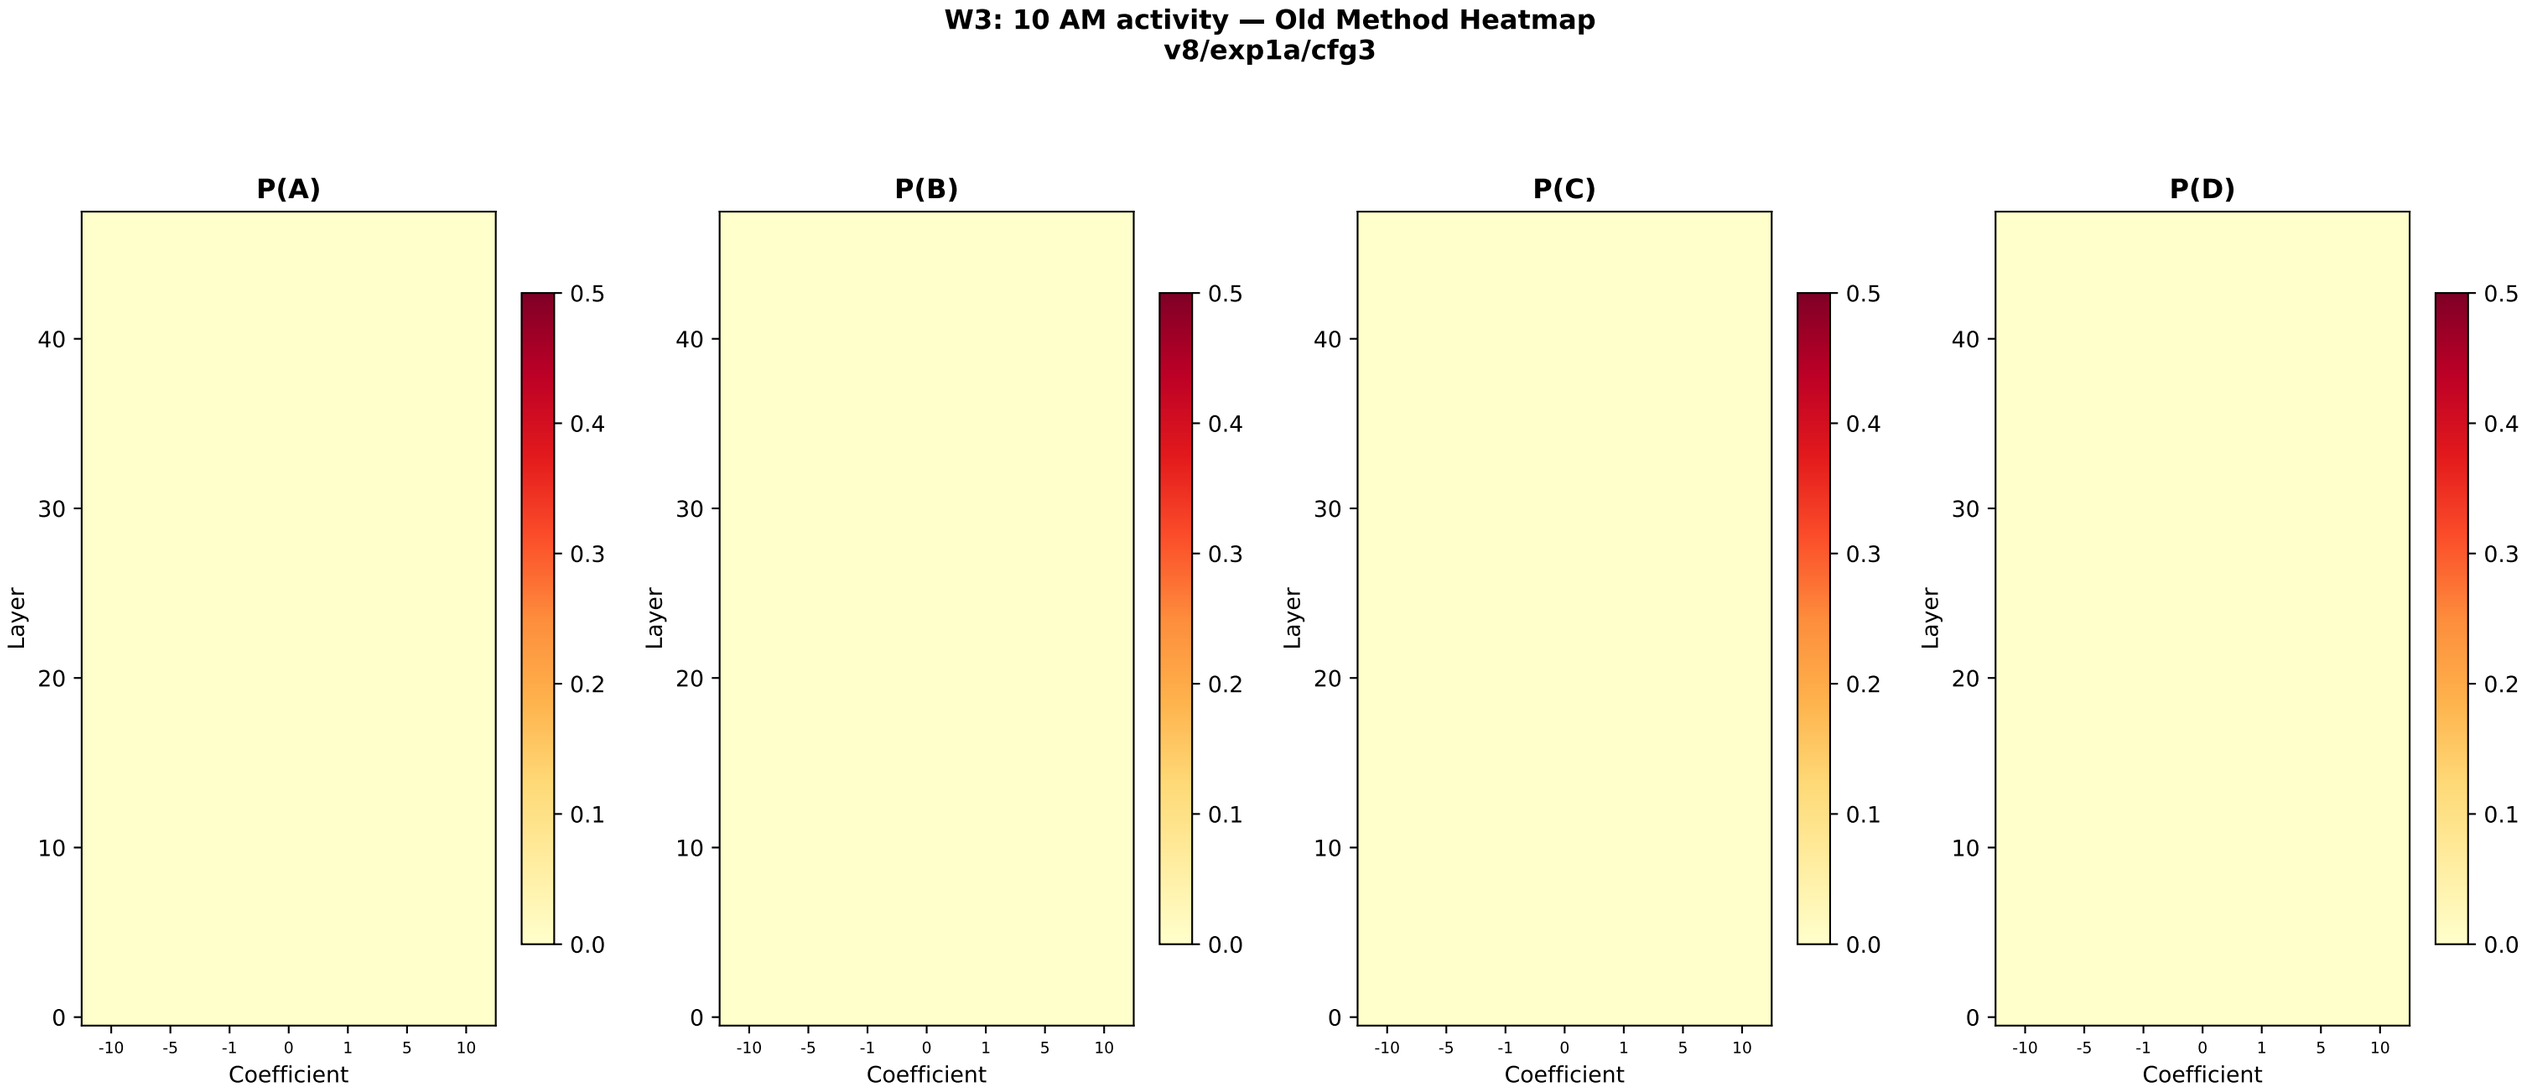
W3: 10 AM activity — Old Method Heatmap
v8/exp1a/cfg3
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

W3: 10 AM activity — New Method (Matteo)
v8/exp1a/cfg3 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

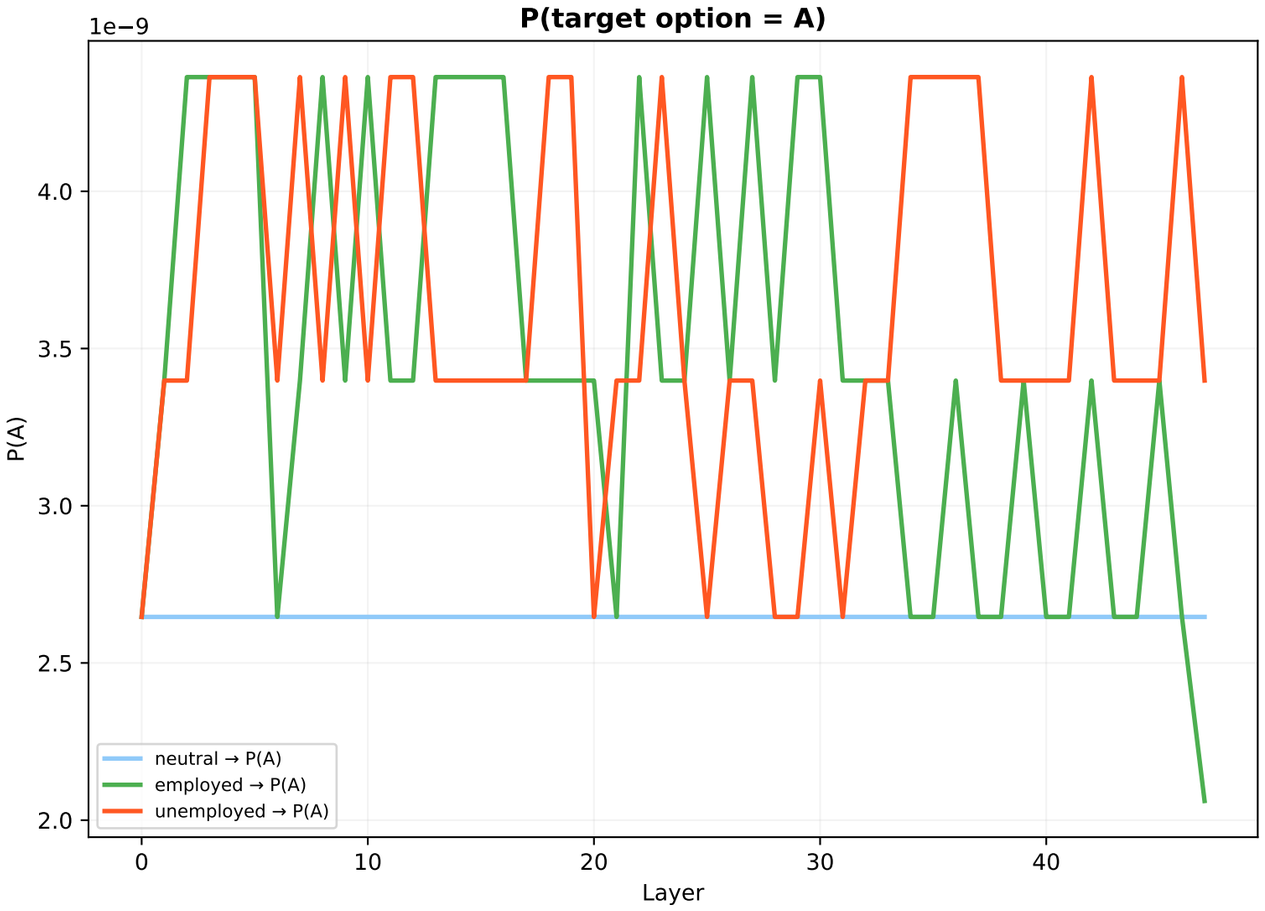

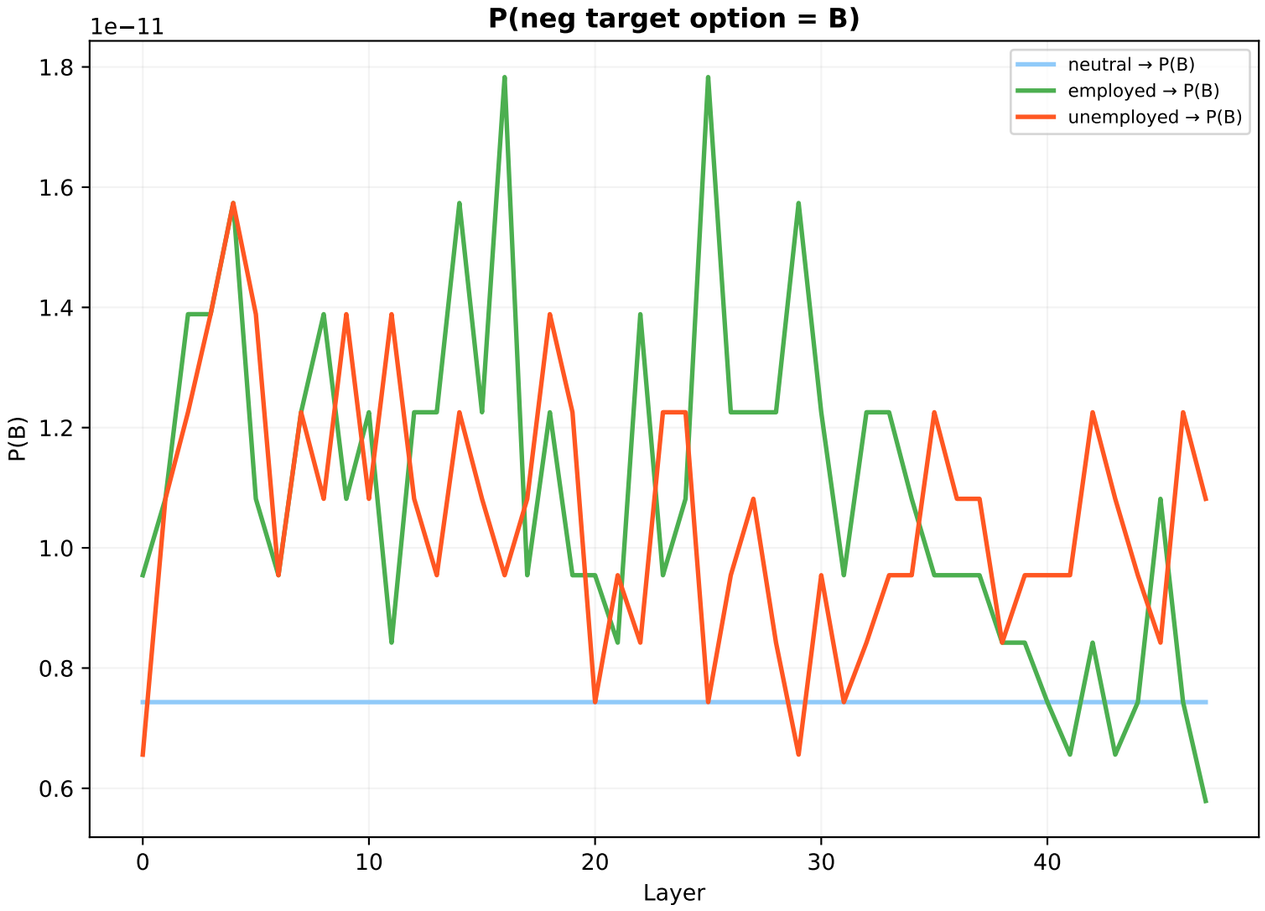

W4: 7 PM activity — Old Method
v8/exp1a/cfg3 | coeffs [-10, -5, -1, 0, 1, 5, 10]

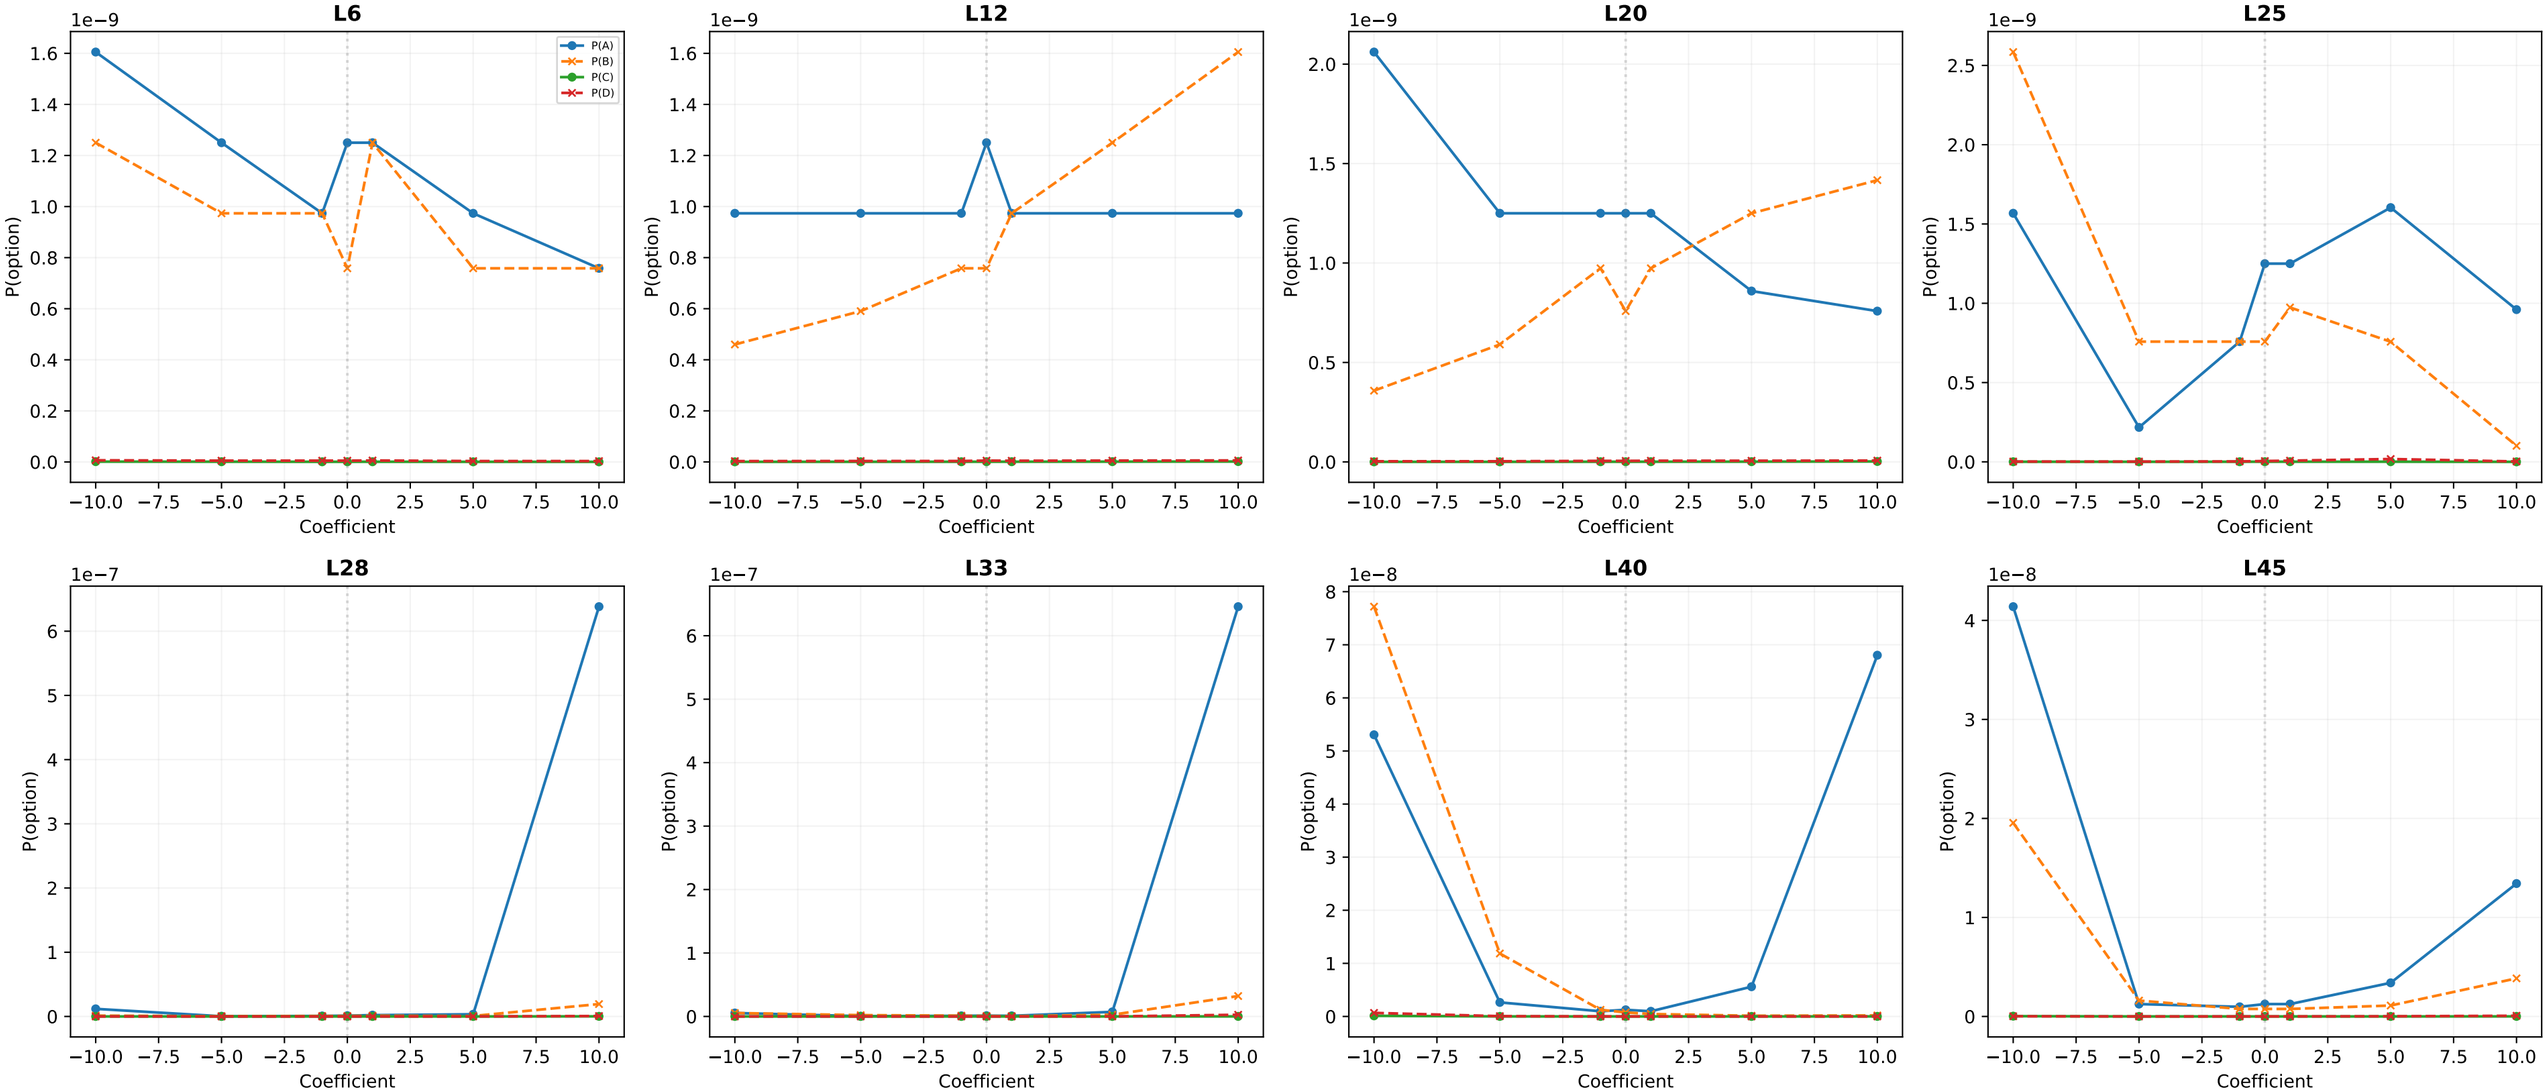

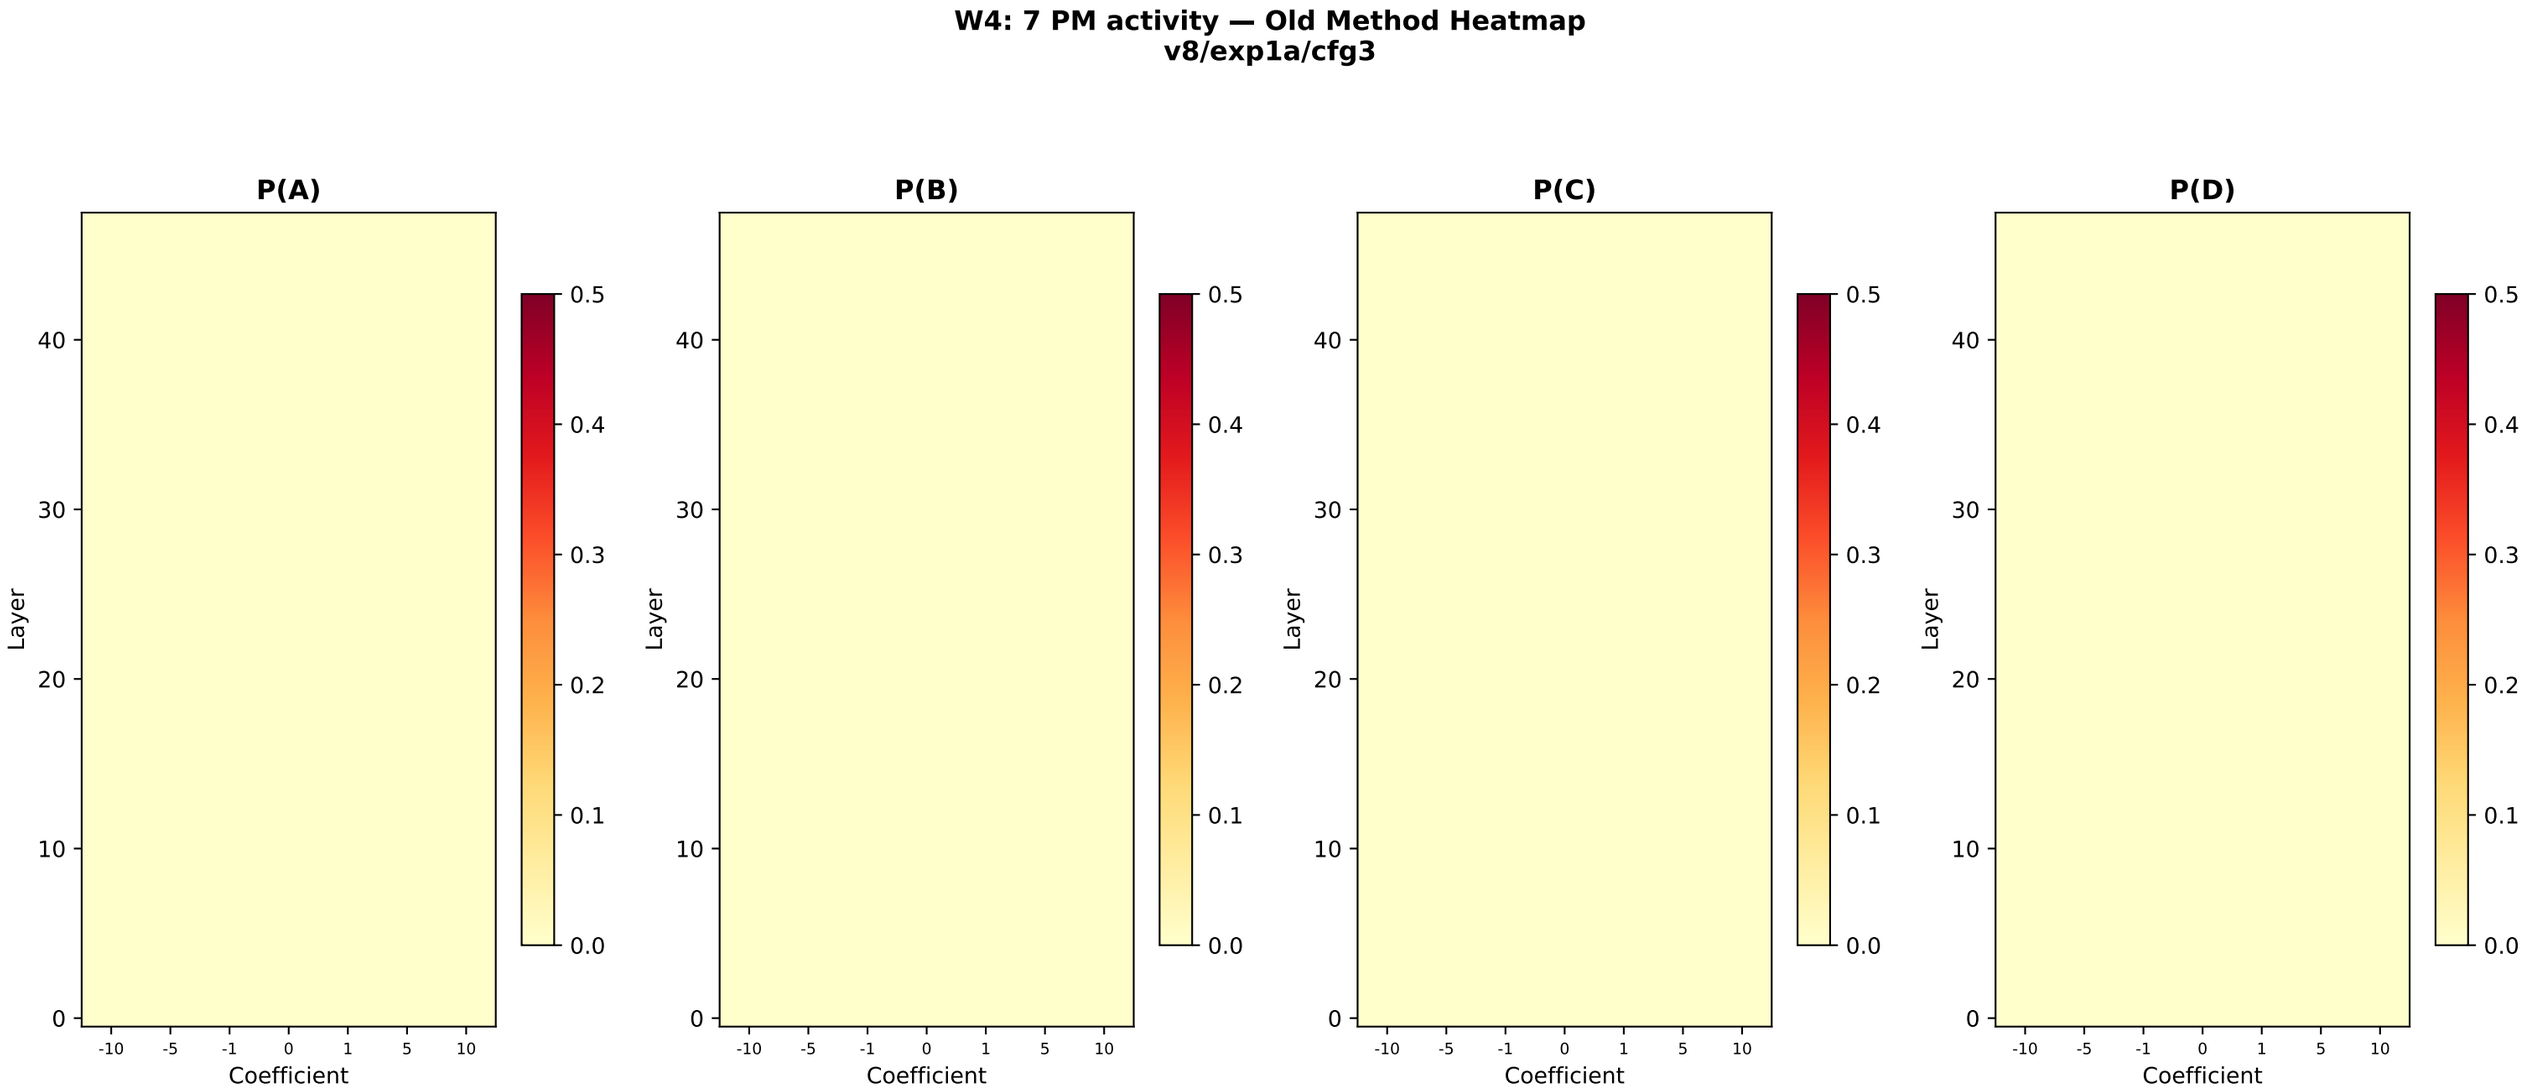
W4: 7 PM activity — Old Method Heatmap
v8/exp1a/cfg3
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

W4: 7 PM activity — New Method (Matteo)
v8/exp1a/cfg3 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

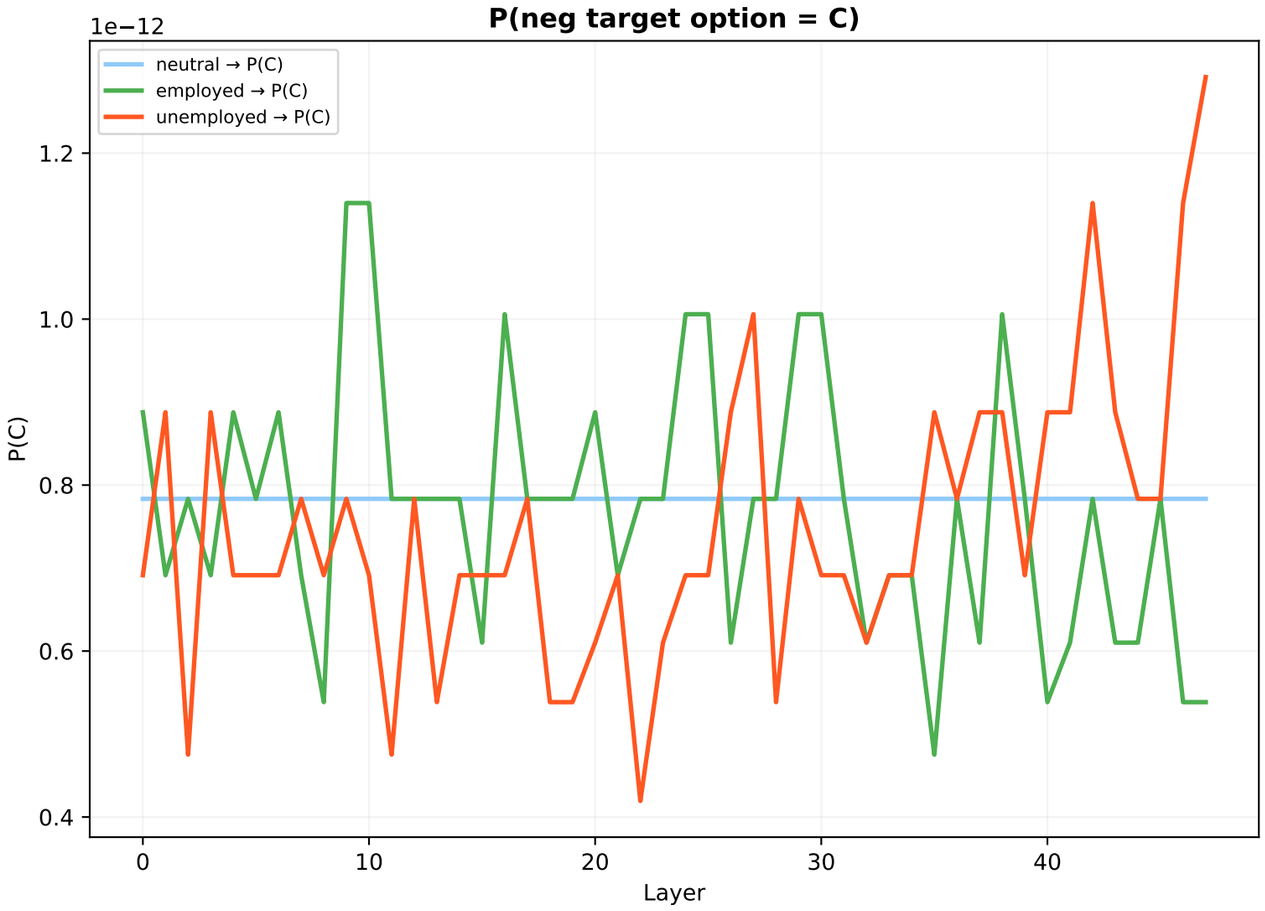

W5: CONTROL: indoor temperature — Old Method
v8/exp1a/cfg3 | coeffs [-10, -5, -1, 0, 1, 5, 10]

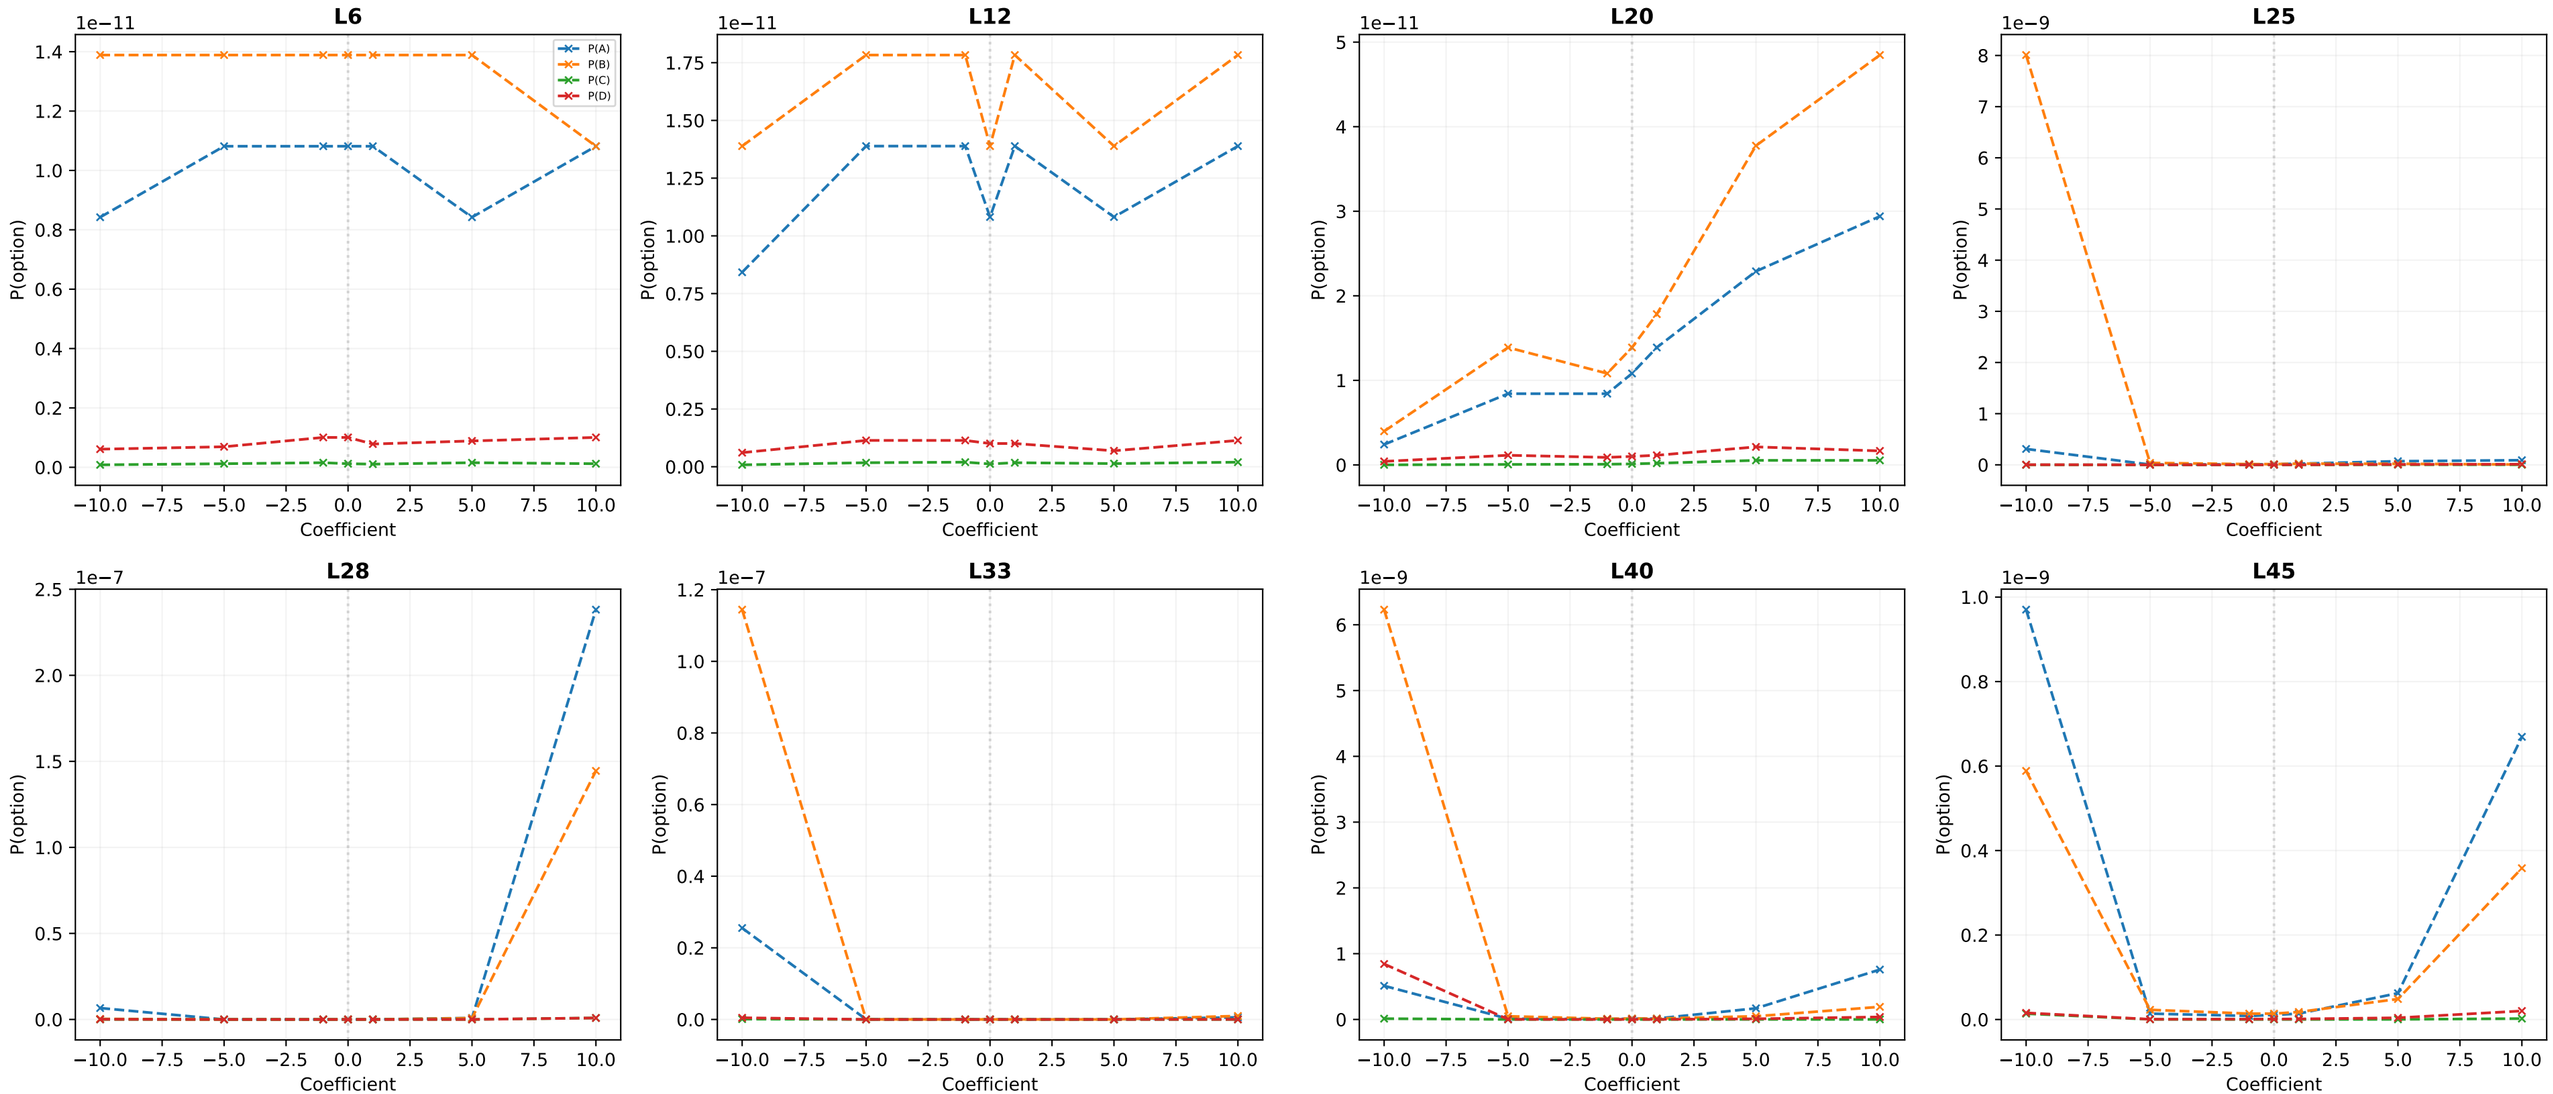

W5: CONTROL: indoor temperature — Old Method Heatmap
v8/exp1a/cfg3

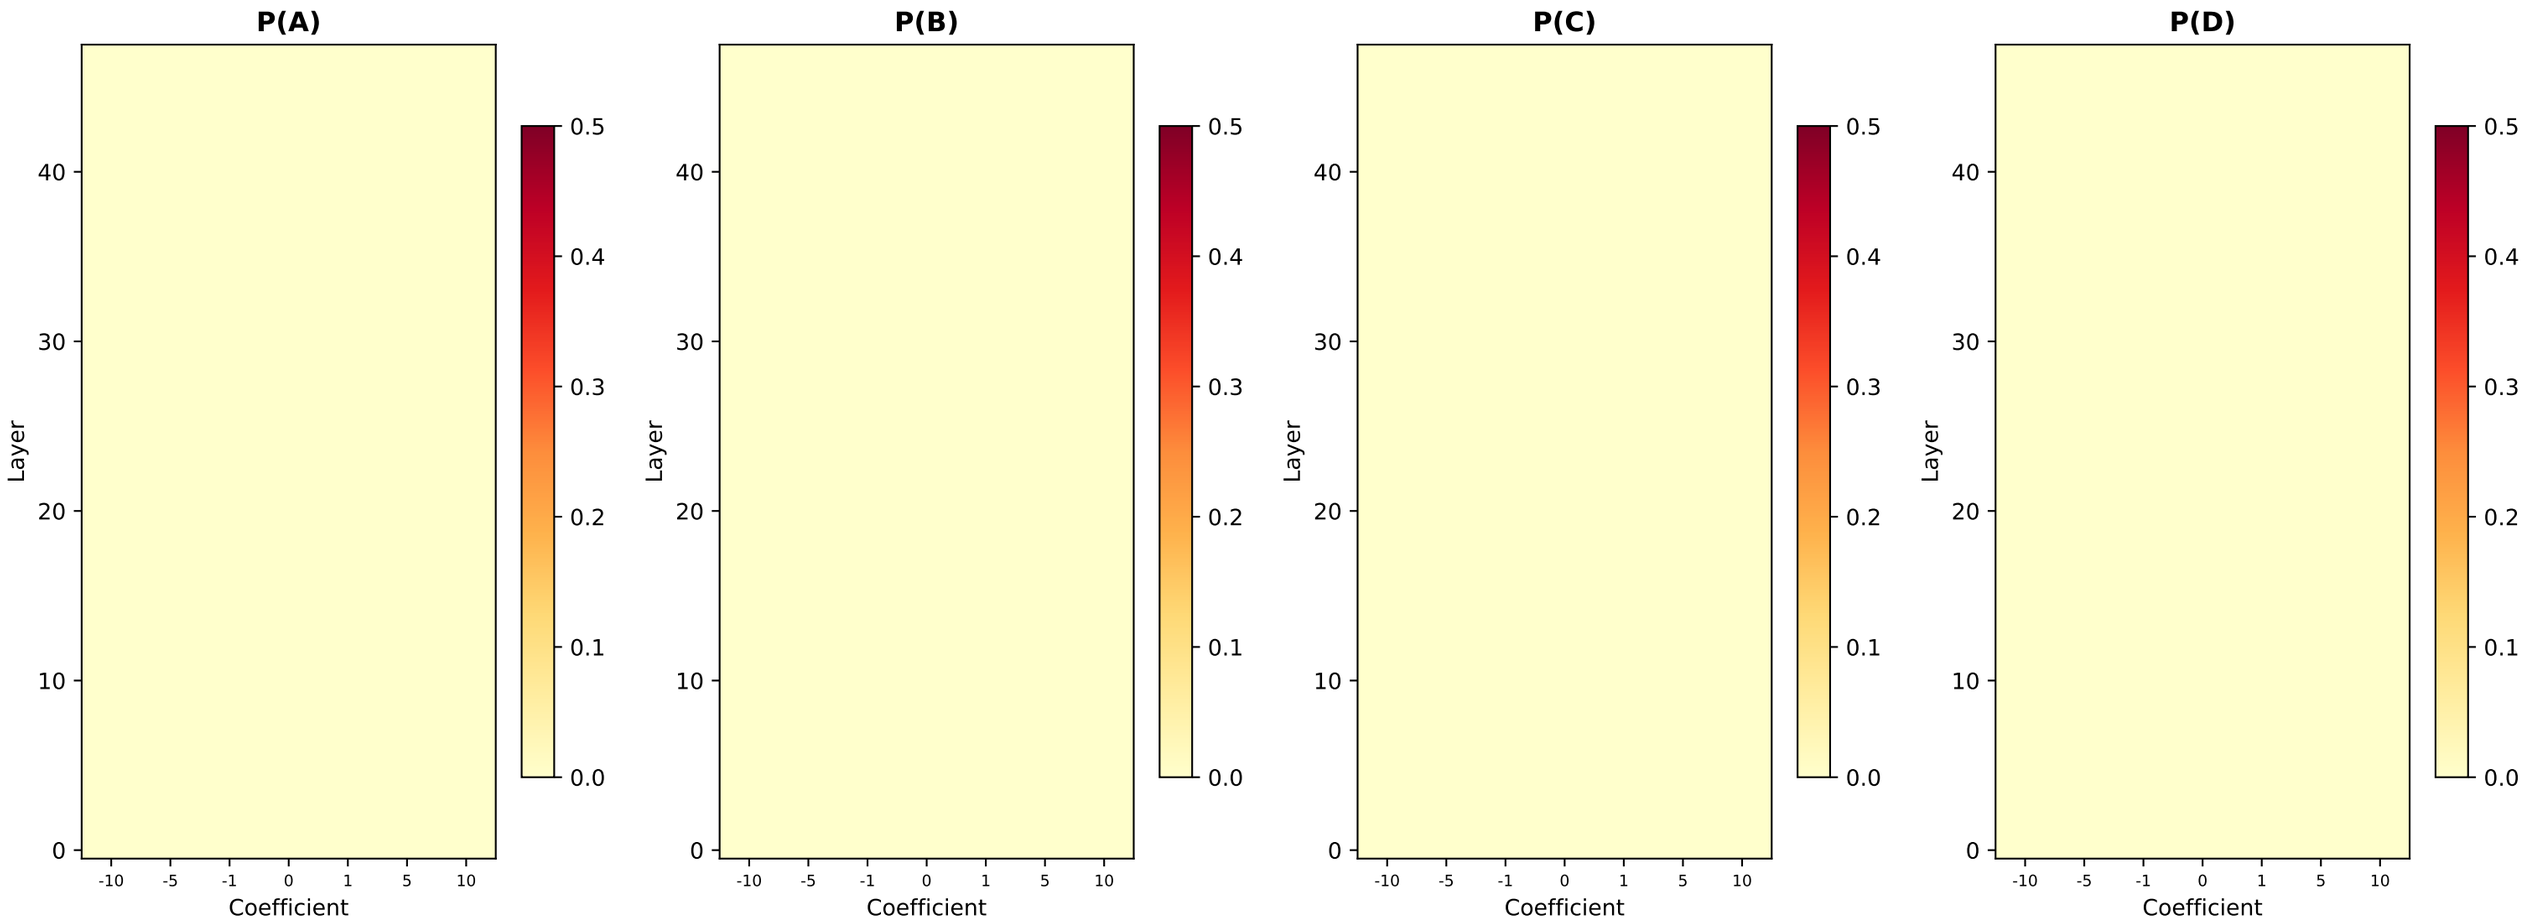

W5: CONTROL: indoor temperature — New Method (Matteo)
v8/exp1a/cfg3 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

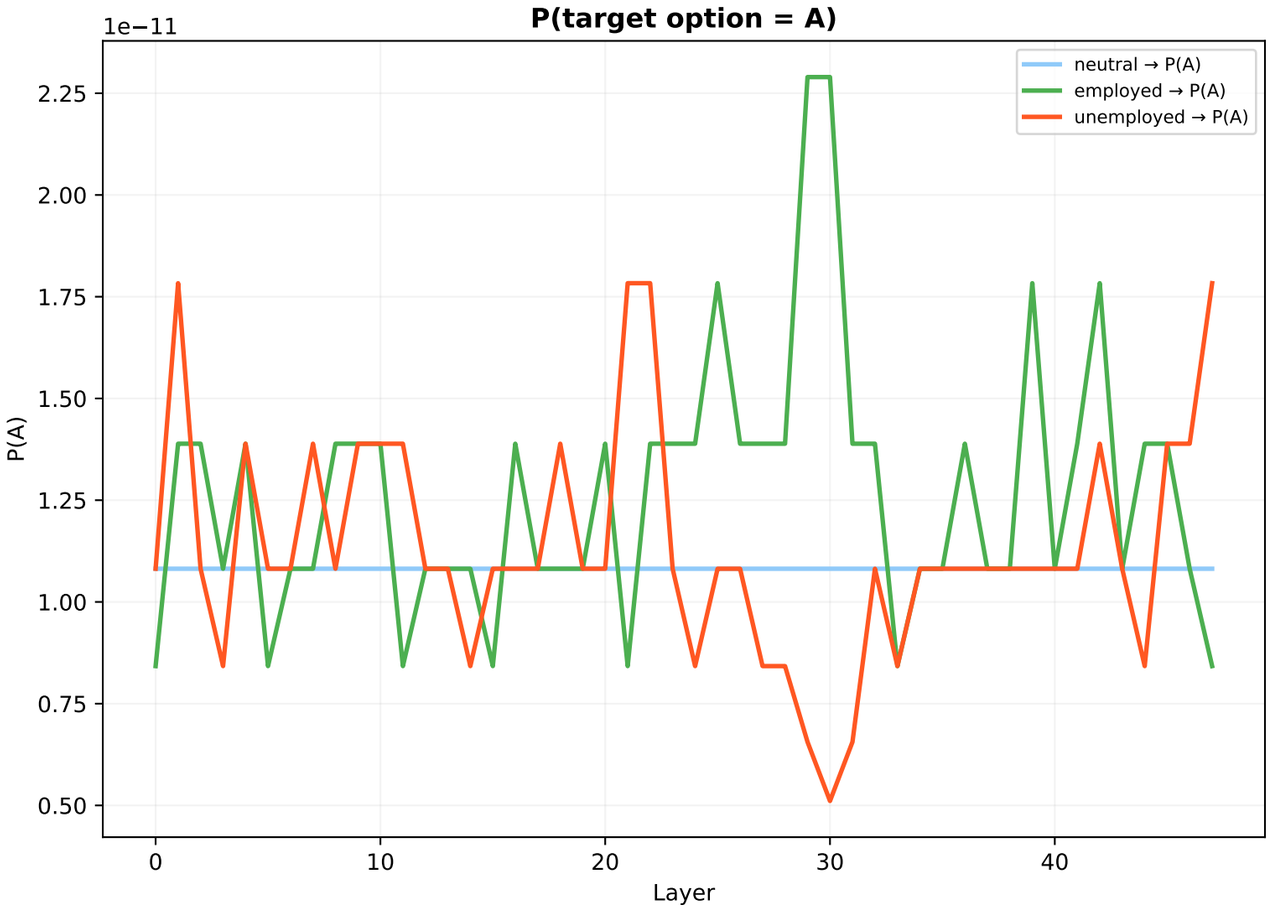

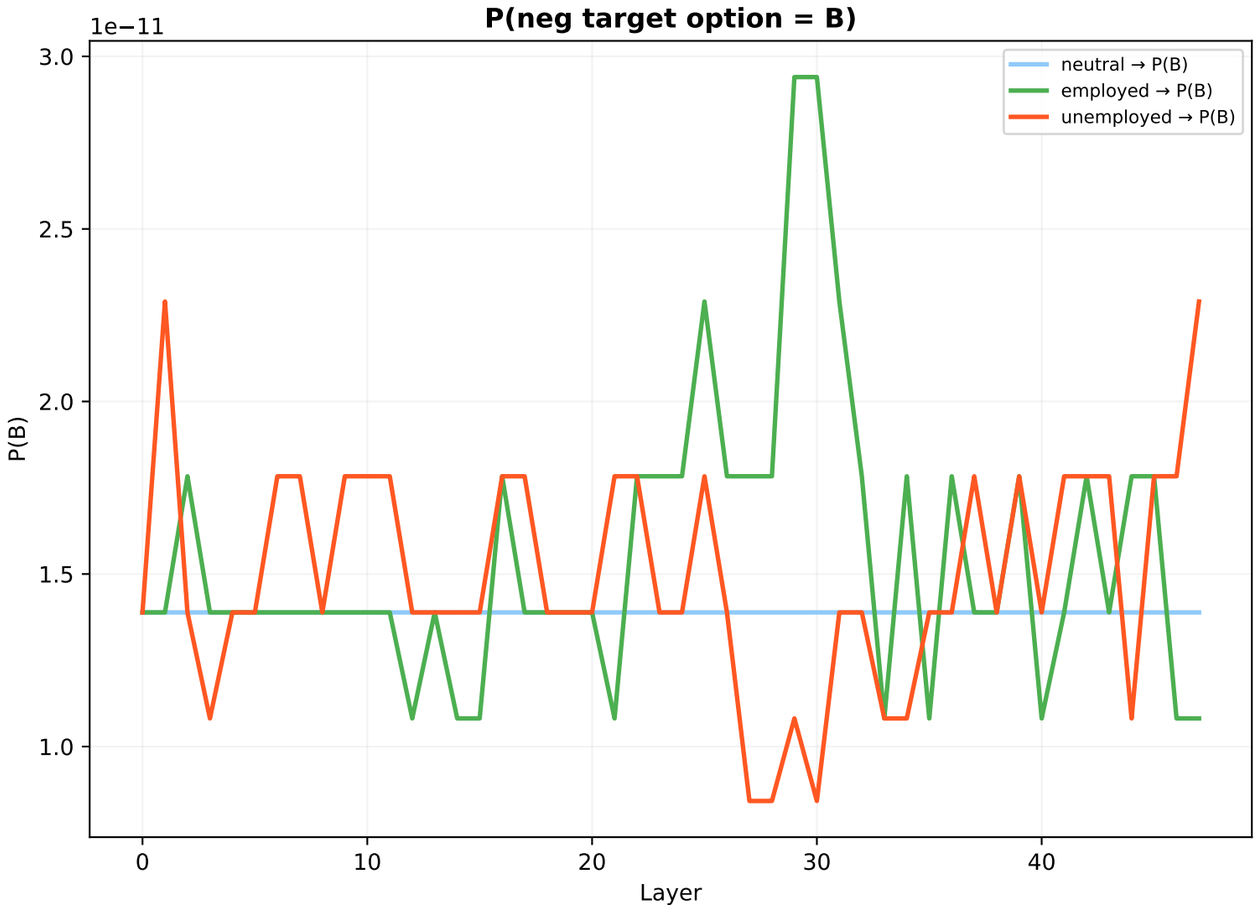

W1: Wake-up time (hour) — Old Method
v8/exp1a/cfg4 | coeffs [-10, -5, -1, 0, 1, 5, 10]

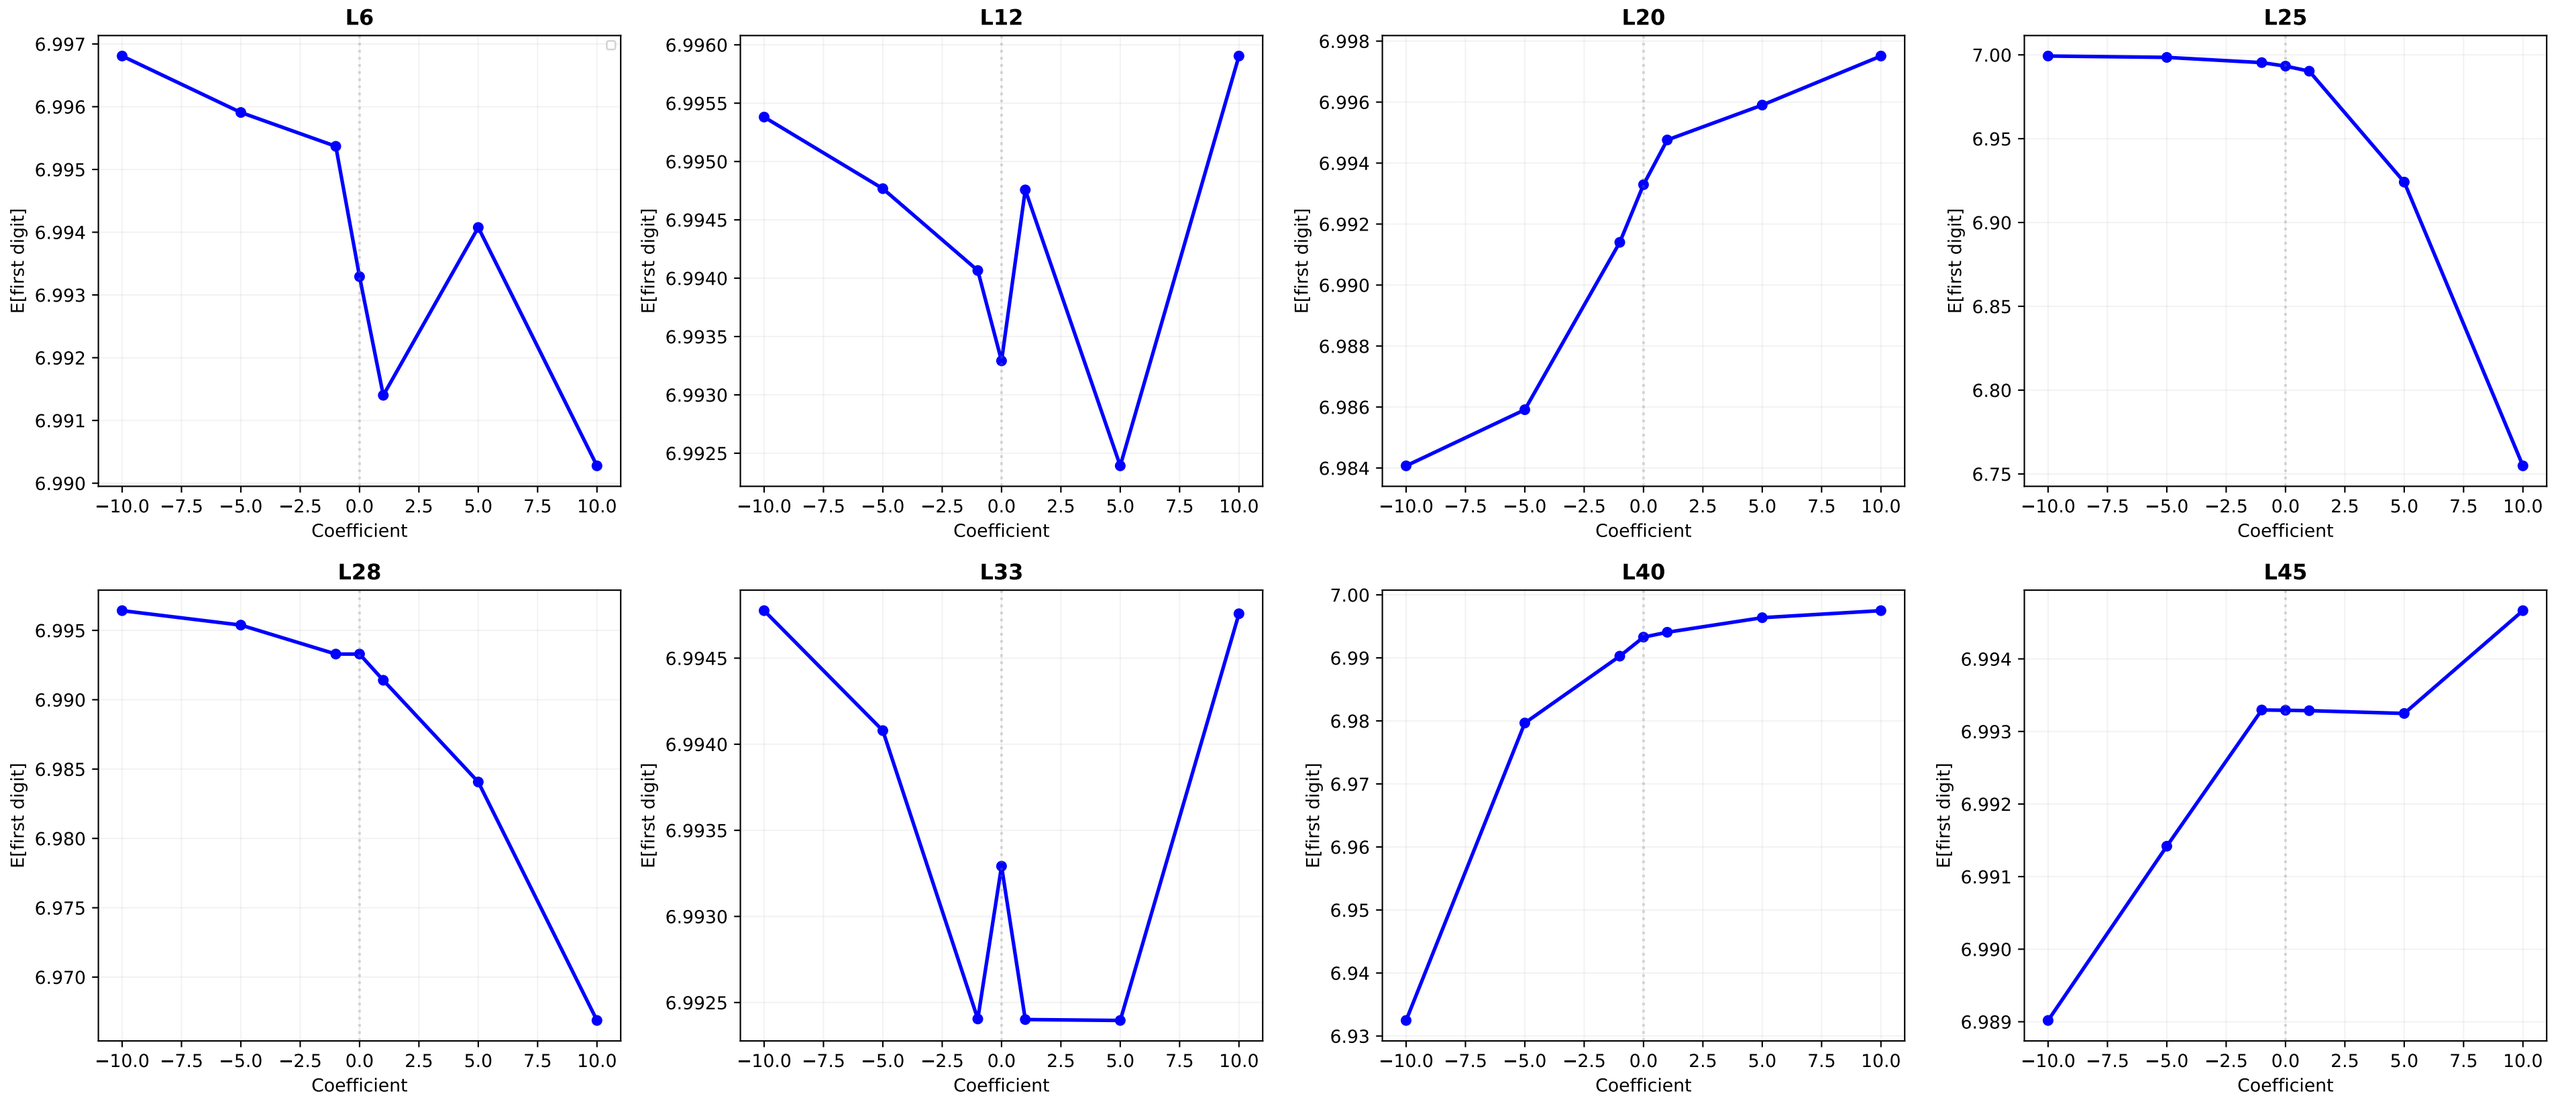

W1: Wake-up time (hour) — Old Method Heatmap
v8/exp1a/cfg4

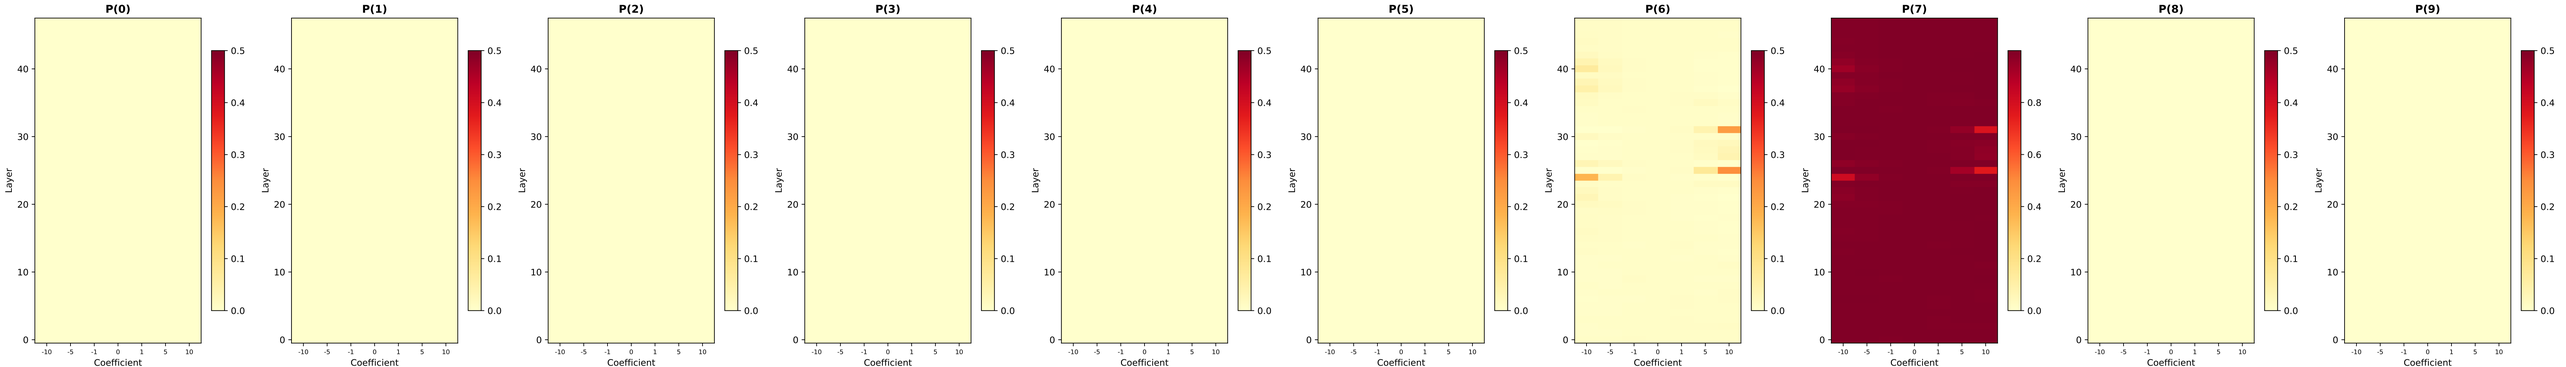

W1: Wake-up time (hour) — New Method (Matteo)
v8/exp1a/cfg4 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

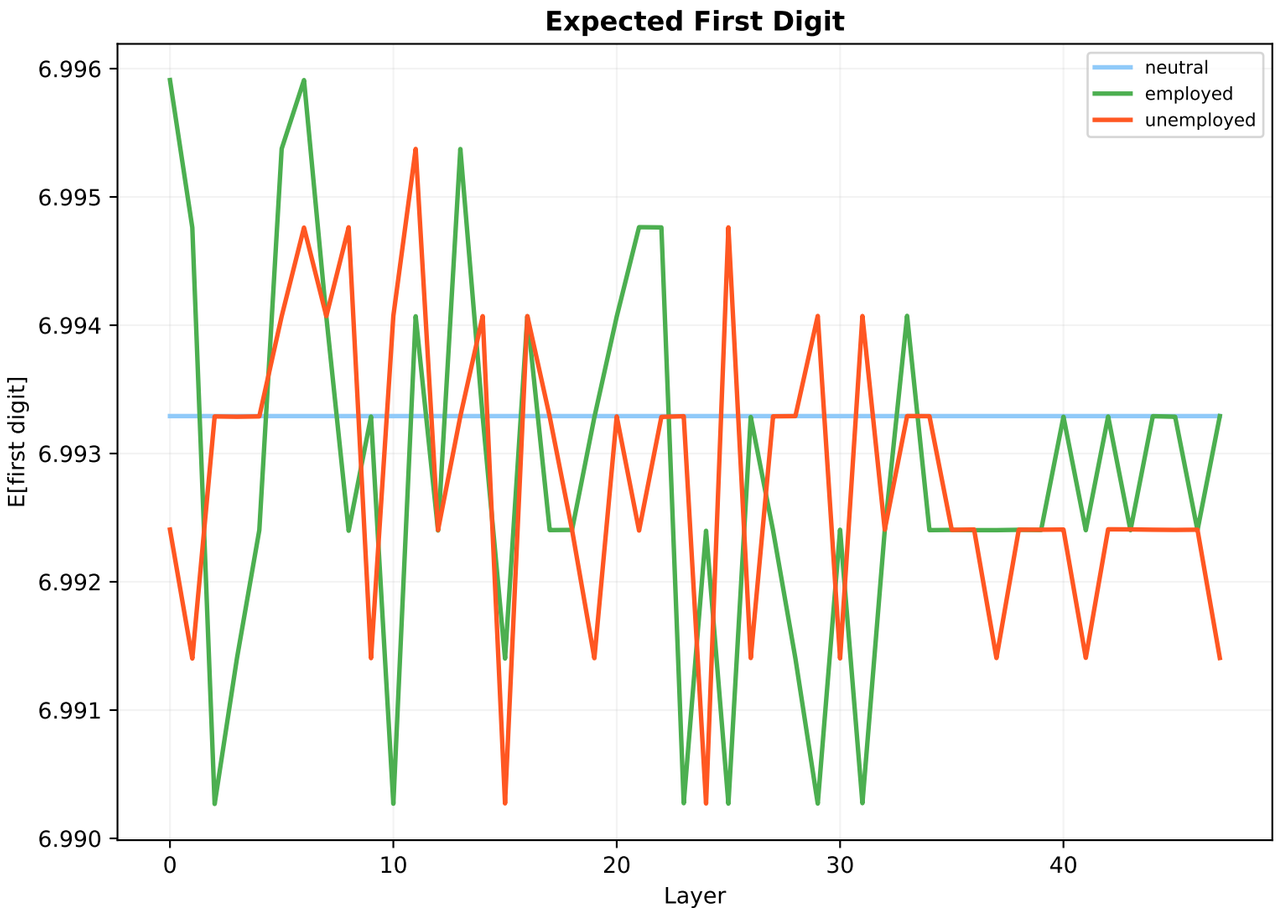

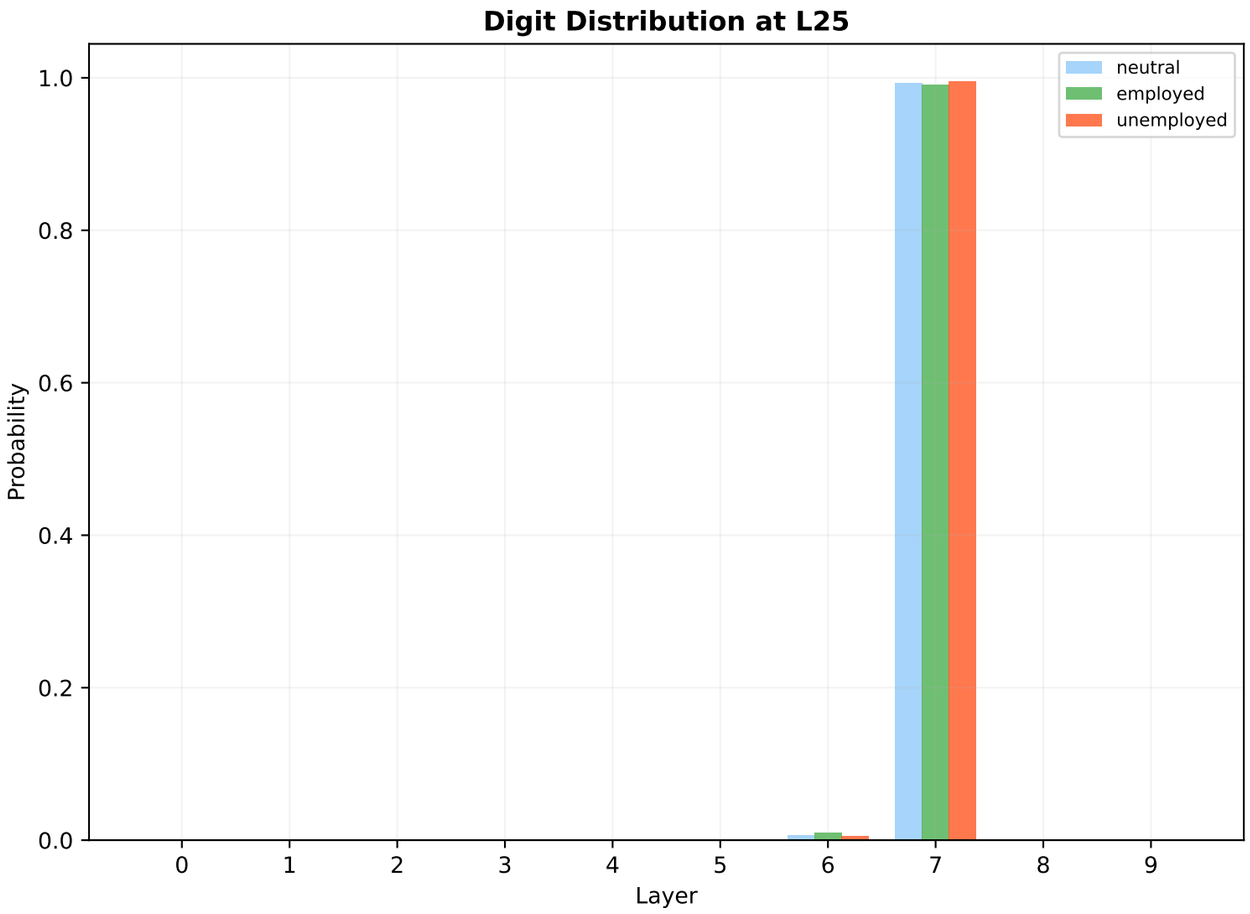

W2: Free time score (0-100) — Old Method
v8/exp1a/cfg4 | coeffs [-10, -5, -1, 0, 1, 5, 10]

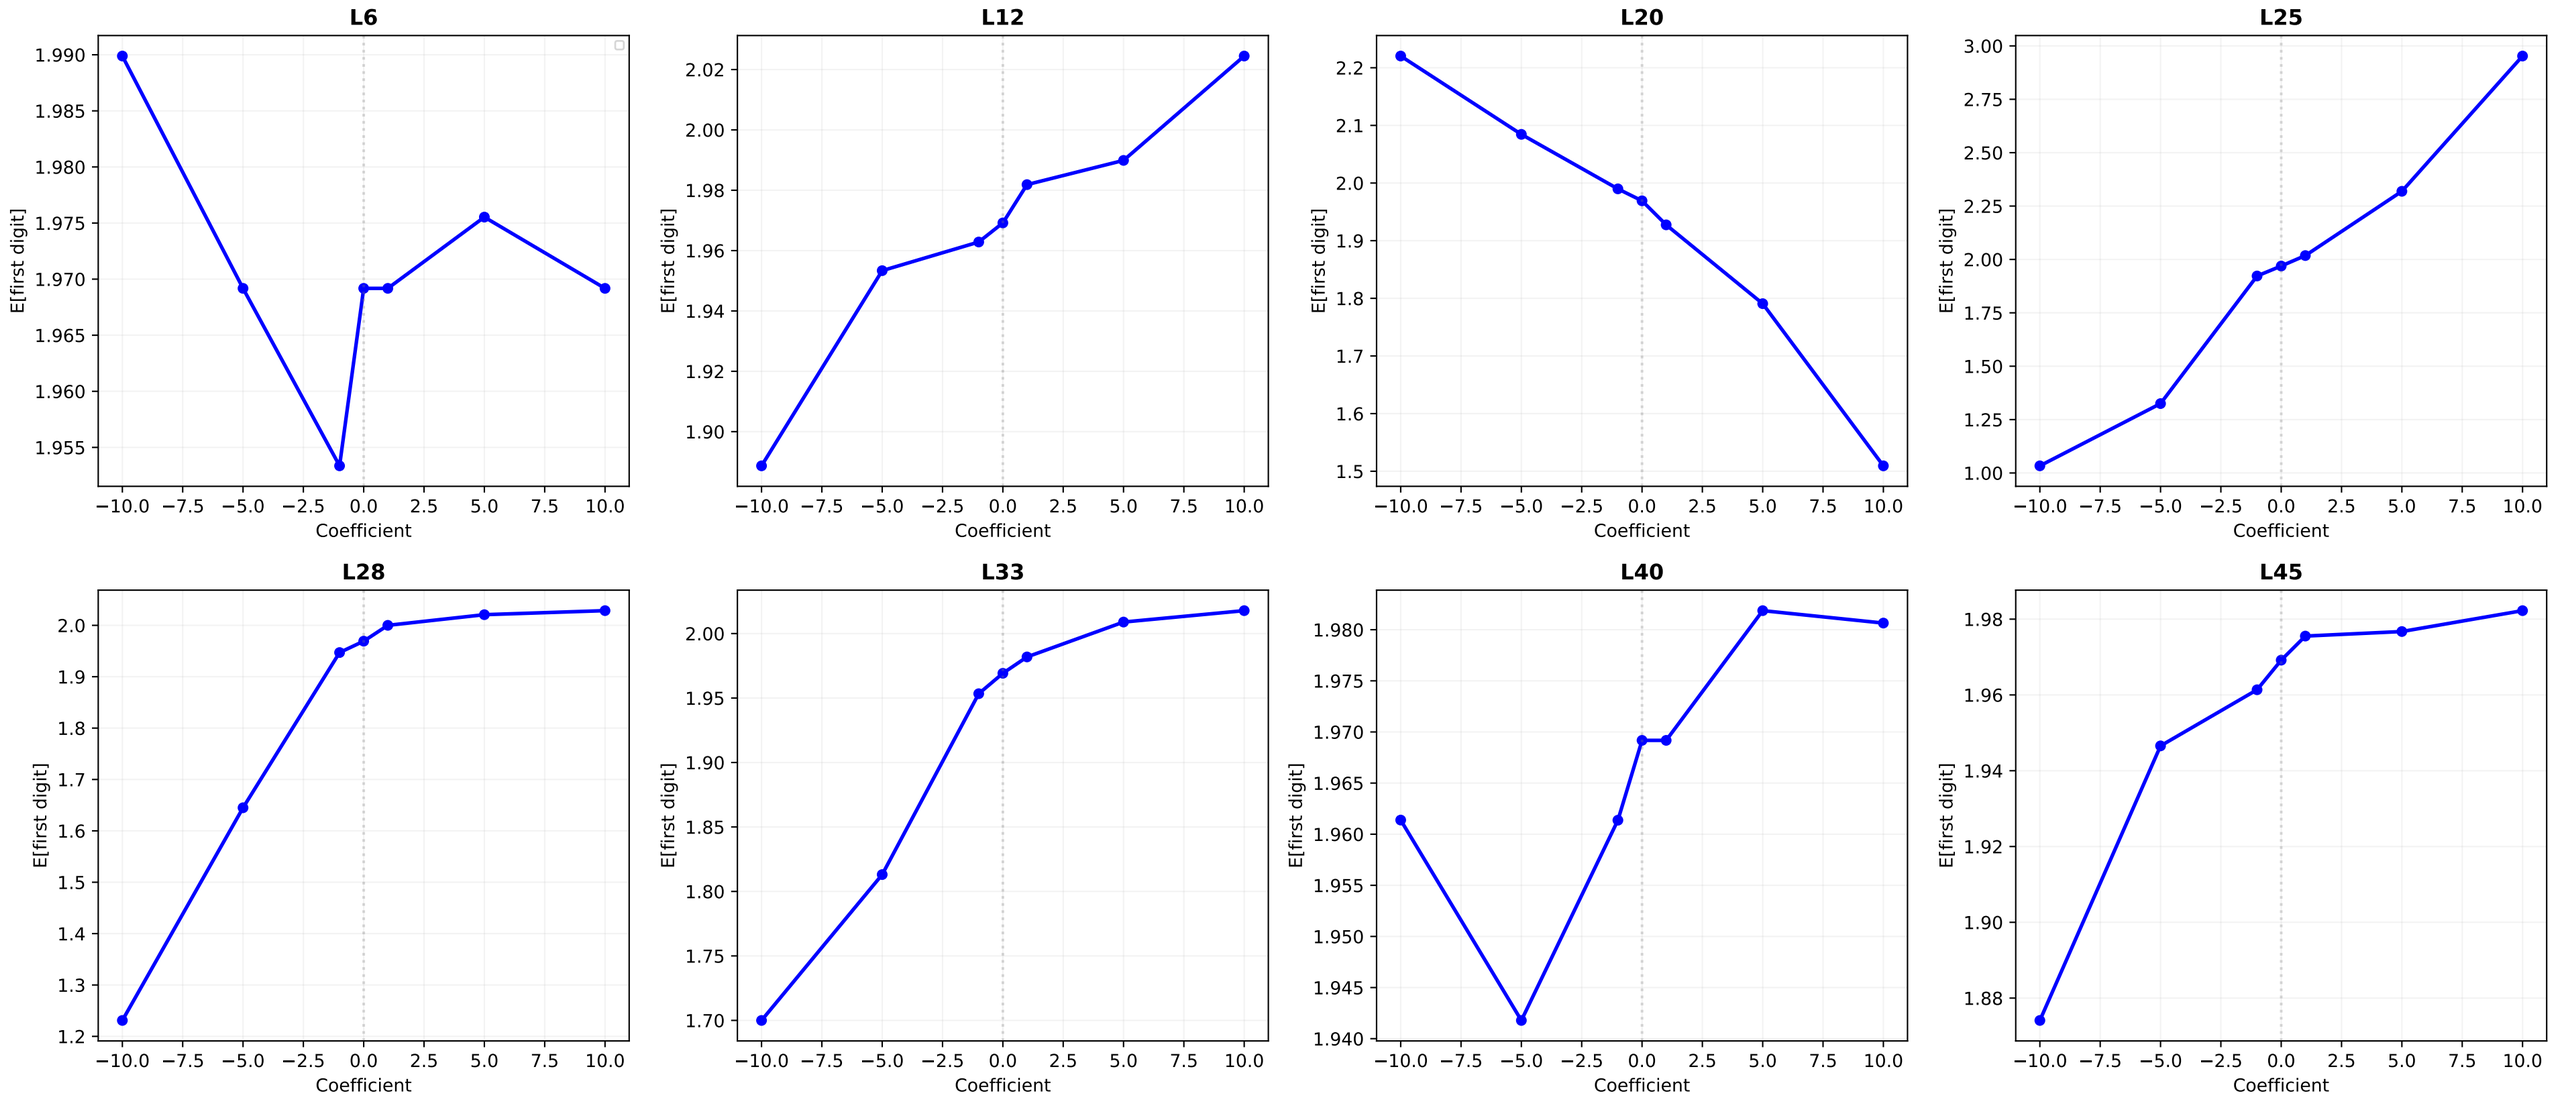

W2: Free time score (0-100) — Old Method Heatmap
v8/exp1a/cfg4

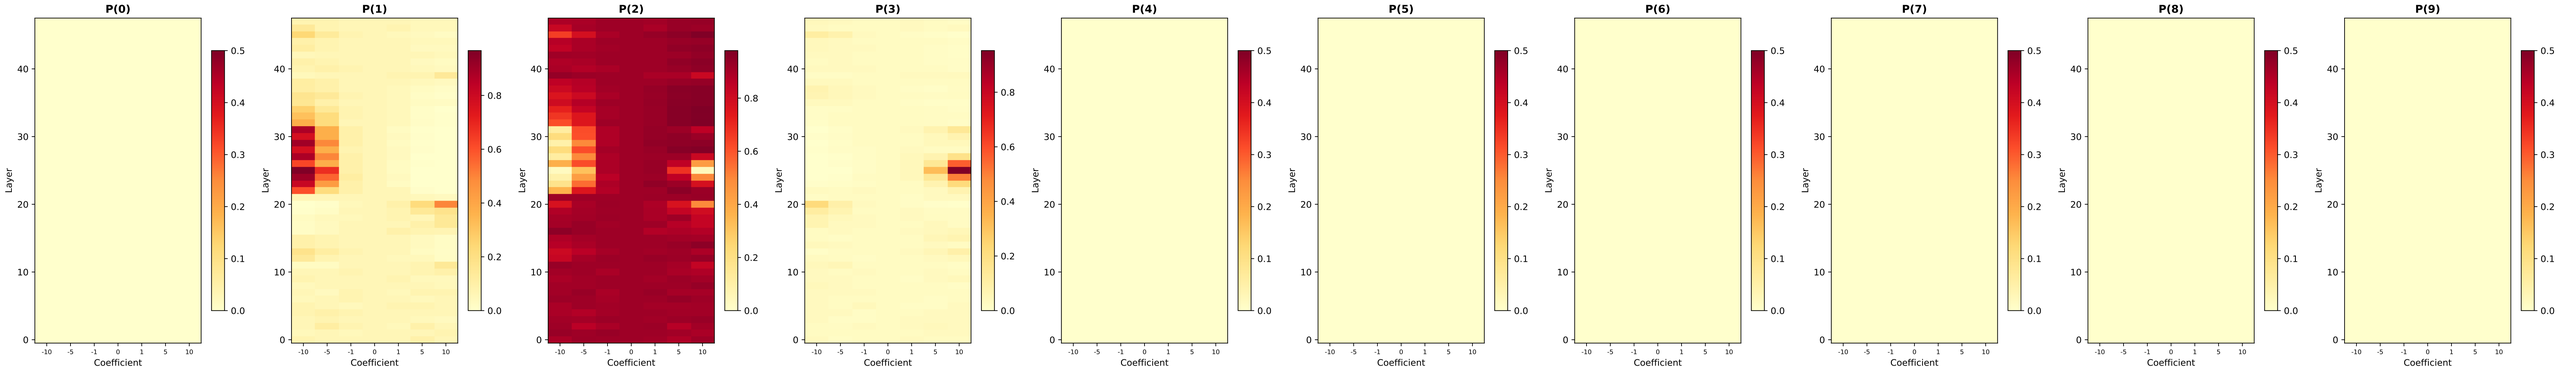

W2: Free time score (0-100) — New Method (Matteo)
v8/exp1a/cfg4 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

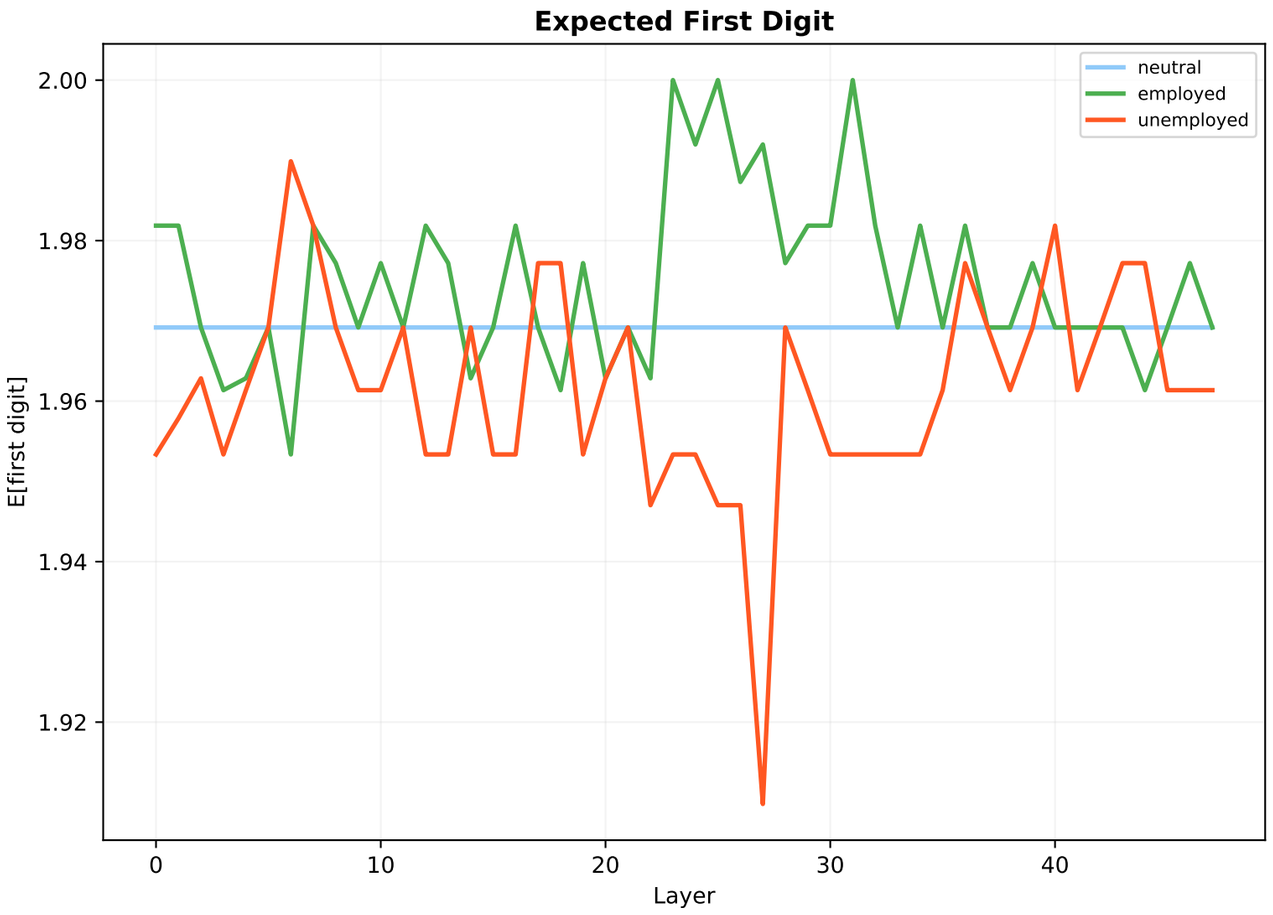

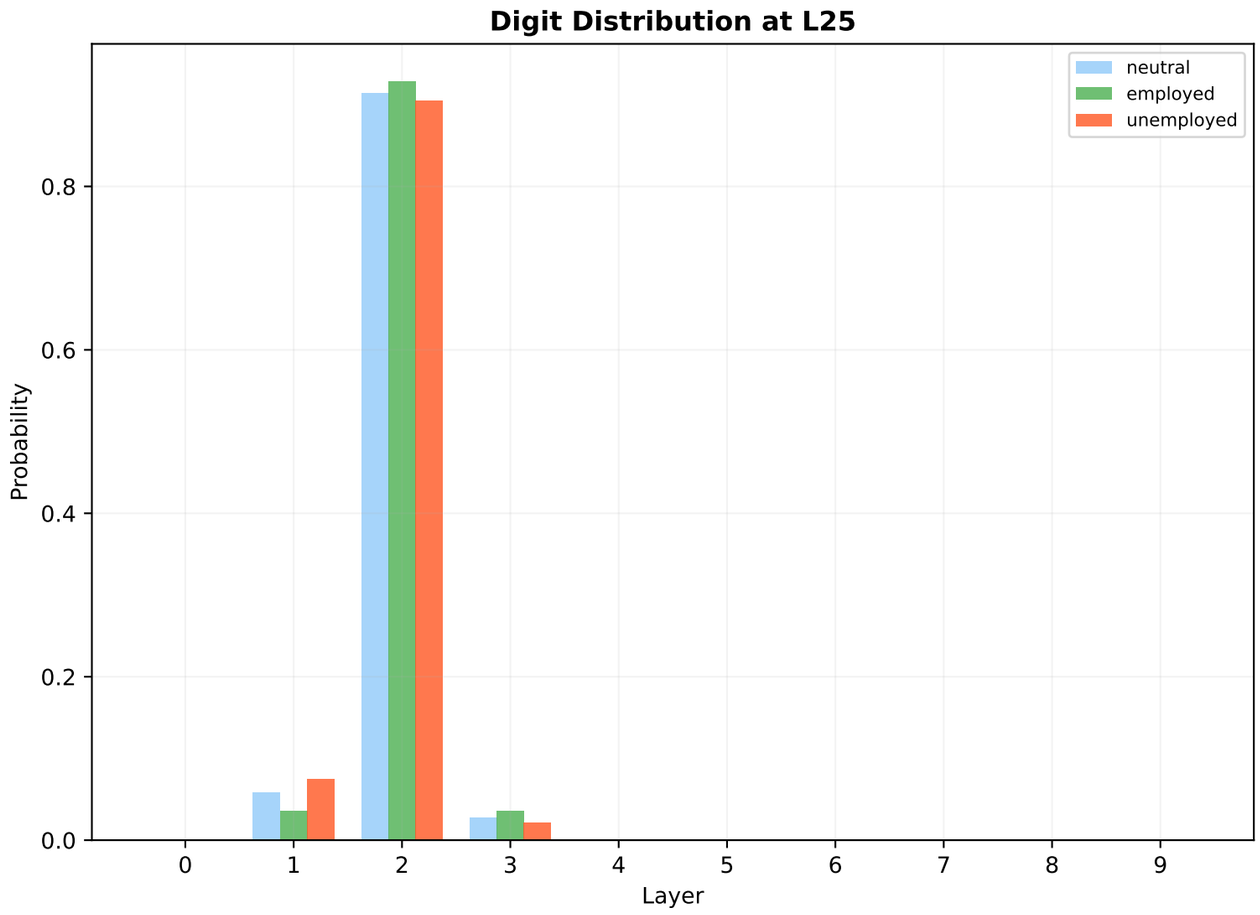

W3: 10 AM activity — Old Method
v8/exp1a/cfg4 | coeffs [-10, -5, -1, 0, 1, 5, 10]

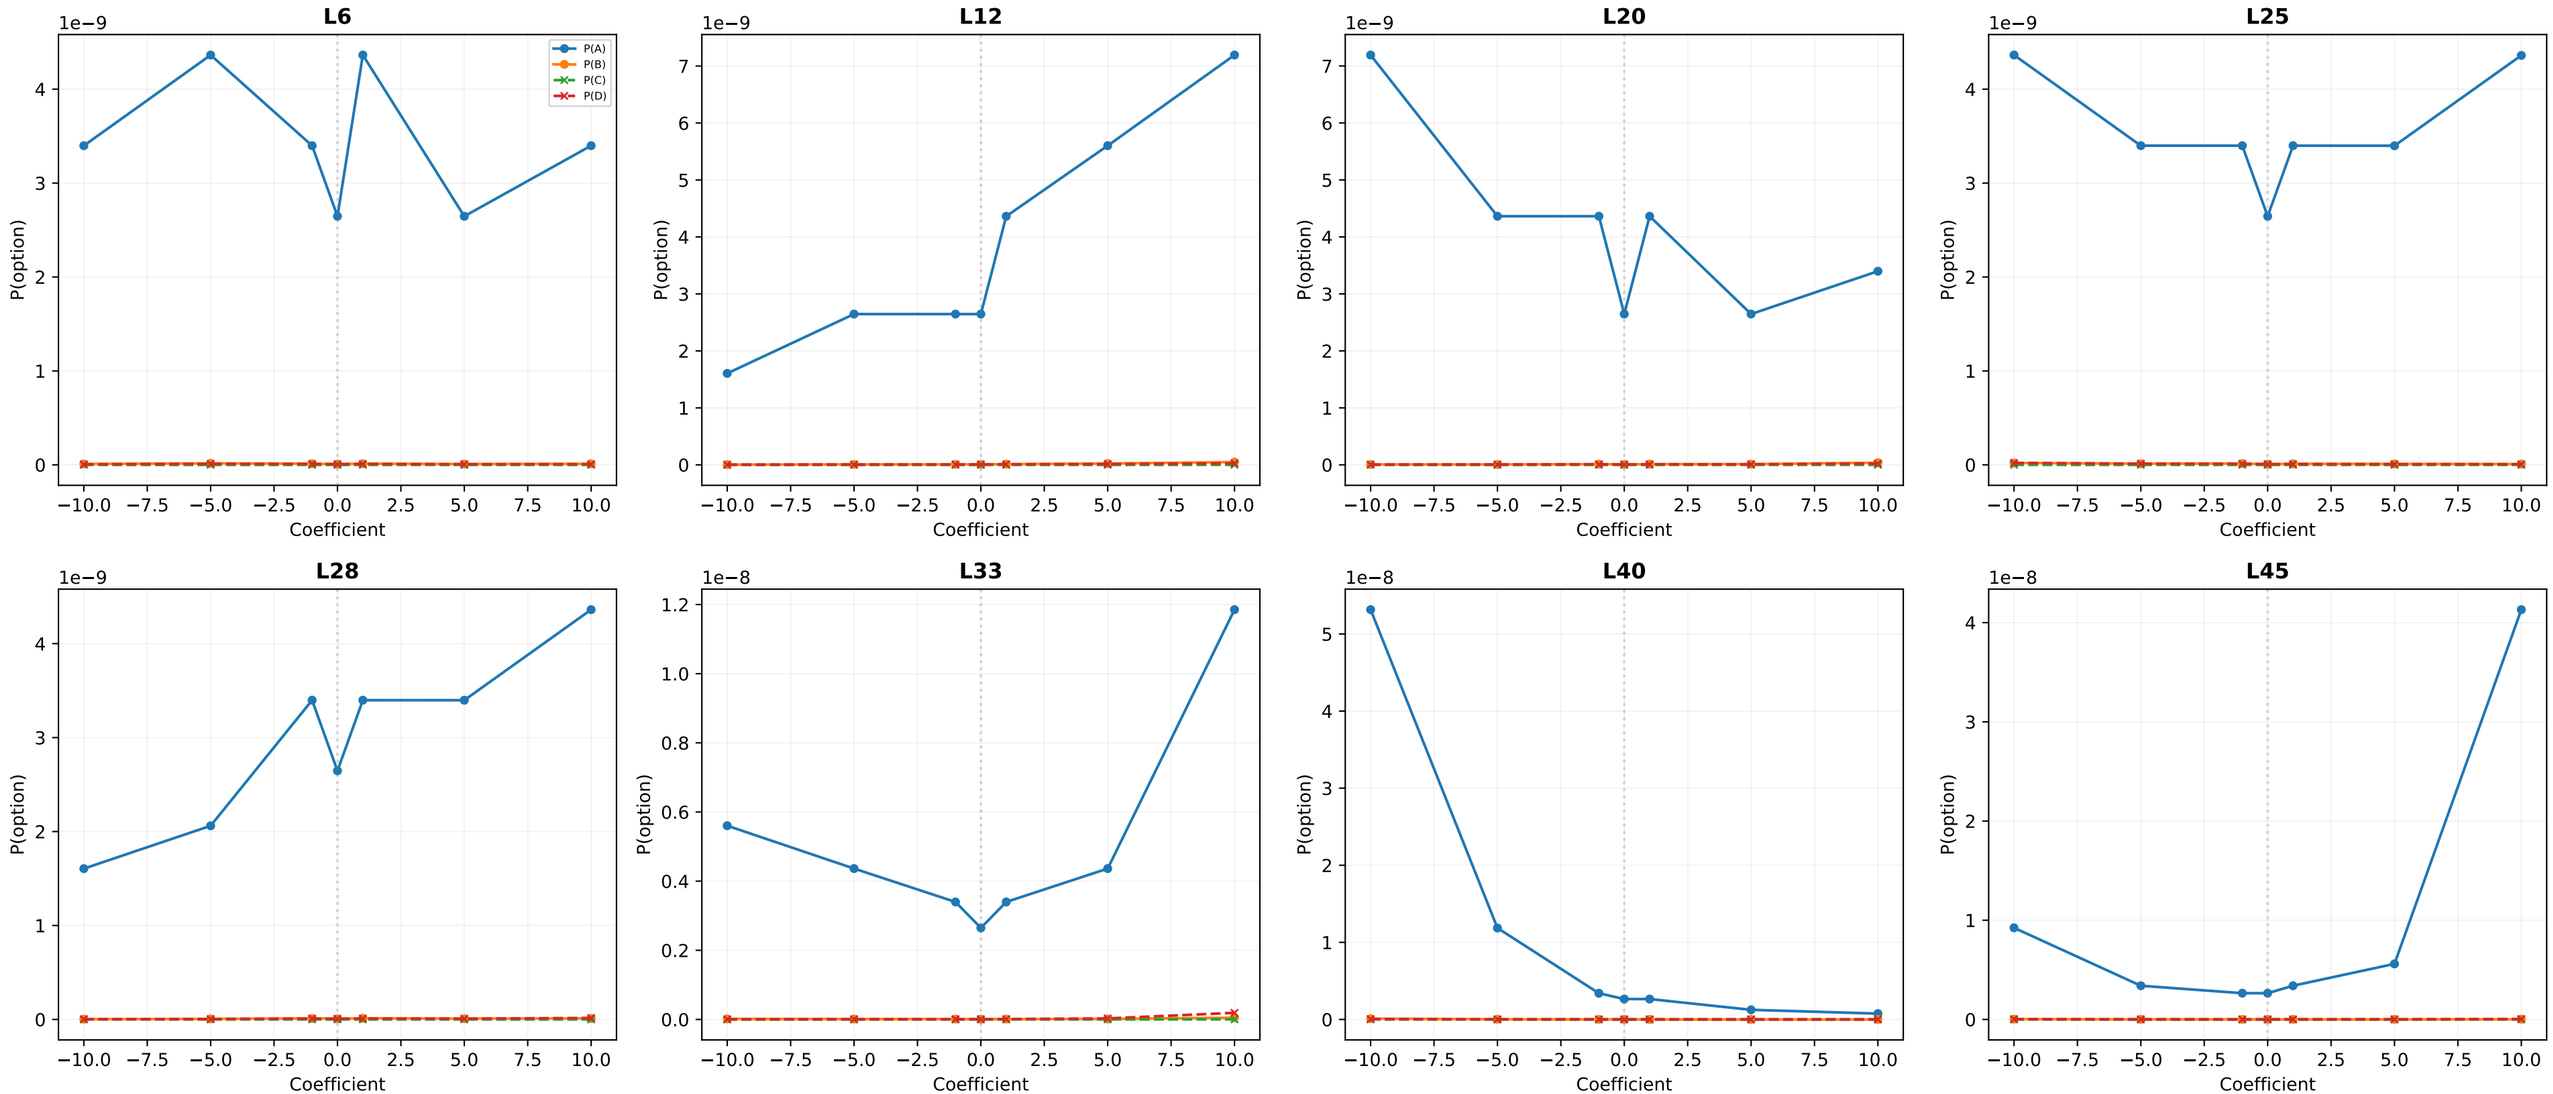

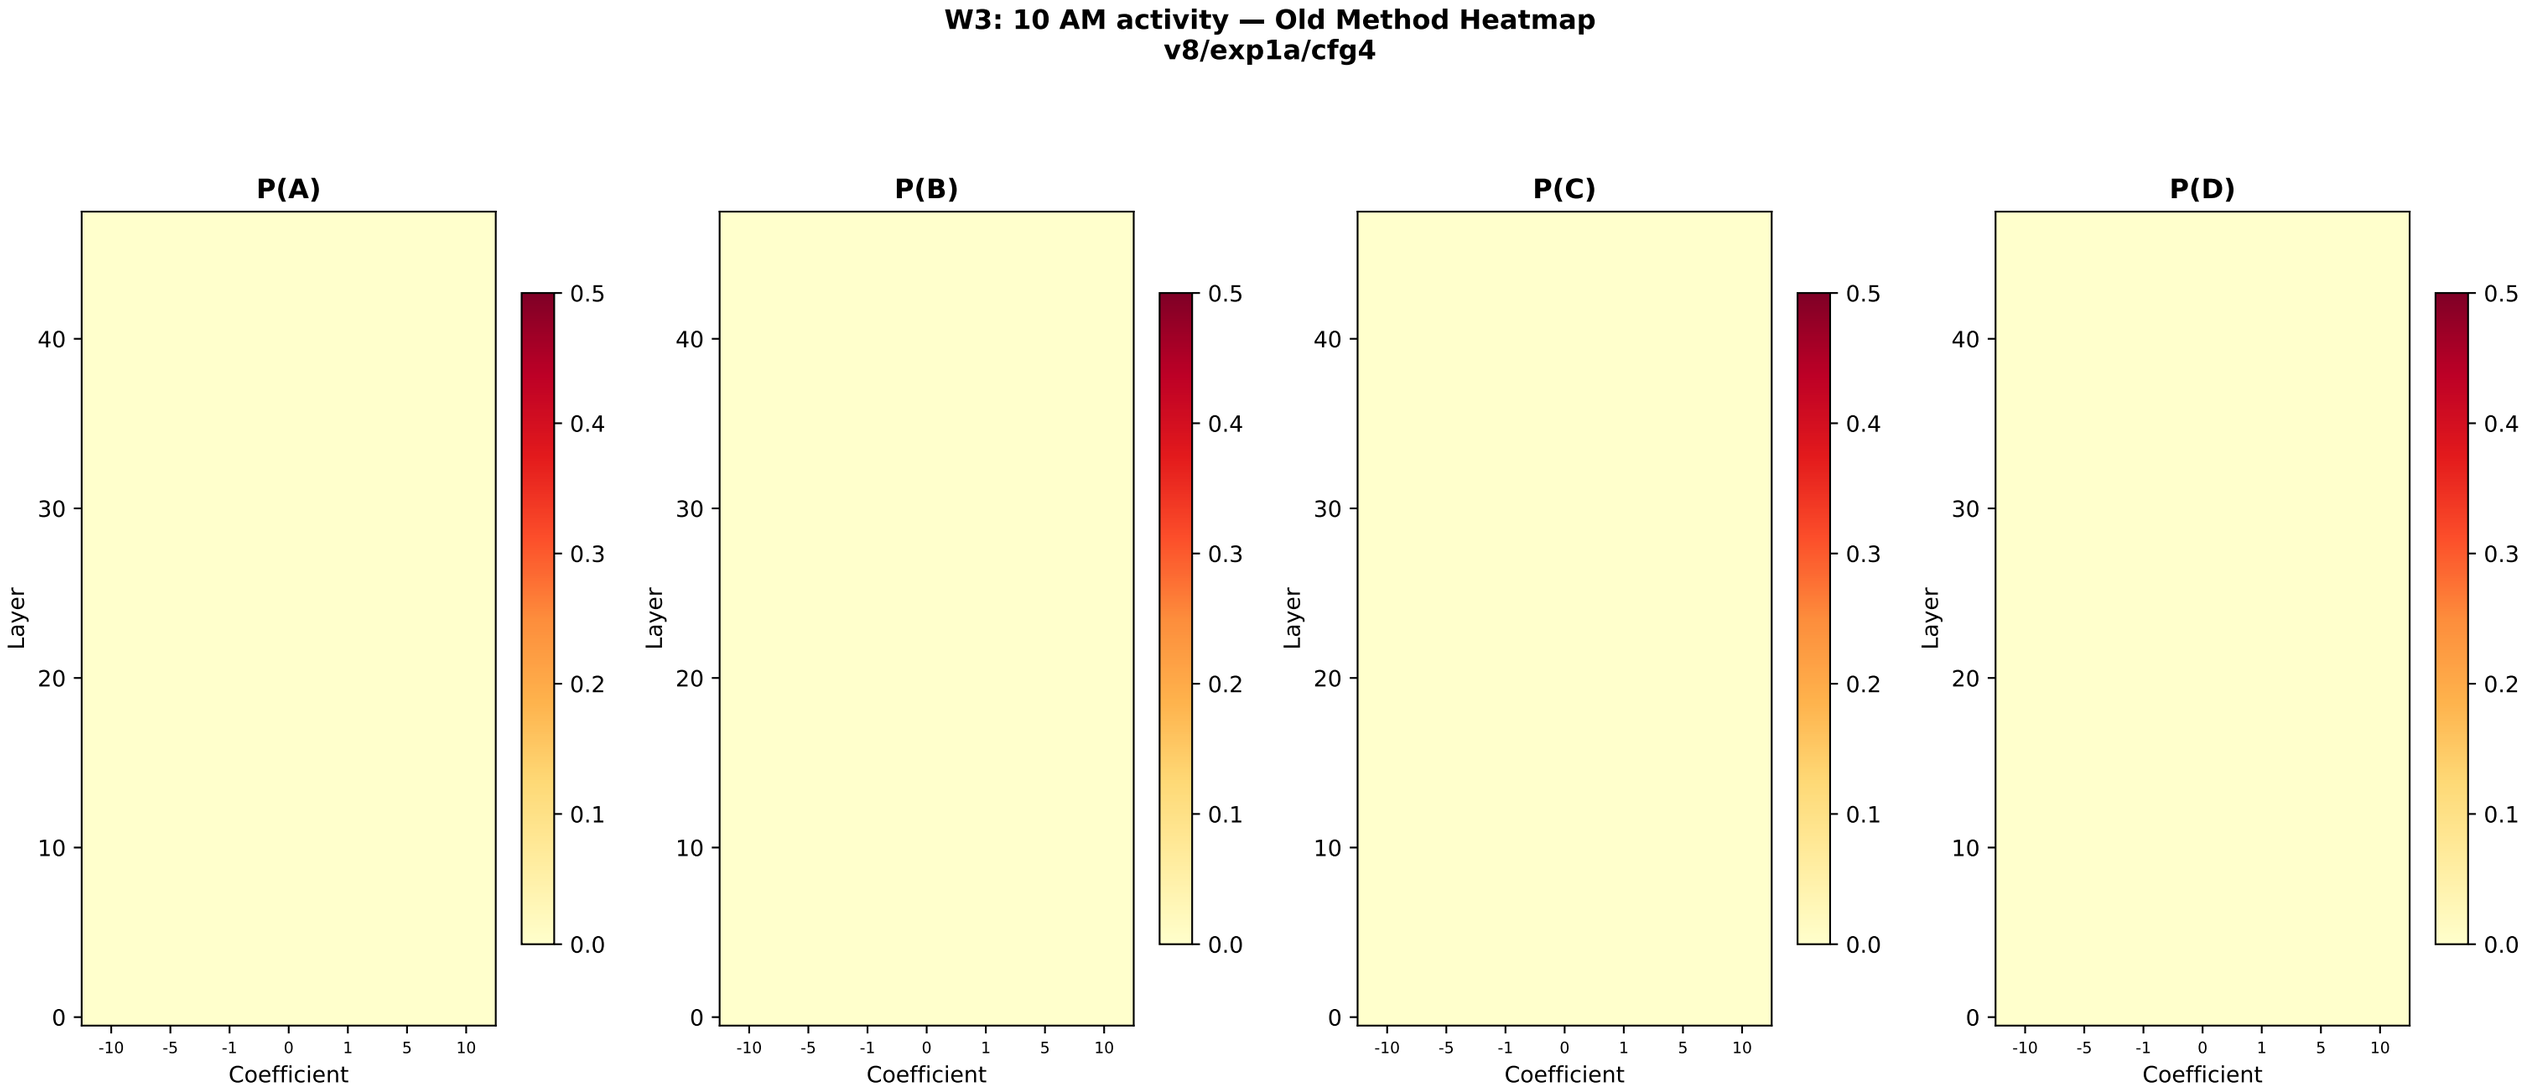
W3: 10 AM activity — Old Method Heatmap
v8/exp1a/cfg4
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

W3: 10 AM activity — New Method (Matteo)
v8/exp1a/cfg4 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

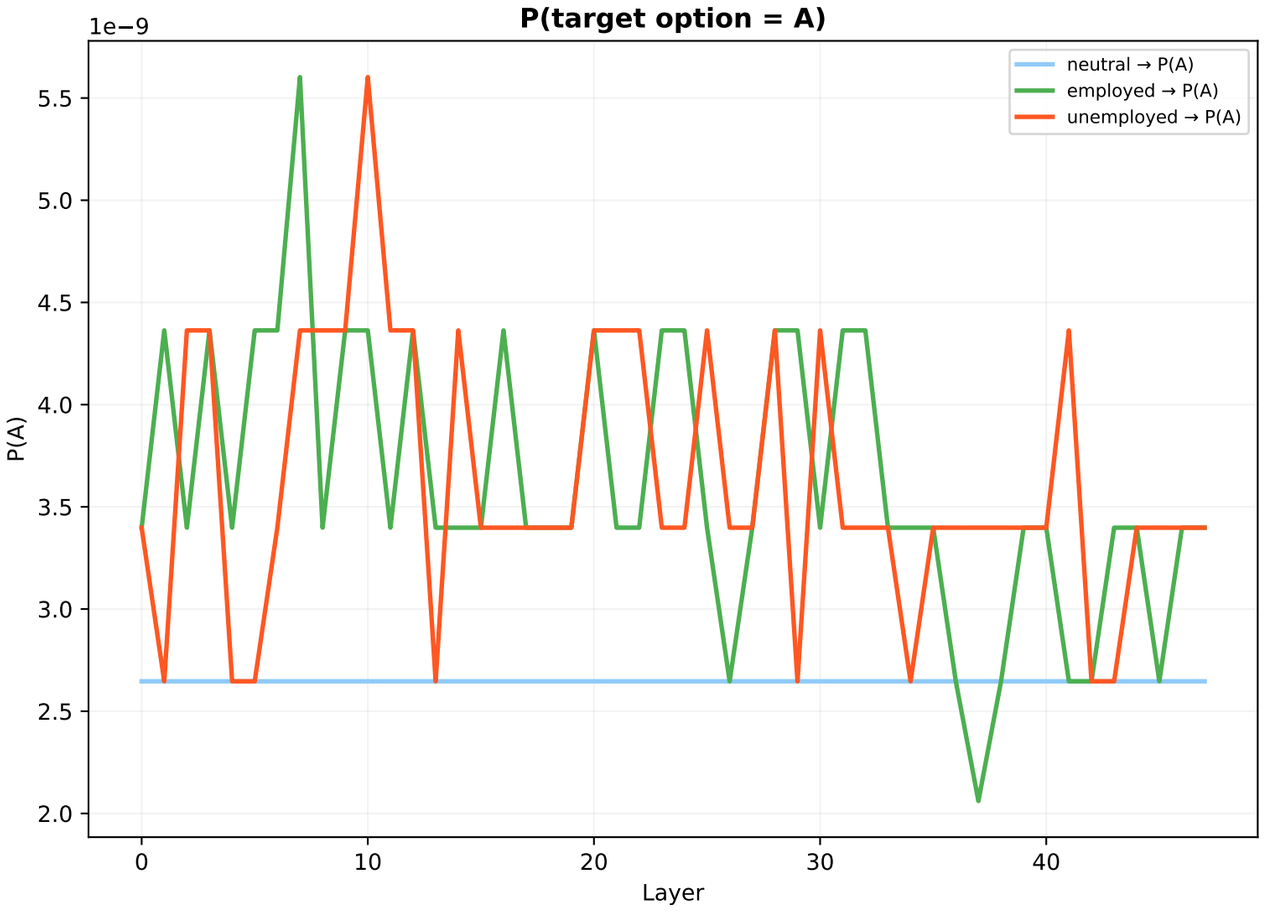

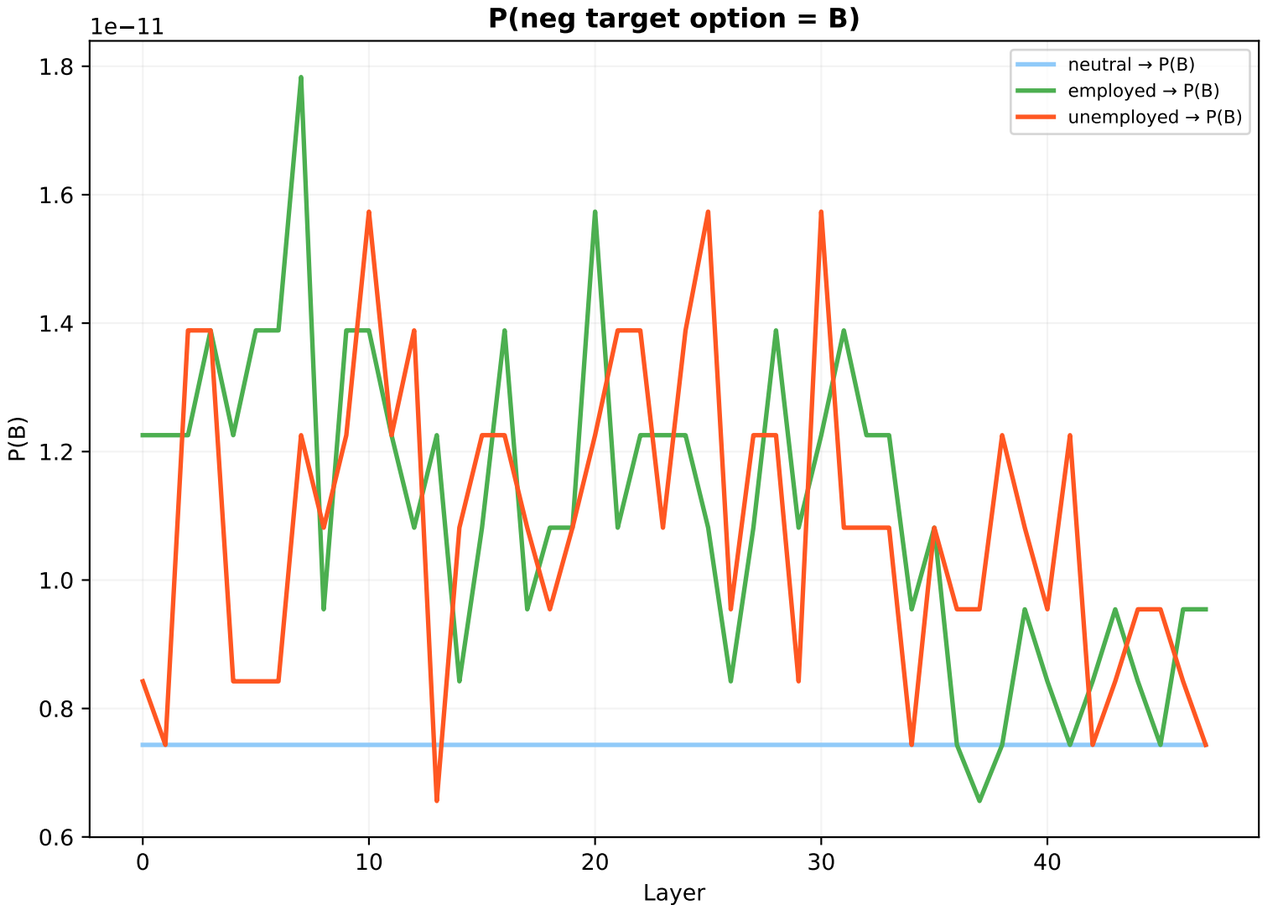

W4: 7 PM activity — Old Method
v8/exp1a/cfg4 | coeffs [-10, -5, -1, 0, 1, 5, 10]

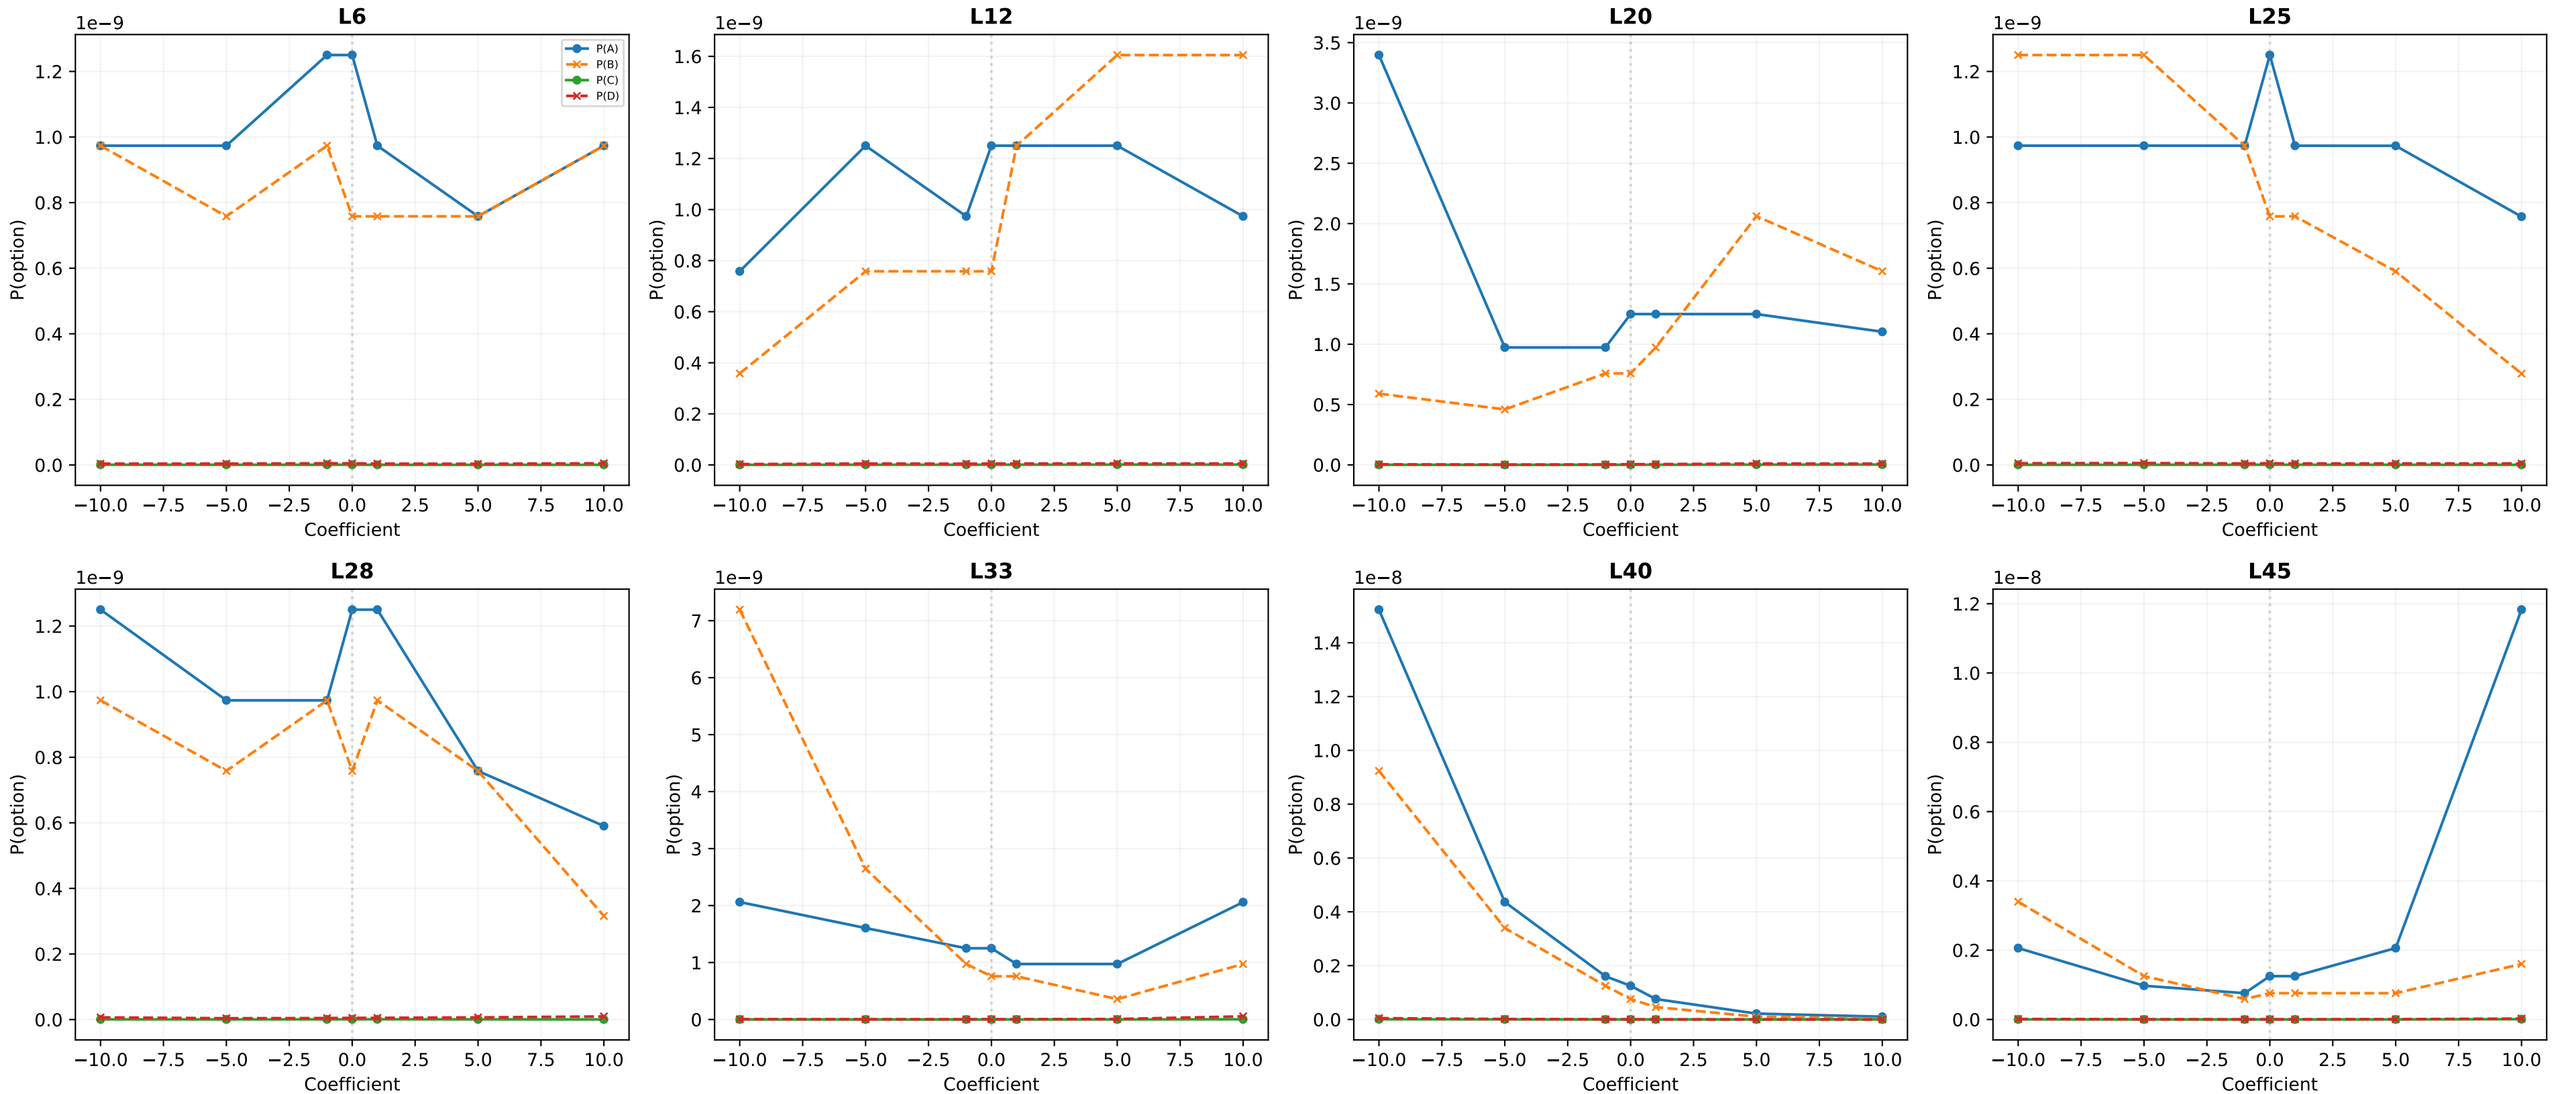

W4: 7 PM activity — Old Method Heatmap
v8/exp1a/cfg4

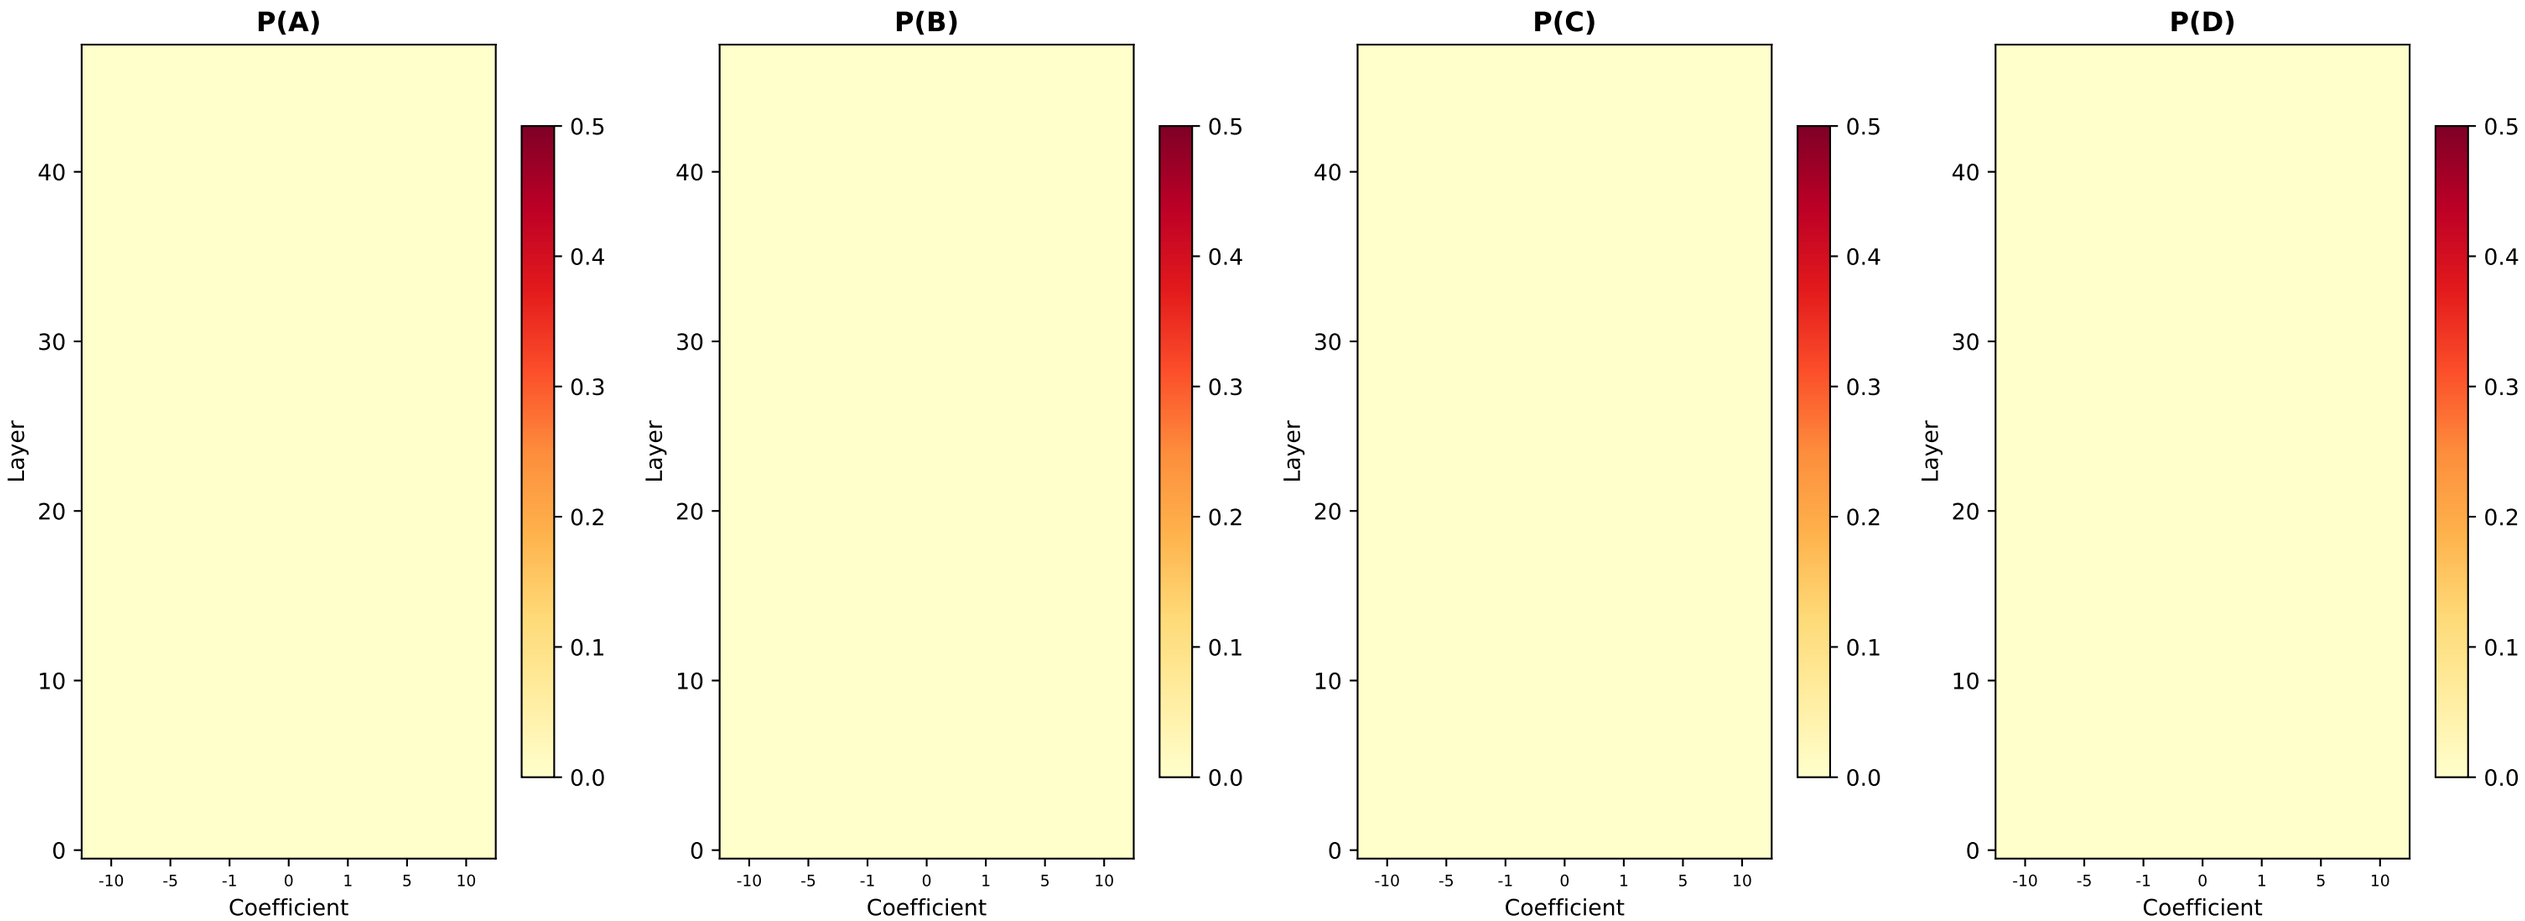

W4: 7 PM activity — New Method (Matteo)
v8/exp1a/cfg4 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

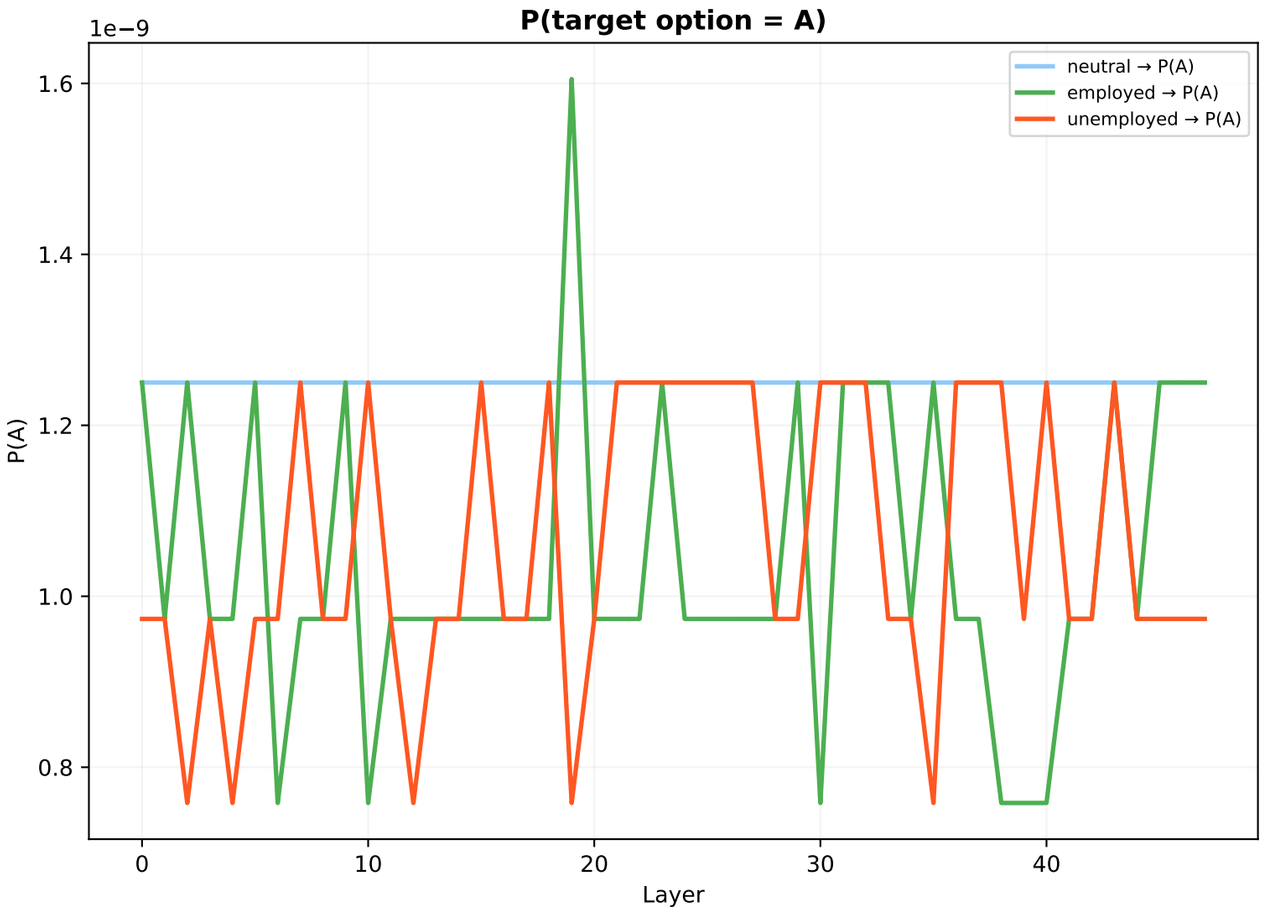

W5: CONTROL: indoor temperature — Old Method
v8/exp1a/cfg4 | coeffs [-10, -5, -1, 0, 1, 5, 10]

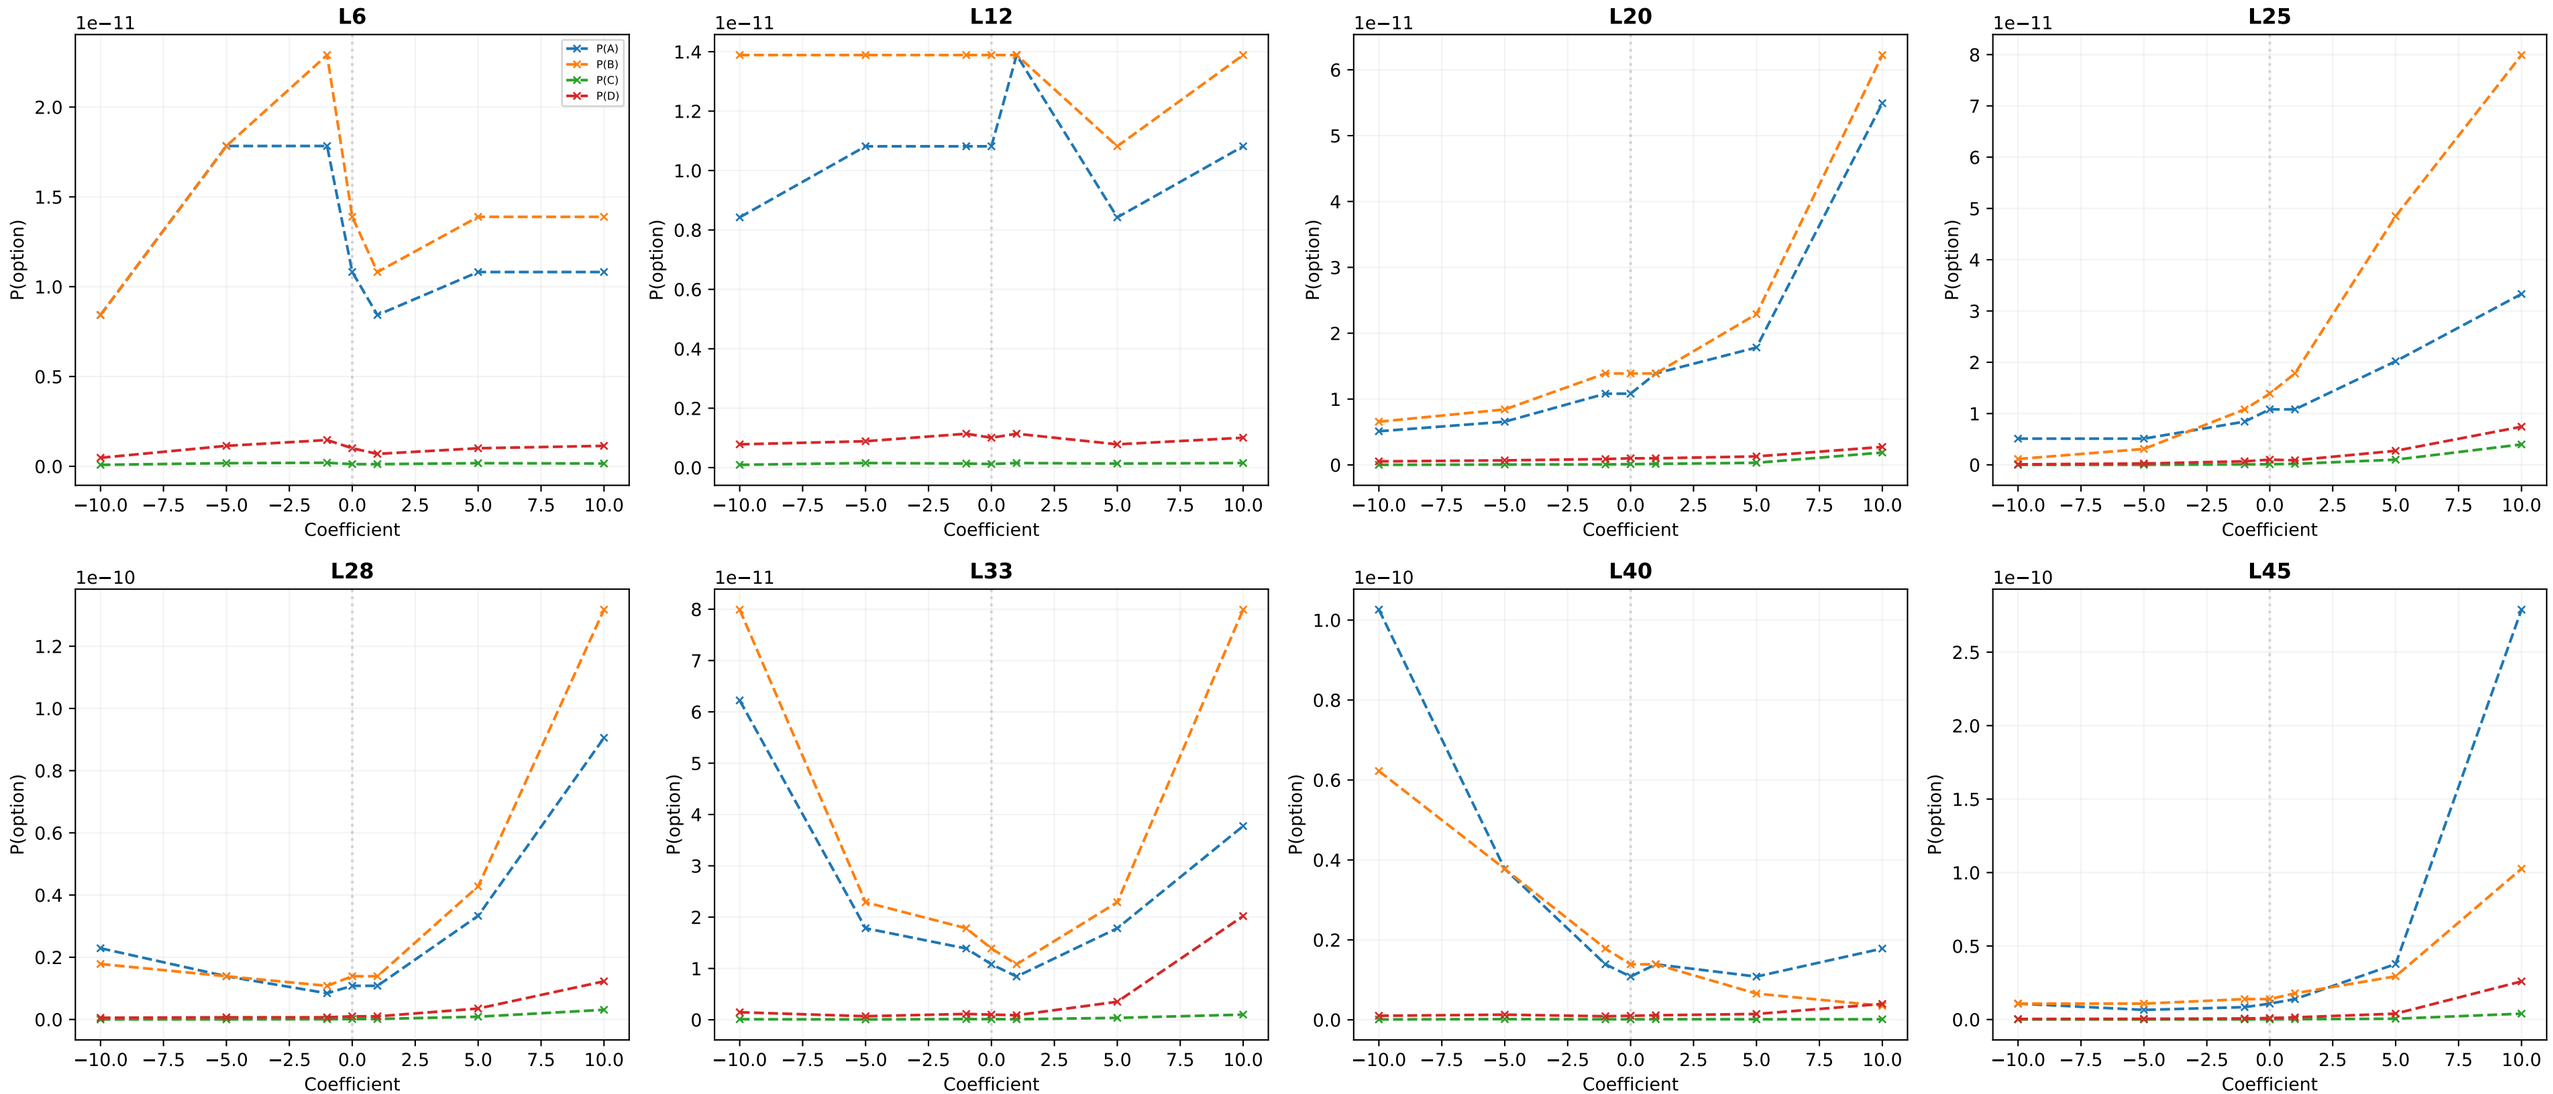

W5: CONTROL: indoor temperature — Old Method Heatmap
v8/exp1a/cfg4

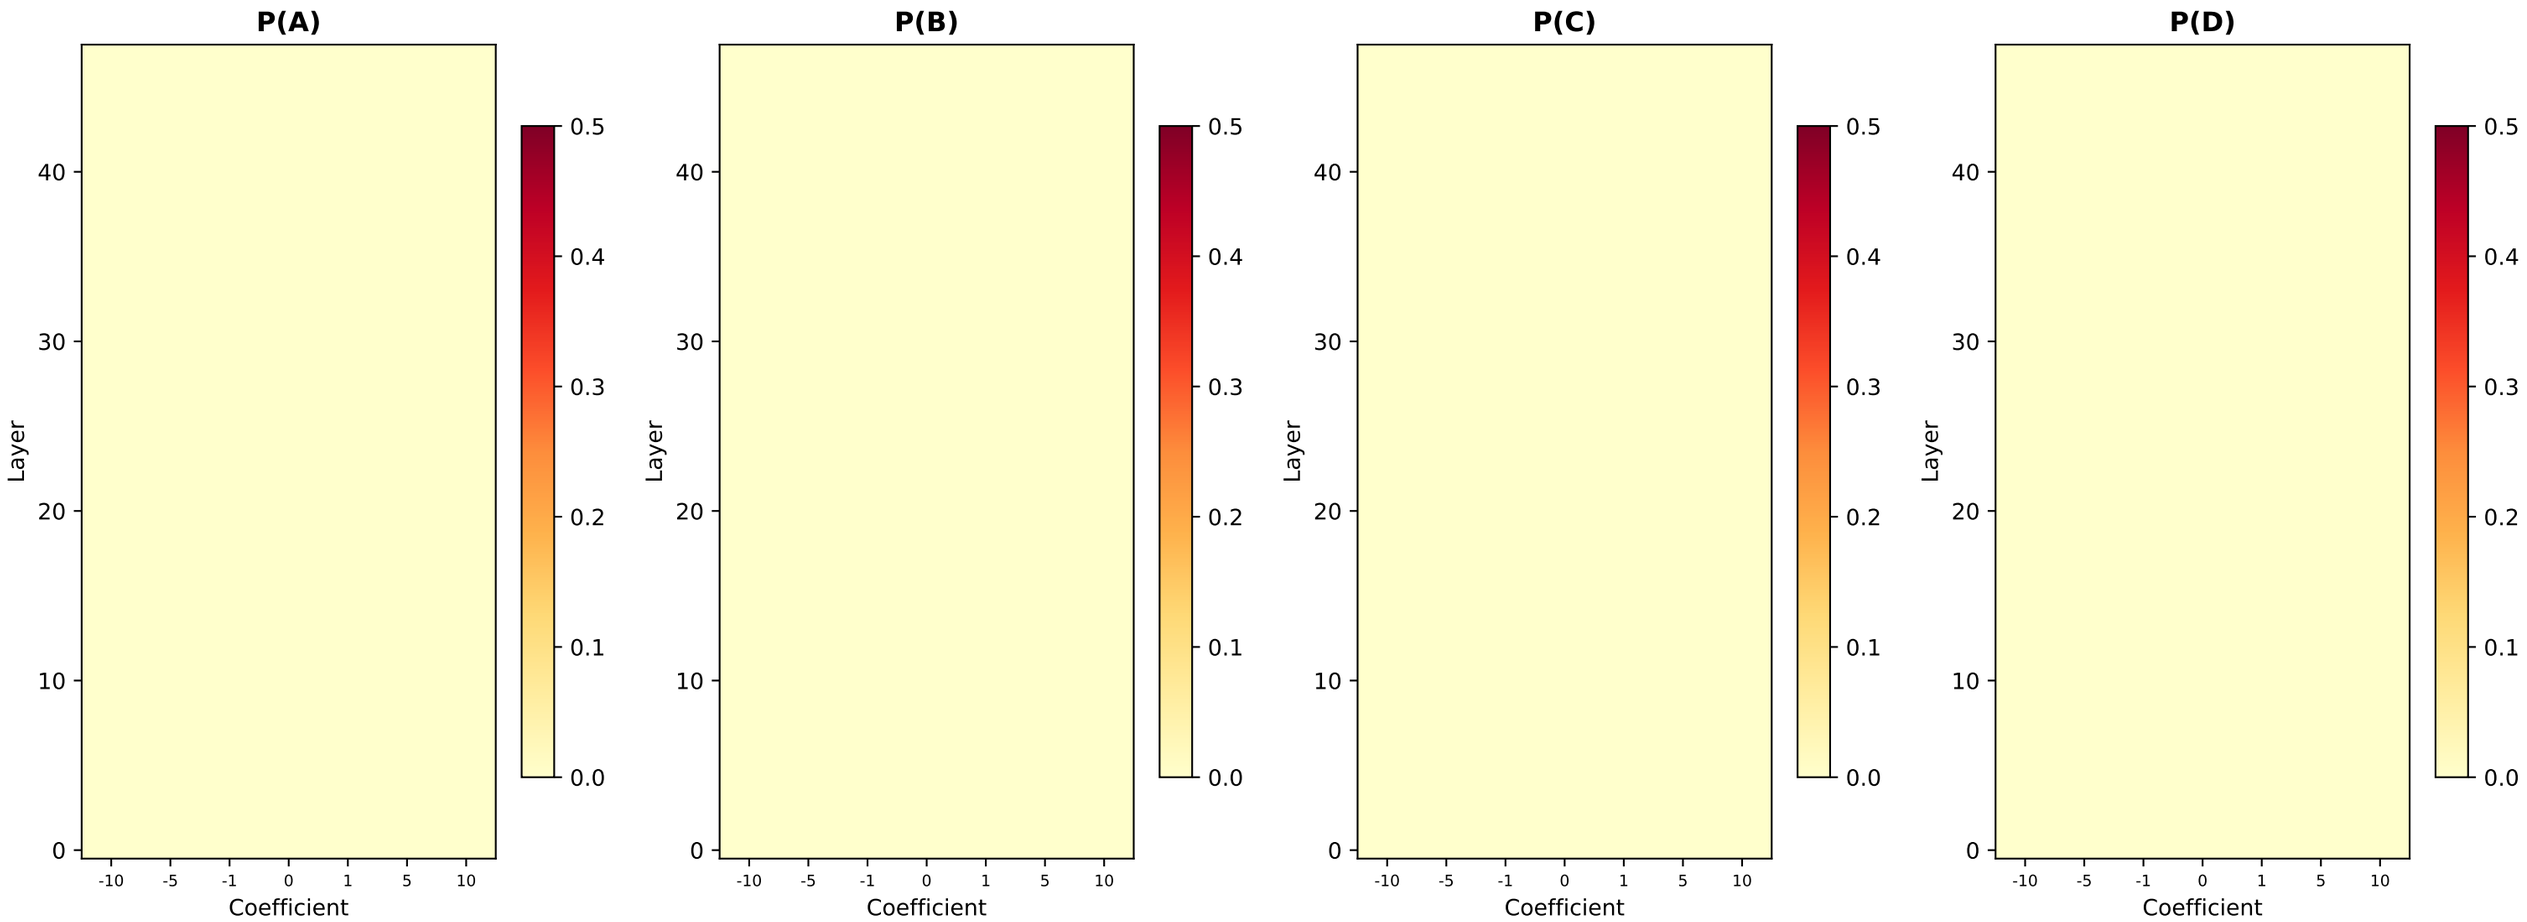

W5: CONTROL: indoor temperature — New Method (Matteo)
v8/exp1a/cfg4 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

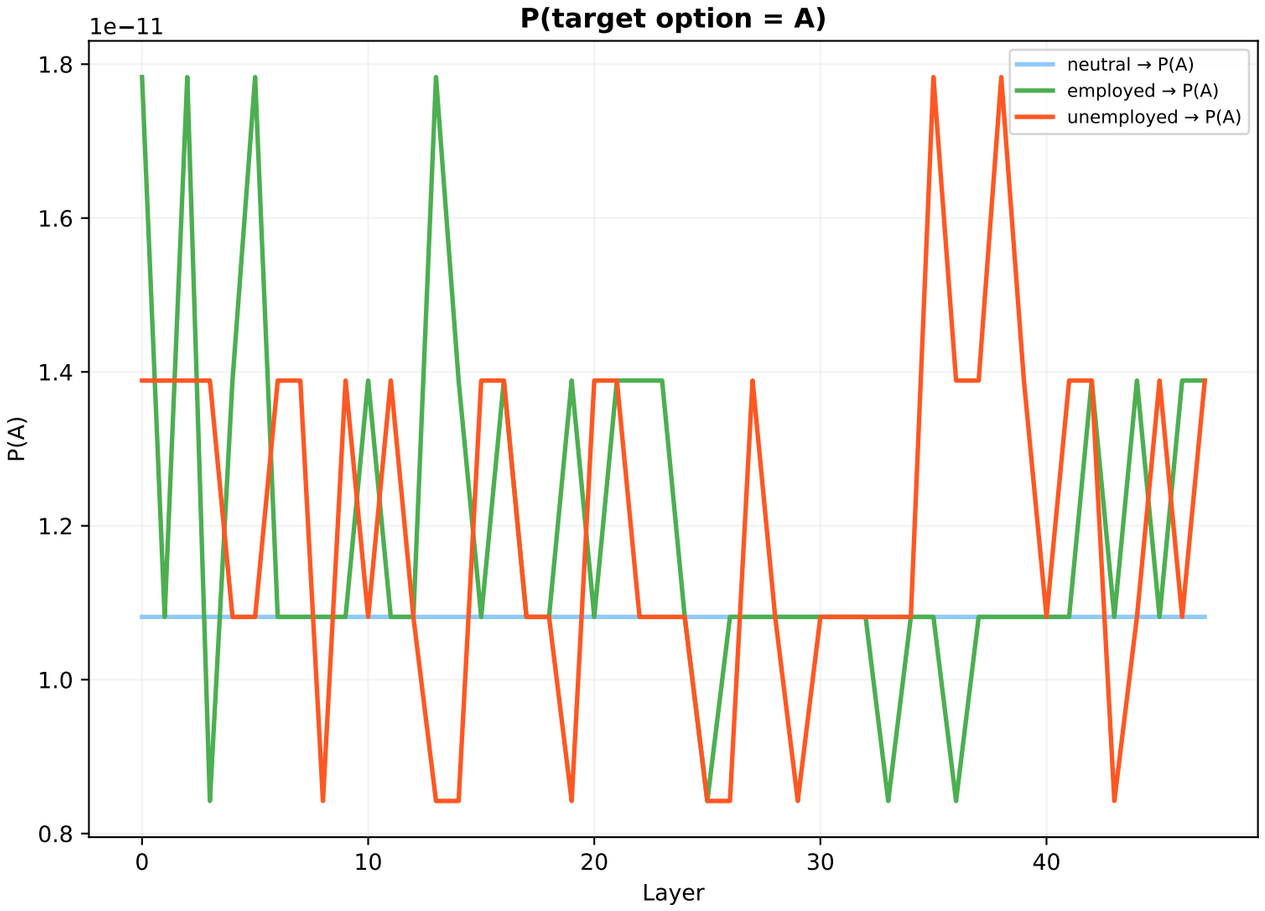

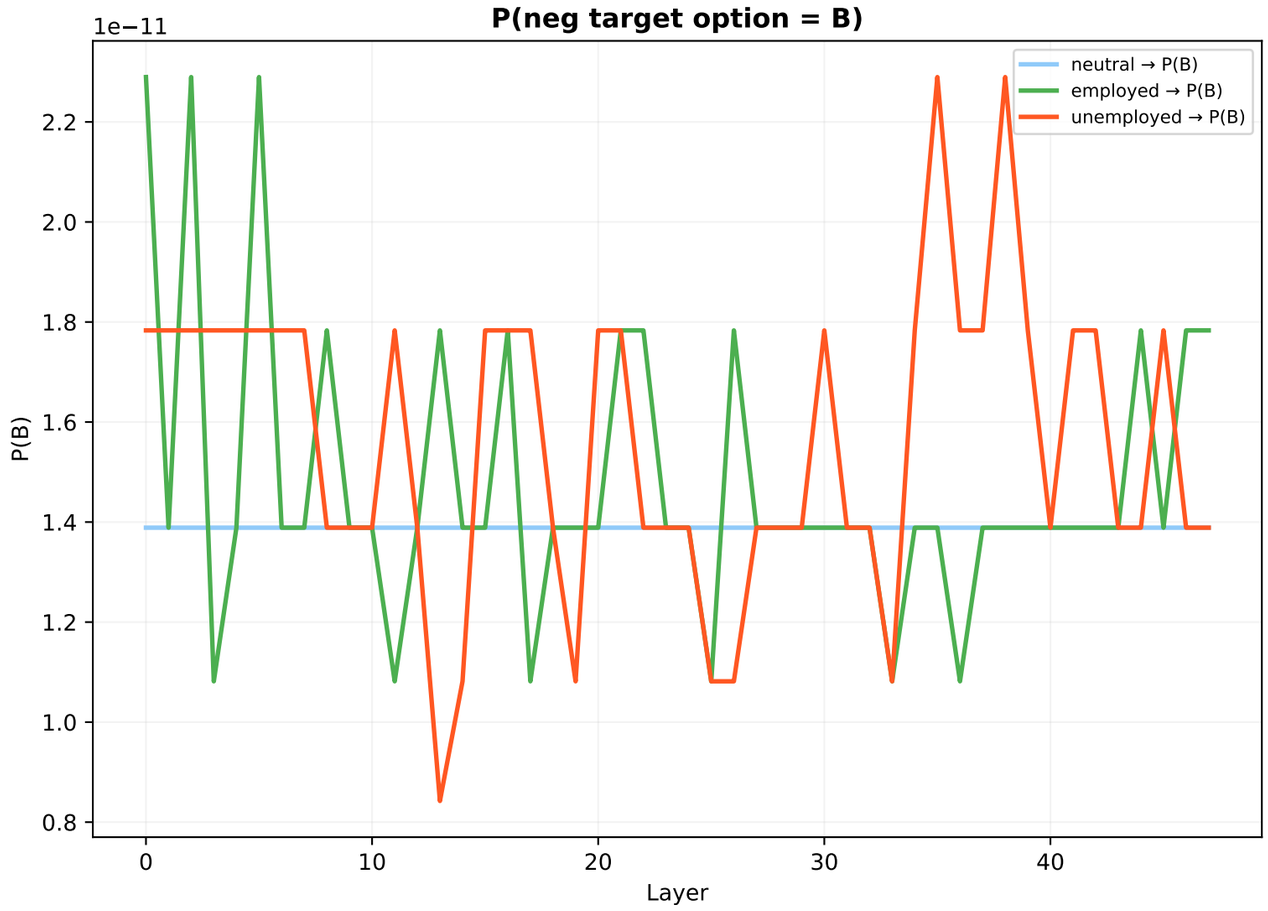

E1: Monthly lunch spending — Old Method
v8/exp2/cfg5 | coeffs [-10, -5, -1, 0, 1, 5, 10]

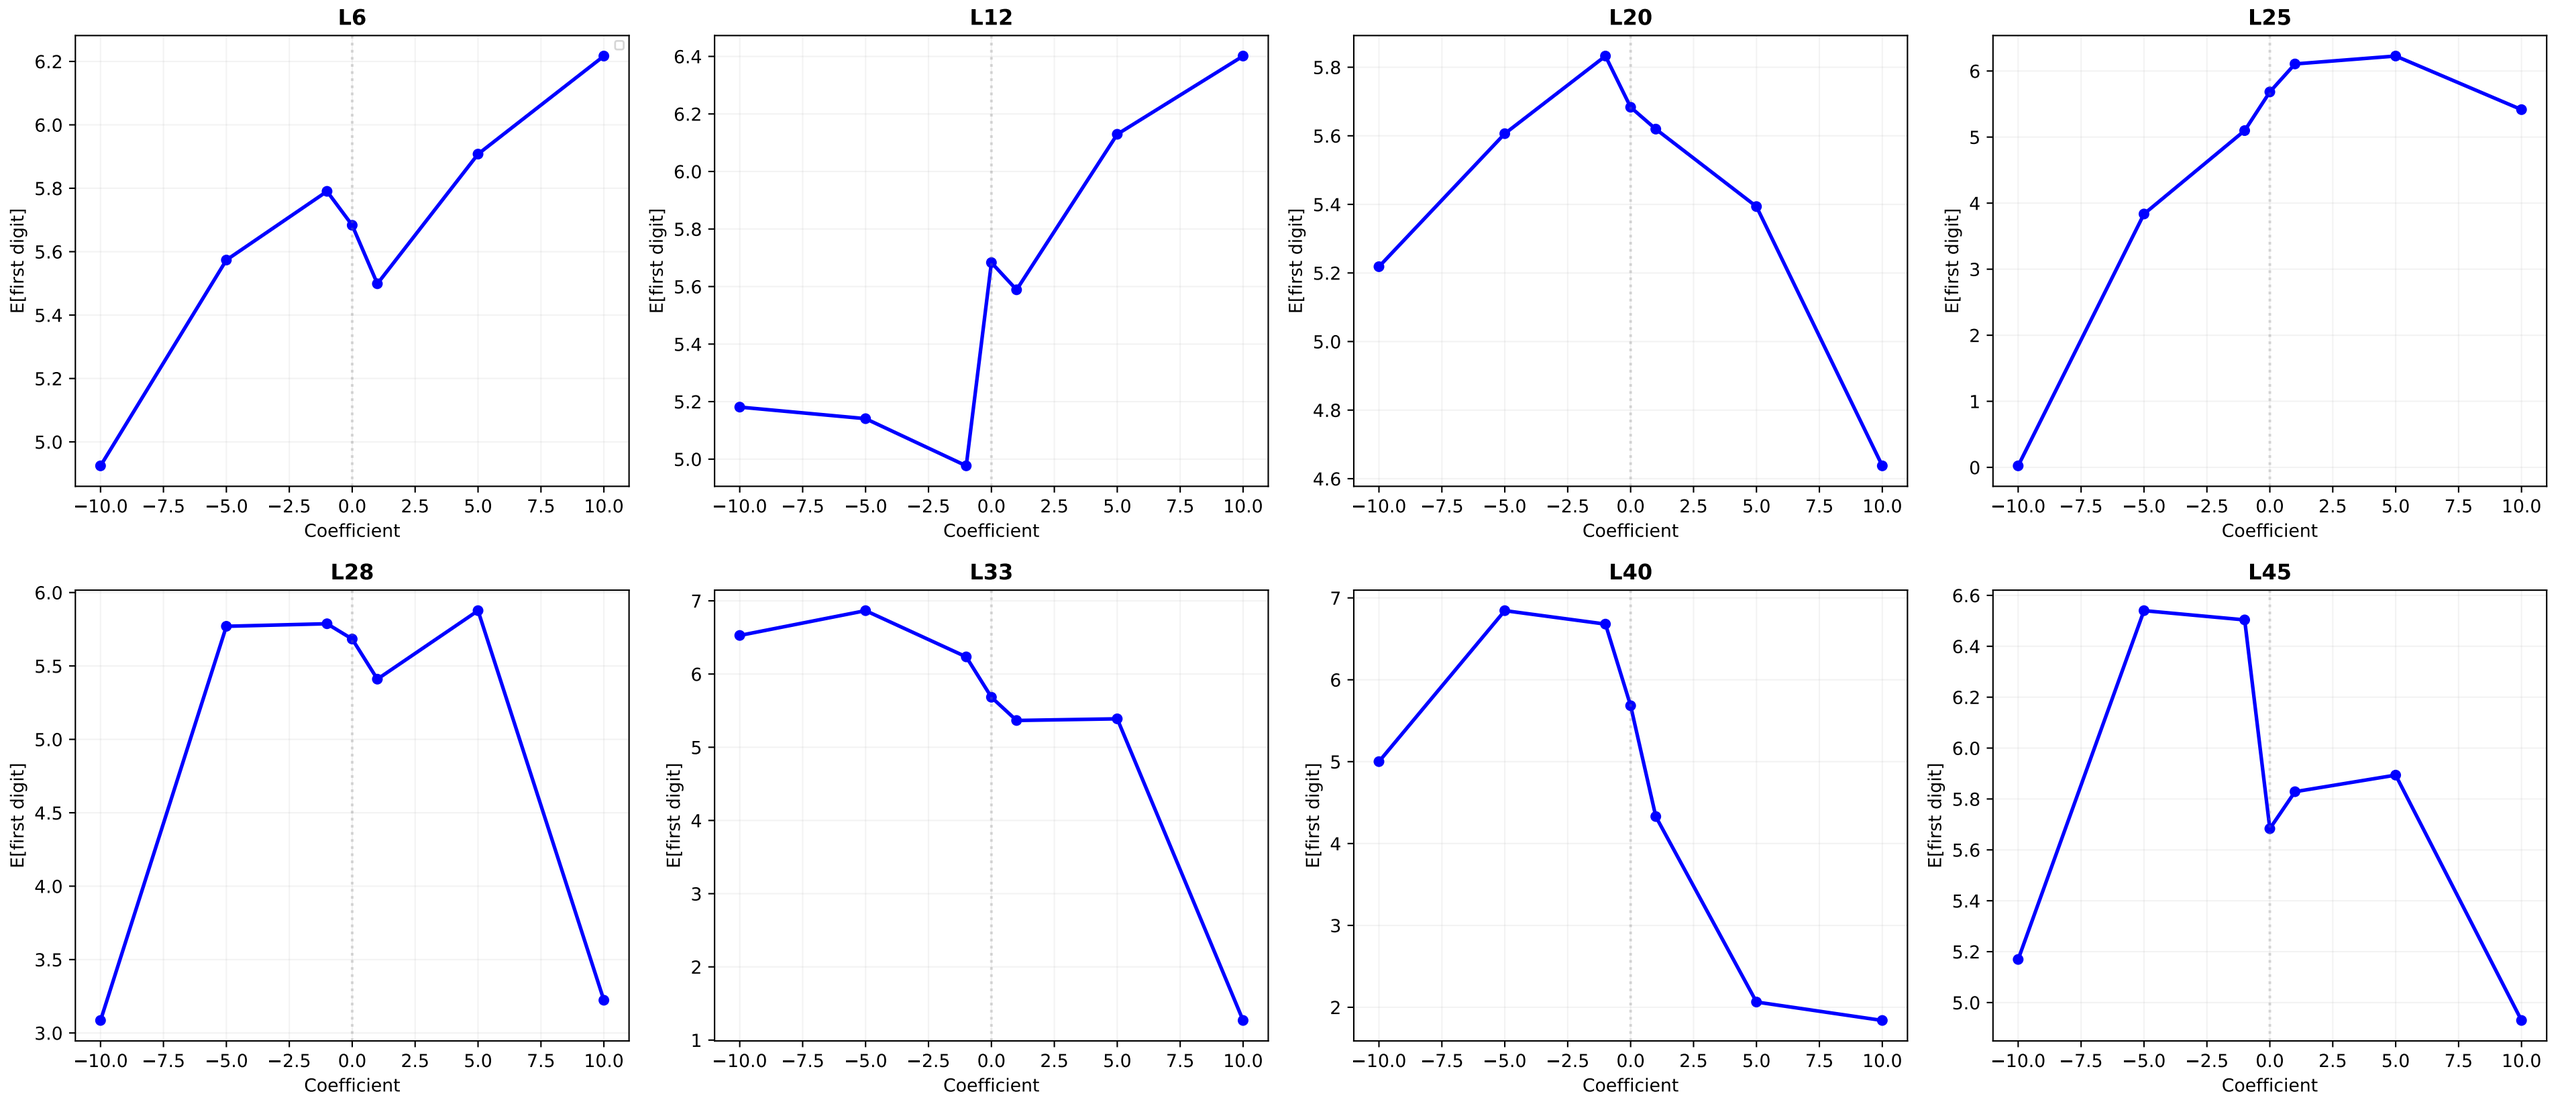

E1: Monthly lunch spending — Old Method Heatmap
v8/exp2/cfg5

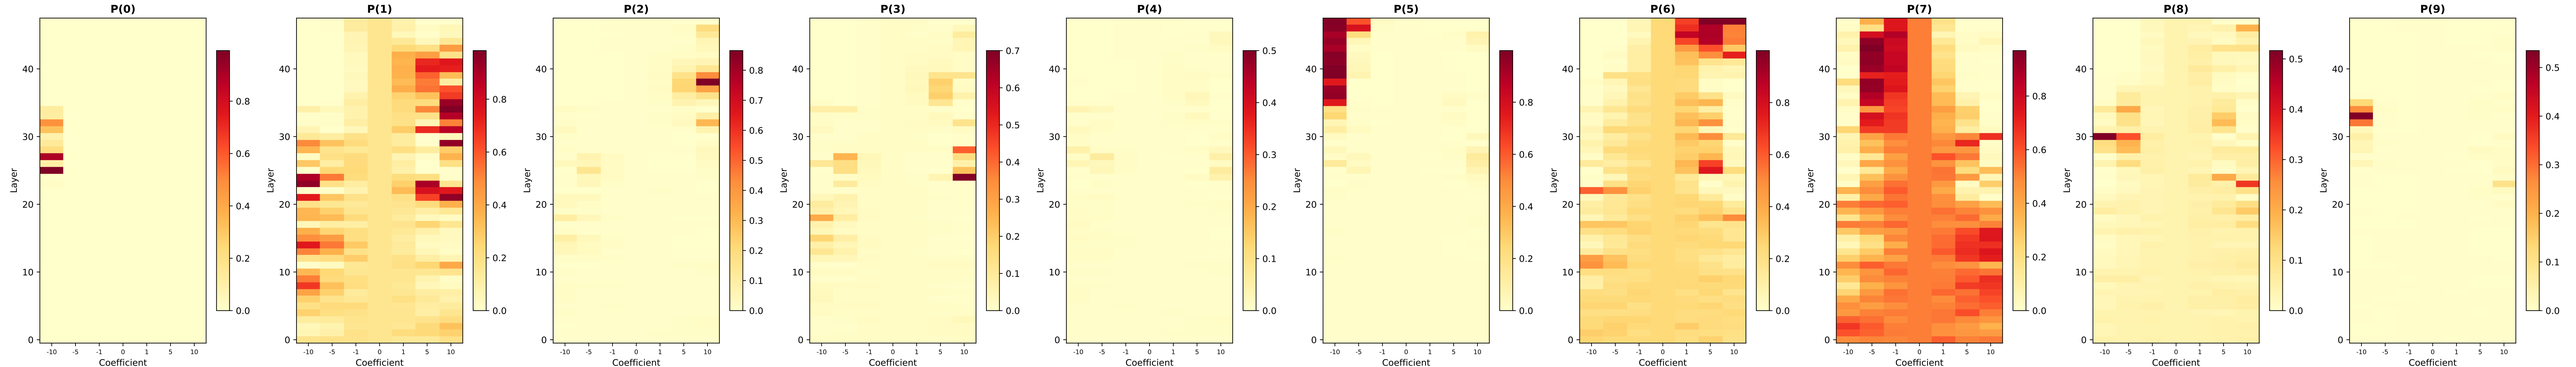

E1: Monthly lunch spending — New Method (Matteo)
v8/exp2/cfg5 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

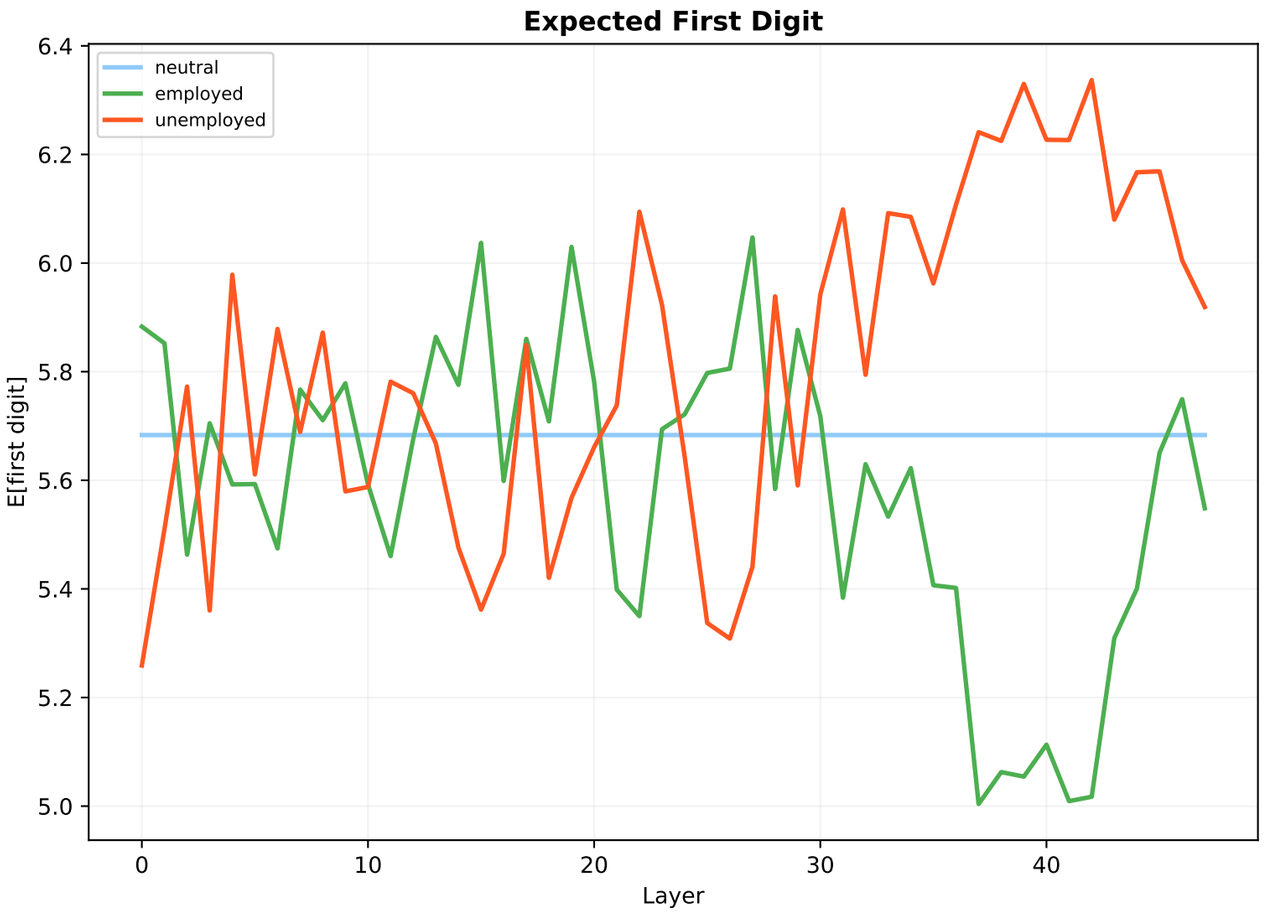

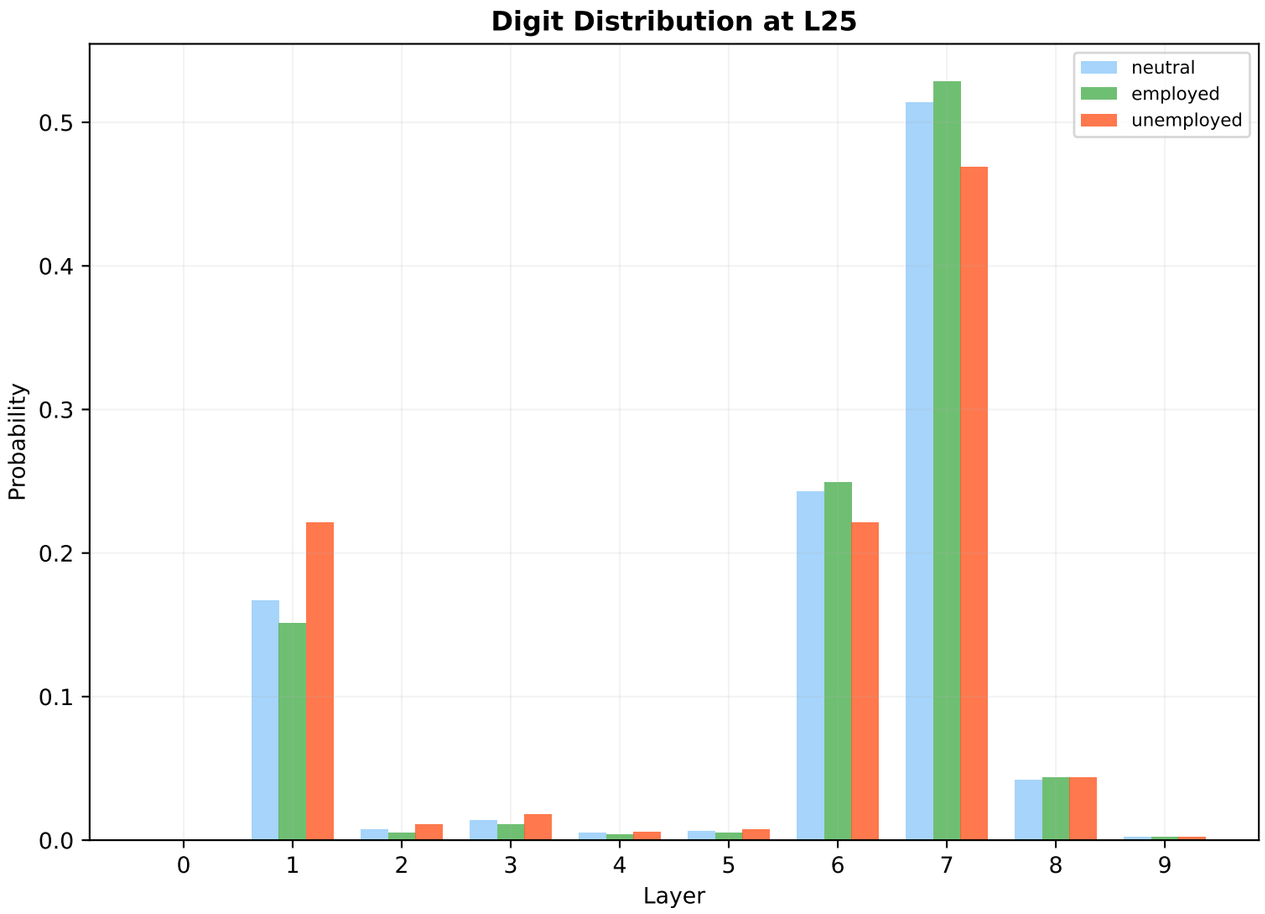

E2: Monthly commute cost — Old Method
v8/exp2/cfg5 | coeffs [-10, -5, -1, 0, 1, 5, 10]

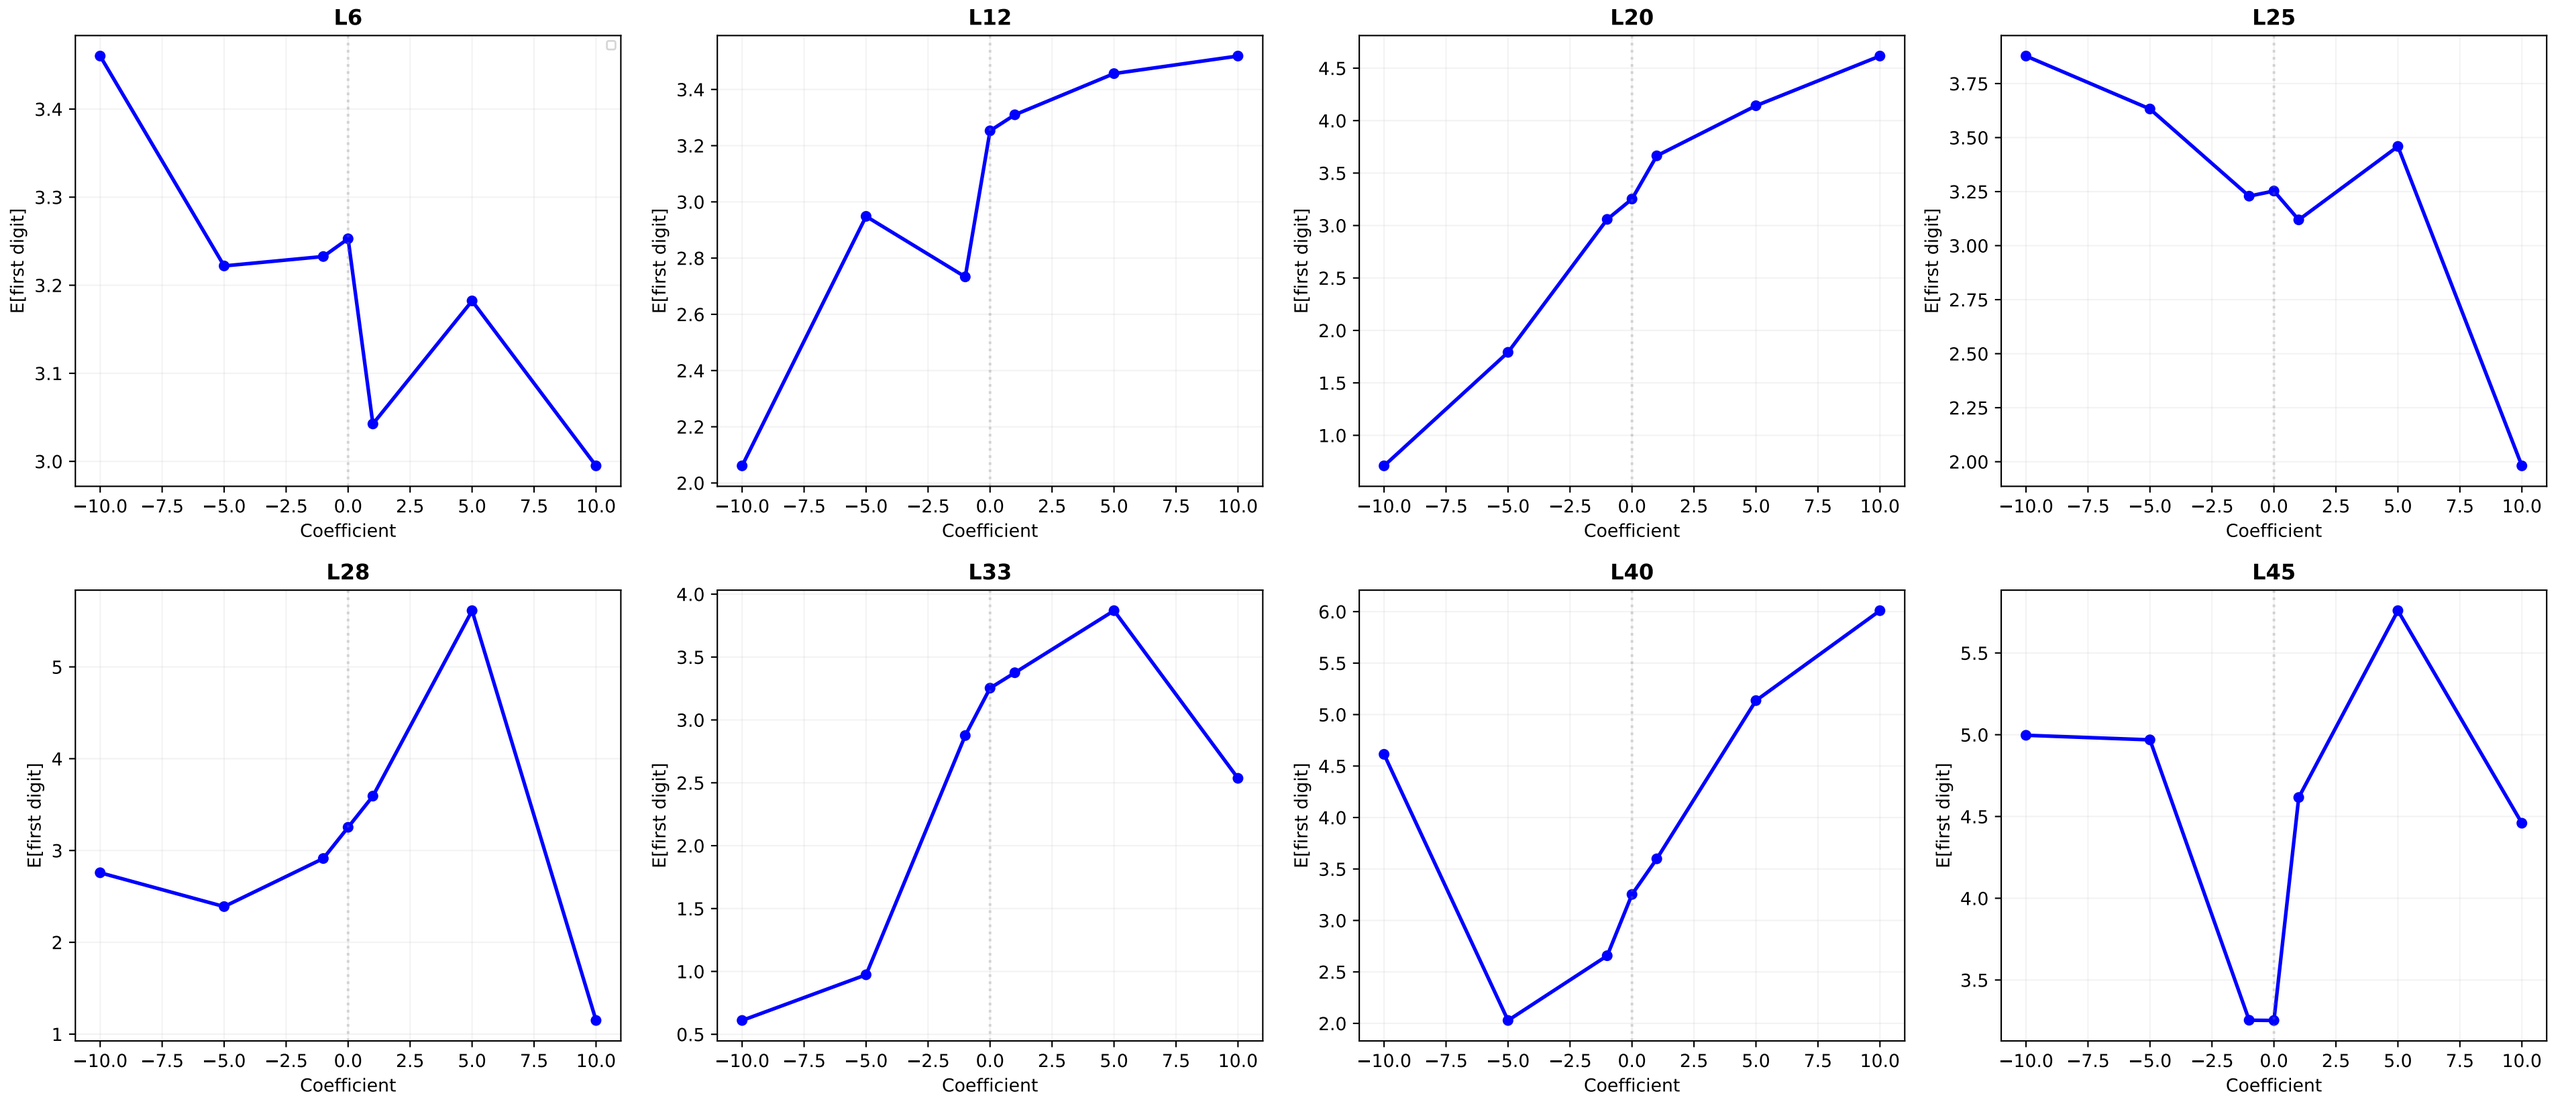

E2: Monthly commute cost — Old Method Heatmap
v8/exp2/cfg5

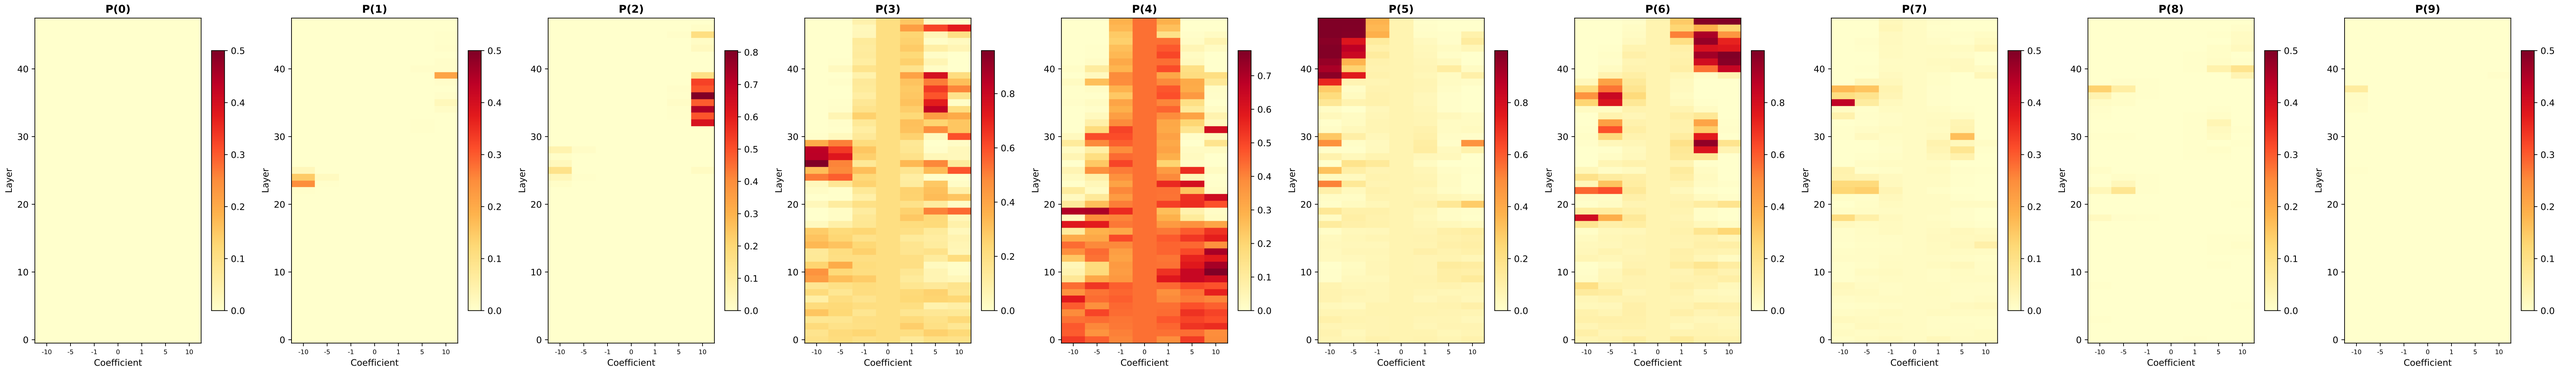

E2: Monthly commute cost — New Method (Matteo)
v8/exp2/cfg5 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

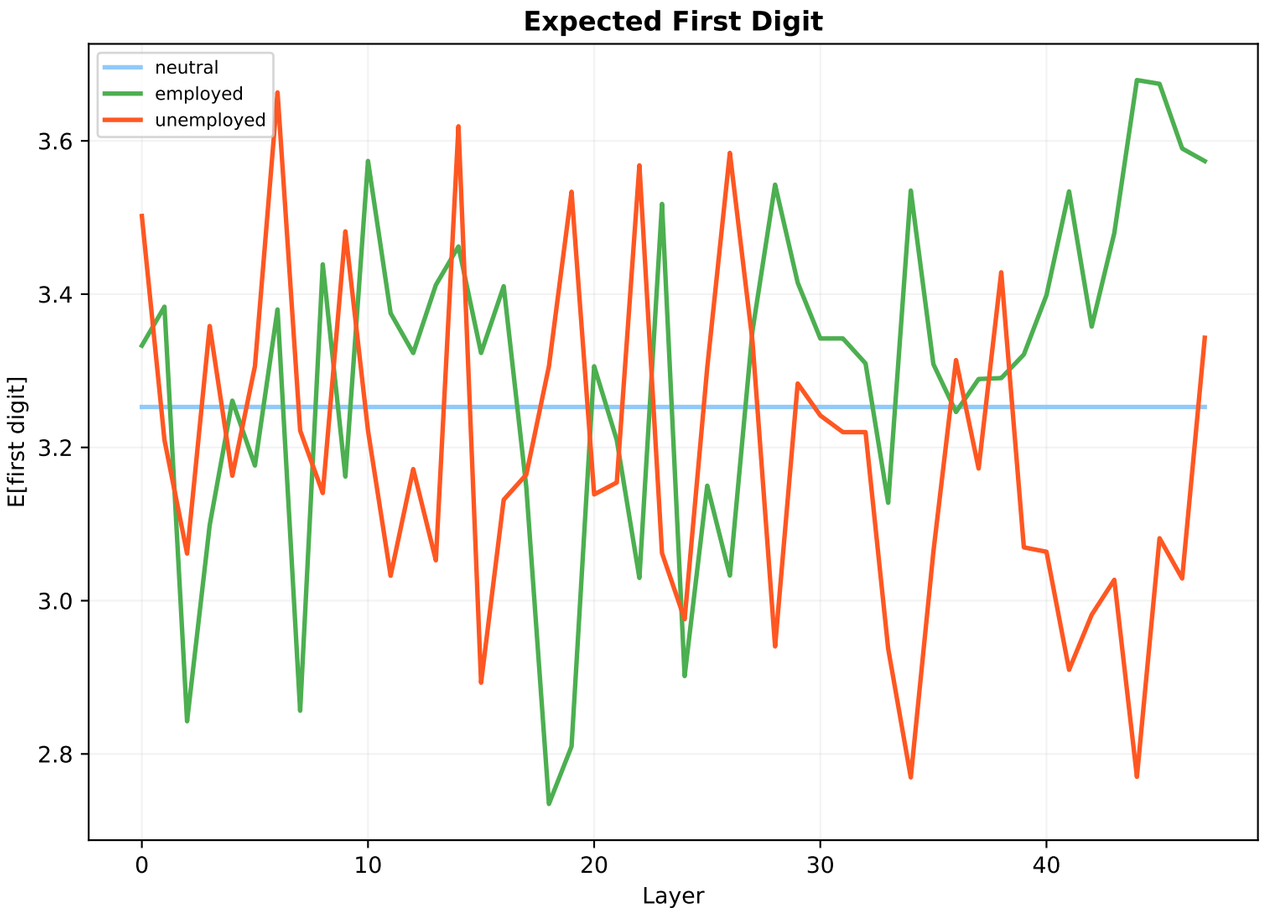

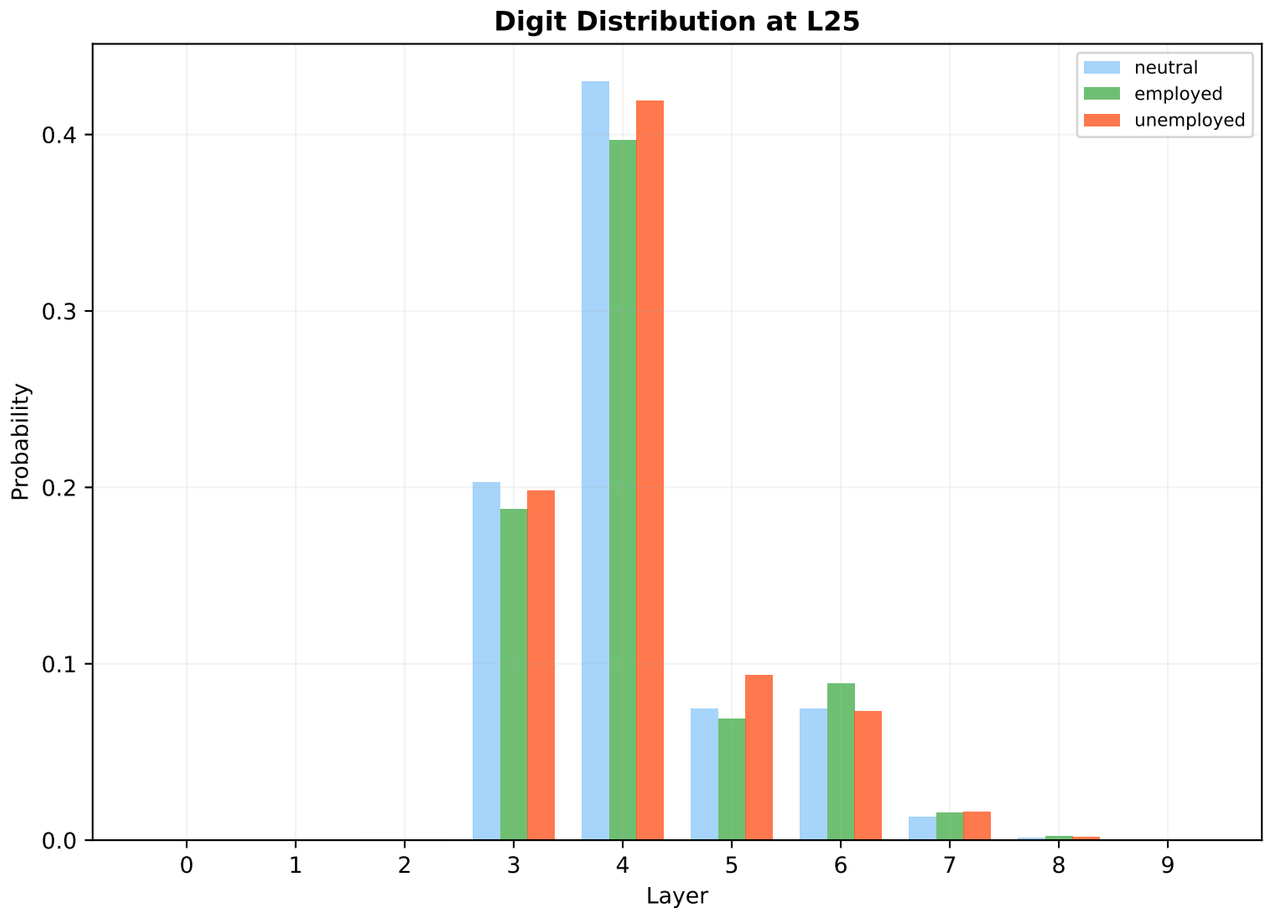

E3: Noon location — Old Method
v8/exp2/cfg5 | coeffs [-10, -5, -1, 0, 1, 5, 10]

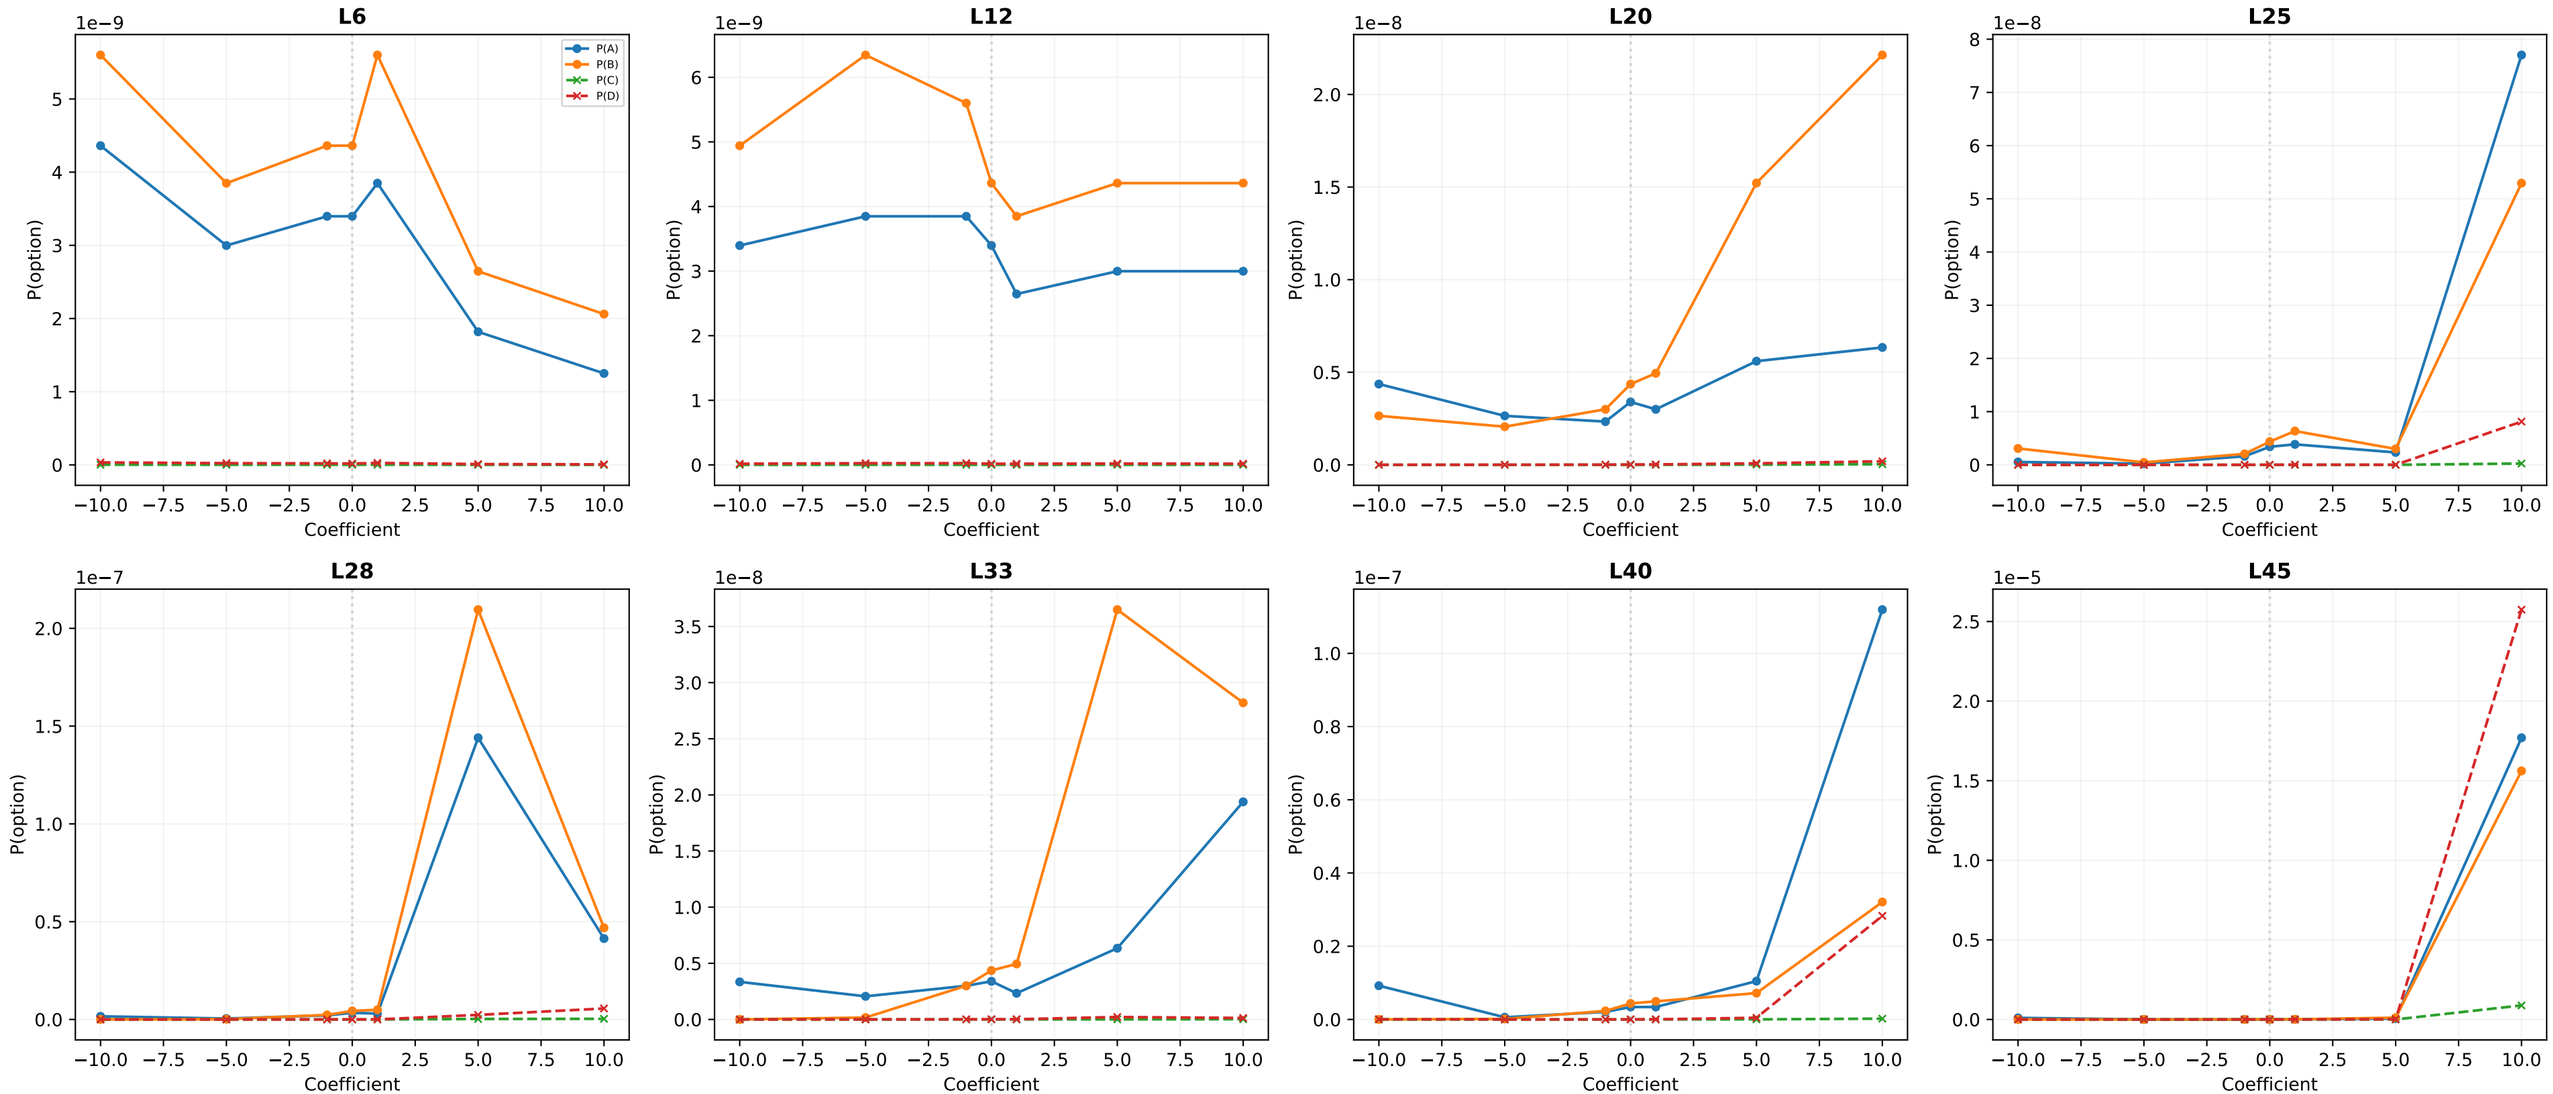

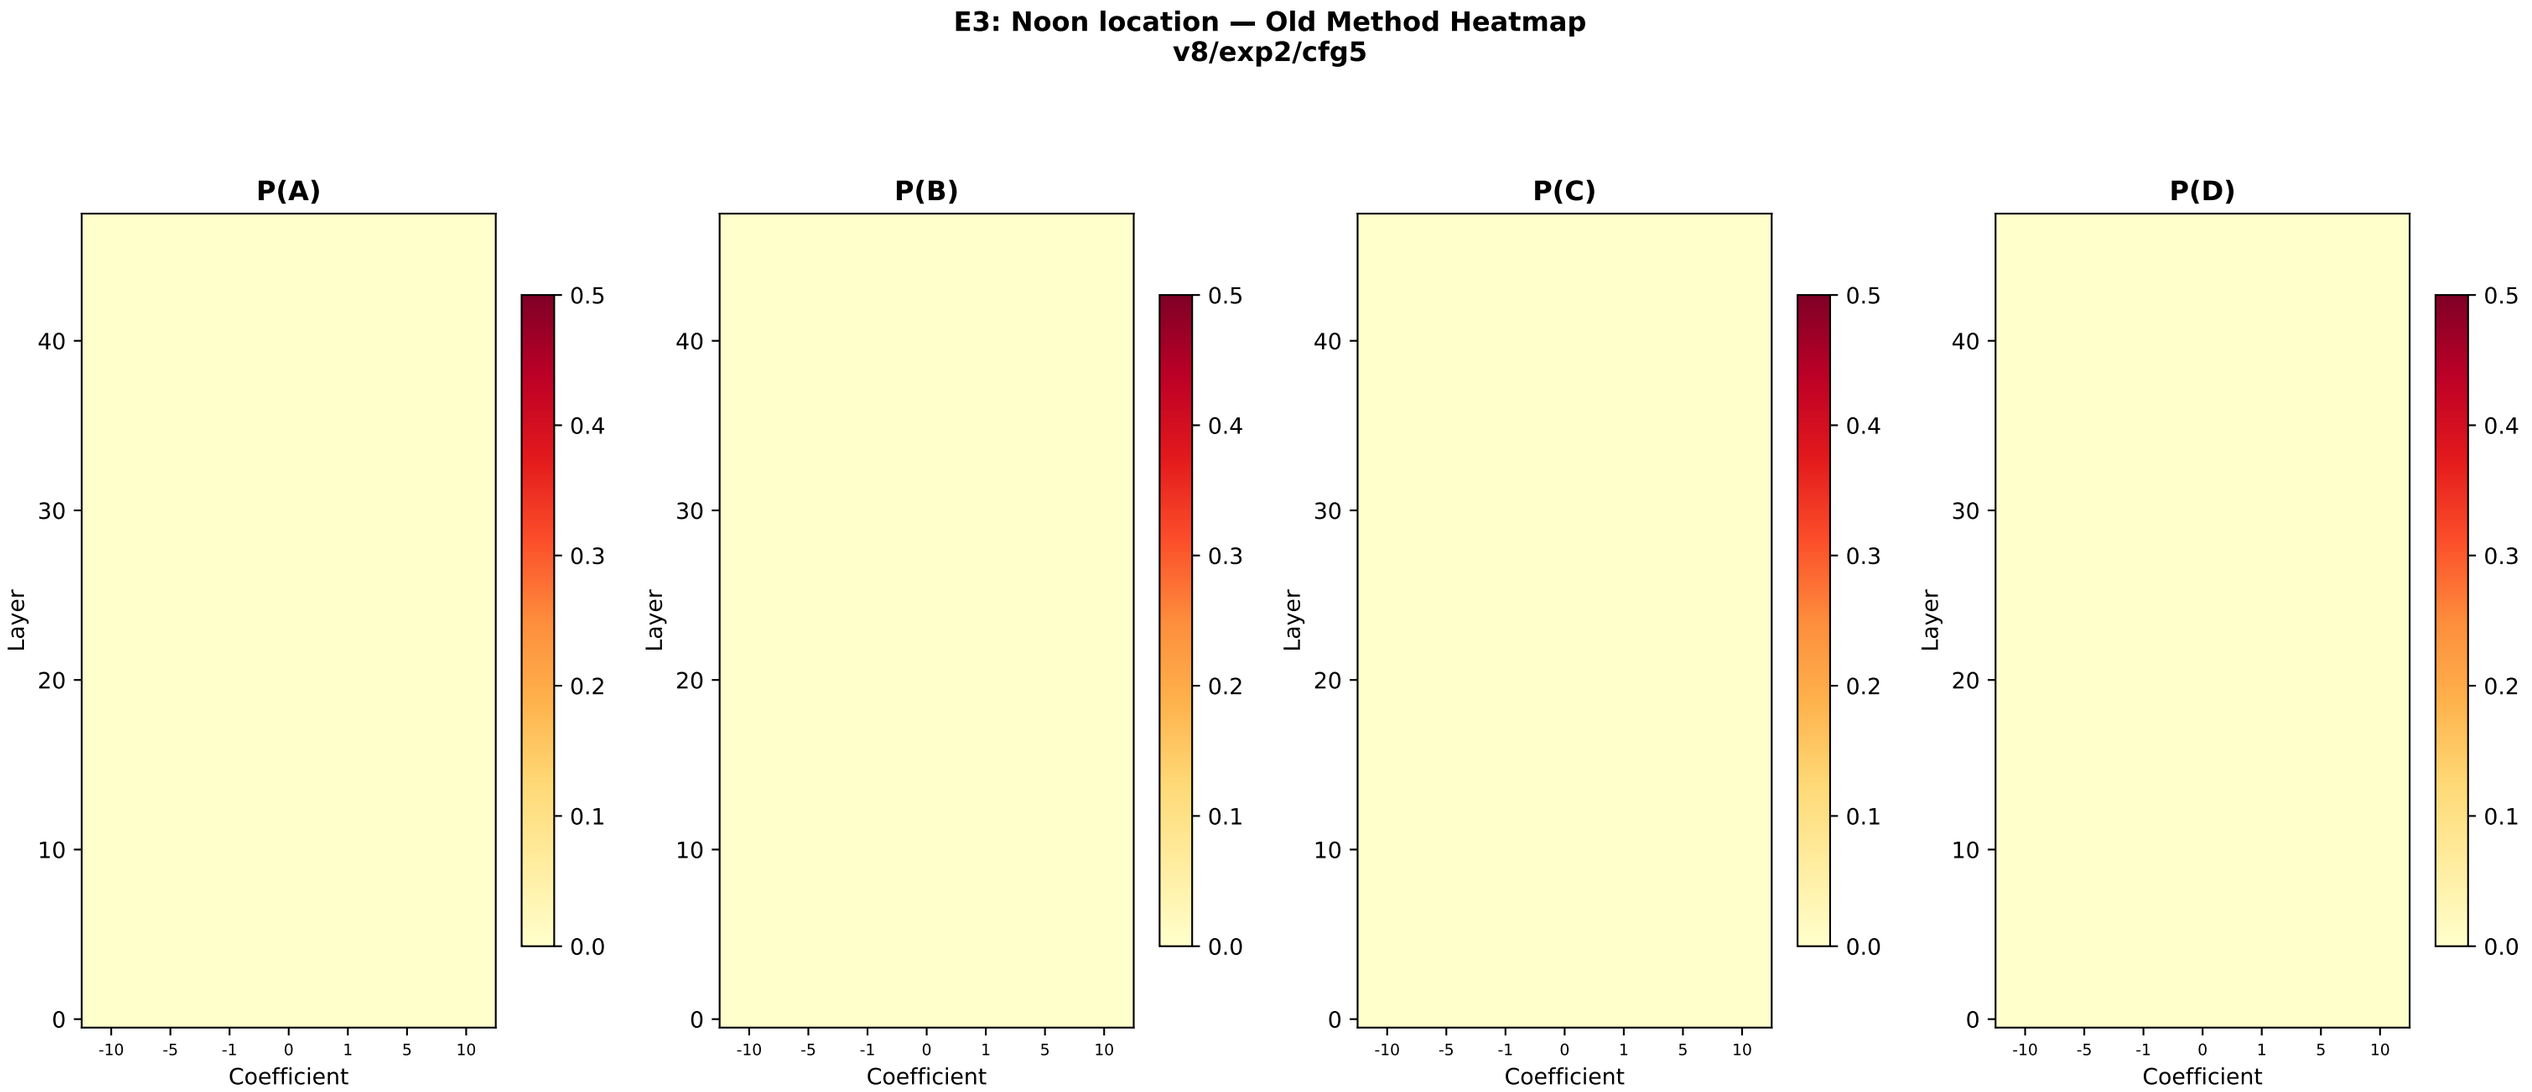
E3: Noon location — Old Method Heatmap
v8/exp2/cfg5
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E3: Noon location — New Method (Matteo)
v8/exp2/cfg5 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

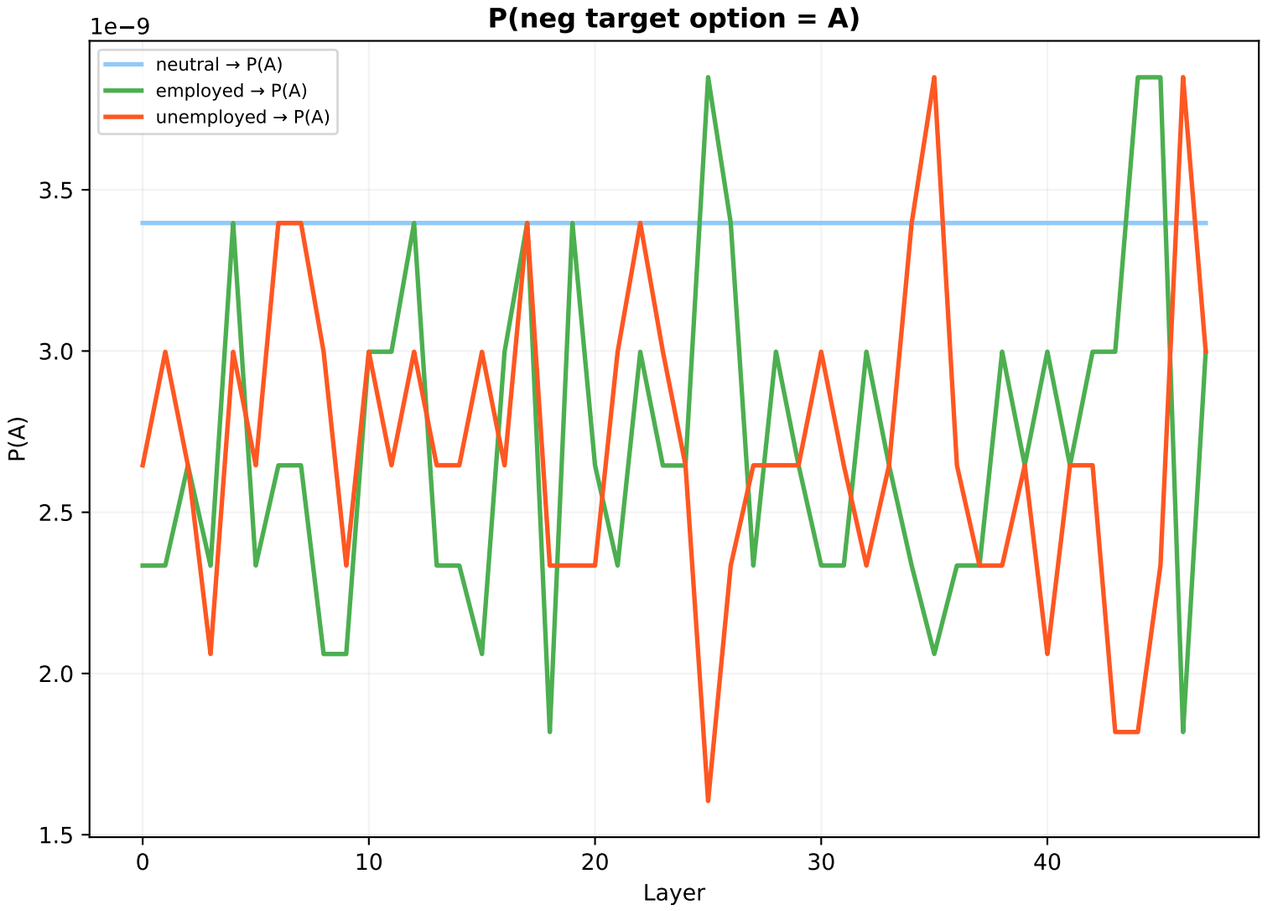

E4: Routine predictability — Old Method
v8/exp2/cfg5 | coeffs [-10, -5, -1, 0, 1, 5, 10]

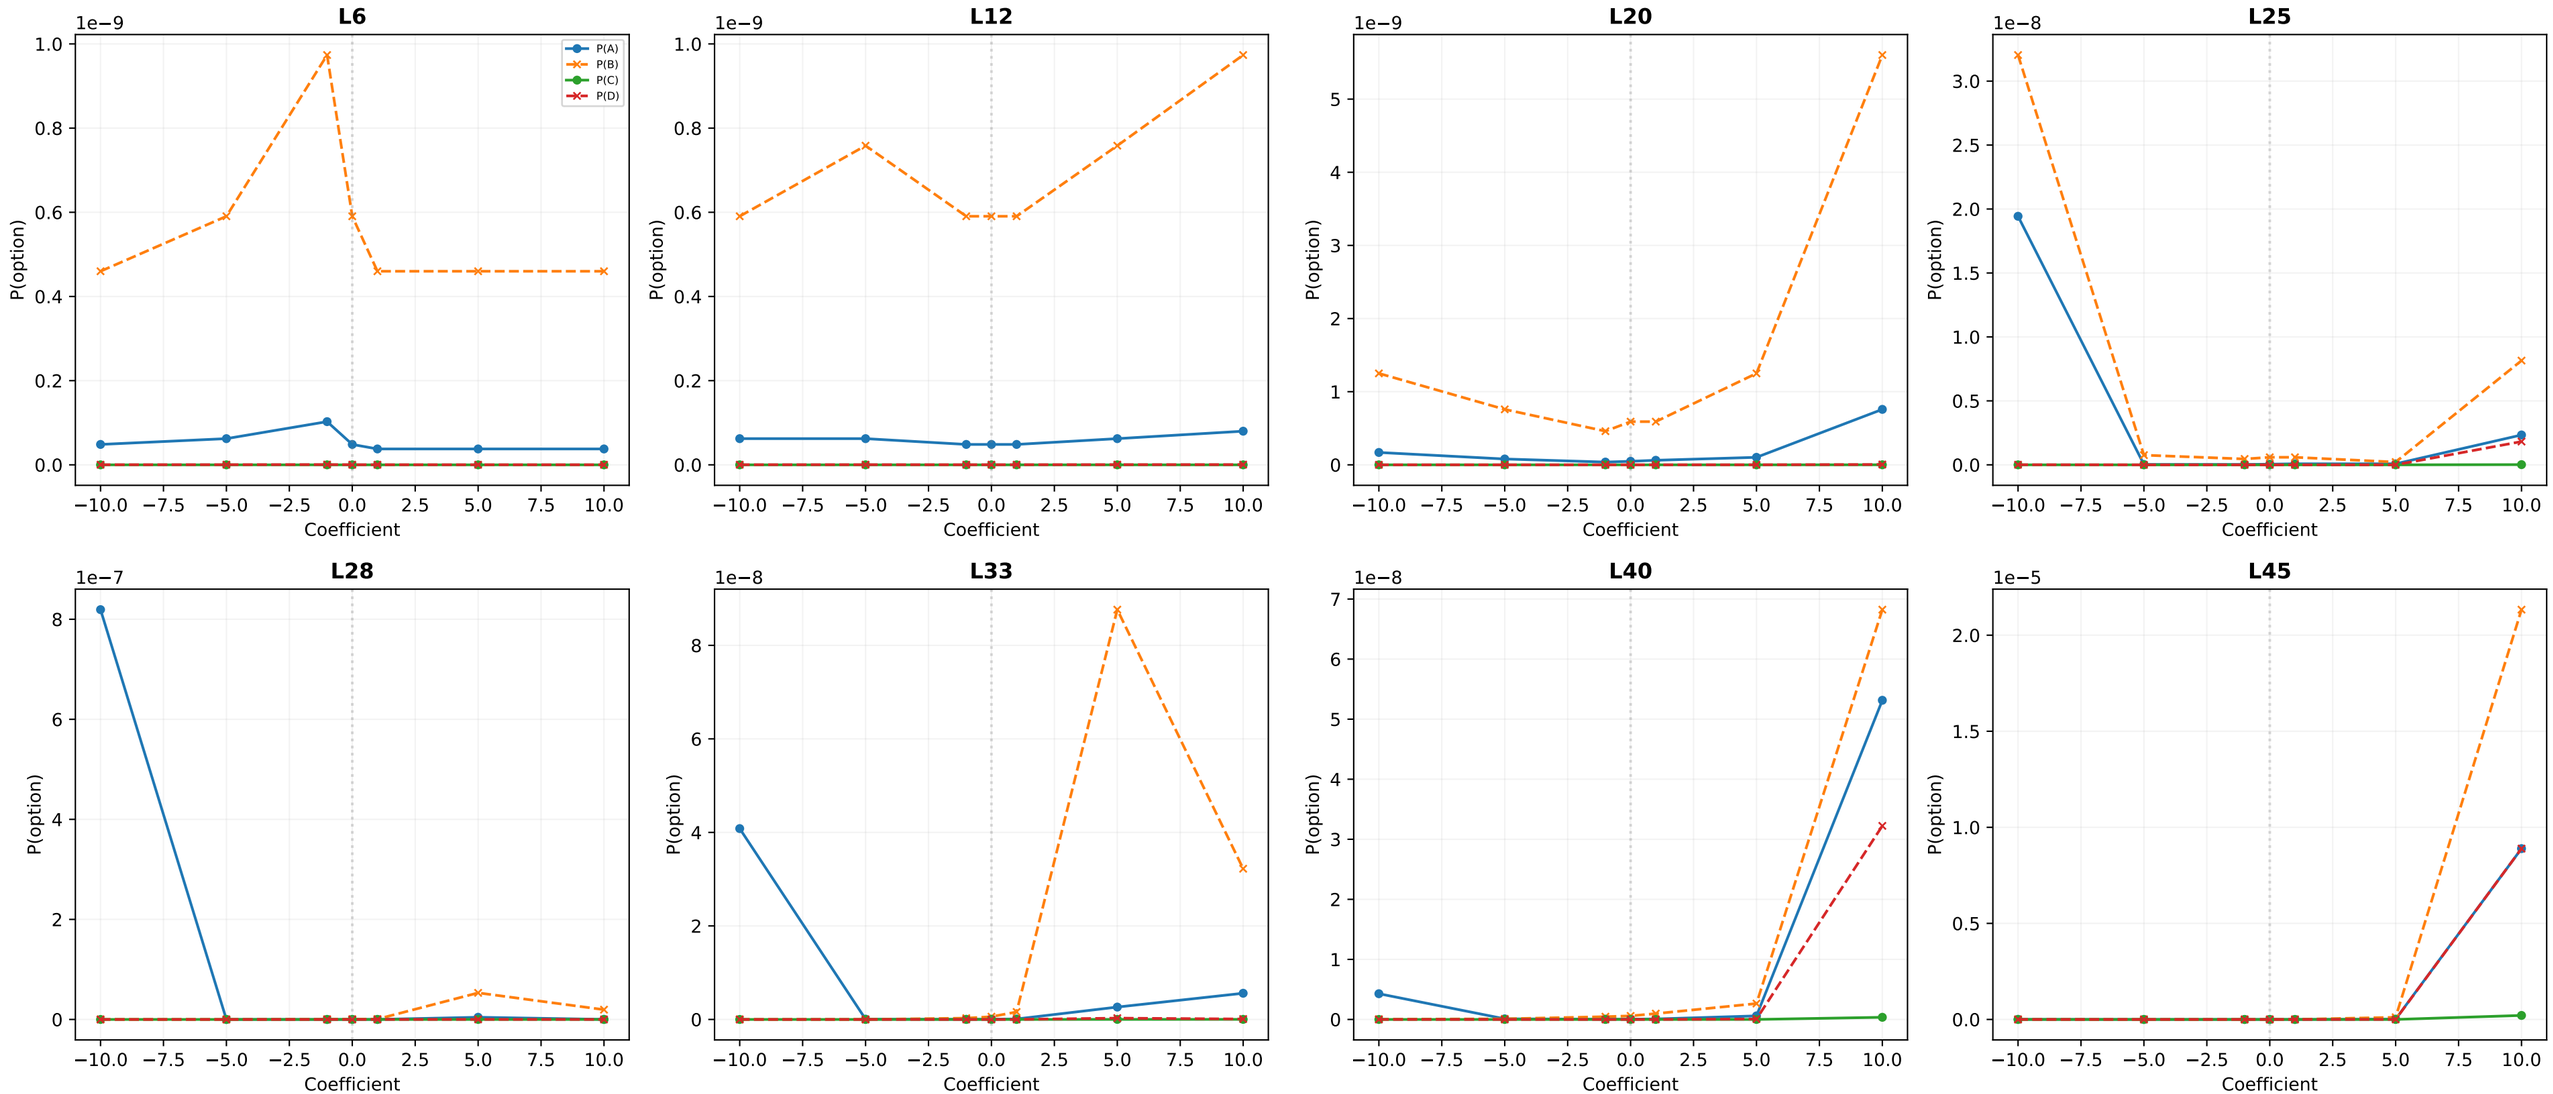

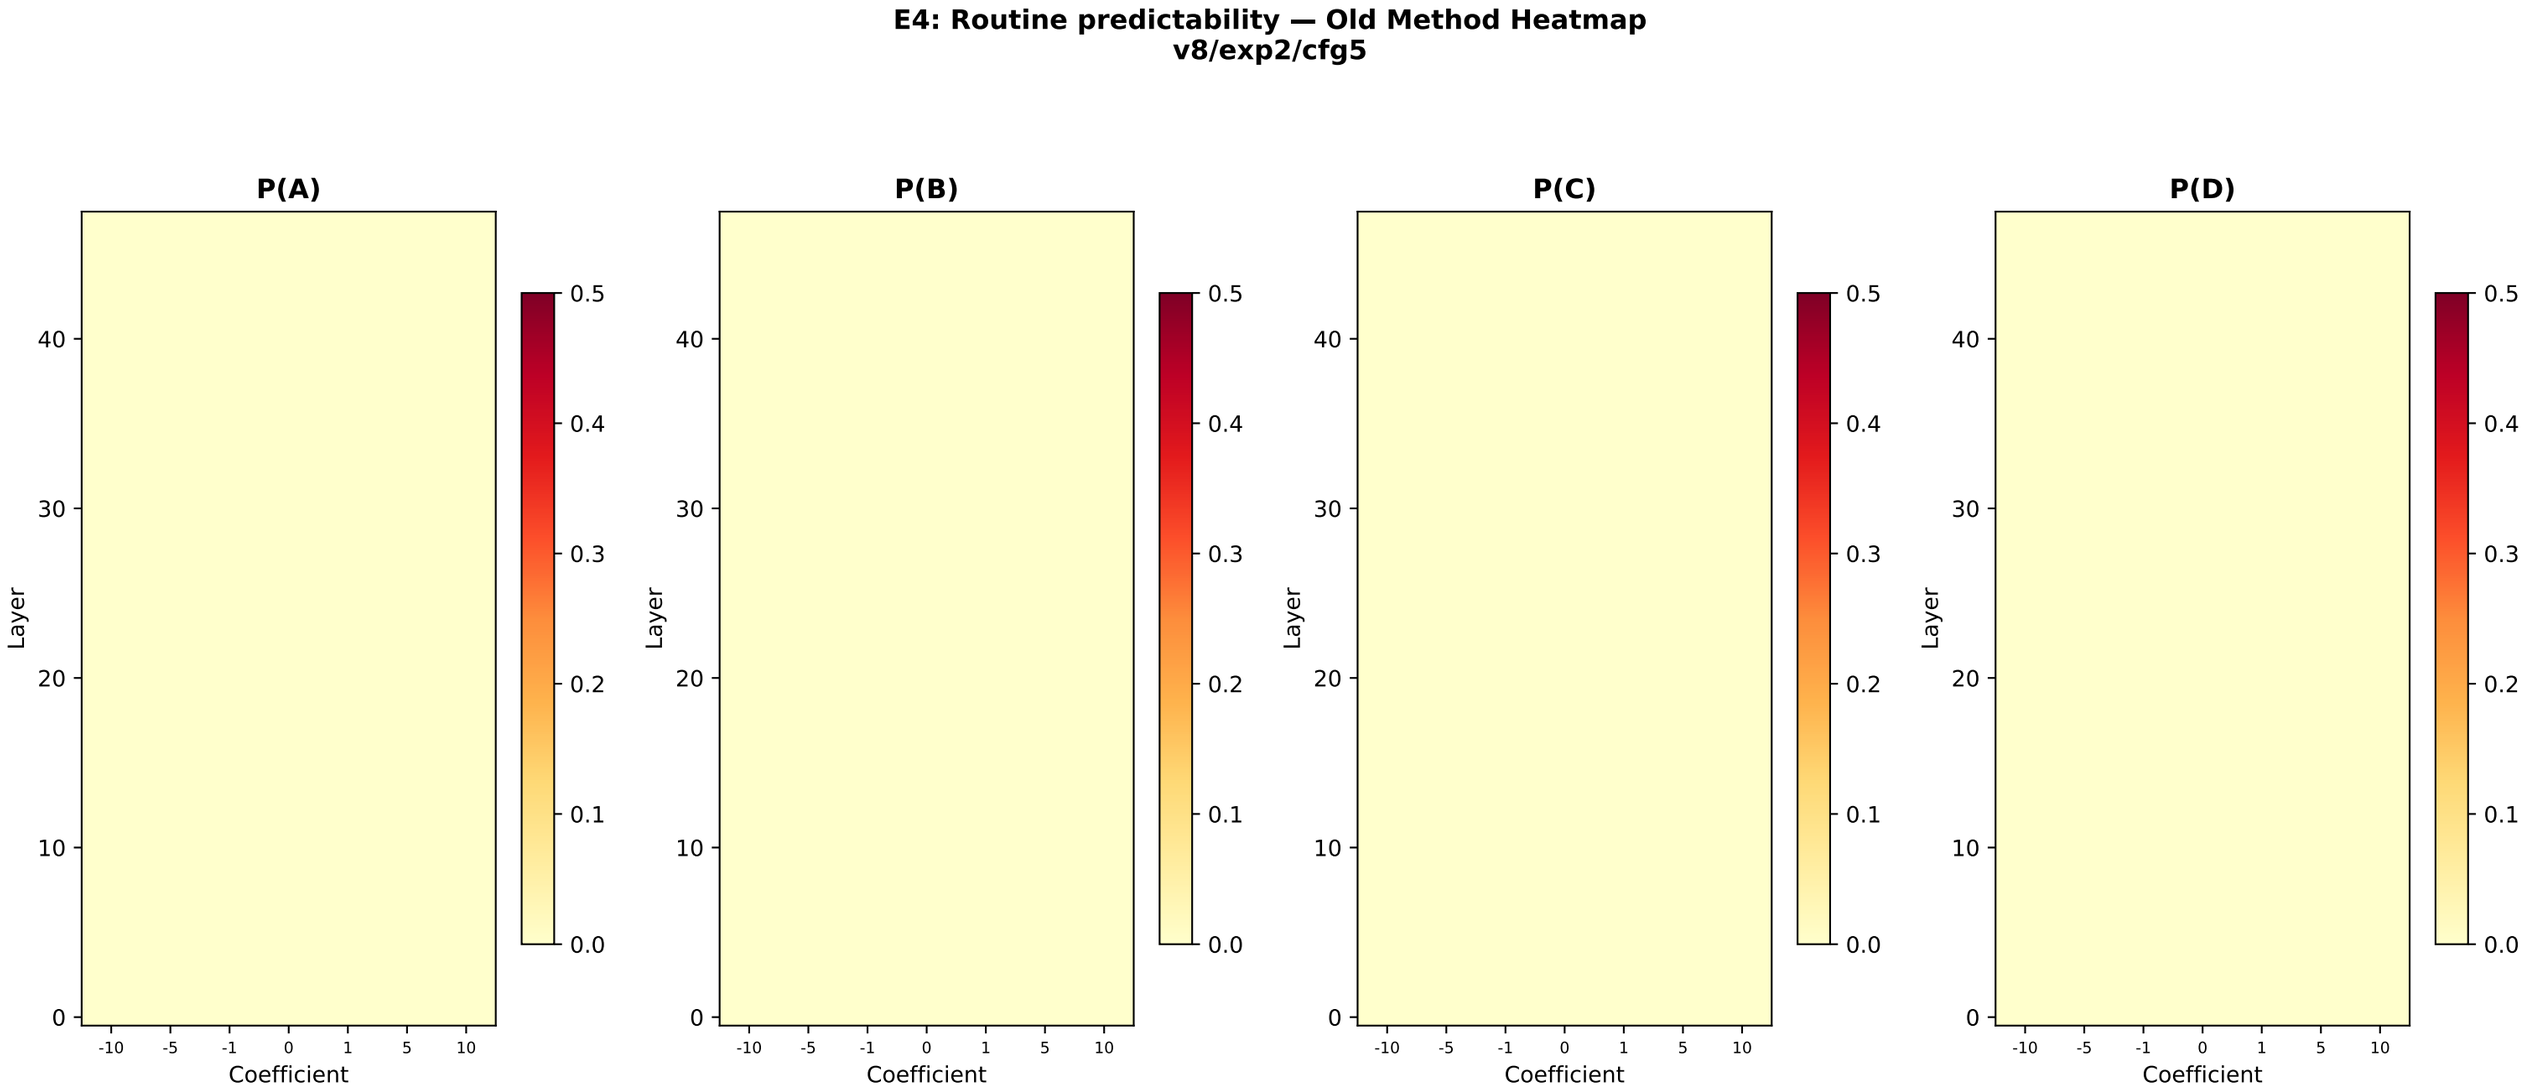
E4: Routine predictability — Old Method Heatmap
v8/exp2/cfg5
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E4: Routine predictability — New Method (Matteo)
v8/exp2/cfg5 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

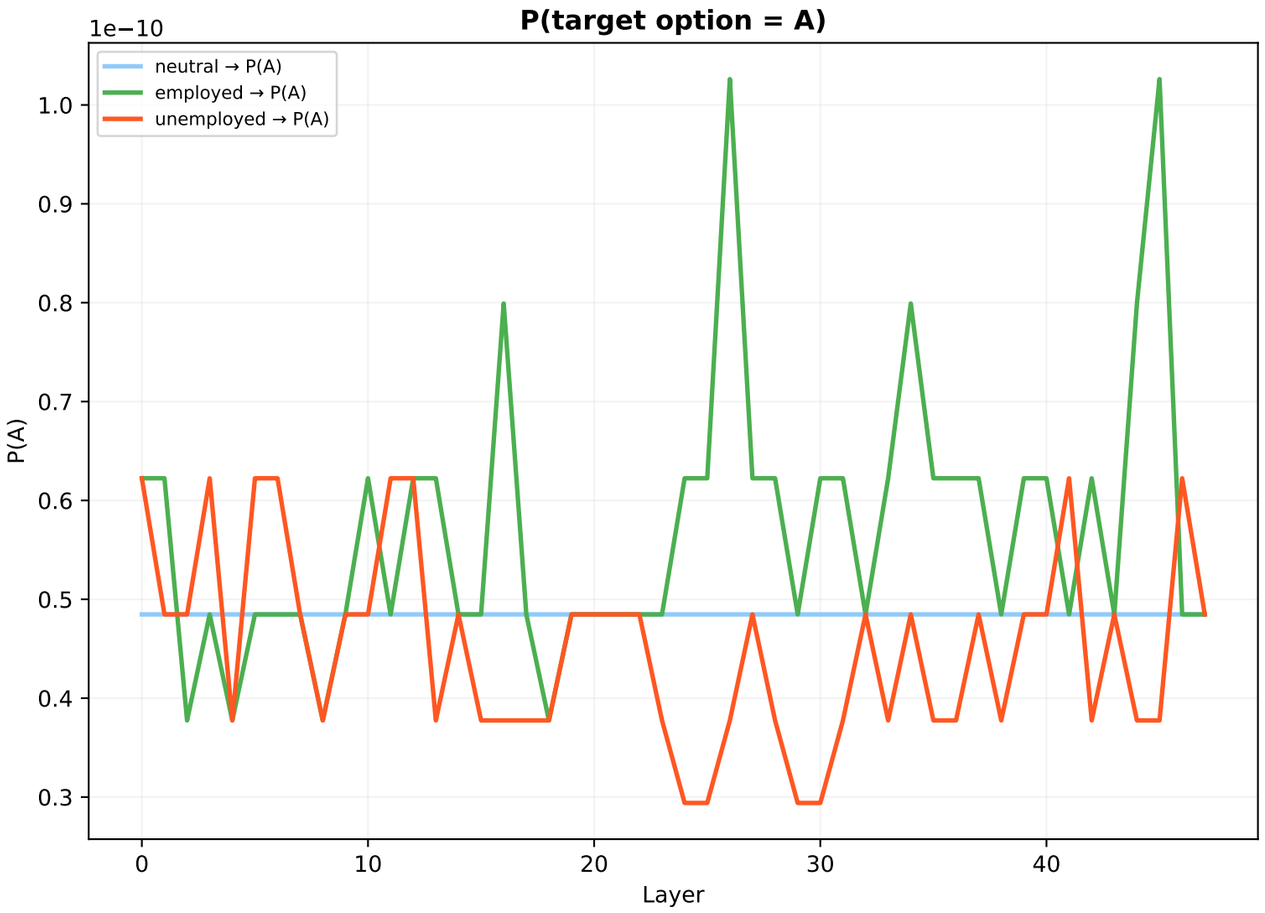

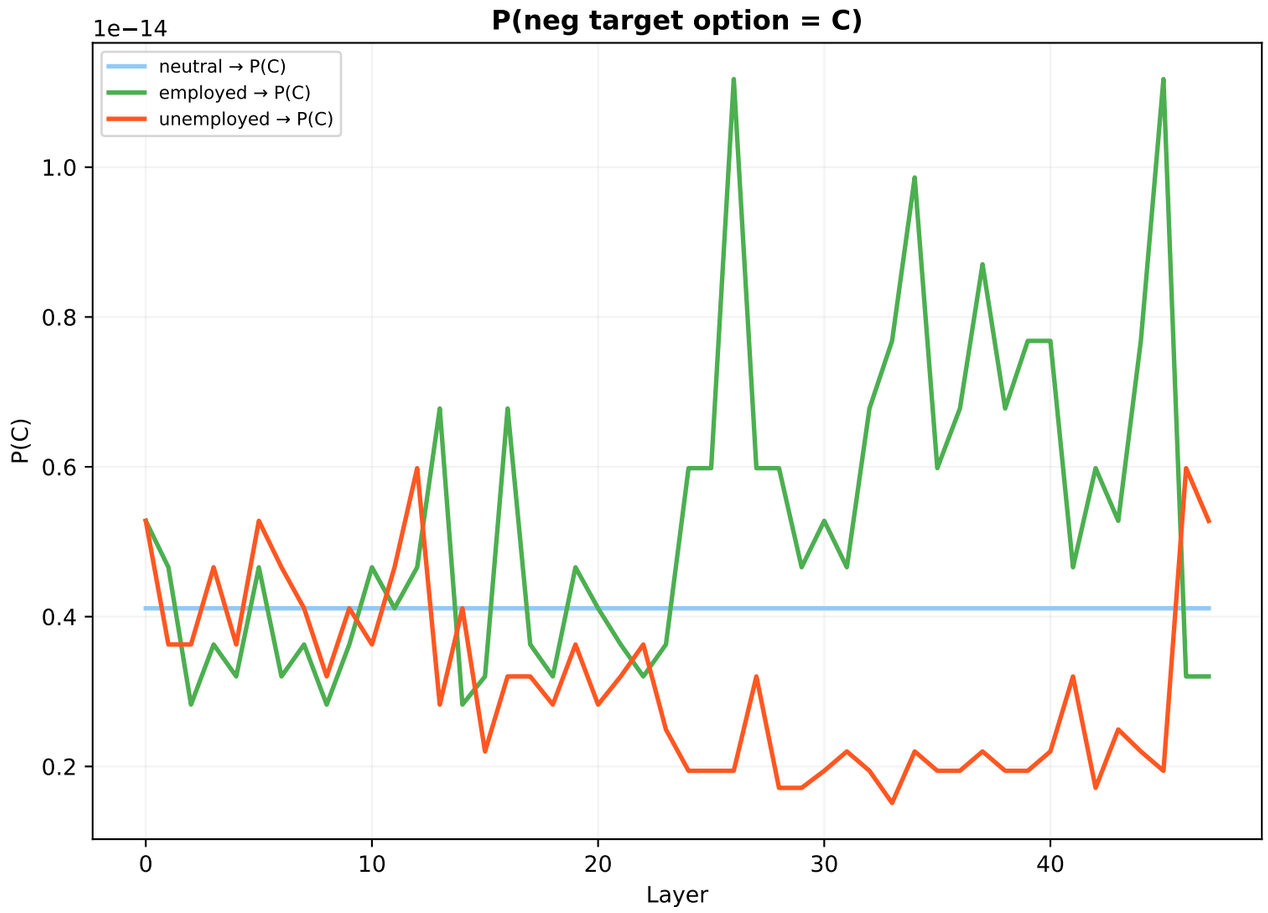

E5: CONTROL: housing type — Old Method
v8/exp2/cfg5 | coeffs [-10, -5, -1, 0, 1, 5, 10]

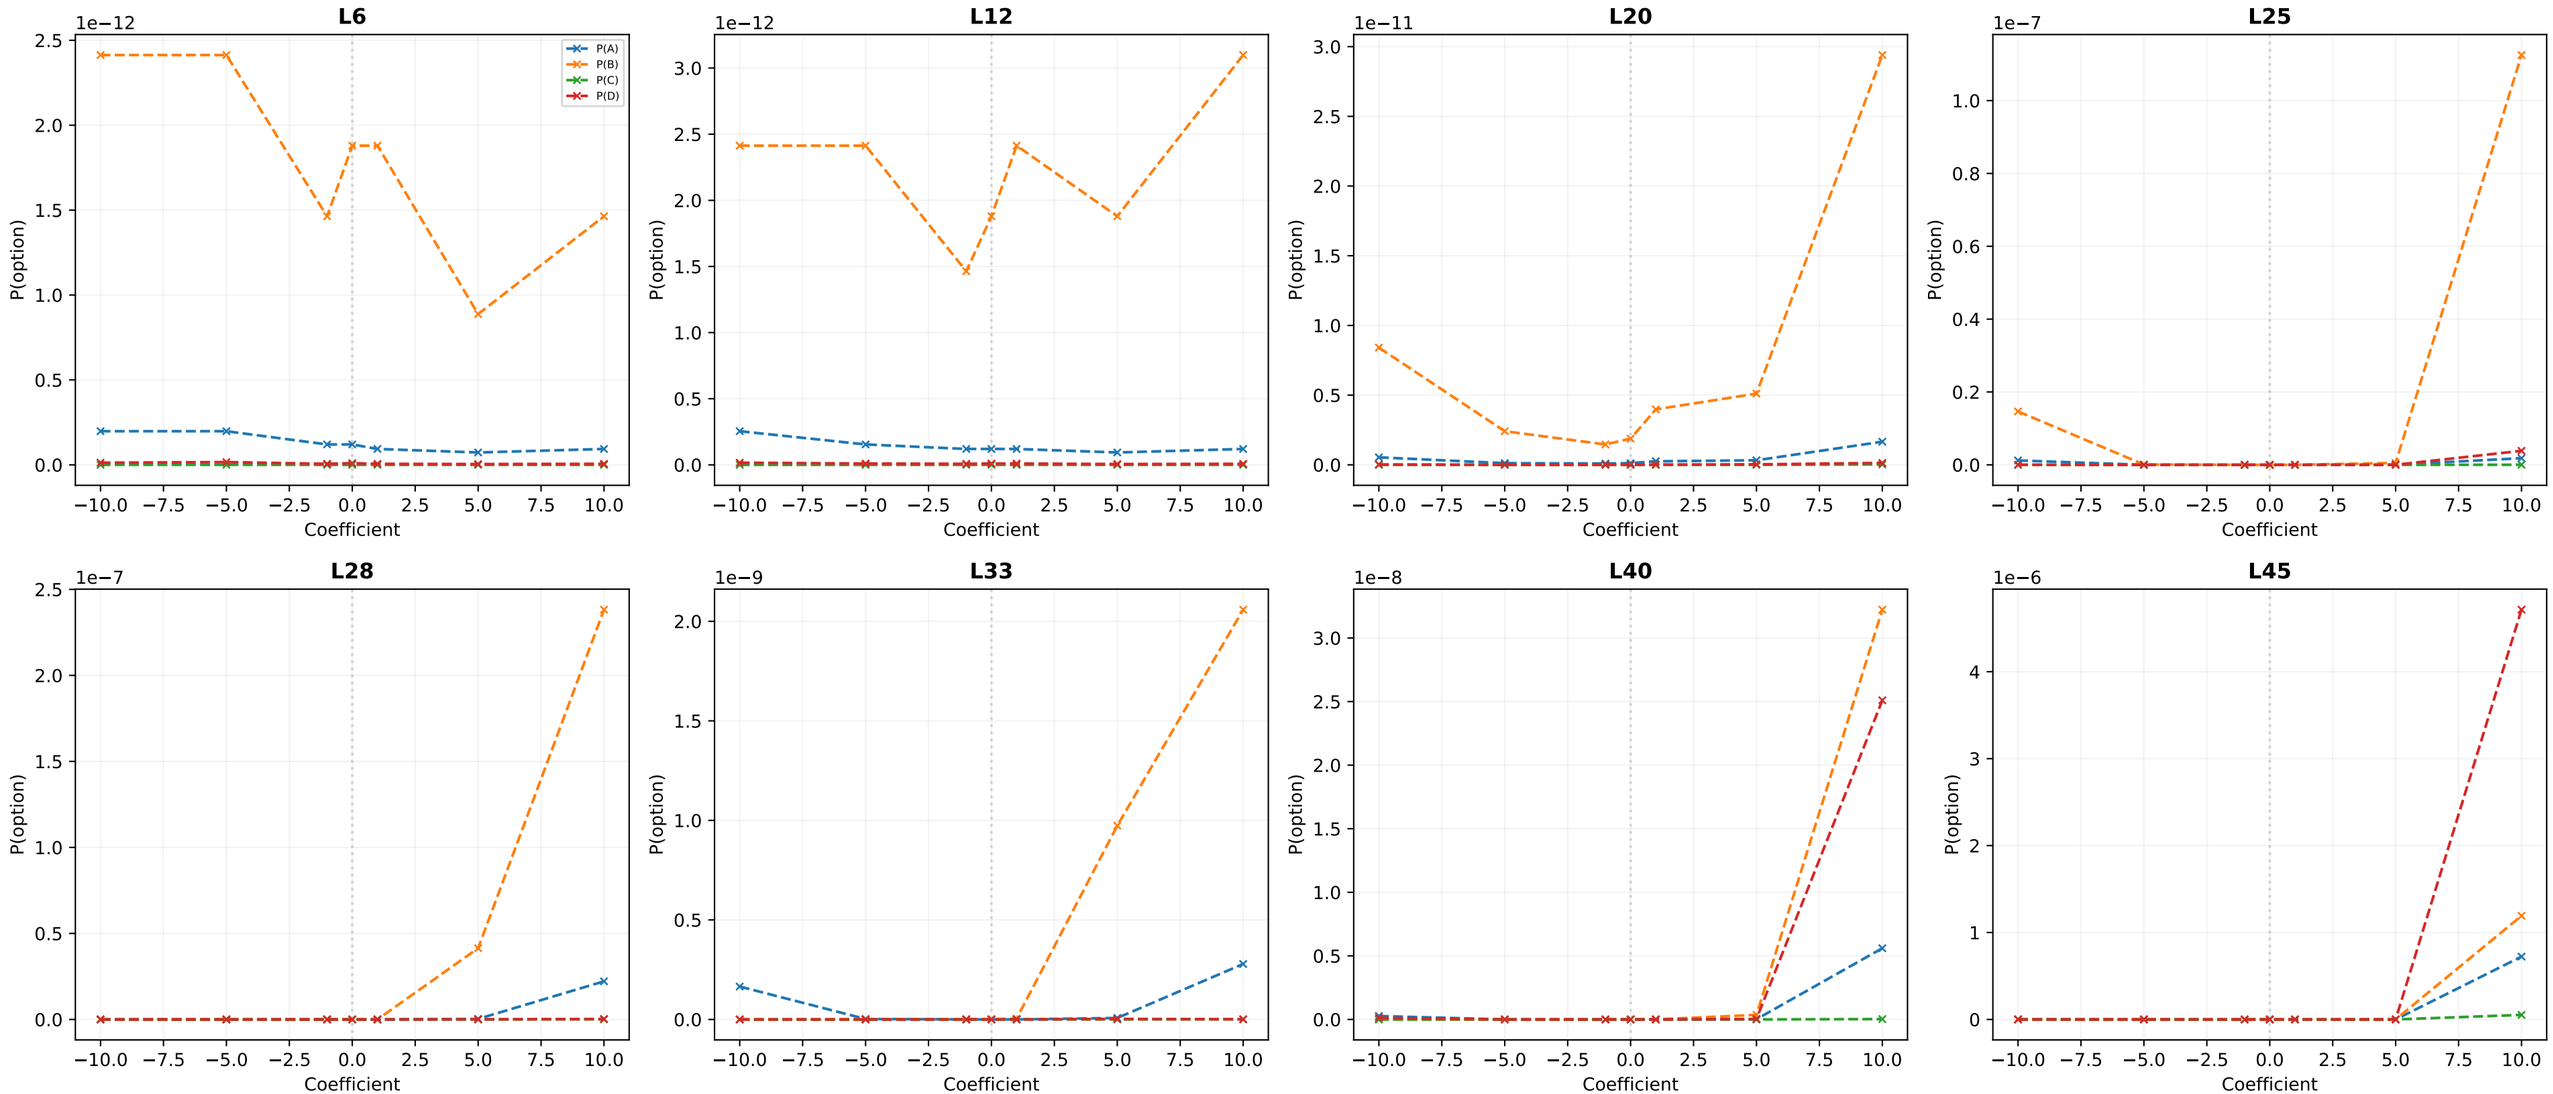

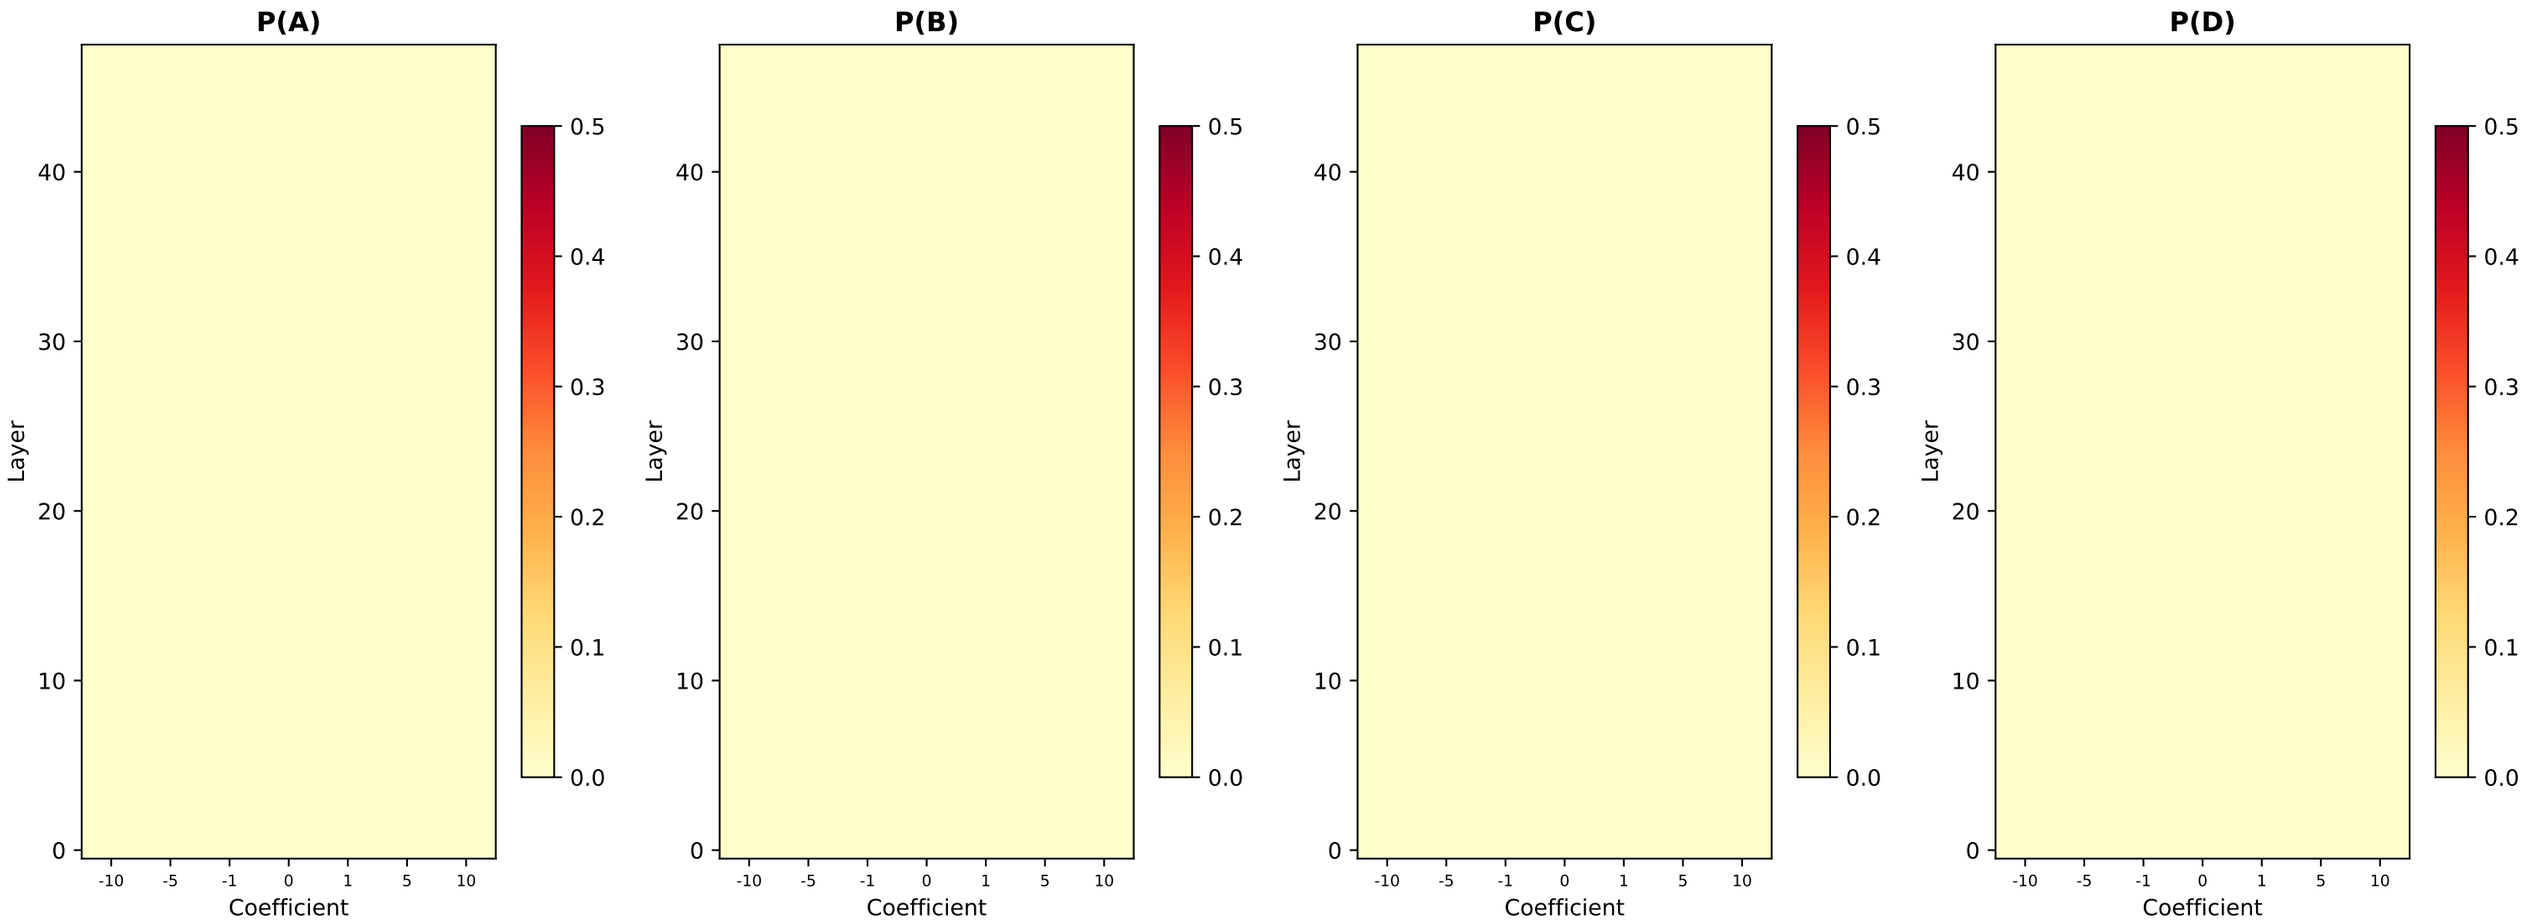
E5: CONTROL: housing type — Old Method Heatmap
v8/exp2/cfg5
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E5: CONTROL: housing type — New Method (Matteo)
v8/exp2/cfg5 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

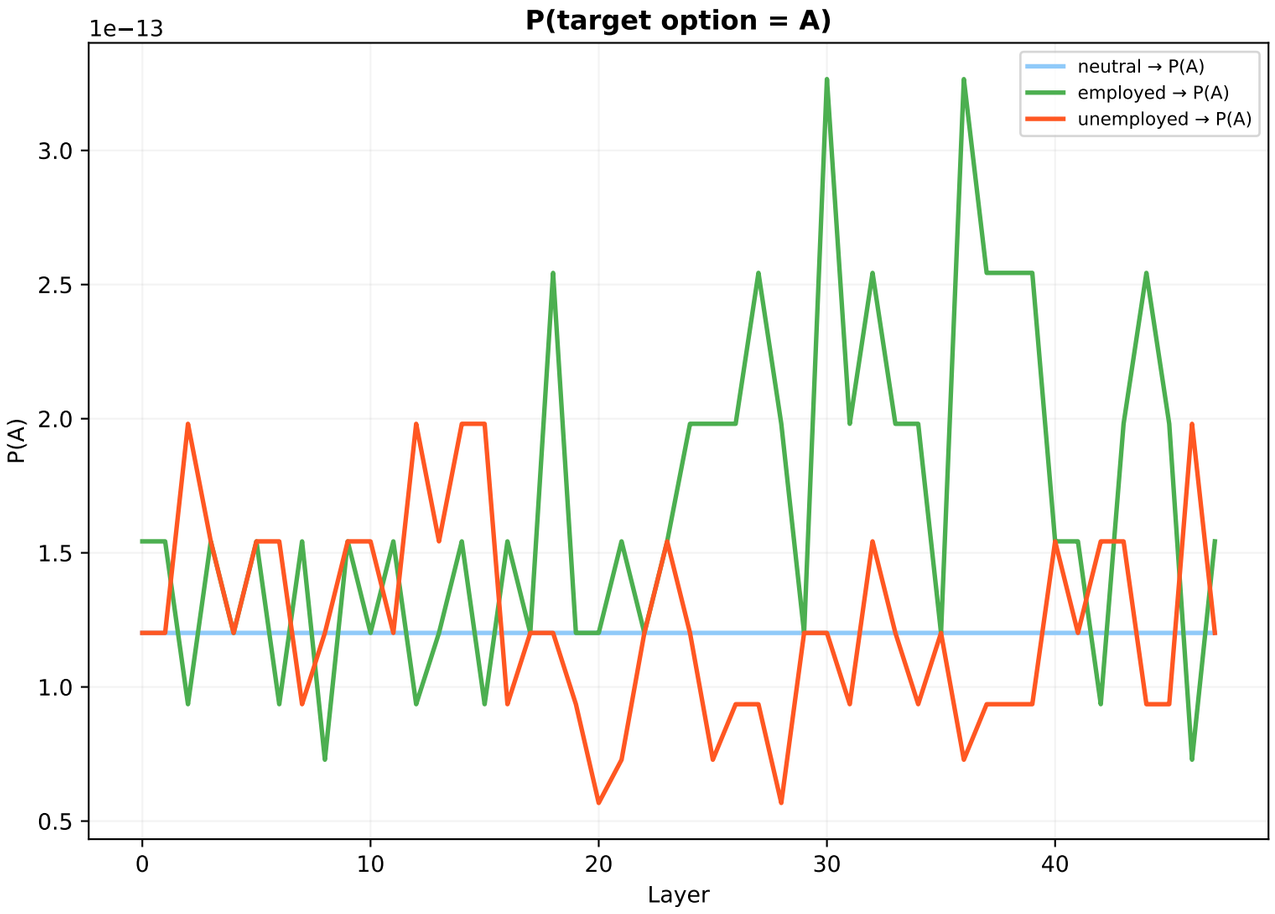

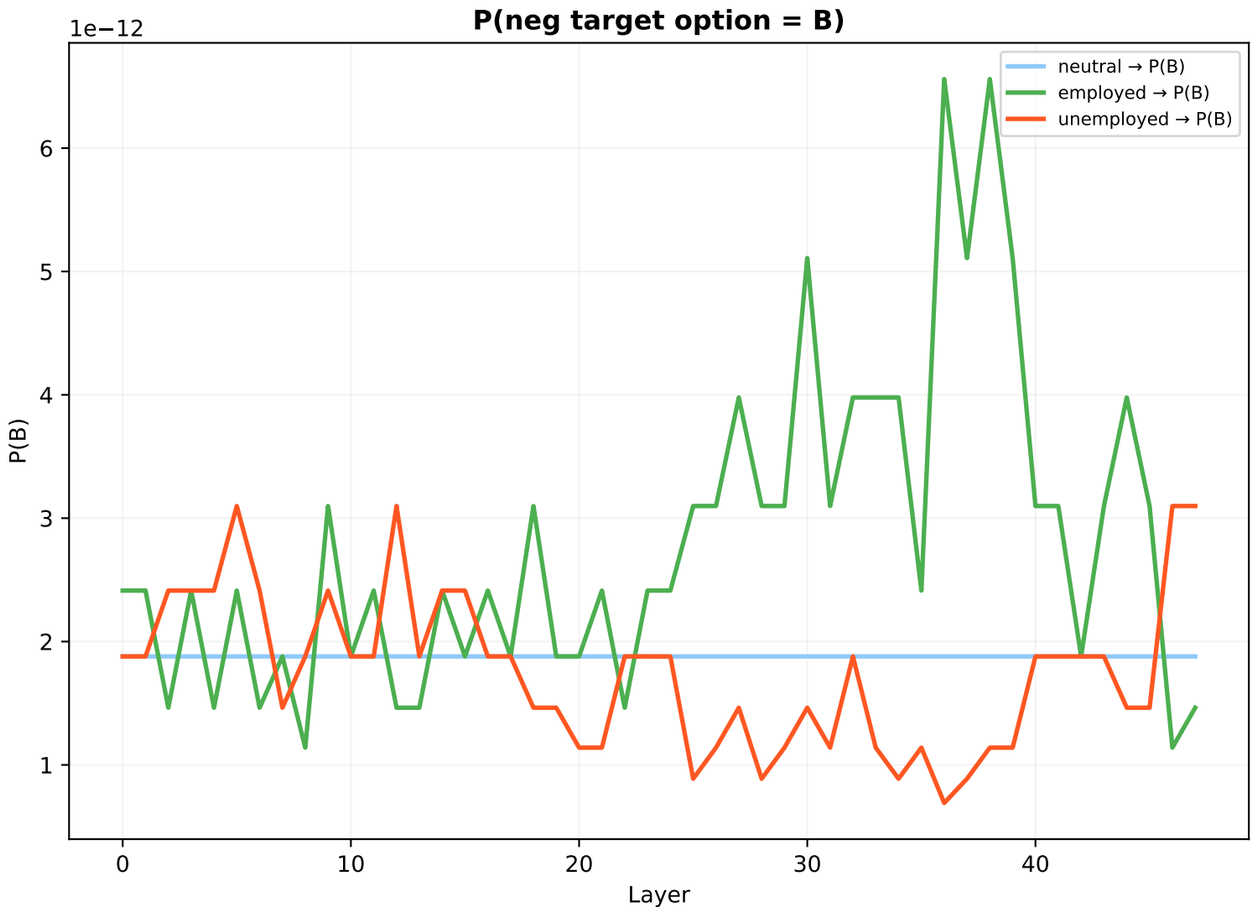

E1: Monthly lunch spending — Old Method
v8/exp2/cfg6 | coeffs [-10, -5, -1, 0, 1, 5, 10]

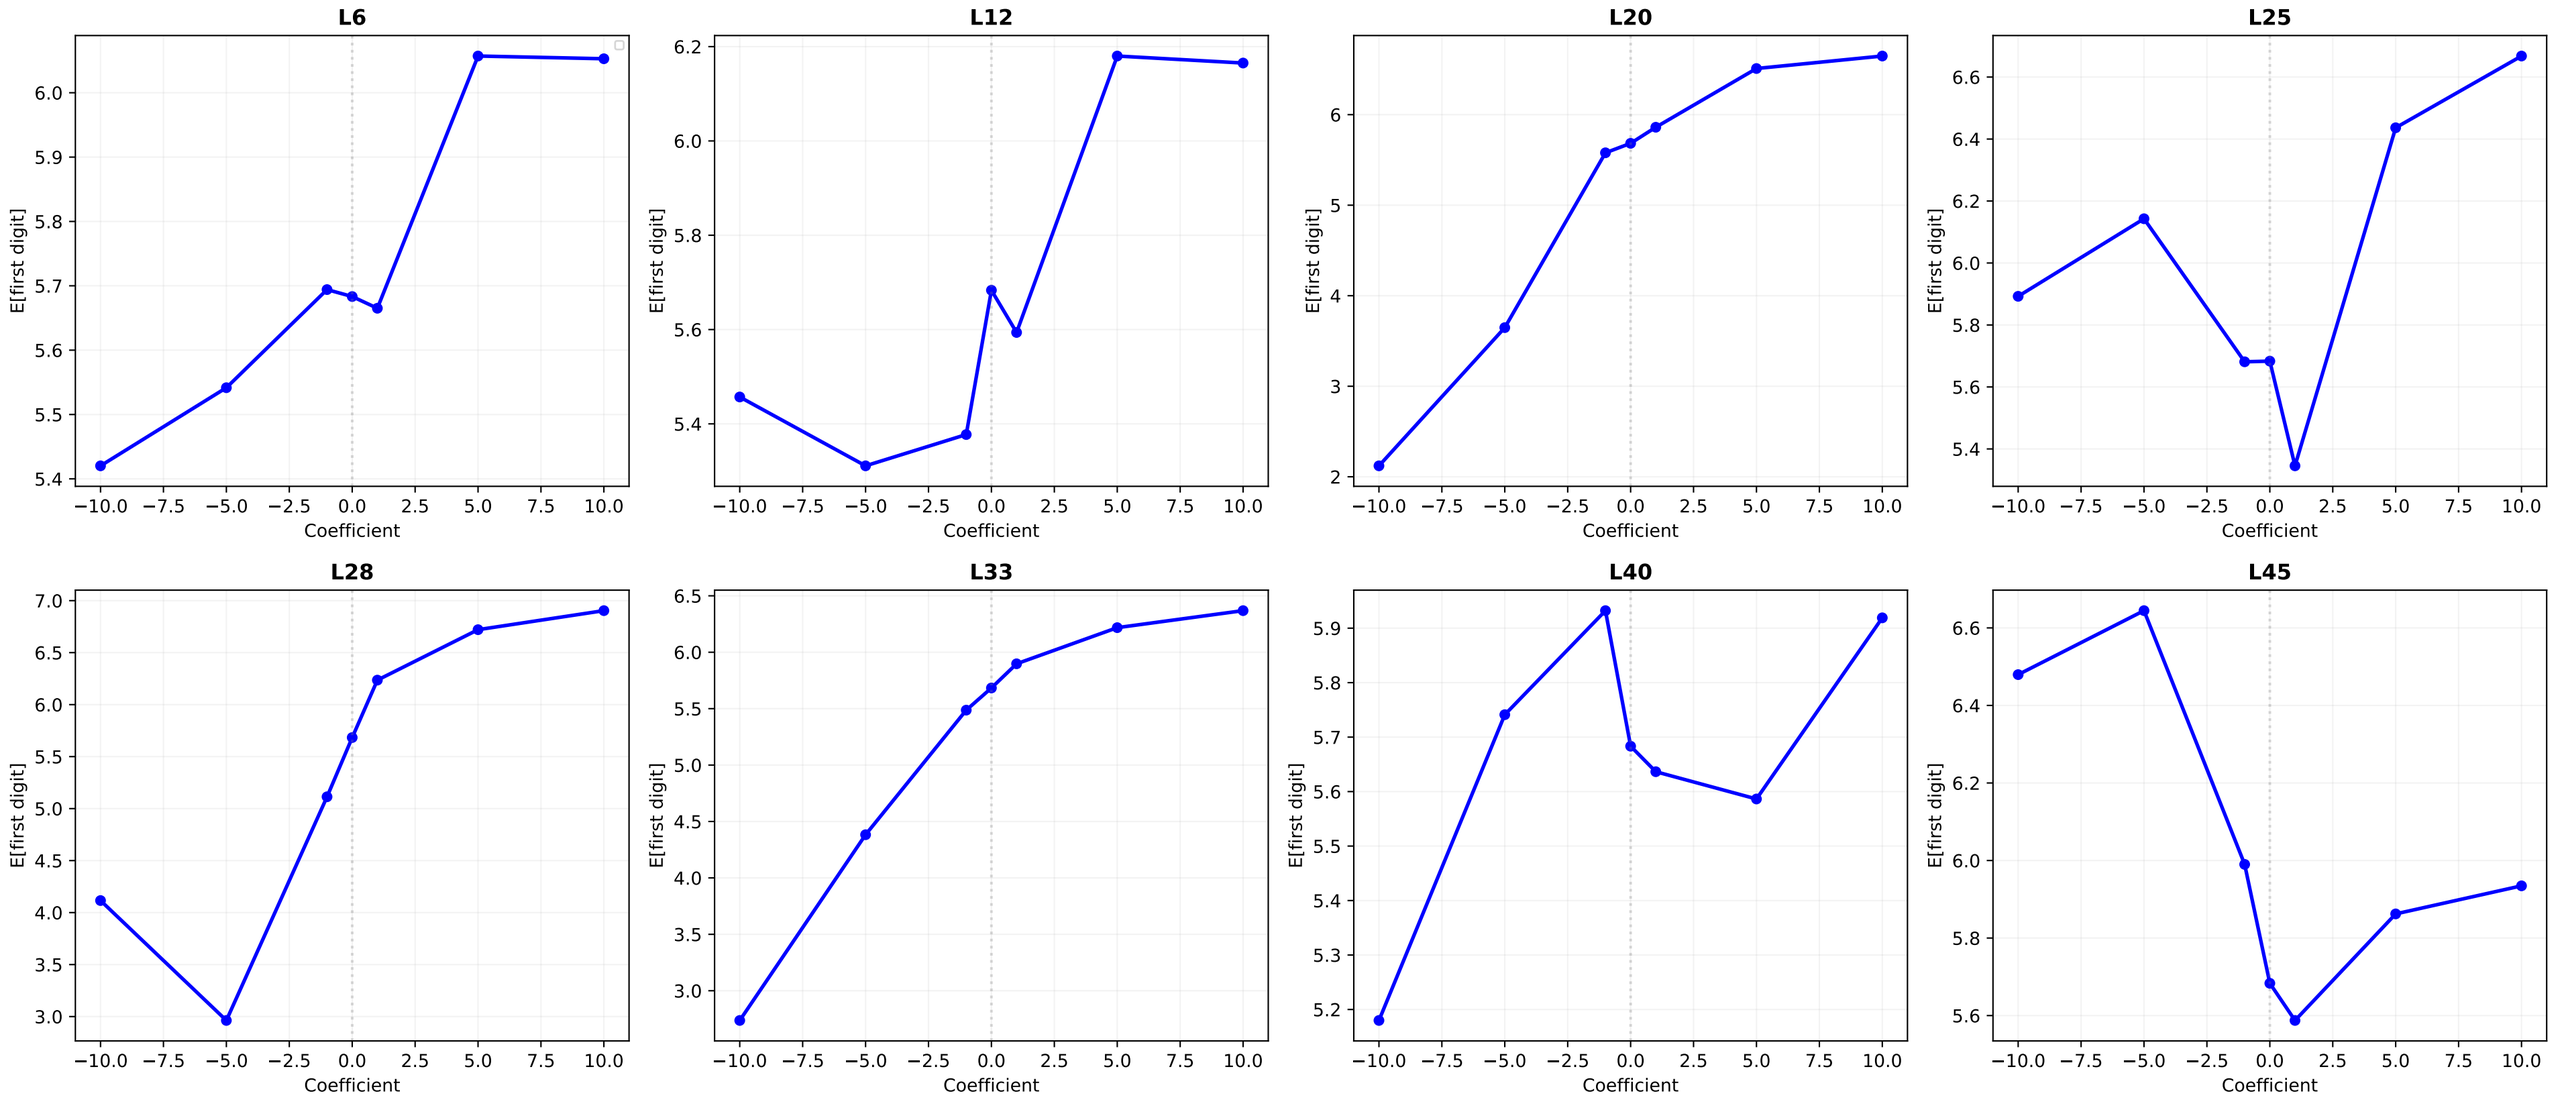

E1: Monthly lunch spending — Old Method Heatmap
v8/exp2/cfg6

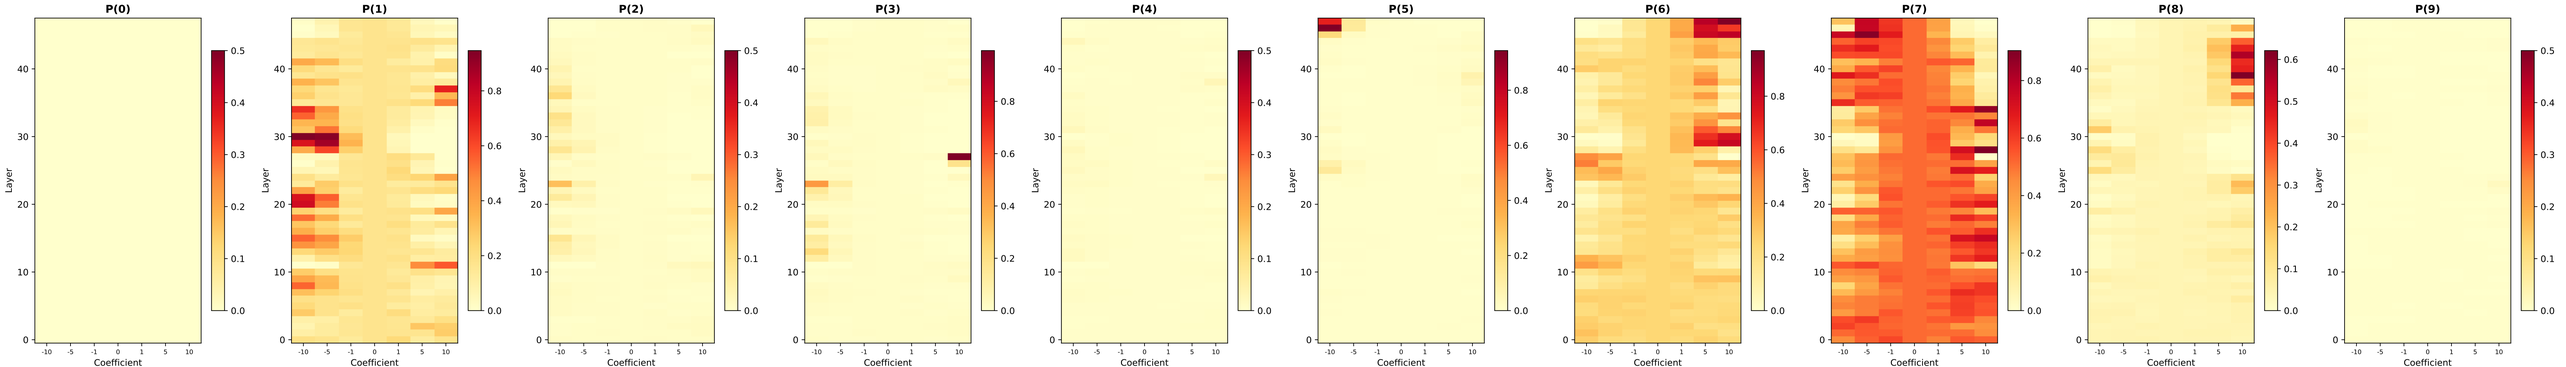

E1: Monthly lunch spending — New Method (Matteo)
v8/exp2/cfg6 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

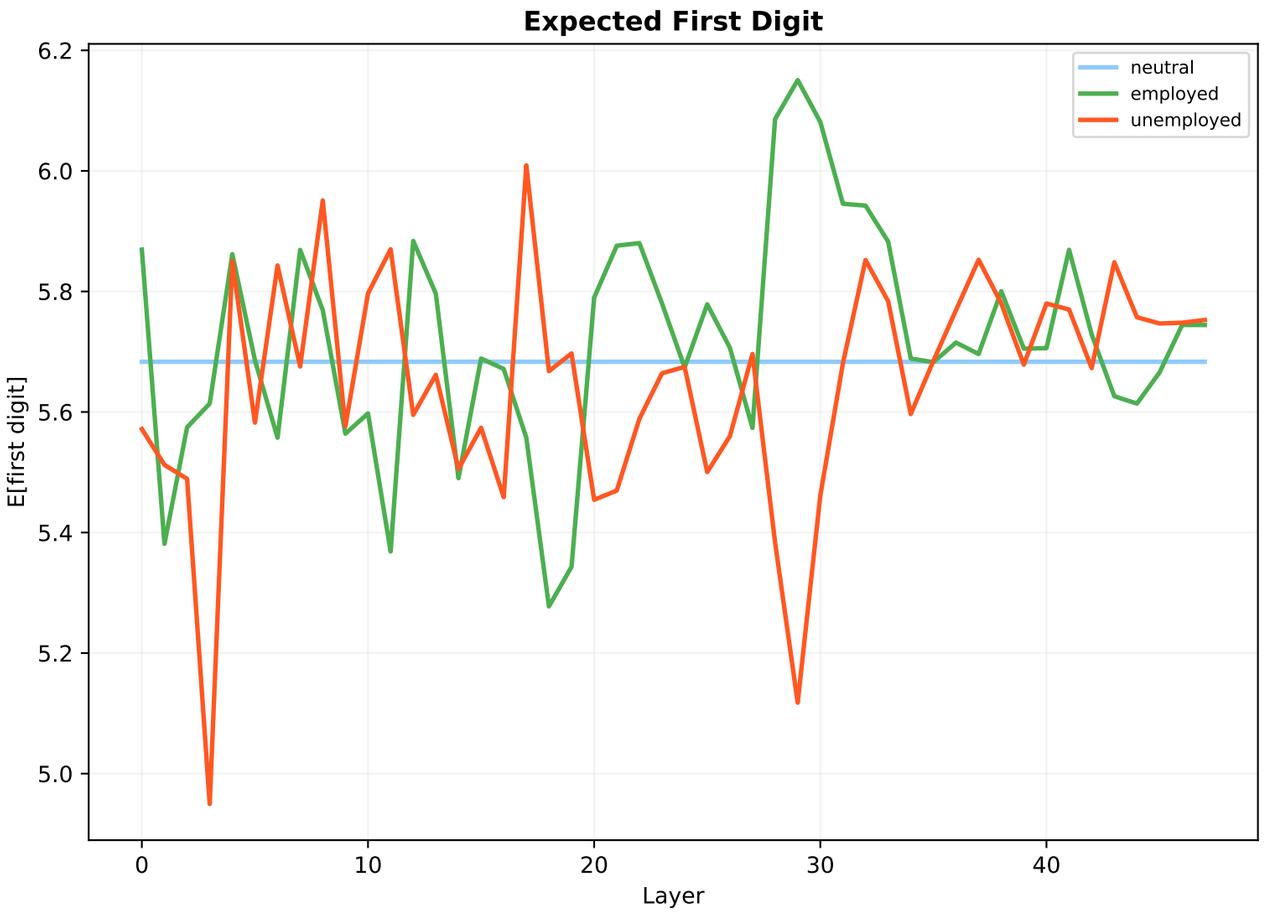

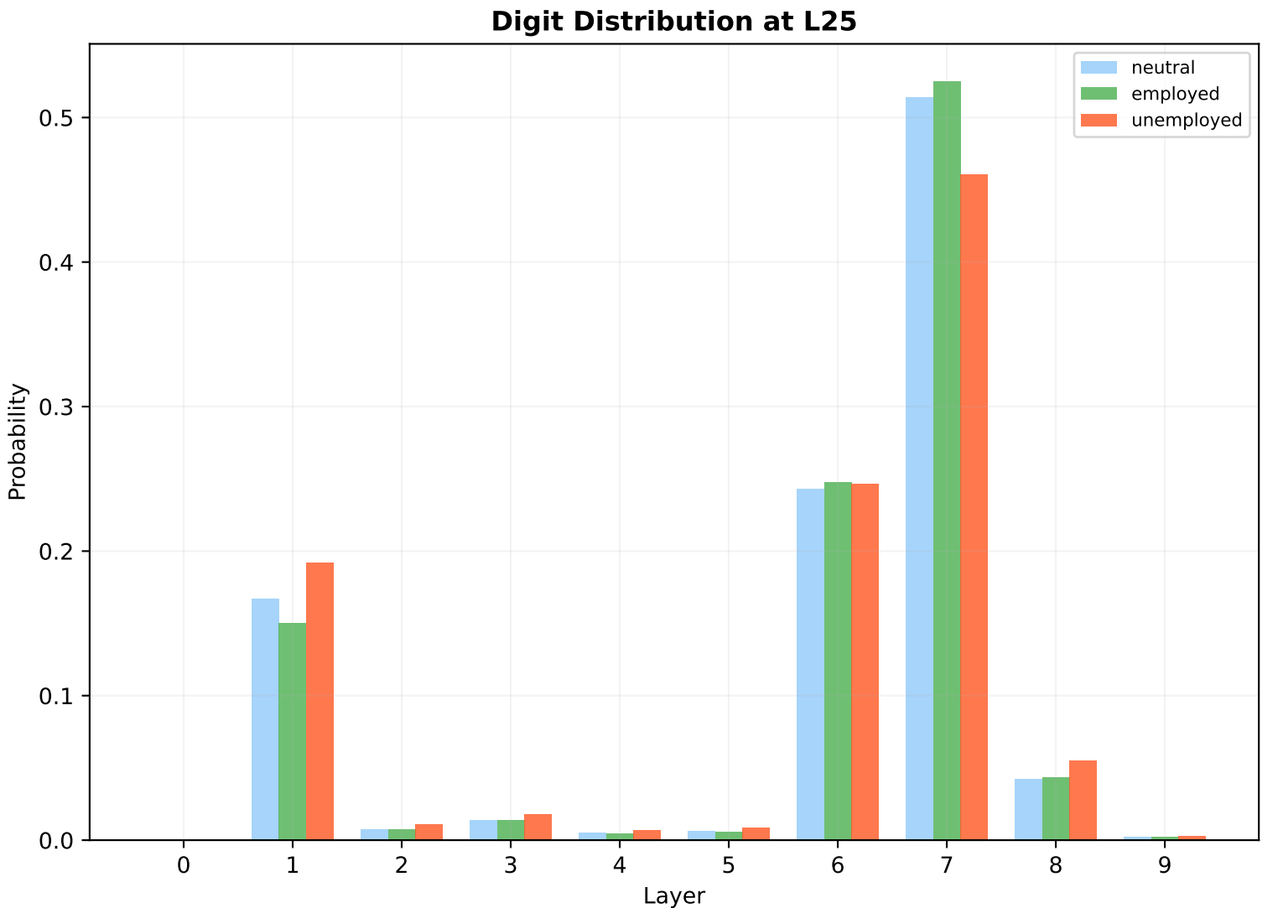

E2: Monthly commute cost — Old Method
v8/exp2/cfg6 | coeffs [-10, -5, -1, 0, 1, 5, 10]

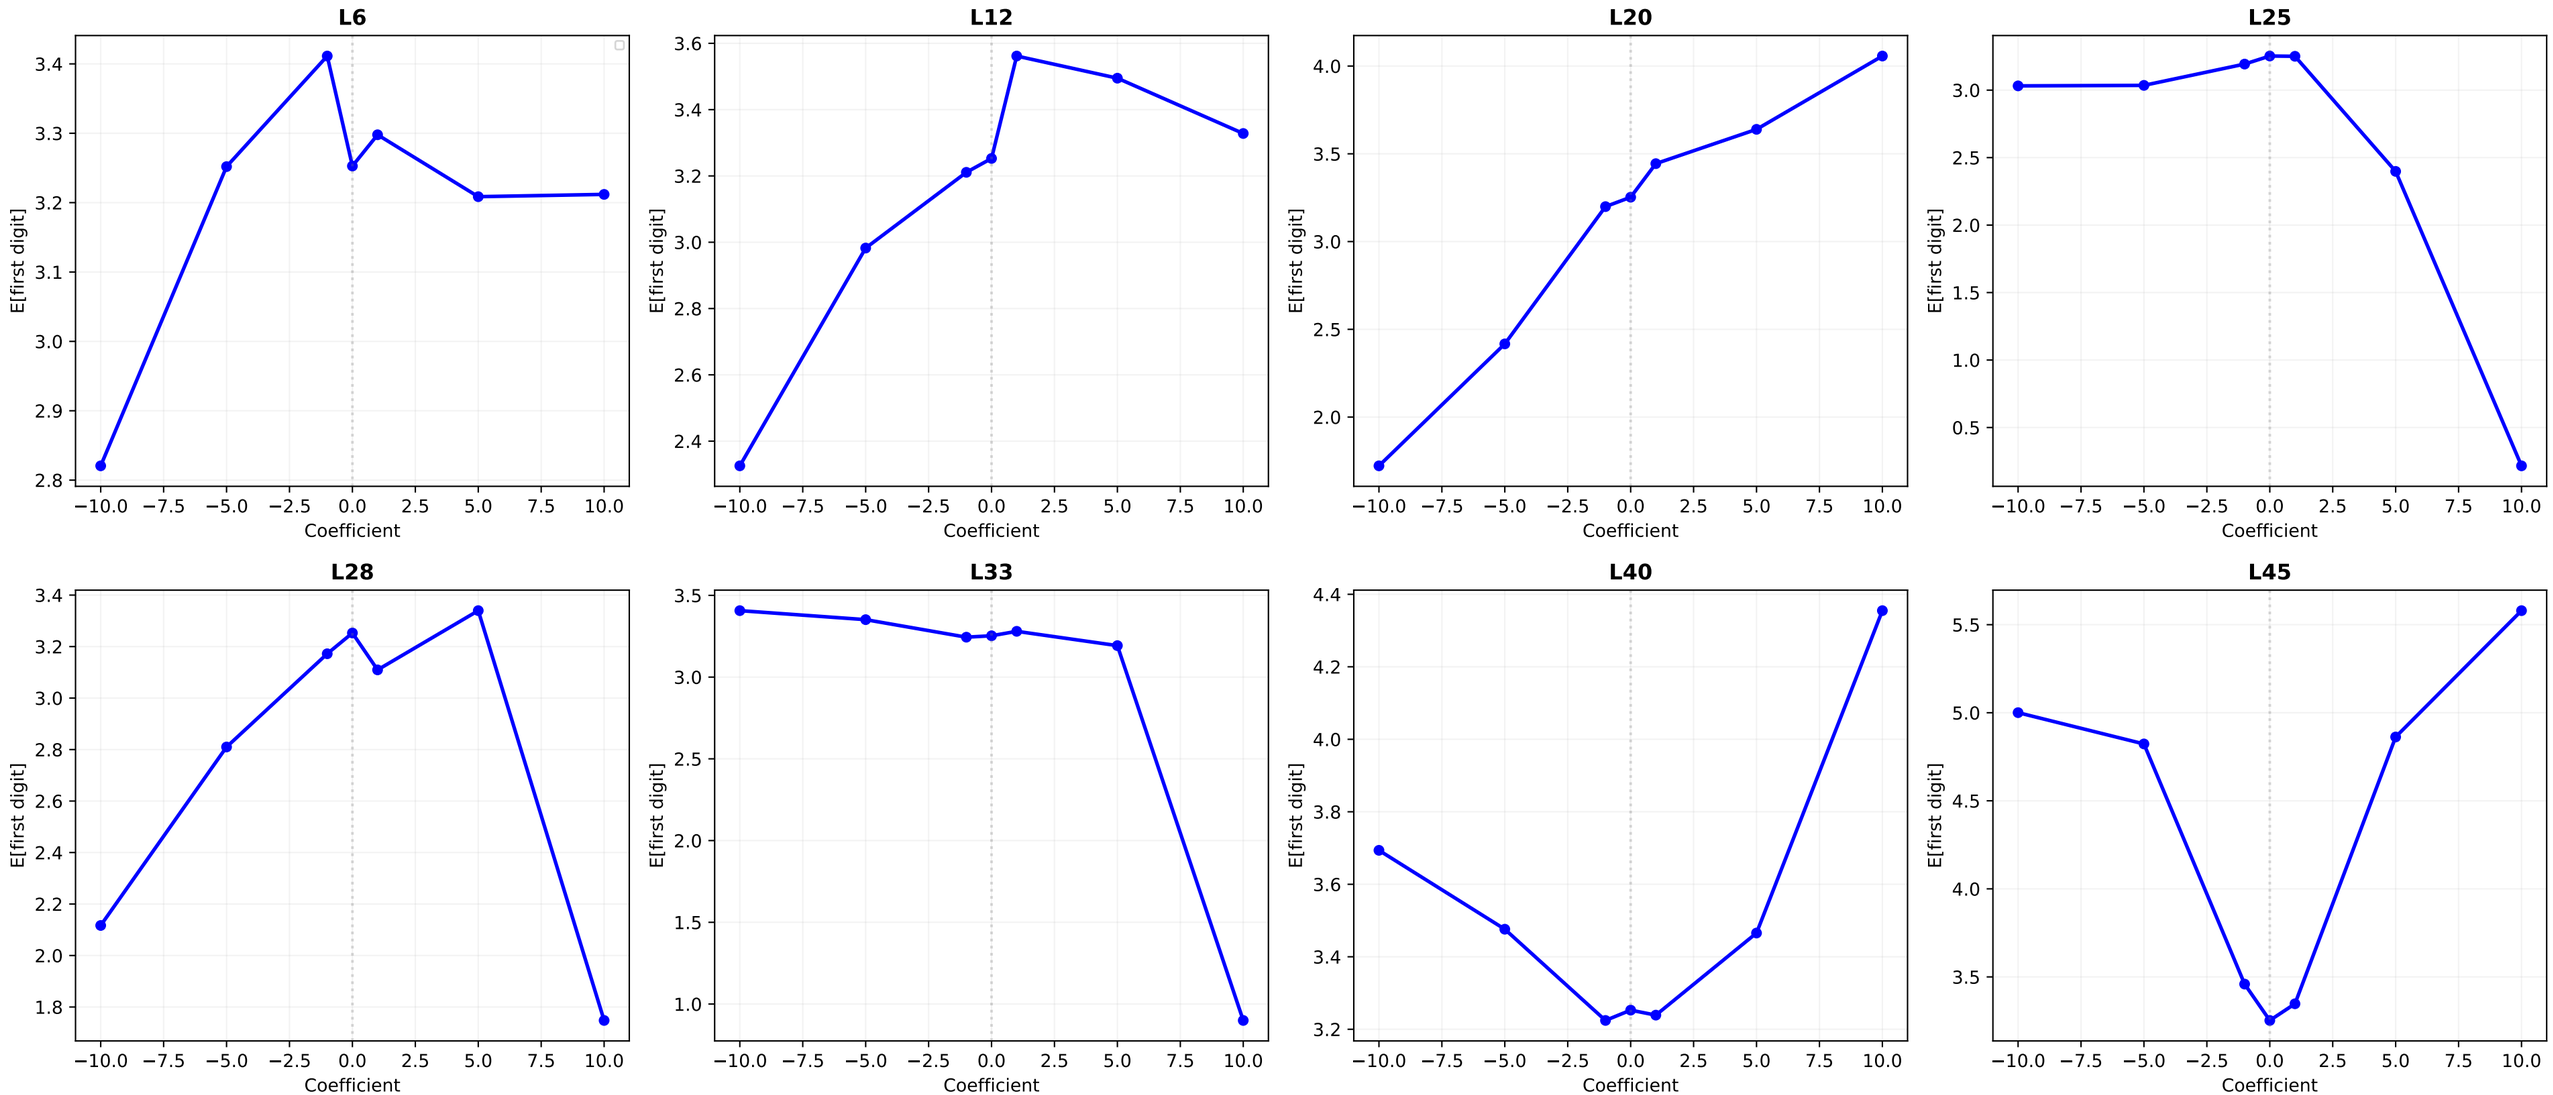

E2: Monthly commute cost — Old Method Heatmap
v8/exp2/cfg6

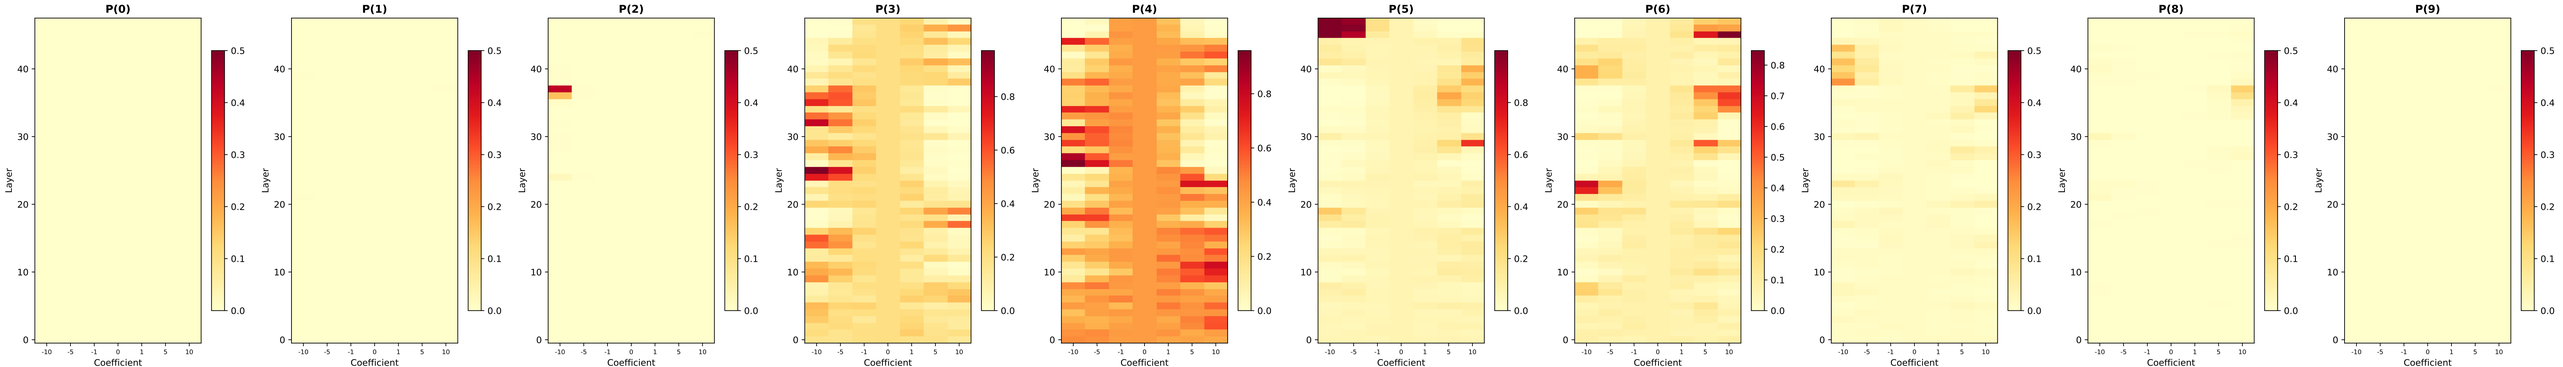

E2: Monthly commute cost — New Method (Matteo)
v8/exp2/cfg6 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

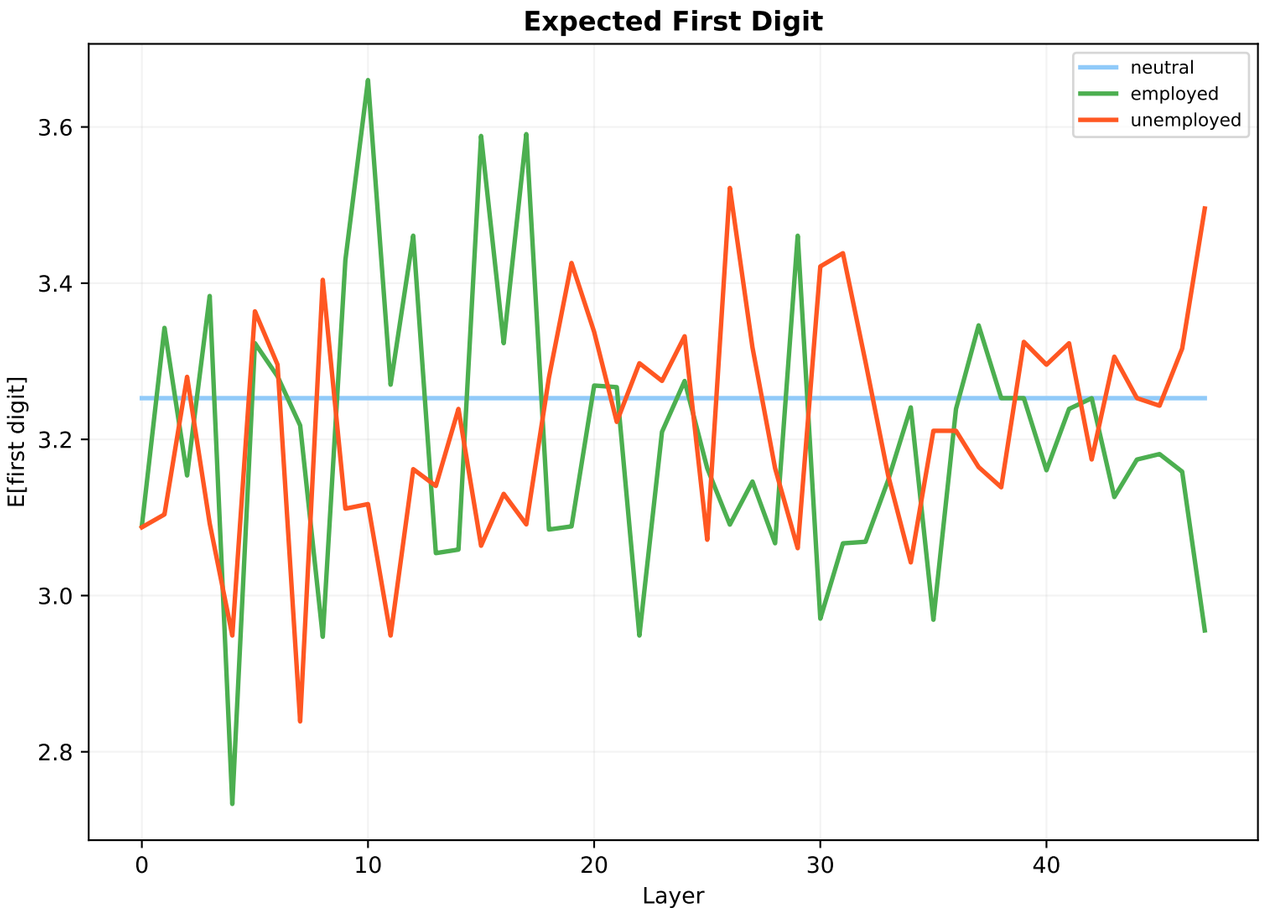

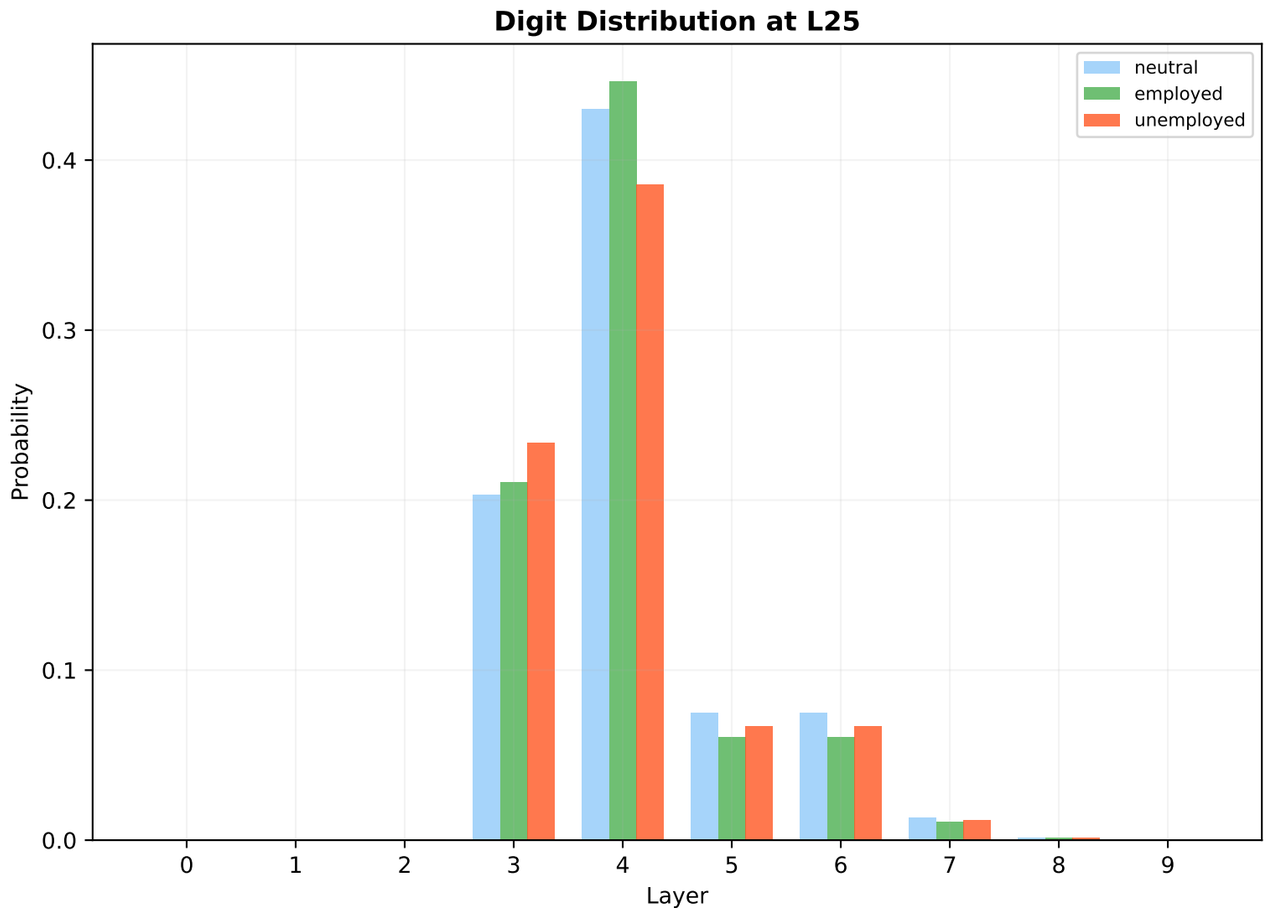

E3: Noon location — Old Method
v8/exp2/cfg6 | coeffs [-10, -5, -1, 0, 1, 5, 10]

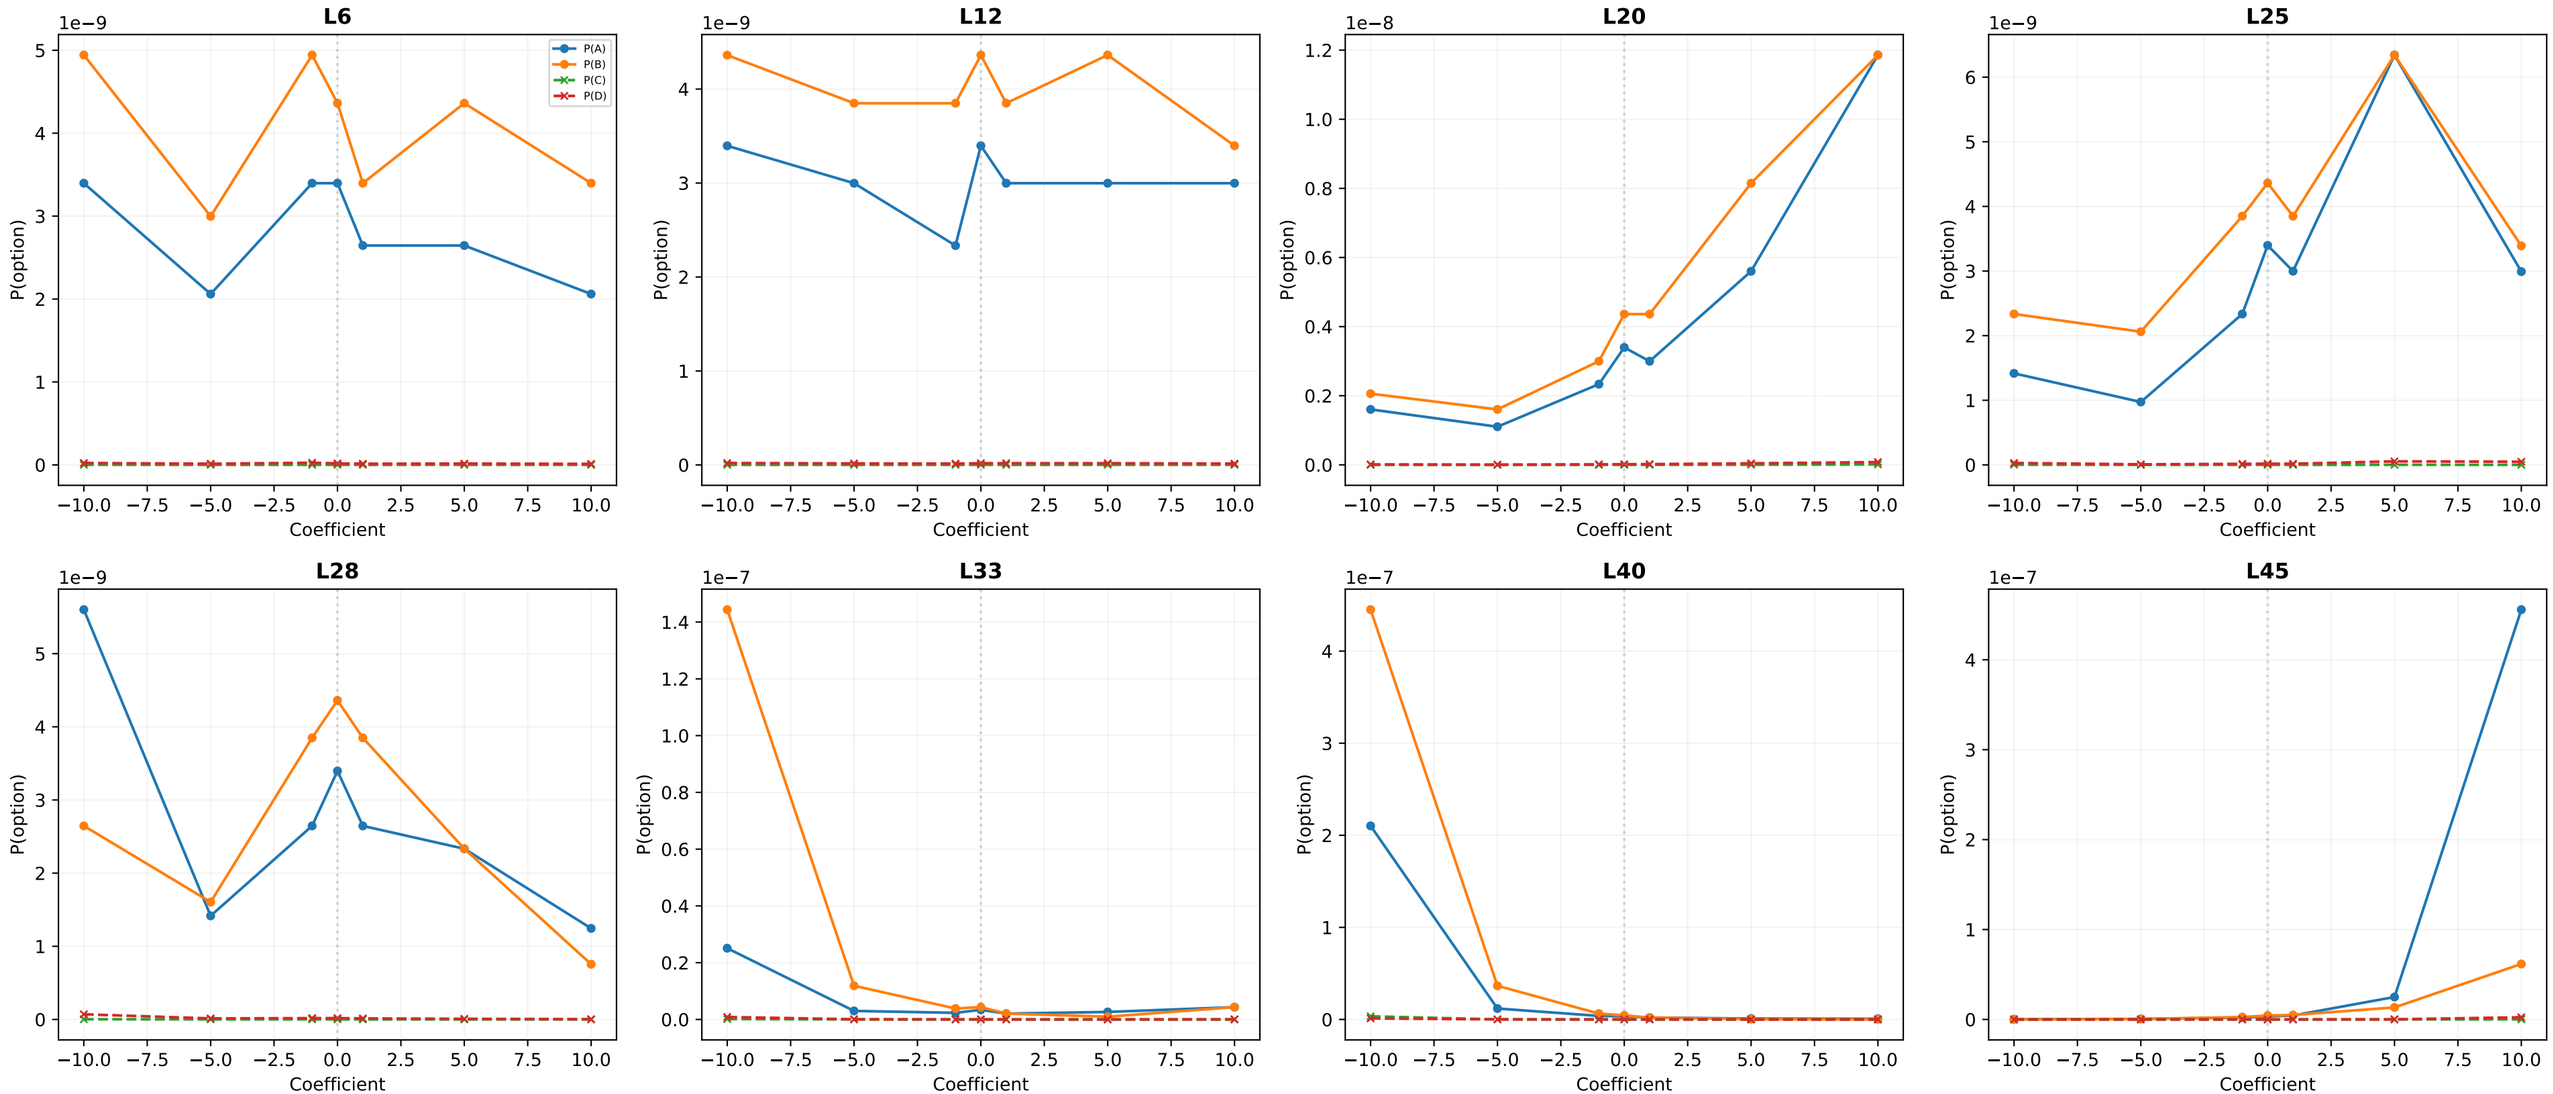

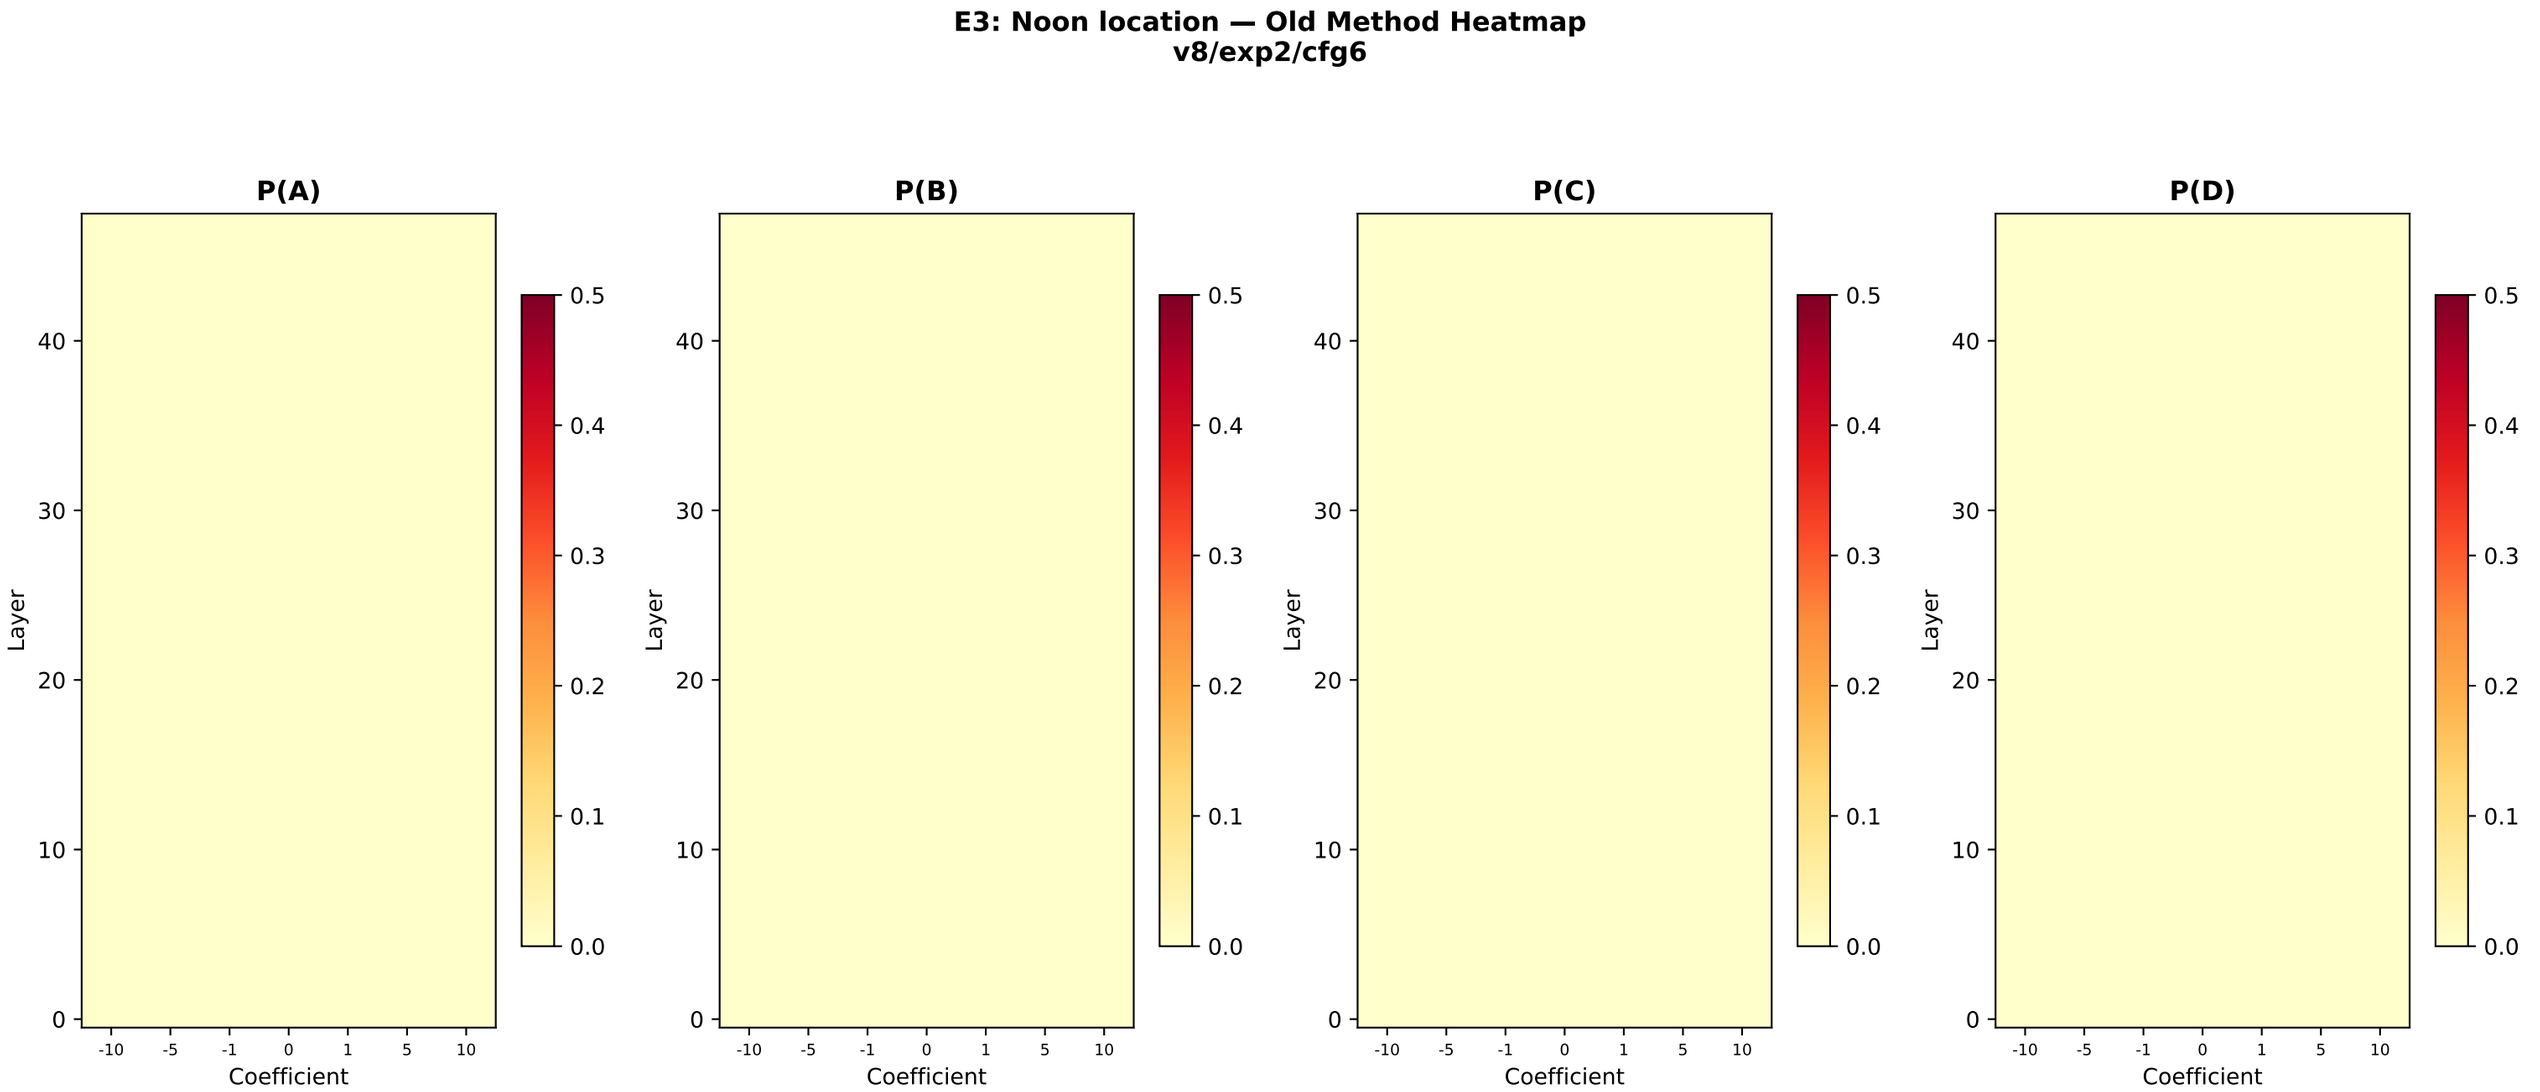
E3: Noon location — Old Method Heatmap
v8/exp2/cfg6
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E3: Noon location — New Method (Matteo)
v8/exp2/cfg6 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

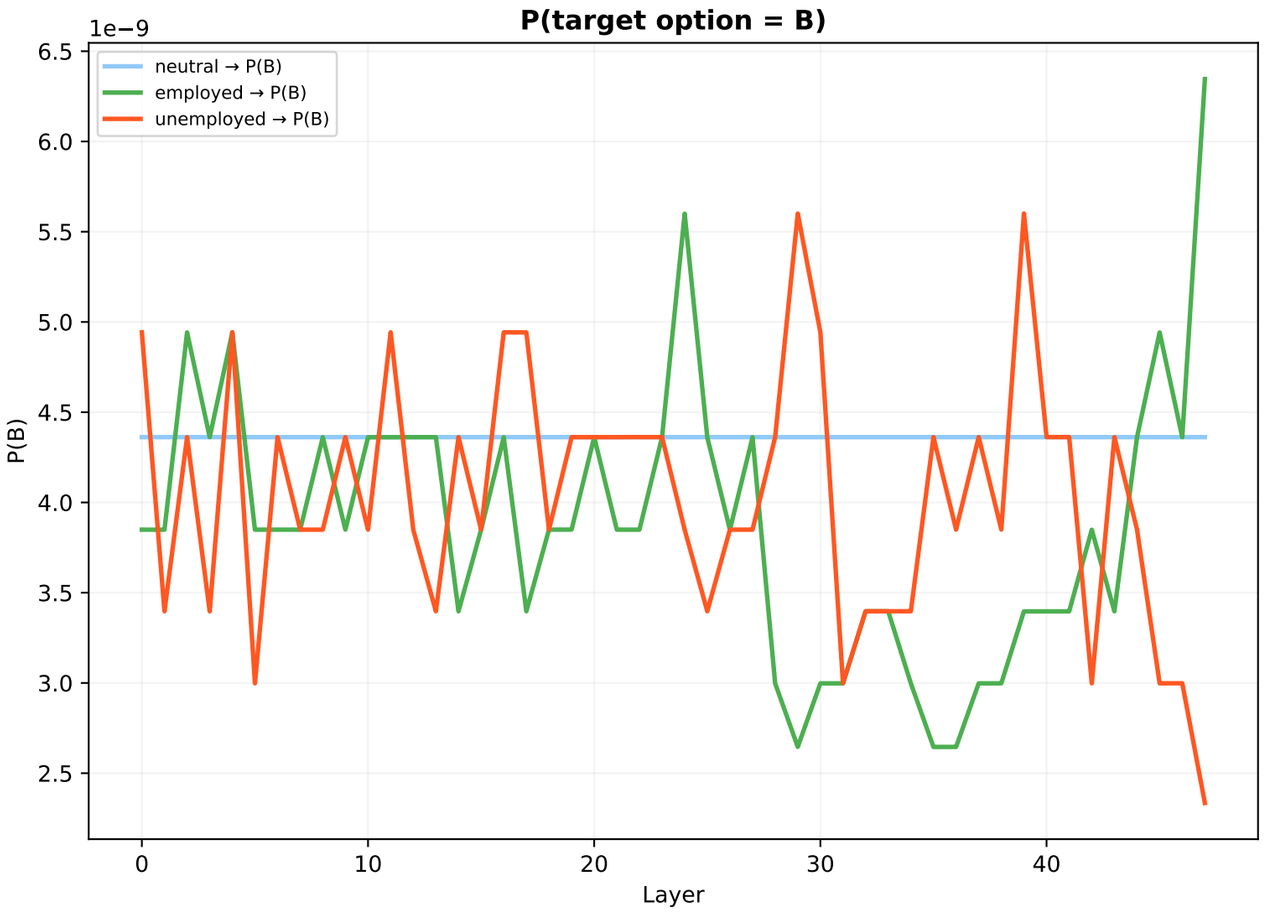

E4: Routine predictability — Old Method
v8/exp2/cfg6 | coeffs [-10, -5, -1, 0, 1, 5, 10]

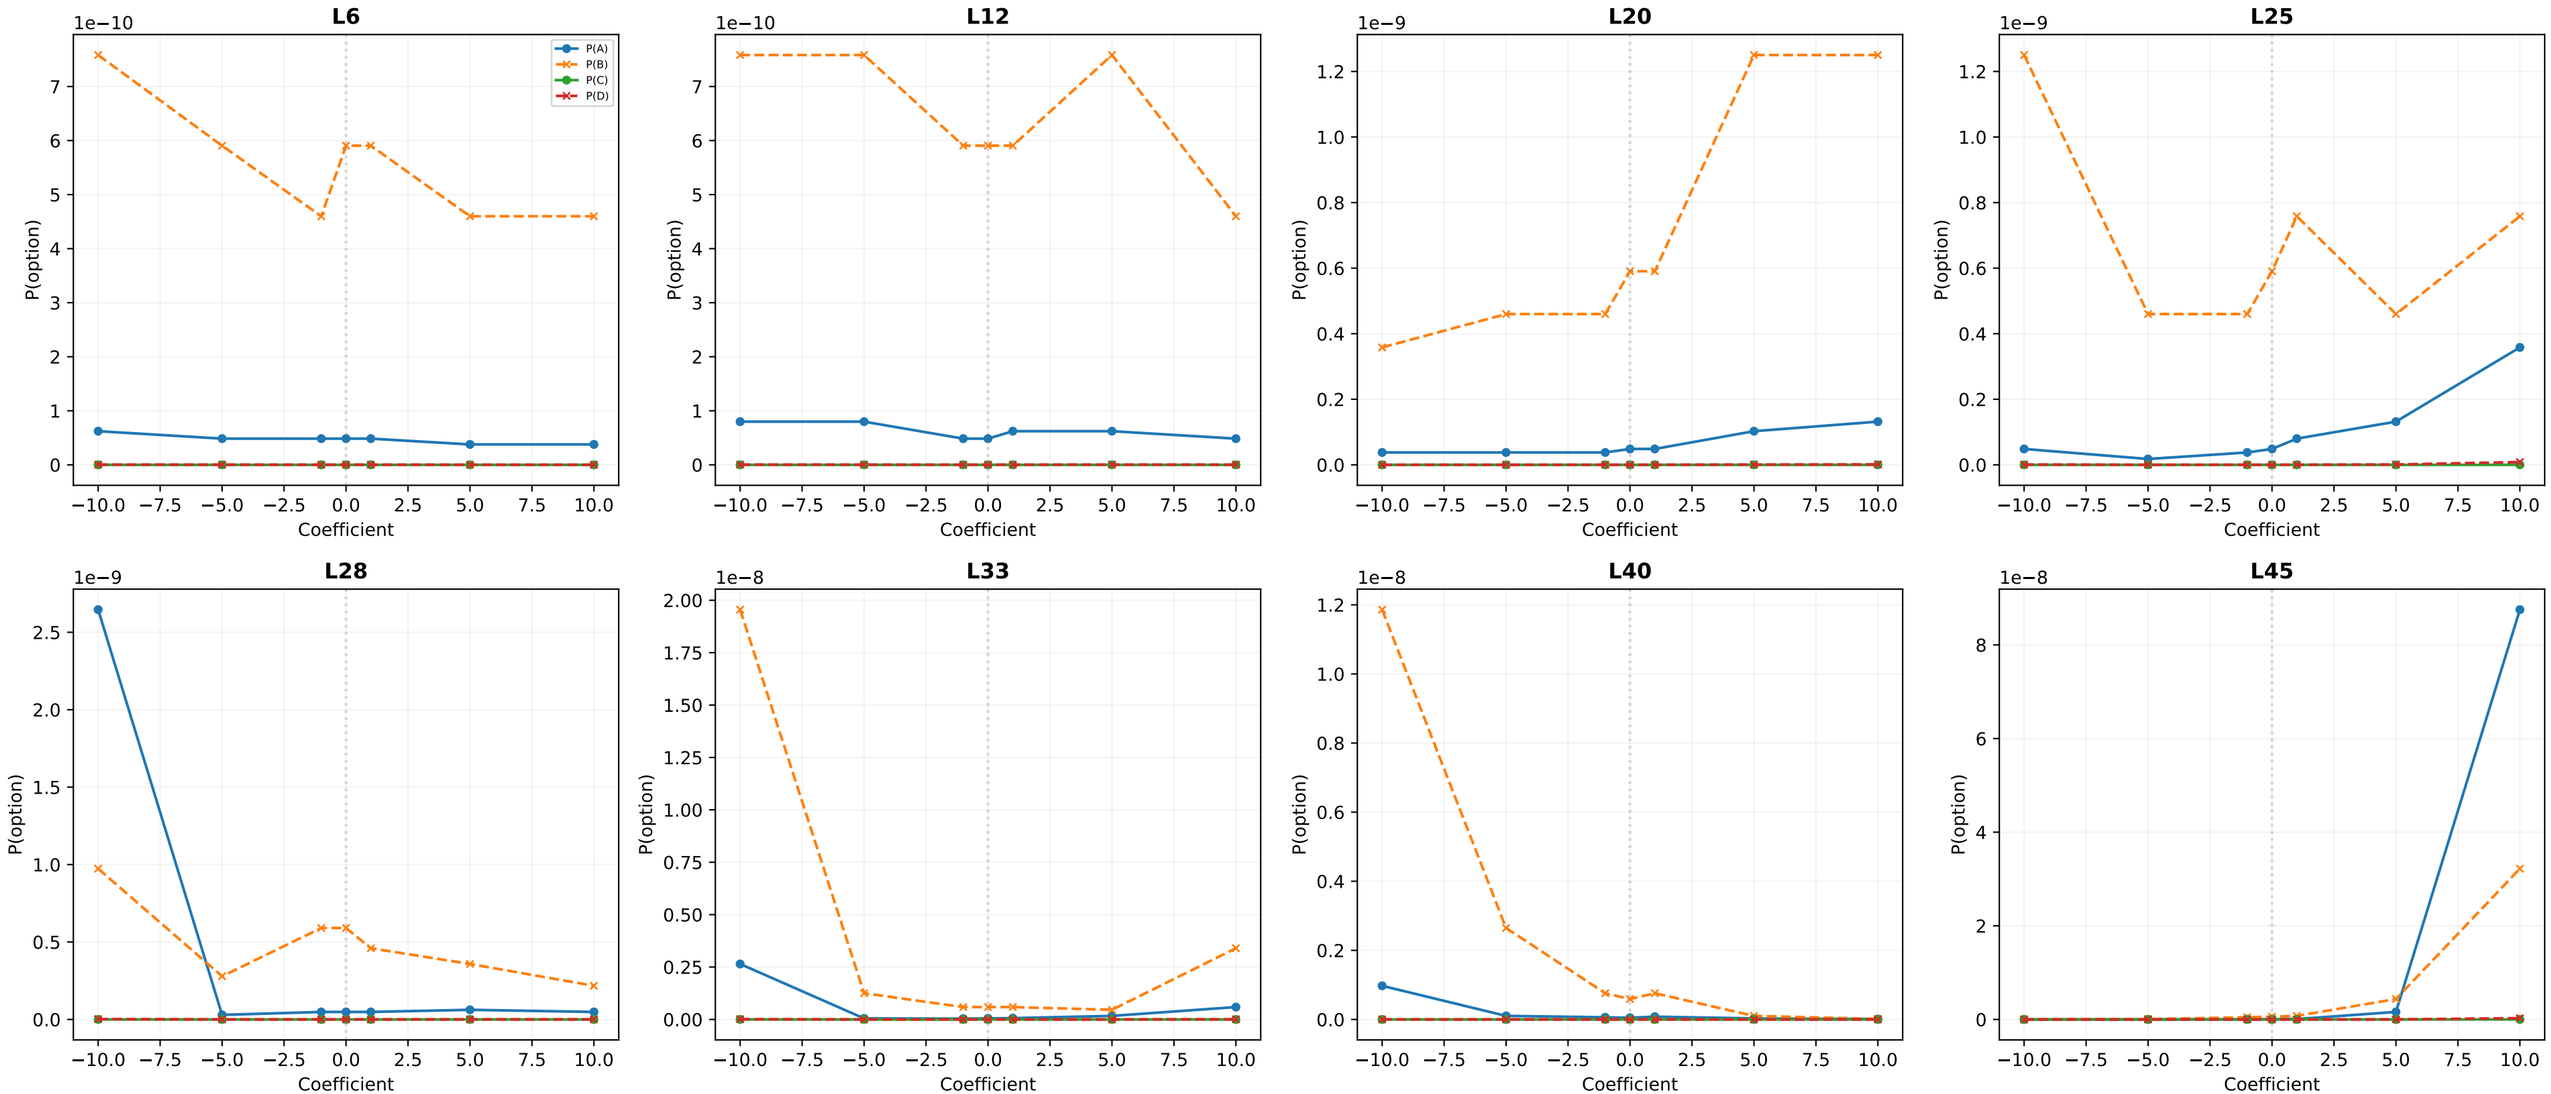

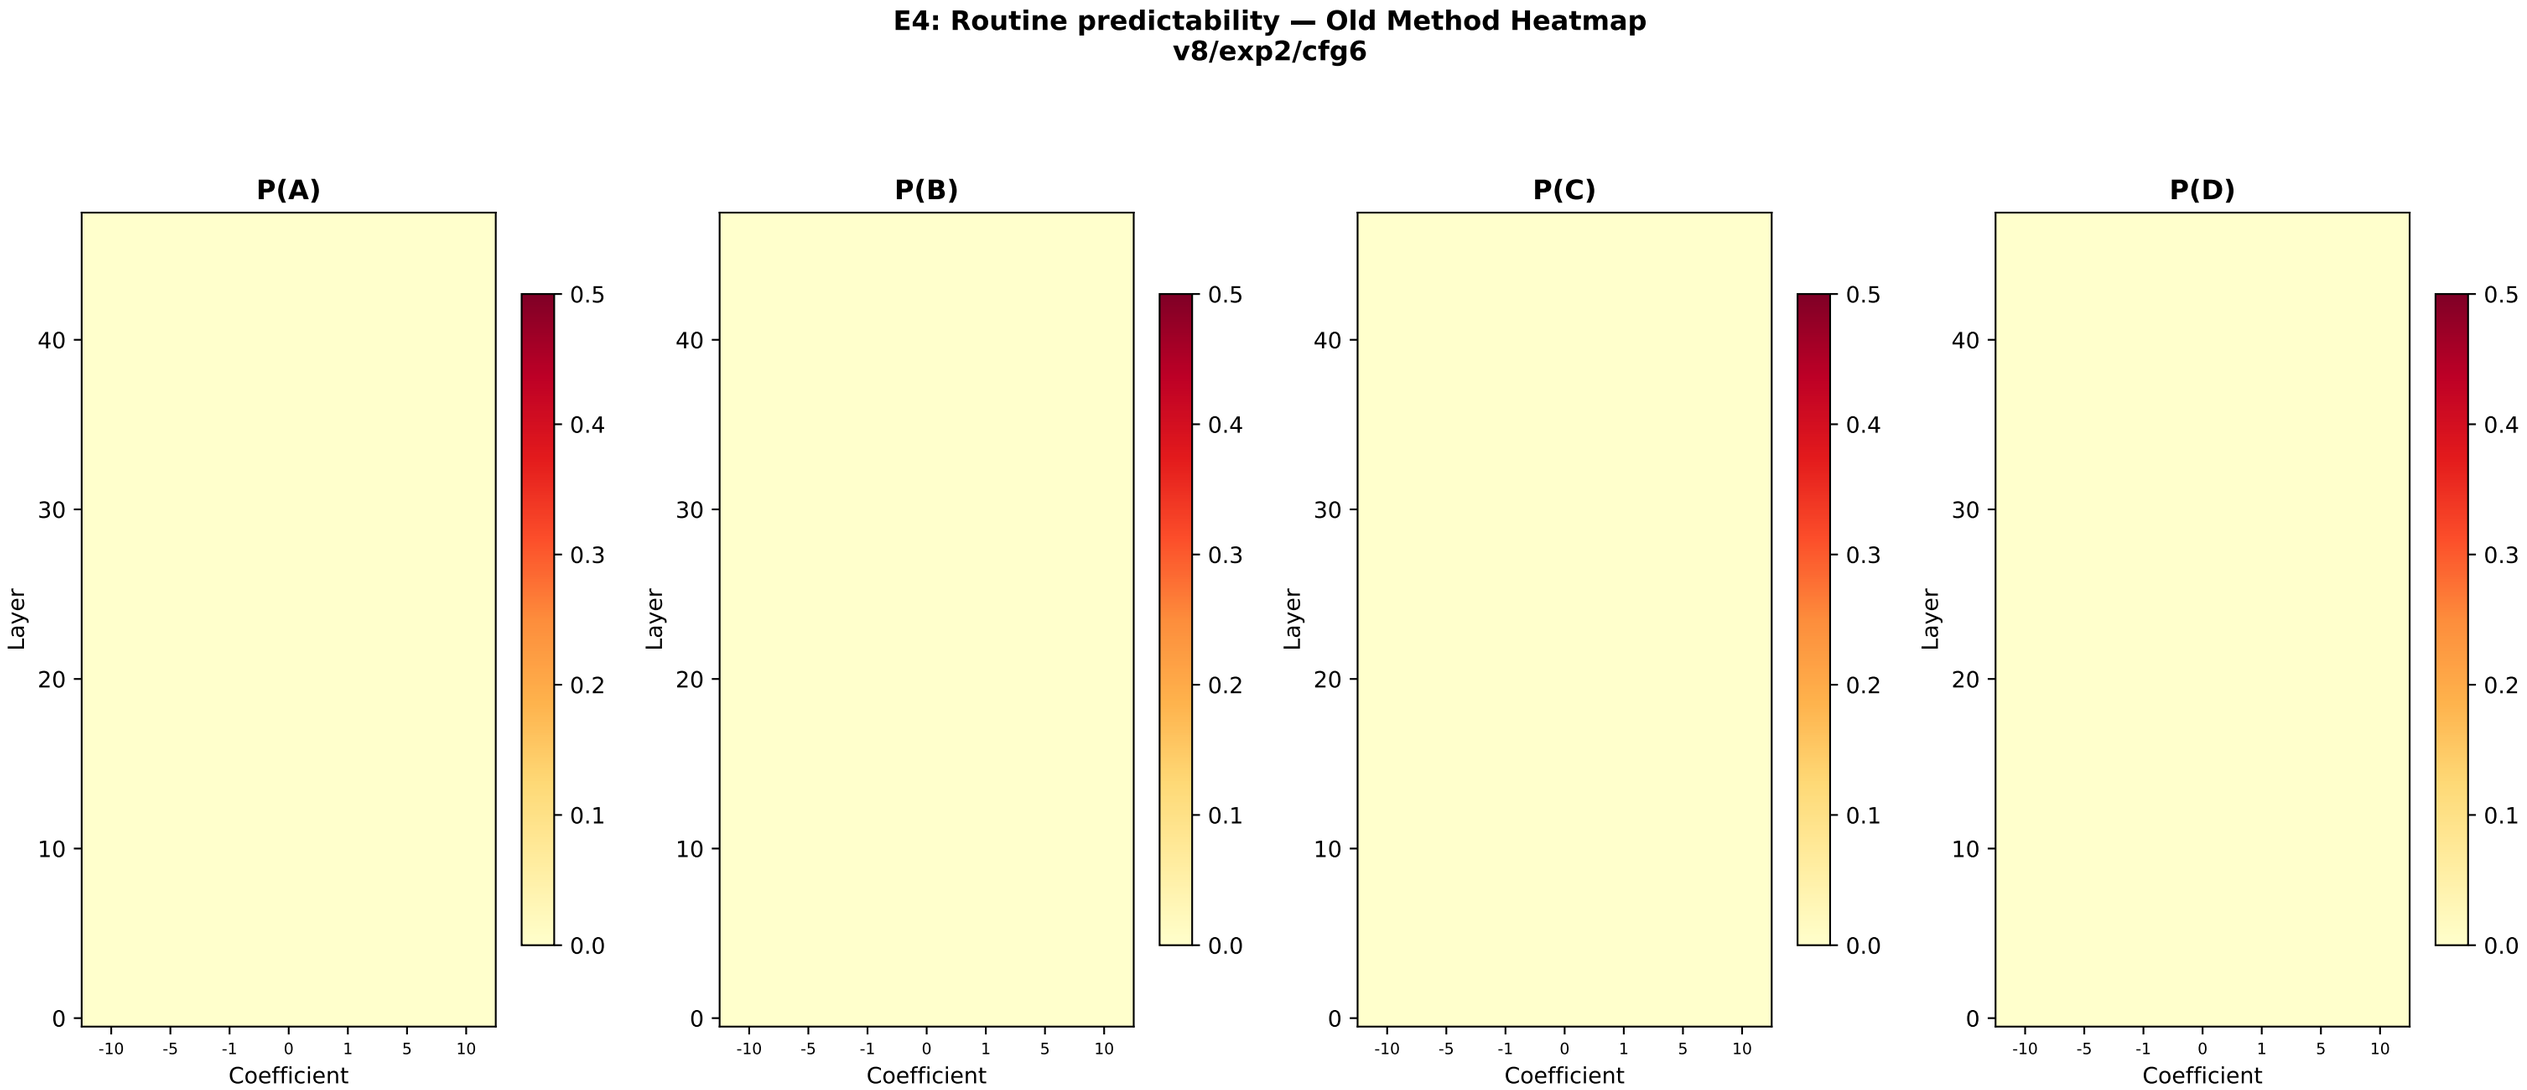
E4: Routine predictability — Old Method Heatmap
v8/exp2/cfg6
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E4: Routine predictability — New Method (Matteo)
v8/exp2/cfg6 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

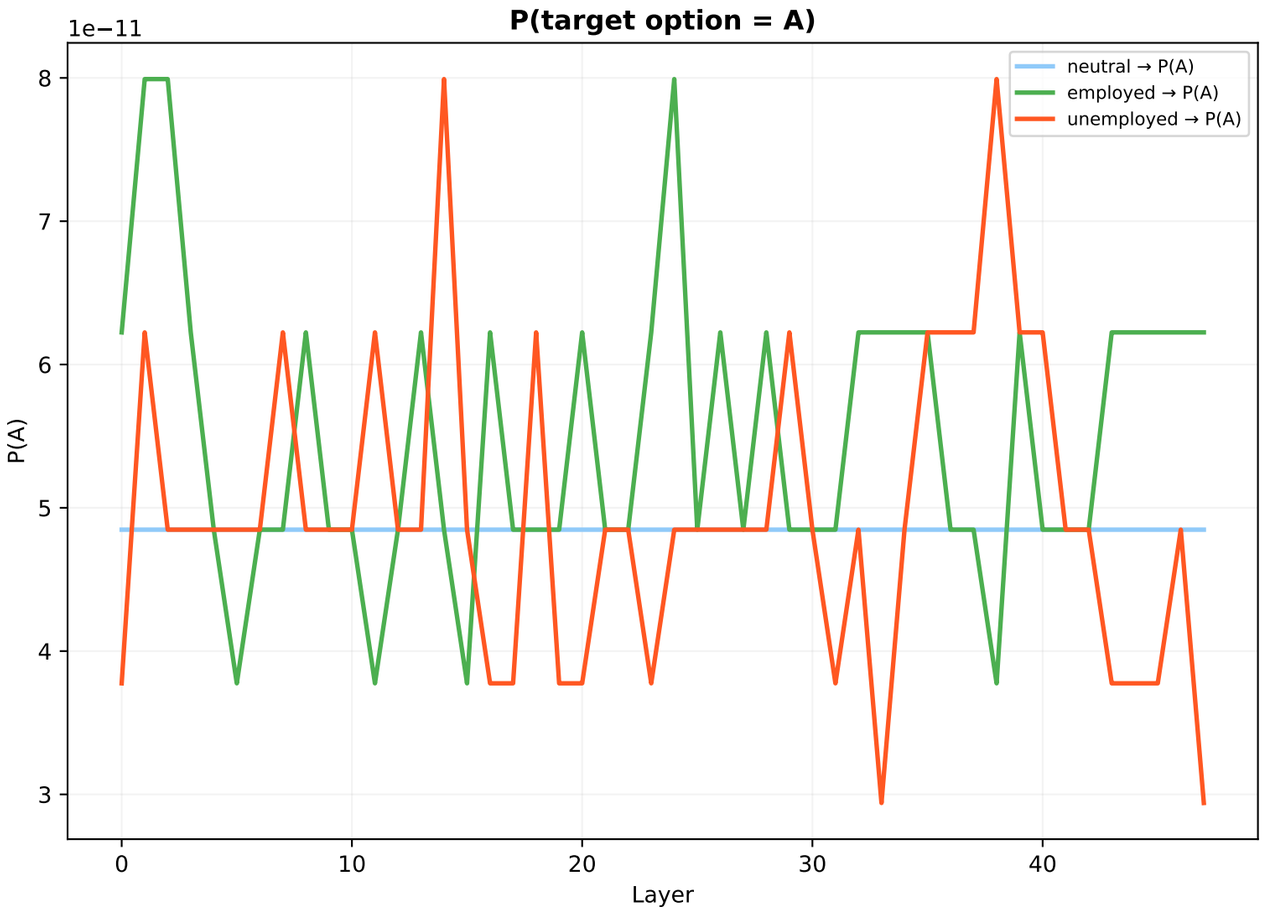

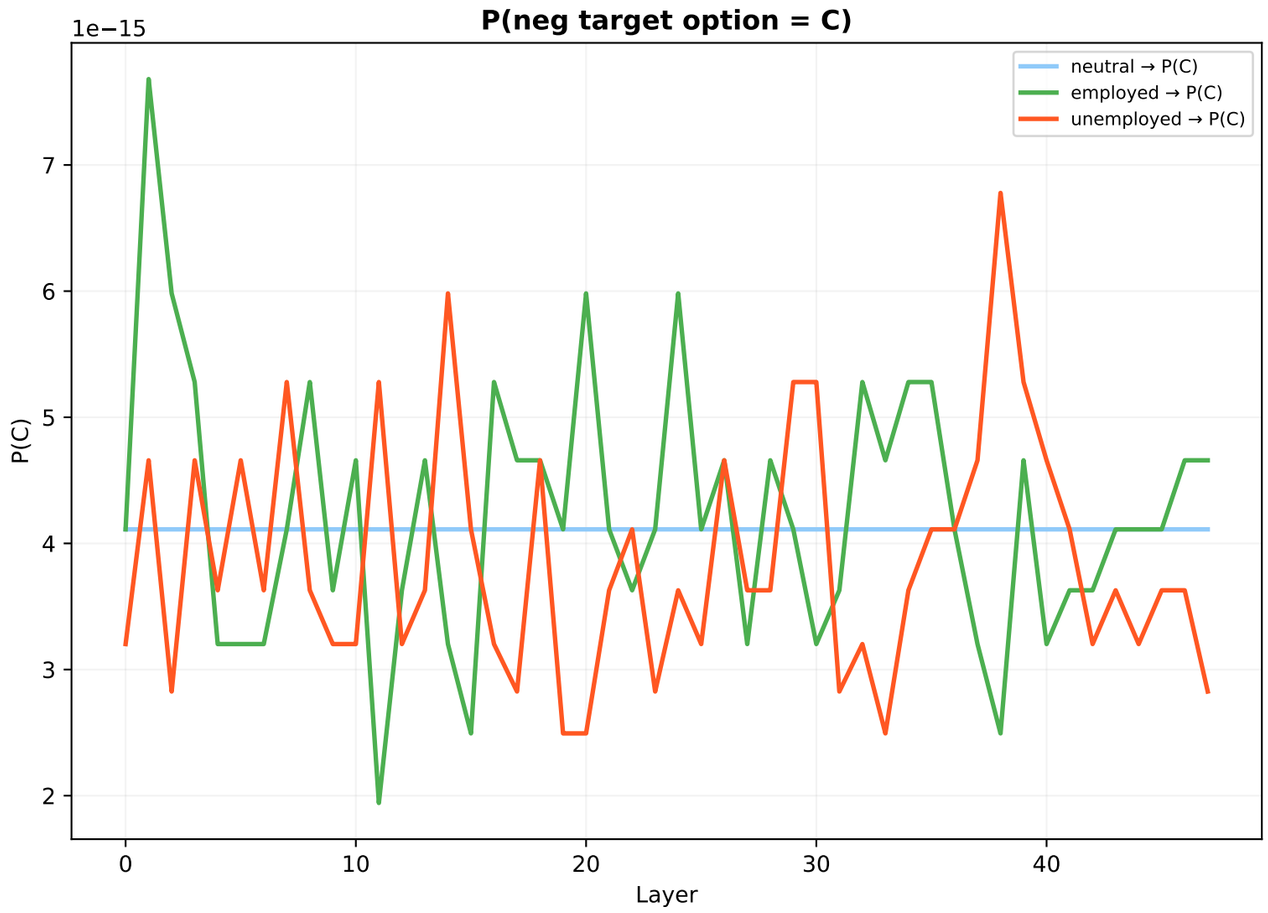

E5: CONTROL: housing type — Old Method
v8/exp2/cfg6 | coeffs [-10, -5, -1, 0, 1, 5, 10]

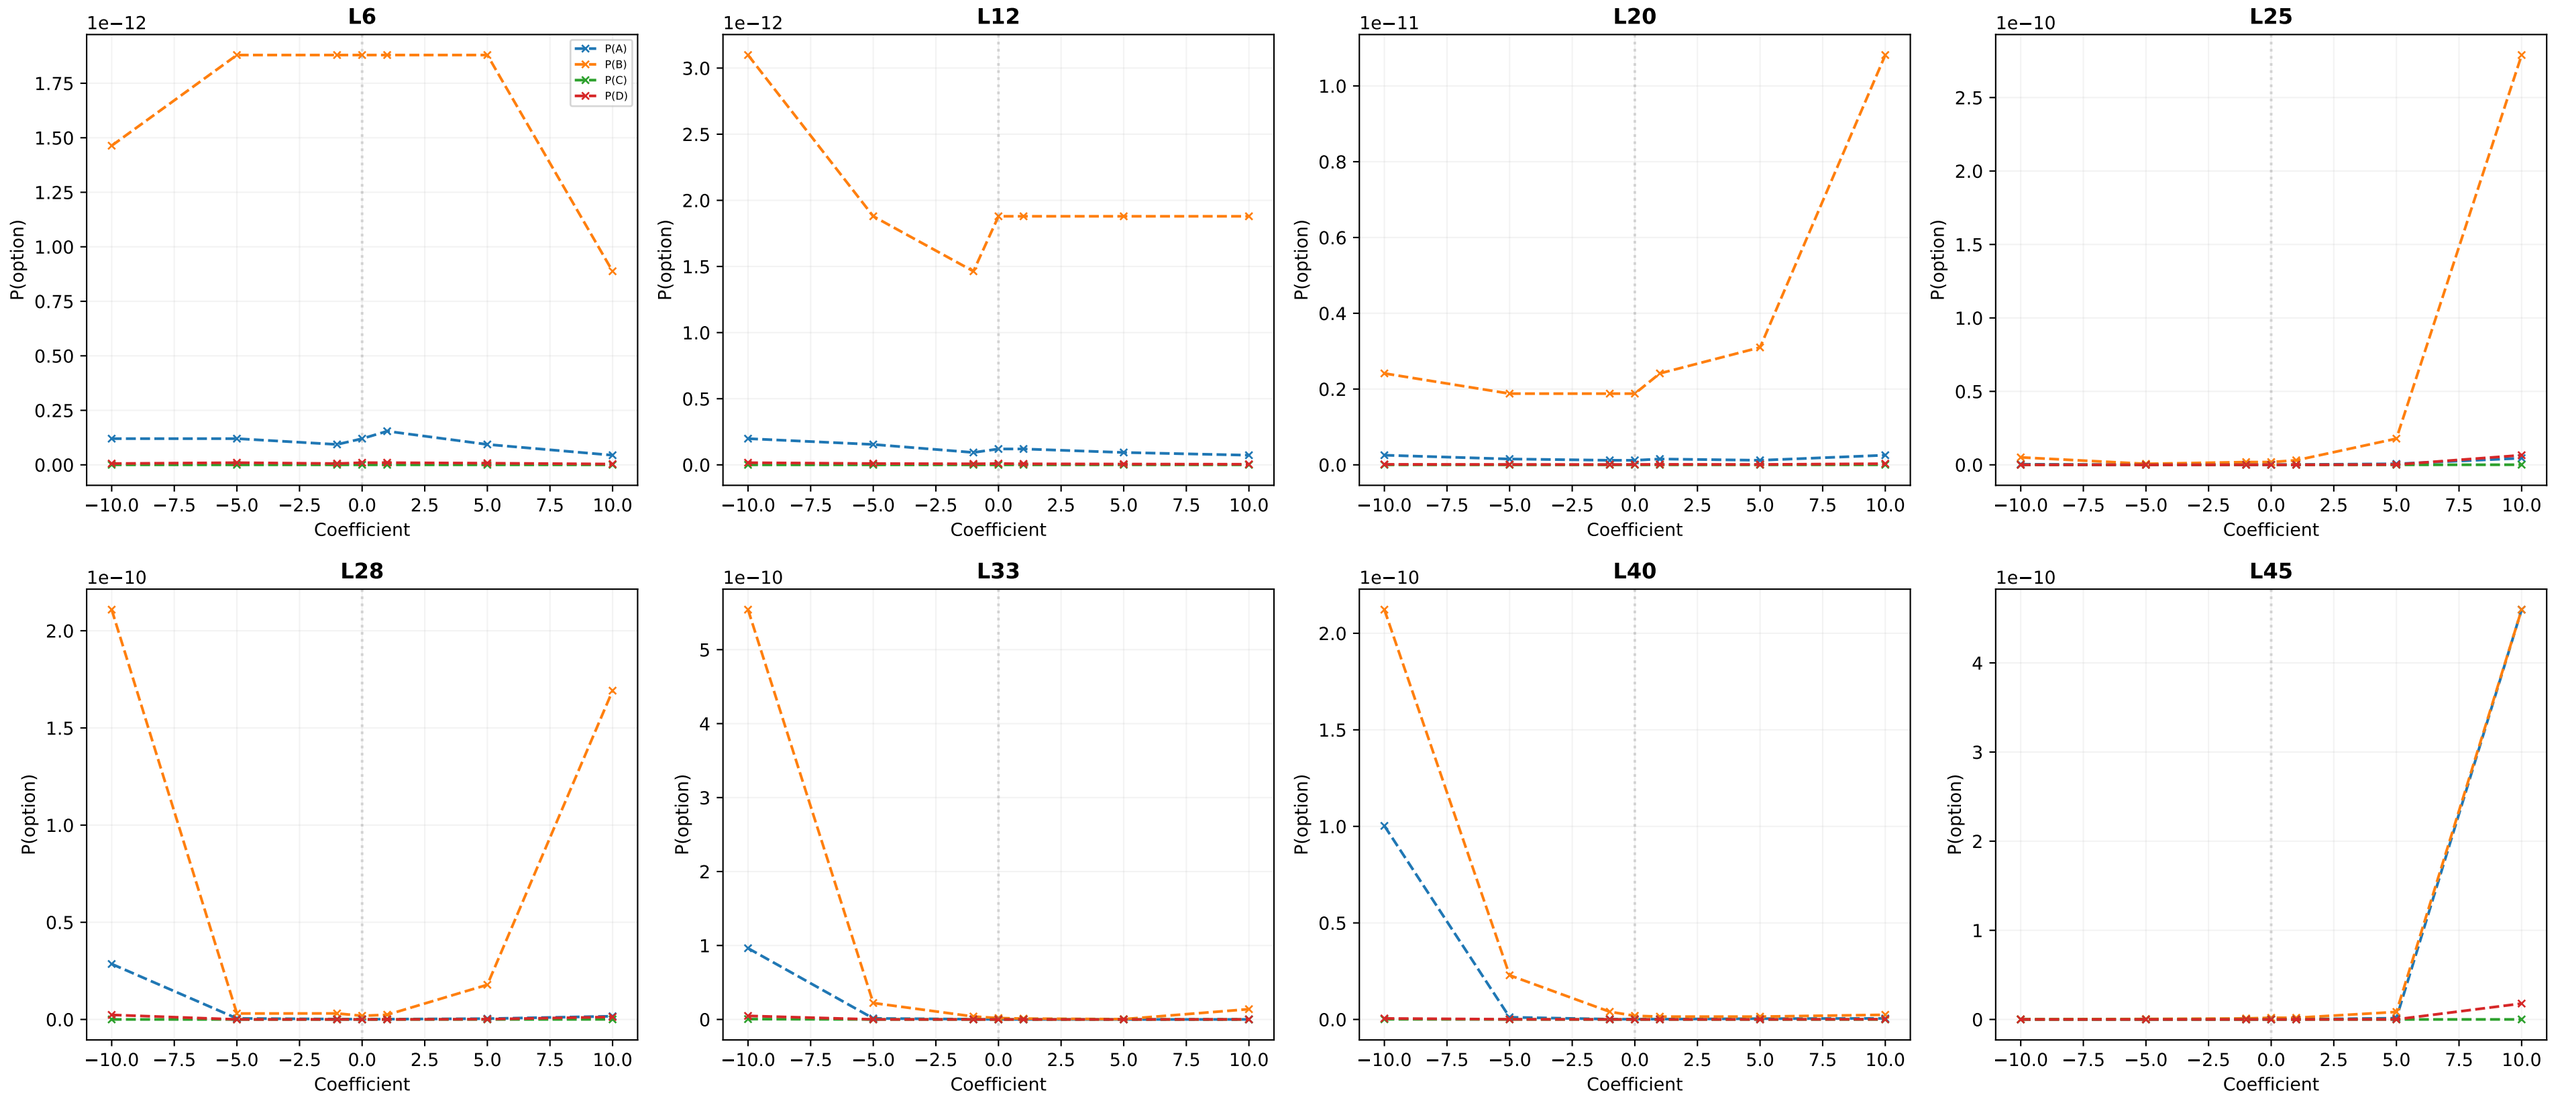

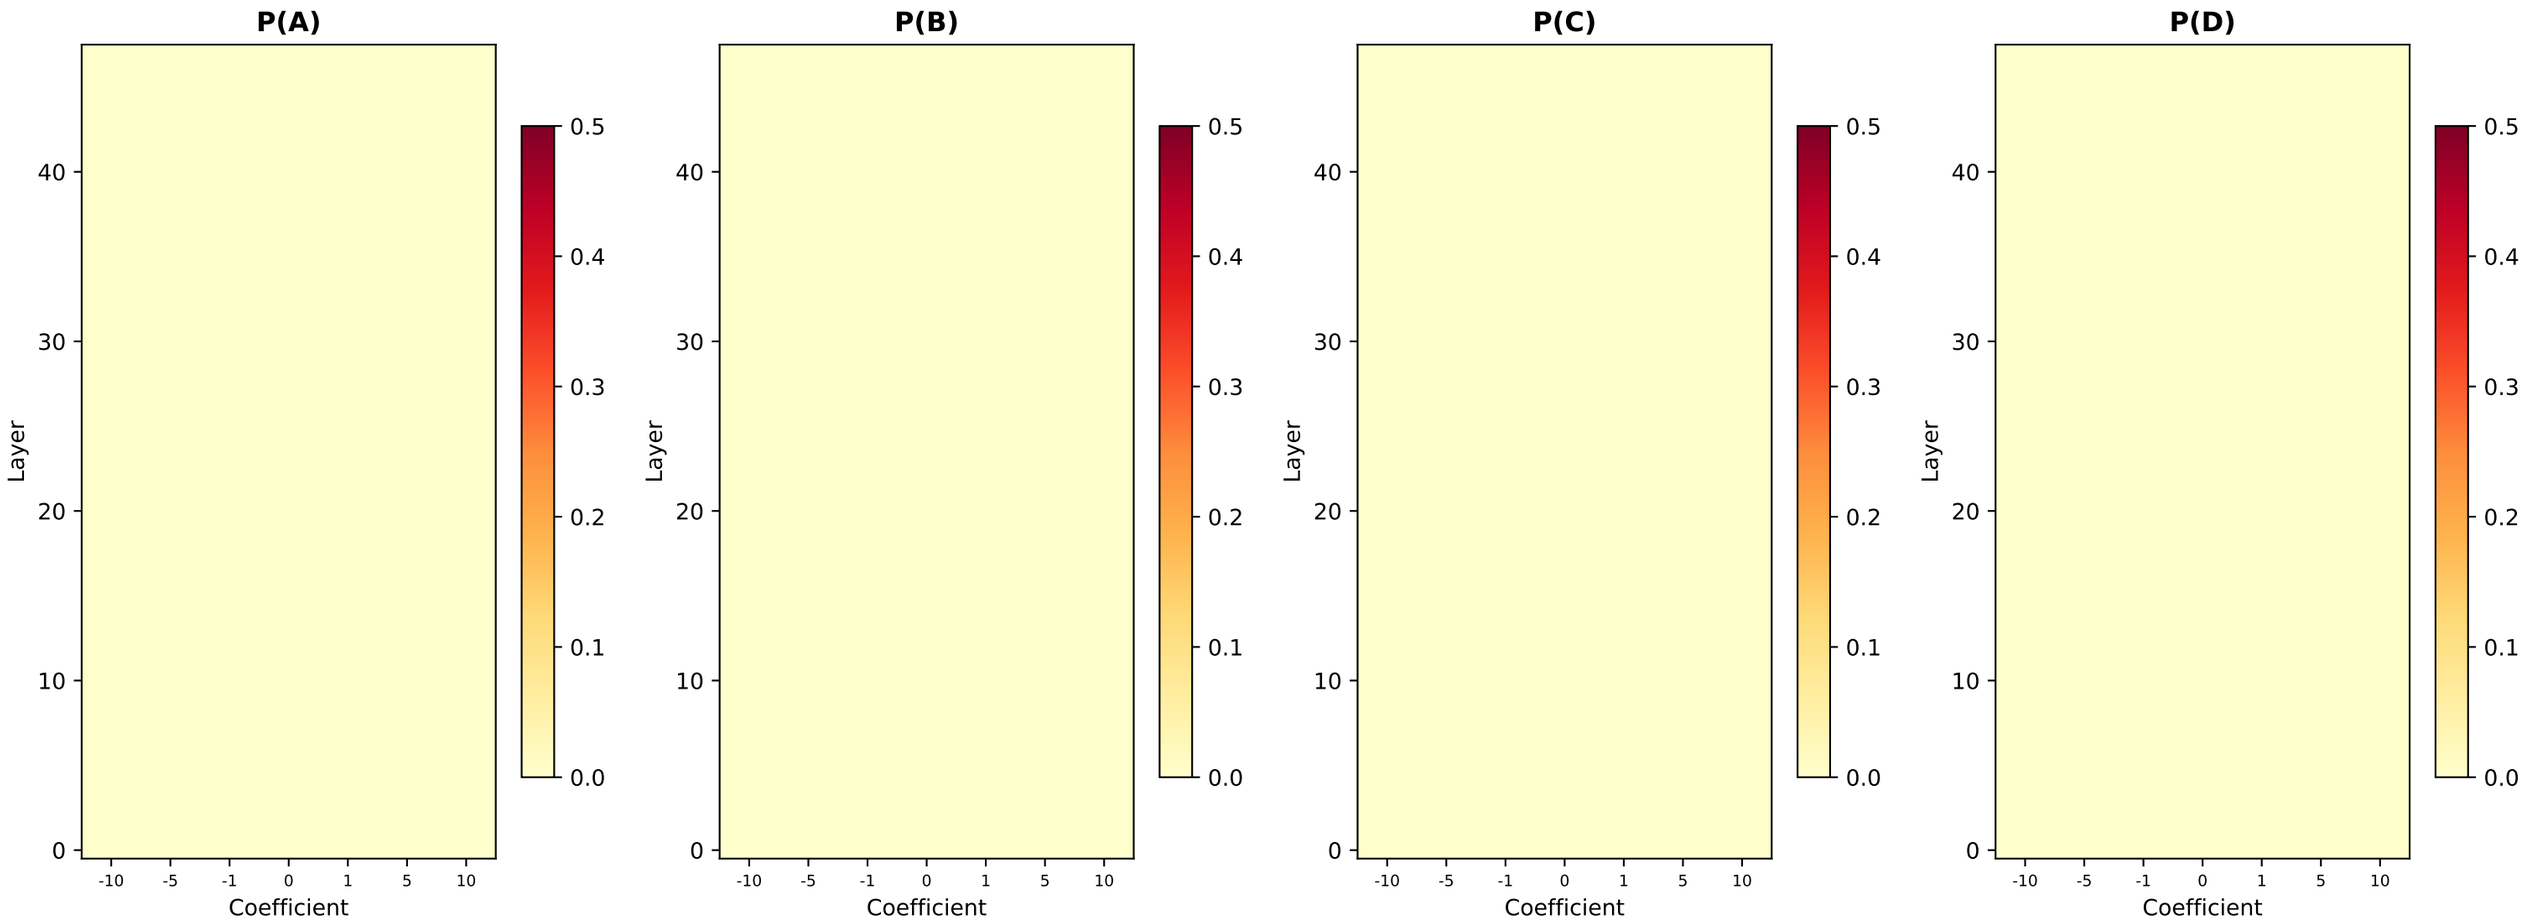
E5: CONTROL: housing type — Old Method Heatmap
v8/exp2/cfg6
P(A)
P(B)
P(C)
P(D)
Layer
Coefficient
0
10
20
30
40
-10
-5
-1
0
1
5
10
0.0
0.1
0.2
0.3
0.4
0.5

E5: CONTROL: housing type — New Method (Matteo)
v8/exp2/cfg6 | 3 conditions: neutral / +V_emp / +V_unemp (raw, no coeff)

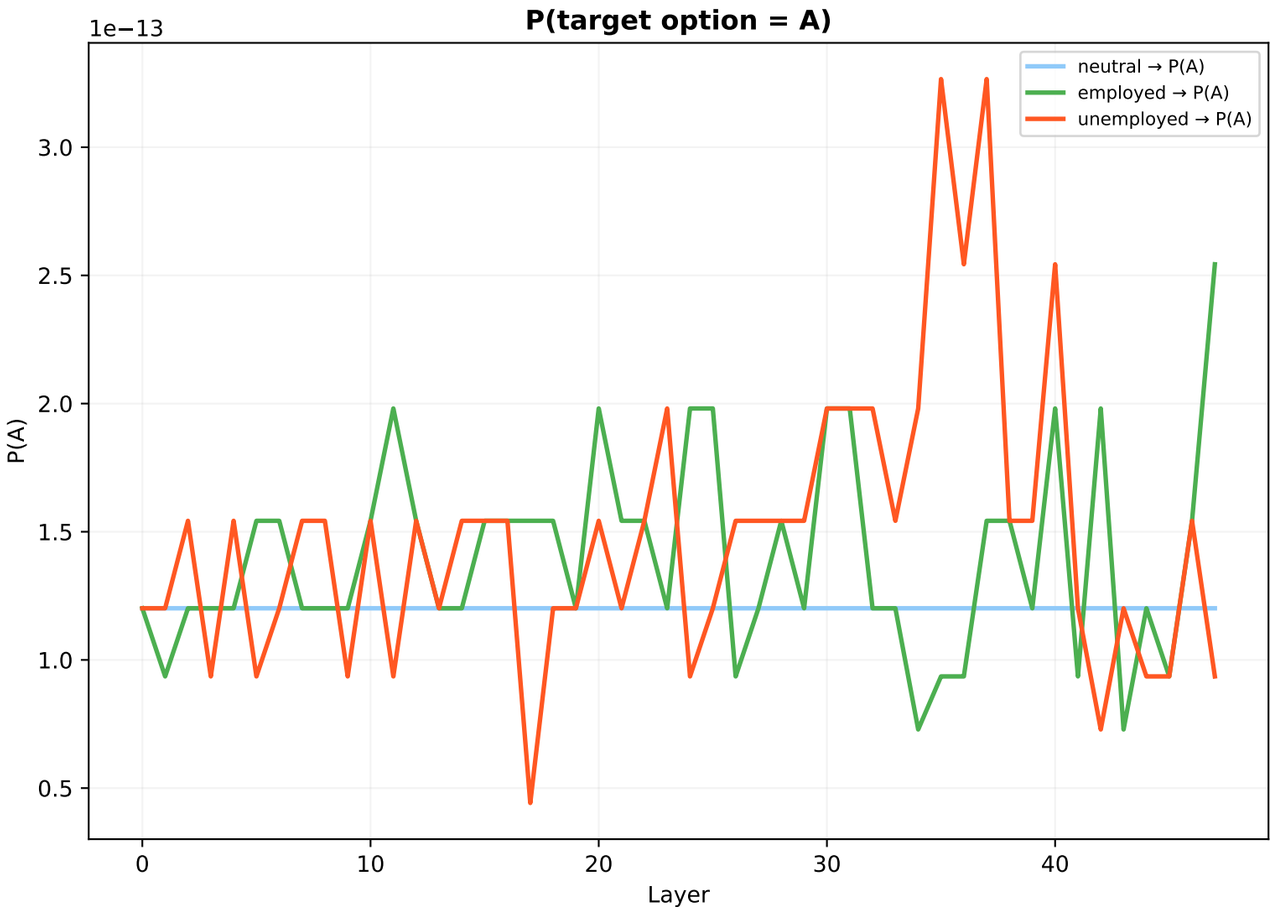

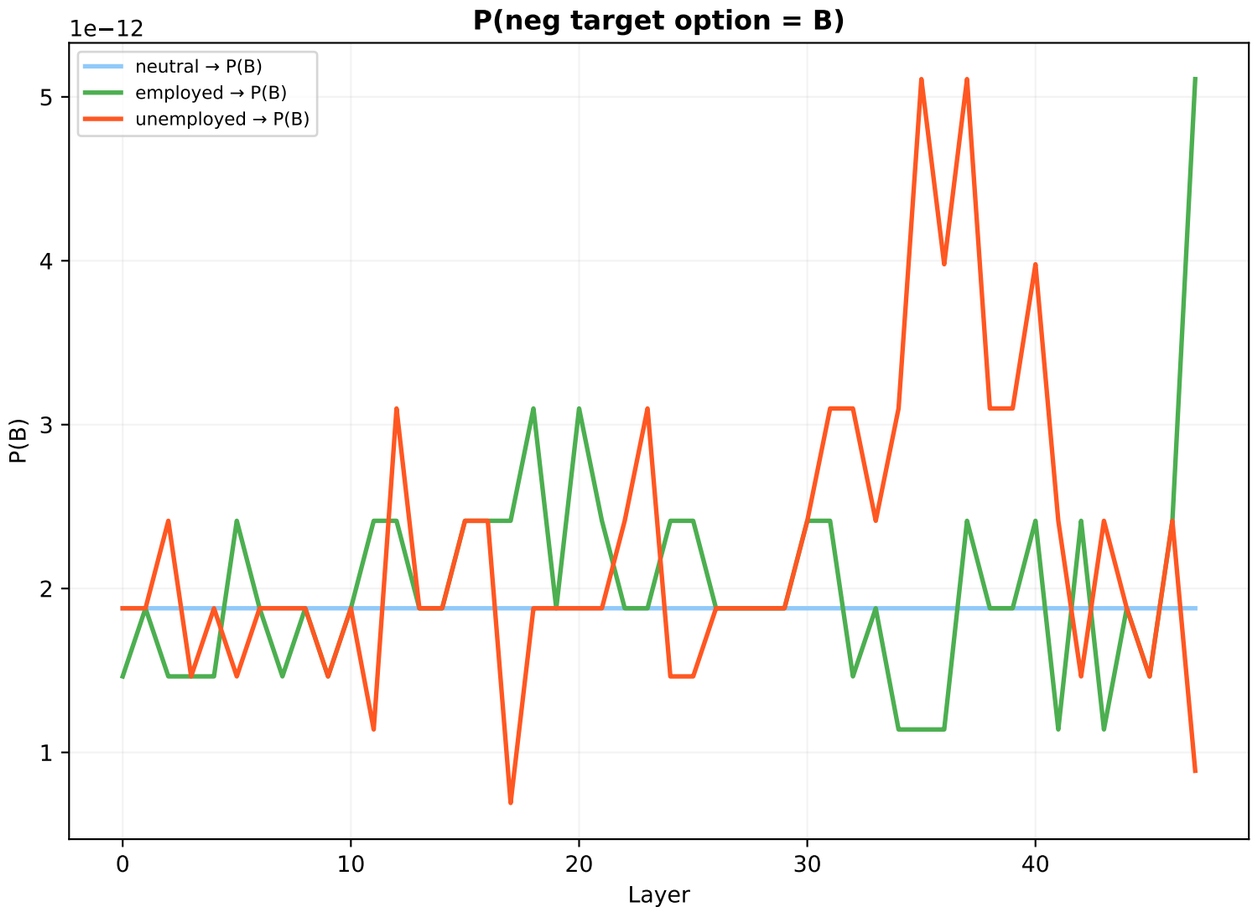

NL Steering Summary

NL Steering — Summary

Key	Q	Type	Ctrl	Old c=-10	Old c=0	Old c=+10	New neut	New emp	New unemp
v7/exp1a/c3	W1	numeric		7.00	6.99	6.18	6.99	6.99	6.99
v7/exp1a/c3	W2	numeric		1.02	1.97	2.99	1.97	2.00	1.92
v7/exp1a/c3	W3	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v7/exp1a/c3	W4	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v7/exp1a/c3	W5	mcq	CTRL	0.000	0.000	0.000	0.000	0.000	0.000
v7/exp1a/c4	W1	numeric		7.00	6.99	6.88	6.99	6.99	6.99
v7/exp1a/c4	W2	numeric		1.06	1.97	2.85	1.97	1.99	1.95
v7/exp1a/c4	W3	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v7/exp1a/c4	W4	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v7/exp1a/c4	W5	mcq	CTRL	0.000	0.000	0.000	0.000	0.000	0.000
v7/exp2/c5	E1	numeric		0.01	5.68	4.65	5.68	5.97	5.35
v7/exp2/c5	E2	numeric		2.89	3.25	0.94	3.25	3.16	3.07
v7/exp2/c5	E3	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v7/exp2/c5	E4	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v7/exp2/c5	E5	mcq	CTRL	0.000	0.000	0.000	0.000	0.000	0.000
v7/exp2/c6	E1	numeric		6.07	5.68	6.34	5.68	5.58	5.71
v7/exp2/c6	E2	numeric		3.82	3.25	0.56	3.25	3.23	3.31
v7/exp2/c6	E3	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v7/exp2/c6	E4	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v7/exp2/c6	E5	mcq	CTRL	0.000	0.000	0.000	0.000	0.000	0.000
v8/exp1a/c3	W1	numeric		6.99	6.99	6.44	6.99	6.99	6.99
v8/exp1a/c3	W2	numeric		1.01	1.97	3.00	1.97	2.03	1.90
v8/exp1a/c3	W3	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v8/exp1a/c3	W4	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v8/exp1a/c3	W5	mcq	CTRL	0.000	0.000	0.000	0.000	0.000	0.000
v8/exp1a/c4	W1	numeric		7.00	6.99	6.75	6.99	6.99	6.99
v8/exp1a/c4	W2	numeric		1.03	1.97	2.95	1.97	2.00	1.95
v8/exp1a/c4	W3	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v8/exp1a/c4	W4	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v8/exp1a/c4	W5	mcq	CTRL	0.000	0.000	0.000	0.000	0.000	0.000
v8/exp2/c5	E1	numeric		0.02	5.68	5.42	5.68	5.80	5.34
v8/exp2/c5	E2	numeric		3.88	3.25	1.98	3.25	3.15	3.30
v8/exp2/c5	E3	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v8/exp2/c5	E4	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v8/exp2/c5	E5	mcq	CTRL	0.000	0.000	0.000	0.000	0.000	0.000
v8/exp2/c6	E1	numeric		5.89	5.68	6.67	5.68	5.78	5.50
v8/exp2/c6	E2	numeric		3.03	3.25	0.22	3.25	3.16	3.07
v8/exp2/c6	E3	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v8/exp2/c6	E4	mcq		0.000	0.000	0.000	0.000	0.000	0.000
v8/exp2/c6	E5	mcq	CTRL	0.000	0.000	0.000	0.000	0.000	0.000

Values at L25. MCQ: P(target_pos). Numeric: E[first_digit].
Old method: raw V with coefficients. New method: raw V_emp/V_unemp, no coeff.