

Tavishi Session 20

Monday, July 6, 2026 11:27 PM

Basics

- Variables ✓
- Data Types ✓
- Type Conversion ✓
- Input and Output ✓
- Comments ✓
- Operators ✓

Control Flow

- if ✓
- if-else ✓
- if-elif-else ✓
- Nested Conditions ✓
- Match Case (optional) ✓

later on

Loops

- for Loop ✓
- while Loop ✓
- Nested Loops ✓
- Loop Control Statements (break, continue, pass) ✓

leave as it

Strings

- String Indexing
- String Slicing
- String Methods
- String Formatting

Collections

- Lists
- Tuples
- Sets
- Dictionaries

Collection Operations

- List Methods
- Tuple Operations
- Set Methods
- Dictionary Methods

Functions

- Function Definition
- Parameters and Arguments
- Return Statement
- Default Arguments
- Keyword Arguments
- Variable Length Arguments (*args, **kwargs)
- Scope (Local and Global)
- Lambda Functions
- map()
- filter()
- reduce()

Control flow :

↳ if
↳ elif
↳ else

Conditions → Is it raining → No / False

4. Raining - bank account → No / False

Conditions $\rightarrow$ Is-it-raining $\rightarrow$ No/True

Is-having-bank-account $\rightarrow$ No/False

Is-summer-holiday $\rightarrow$ Yes/True

If not raining $\rightarrow$ condition

$\hookrightarrow$ print("will not go school")

else: $\rightarrow$ statement

$\hookrightarrow$ print("will go school")

if ✓
else ✓
elif
En:


Kid ≤ 10
teenage > 10 and teenage ≤ 18
 $\hookrightarrow$ true
 $\swarrow$ Boolean operator

age $> 18 \rightarrow$ adult.

En: age $\begin{cases} \text{Kid} \\ \text{Teenager} \\ \text{adult} \end{cases}$

Nested Conditional :

Nested Conditional :

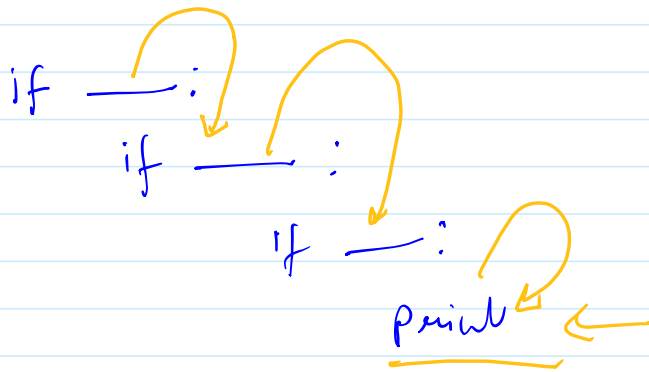

Strings: Sequence of characters


Whatever you put inside double quotes is called string.

Ex

```
"Azaan"  
"Tavishi"  
"_age"  
"21"  
"21 azaan##"
```

String Methods:

name = T a v i s h i
0 1 2 3 4 5 6

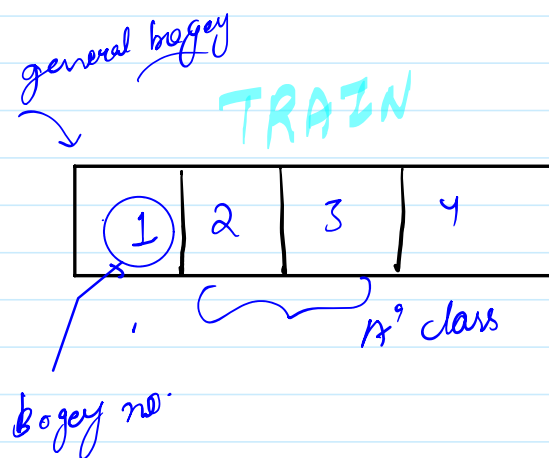

Indexing starts from always 0 in python

why from 0?

How much it is differ from 0th guy in terms of distance