



Programming language:-

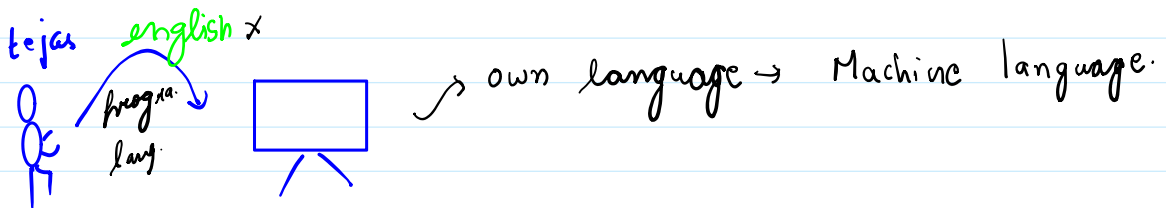

Programming language is a way to communicate to computer



Why Python ?

- ↳ simple → take less development time
  - ↳ Community support
  - ↳ Huge libraries.  
pre-written code written by others
- Diagram illustrating a workflow: A box labeled 'Project' has an arrow pointing to it from the text 'Tejas → Same project'. Another arrow points from the 'Project' box to the text 'tons of error'.

Print:- (Output)

console.log ( ) → print ( - )

`console.log ( )` → `print ( — )`

Separator:-

```
fruits = ['orange', 'Mango', 'Apple']
```

```
for item in fruits:-  
    print(item)
```

O/P → orange  
Mango  
Apple

separator  
orange # mango # Apple

```
print(item, end = "#")
```

Literals :

fixed value


Ex-

age

wt

favorite-movies

is-it-rain = False

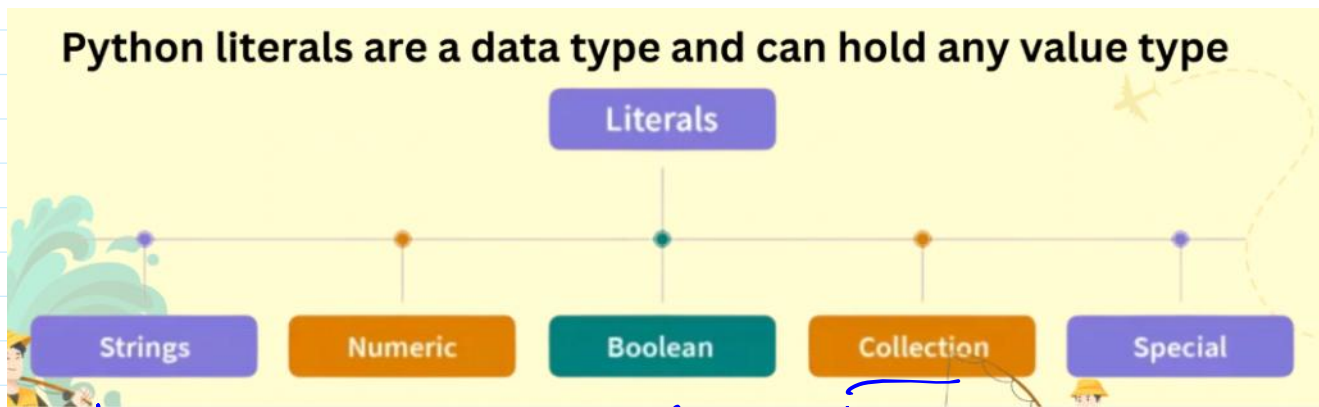

Sequence of characters  
None -> "None"

int -> age

✓

list  
tuple  
set  
dictionary

## Variables :

↳ Memory containers which store values

- Integer
- Float
- boolean
- string.



1-name x  
name 1 ✓  
No special

## Case Sensitive :-

↳ AGE > different  
↳ age

spaces not allowed

Quiz ;


- student\_name ✓
- 2students ✗
- count

Keywords

while class exec assert

- student\_name ✓
- 2students ✗
- \_count ✓
- first-name ✗
- total\_marks ✓
- class ✗
- userAge ✓
- user age ✗
- price\_2026 ✓
- 2026\_price ✗
- \_\_init\_\_ ✗
- myVariable ✓
- salary\$ ✗
- employee\_id ✓
- for ✗
- is\_active ✓
- roll\_no\_1 ✓
- #count ✗
- PI\_VALUE ✓
- student@name ✗

Exception

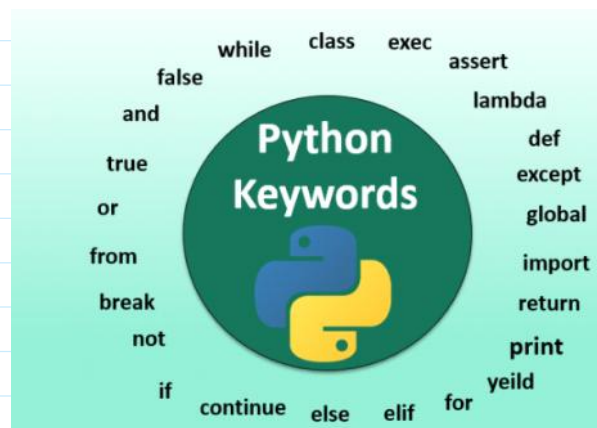

Learn :- Inventor of Python → Guido Van Rossum (1991)

How to take input:-

age = input("Enter age")

input = 5

Expected → 10

Actual = 55

print(2 \* age)

Input function in python always takes input by default as string

"5" → 5  
String Integer  
↳ specific → type Casting

Home Work :

x =  
y = > input

y = 1/2

print → Add, subtract, multiply, divide