


IUTFood-Project-client
-codes/IUTFoodServer/observer.h

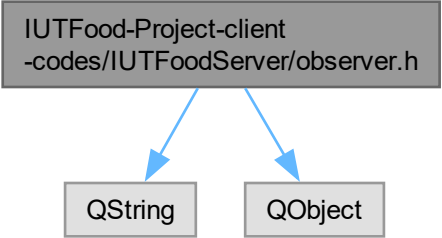

```
graph TD; A["IUTFood-Project-client<br/>-codes/IUTFoodServer/observer.h"] --> B["QString"]; A --> C["QObject"];
```

The diagram illustrates the dependencies of the file `observer.h` within the `IUTFood-Project-client`. A central box at the top lists the file path. Two blue arrows point downwards from this box to two separate boxes below, labeled `QString` and `QObject`, indicating that `observer.h` depends on these two classes.

QString

QObject