

Greedy Algorithms

A greedy algorithm always makes the choice that looks best at this moment.

Practice problems:

PROBLEM 01. Fractional knapsack

The weights and values of n items are given. *The items are such that you can take a whole item or some fraction of it (divisible).* You have a knapsack to carry those items, whose weight capacity is W . Due to the capacity limit of the knapsack, it might not be possible to carry all the items at once. In that case, pick items such that the profit (total values of the taken items) is maximized.

Write a program that takes the weights and values of n items, and the capacity W of the knapsack from the user and then finds the items which would maximize the profit using a greedy algorithm.

sample input	sample output
n weight, value ... W	
4 4 16 3 9 3 18 2 16 5	item 4: 2.0 kg 16.0 taka item 3: 3.0 kg 18.0 taka profit: 34 taka

Possible greedy strategies:

- Pick the lightest item first, then pick the next lightest item and so on.
- Pick the costliest (per-unit value wise) item first, then pick the next costliest item and so on.
(optimal answer)
- Pick the costliest (total value wise) item first, then pick the next costliest item and so on.

pseudocode (version 1):**Function** FractionalKnapsack($W, v[n], w[n]$)


1. **sort items by v_i/w_i descending** // v_i, w_i = value and weight of the i th item
2. **$cap_left = W, profit = 0$** // cap_left = capacity left
3. **$i = 1$**
4. **while $cap_left > 0$ and $i \leq n$ do**
5. **$fraction = \min(1.0, cap_left/w_i)$** // fraction = fraction taken from i th item
6. **$cap_left = cap_left - fraction * w_i$**
7. **$profit = profit + fraction * v_i$**
8. **$i++$**
9. **end while**

pseudocode (version 2):**Function** FractionalKnapsack($W, v[n], w[n]$)

1. sort items by v_i/w_i descending // v_i, w_i = value and weight of the i th item
2. $cap_left = W, profit = 0$ // cap_left = capacity left
3. $i = 1$
4. **while** $cap_left > 0$ **and** $i \leq n$ **do**
5. **if** $cap_left \geq w_i$ **then**
6. $profit = profit + v_i$
7. $cap_left = cap_left - w_i$
8. **else:**
9. $profit = profit + v_i * cap_left/w_i$
10. $cap_left = 0$
11. $i++$
12. **end while**

ALTERNATIVE QUESTION 01.1: Minimize #trips

Suppose you are taking part in a game show, where you are given a knapsack of **W** weight capacity. There are **n** boxes of **n** different items in front of you. Each box has a label that says the name, total weight and the total value of that item. *The items are divisible.*

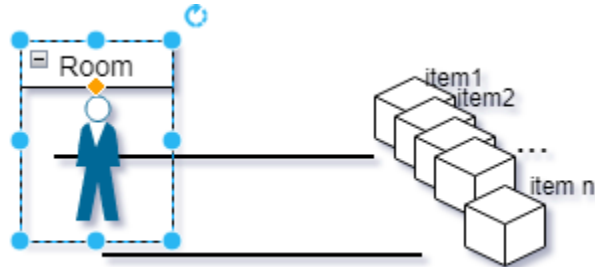

Your task is to carry all the items from the boxes to your room by making a minimum number of trips. Due to the capacity limit of the knapsack, it might not be possible to carry all the items at once. Write a code to solve this problem using a greedy algorithm.

Sample input	Sample output
W n item, value, weight ...	
15 4 silver-dust 300 4 gold-dust 2000 8 salt 80 10 sugar 89 10	Taking gold-dust 8.0 kg -- 2000.0 taka Taking silver-dust 4.0 kg -- 300.0 taka Taking sugar 3.0 kg -- 26.7 taka Trip 1 profit 2326.7 taka Taking sugar 7.0 kg -- 62.3 taka Taking salt 8.0 kg -- 64.0 taka Trip 2 profit 126.3 taka Taking salt 2.0 kg -- 16.0 taka Trip 3 profit 16.0 taka
25 4 silver-dust 300 4 gold-dust 2000 8 salt 80 10 sugar 89 10	Taking gold-dust 8.0 kg -- 2000.0 taka Taking silver-dust 4.0 kg -- 300.0 taka Taking sugar 10.0 kg -- 89.0 taka Taking salt 3.0 kg -- 24.0 taka Trip 1 profit 2413.0 taka Taking salt 7.0 kg -- 56.0 taka Trip 2 profit 56.0 taka

ALTERNATIVE QUESTION 01.2: Maximize your marks

Write a code for the following scenario using greedy algorithm:

You are attending your mid-term of the course “CS101”. The total marks of the exam is M and the total time is T minutes. You have to answer N questions, where the i-th question carries m_i marks and takes t_i minutes for you to answer. The marks you receive will be proportional to the percentage of your answer compared to the full answer, e.g., if a question contains 100 marks and you complete 30% of it, you will get 30 marks.

- Find the maximum marks you can get in this exam.
- Print the questions you have to answer for that.
- Find the maximum marks you can get in this exam if you are allowed to take the same exam in a group with your one friend (as long as a question is answered, both of you get marks irrespective of who answered it) and your friend’s answering capacity is exactly the same as you.

Sample Input	Sample Output
M T N m_1 t_1 m_2 t_2 ... m_n t_n	
120 20 5 20 10 20 5 30 5 30 6 20 40	Maximum 88 marks answering alone ques 3 100% done -- 30 marks ques 4 100% done -- 30 marks ques 2 100% done -- 20 marks ques 1 40% done -- 8 marks Maximum 107 marks answering with a friend

PROBLEM 02. Activity Selection Problem [CLRS 16.1]

Problem Description: Suppose we have a set $S = \{a_1, a_2, \dots, a_n\}$ of n proposed activities that wish to use a resource, such as a lecture hall, which can serve only one activity at a time. Each activity a_i has a start time s_i and a finish time f_i , where $0 \leq s_i < f_i < \infty$. If selected, activity a_i takes place during the half-open time interval $[s_i, f_i)$. Activities a_i and a_j are compatible if the intervals $[s_i, f_i)$ and $[s_j, f_j)$ do not overlap. That is, a_i and a_j are compatible if $s_i \geq f_j$ or $s_j \leq f_i$. In the activity-selection problem, we wish to select a maximum-size subset of mutually compatible activities.

Possible greedy strategies:

- Select the activity that starts first, next select the activity that starts first and does not conflict with the already picked activities
- Select the activity that ends first (this one gives the optimal answer)
- Select the activity that has the shortest duration first

Pseudocode (Loop version):

Function Greedy-Activity-Selector (s, f):

1. sort activities by finish time ascending
2. $n = s.length$
3. $A = \{a_1\}$
4. $k = 1$
5. **for** $m=2$ **to** n **do**
6. **if** $s[m] \geq f[k]$ **then**
7. $A = A \cup \{a_m\}$
8. $k = m$
9. **end for**
10. **return** A

ALTERNATIVE QUESTION 02.1:

Suppose you are managing a multipurpose hall of your university, where seminars, lectures, and even cultural events are held. **N** clubs have sent you booking requests for their events tomorrow. Each booking request contains the club id (**c_i**), the start time (**s_i**) and the duration (**d_i**) of the events. Approve the booking requests such that you can accommodate maximum events tomorrow, without creating conflict. Note that, after an event you need **X** hour to clean up and prepare for the next event.

Sample input	Sample output
N c_1 s_1 d_1 c_2 s_2 d_2 ... X	
4 a 2 8 b 3 4 d 8 1 c 7 1 0	Chosen clubs: b c d
4 a 2 8 b 3 4 d 8 1 c 7 1 1	Chosen clubs: b d

PROBLEM 03. Greedy Coin Change

Consider the problem of making change for **N** cents using the fewest number of coins. Assume that each coin's value is an integer. Write a greedy algorithm to make change consisting of quarters (25 cents), dimes (10 cents), nickels (5 cents), and pennies (1 cent).

Sample input N	Sample output
173	25 cents --- 6 10 cents --- 2 1 cents --- 3 Total 11 coins

Consider the problem of making change for **N** cents using the fewest number of coins. Assume that each coin's value is an integer. Write a greedy algorithm to make change consisting of coins c_1, c_2, \dots, c_d .

Sample input N d c_1, c_2, \dots, c_d	Sample output
173 4 10 1 25 5	25 cents --- 6 10 cents --- 2 1 cents --- 3 Total 11 coins

PROBLEM 04. Finding Minimum Stops [\[Link1\]](#)

Suppose you were to drive from St. Louis to Denver along I-70. Your gas tank, when full, holds enough gas to travel m miles, and you have a map that gives distances between gas stations along the route. Let $d_1 < d_2 < \dots < d_n$ be the locations of all the gas stations along the route where d_i is the distance from St. Louis to the gas station. You can assume that the distance between neighboring gas stations is at most m miles. Your goal is to make as few gas stops as possible along the way. Give the most efficient algorithm you can to determine at which gas stations you should stop.

PROBLEM 05. Determine the smallest set of unit-length closed intervals

Given a set $x_1 \leq x_2 \leq \dots \leq x_n$ of points on the real line, give an algorithm to determine the smallest set of unit-length closed intervals that contains all of the points. A closed interval includes both its endpoints; for example, the interval $[1.25; 2.25]$ includes all x_i such that $1.25 \leq x_i \leq 2.25$.

Sample input n x1, x2, ..., xn	Sample output
6 5.22 6.1 2.2 2.5 3.25 4.8	
5 5.22 6.1 2.2 2.5 3.25	

PROBLEM 06. Huffman Encoding

```
HUFFMAN( $C$ )
1   $n = |C|$ 
2   $Q = C$ 
3  for  $i = 1$  to  $n - 1$ 
4      allocate a new node  $z$ 
5       $z.left = x = \text{EXTRACT-MIN}(Q)$ 
6       $z.right = y = \text{EXTRACT-MIN}(Q)$ 
7       $z.freq = x.freq + y.freq$ 
8       $\text{INSERT}(Q, z)$ 
9  return  $\text{EXTRACT-MIN}(Q)$     // return the root of the tree
```

Huffman Decoding

7. More practice problems: <https://leetcode.com/tag/greedy/>