

Do VLMs See in English?

Mechanistic Analysis of the Language Pivot in Multilingual Vision-Language Models

Anonymous ACL submission

Abstract

Multilingual vision-language models (VLMs) consistently underperform on non-English visual queries, yet the internal mechanism behind this disparity remains unknown. As a focused case study on LLaVA-1.5-7B, we apply logit-lens analysis and causal activation patching to show that non-English visual queries are routed through an English-biased representational bottleneck in layers 5–17, extending the English-pivot phenomenon of Wendler et al. (2024) to the multimodal setting. Peak causal influence occurs at layer 8 ($\Delta\text{AIE}=0.49$), with all measurable pivot signal running through text-token positions. Without visual context, language-specific representations do not emerge at any layer, confirming that visual content is necessary to activate the pivot pathway. Building on these findings, we derive training-free language-steering vectors at the mechanistically identified pivot layers, improving Russian VQA by +6.5 pp and Portuguese by +1.0 pp on MMMB without any fine-tuning. Our results are consistent with the English pivot being a structural property of the LLM backbone that multimodal pre-training does not mitigate; we hypothesise that analogous pivot structures will be found in other LLM-backbone VLMs, and propose our mechanistic methodology as a blueprint for such investigations.

1 Introduction

Multilingual VLMs are deployed globally, yet a persistent gap separates their English and non-English performance on visual question answering (Fan et al., 2025; Song et al., 2025). Prior work attributes this gap to training-data imbalance or insufficient multilingual instruction tuning, and proposes remedies such as language-aware fine-tuning (Fan et al., 2025) or

culturally diverse data (Nyandwi et al., 2025). Yet no prior work has asked the mechanistic question: *where* in the network does English bias arise, and what causal role does the visual modality play?

The text-only interpretability literature provides a starting hypothesis. Wendler et al. (2024) show that LLaMA-family models process multilingual input through three phases: an *input space*, a *concept space* where representations become English-biased, and an *output space* where the target language is reconstructed. Ferrando and Costa-jussà (2024) extend this to circuit-level analysis across languages. Neither work addresses VLMs, leaving open whether the visual modality interacts with or suppresses this pivot.

We fill this gap with the first causal mechanistic analysis of the English pivot in a multilingual VLM, conducting a focused case study on LLaVA-1.5-7B. We view our findings as a case study rather than universal claims, and hypothesise that analogous pivot structures—mediated through the LLM backbone’s concept space—will generalise to other VLMs built on English-dominant LLM backbones; we propose our methodology as a blueprint for testing this hypothesis in future work. Our contributions are:

- We confirm that LLaVA-1.5-7B routes non-English visual queries through an English-biased concept space in **layers 5–17**, with peak causal responsibility at layer 8 ($\Delta\text{AIE}=0.49$; §4.3).
- We show that visual context is *necessary* for language-specific representations to emerge, and that under our patching design—which uses the same image in both passes—all measurable pivot signal runs through text-token positions; isolat-

ing visual causal contributions would require paired semantically-equivalent cross-lingual images (§4.3).

- We derive training-free steering vectors at the mechanistically identified pivot layers, yielding **+6.5 pp** on Russian and **+1.0 pp** on Portuguese on the MMBB multiple-choice benchmark, without any fine-tuning (§4.4).

2 Related Work

Mechanistic interpretability of multilingual LLMs. Wendler et al. (2024) establish the three-phase English-pivot model for LLaMA via logit-lens analysis. Dumas et al. (2025) use activation patching to show that concept representations are language-agnostic at intermediate layers, separating the underlying concept from its surface language form. Ferrando and Costa-jussà (2024) show language-agnostic circuits are reused across languages, implying the pivot is structural. Brinkmann et al. (2025) use causal sparse-autoencoder feature analysis to show shared latent grammatical representations across typologically diverse languages; Resck et al. (2025) survey mechanistic and interpretability findings across multilingual LLMs more broadly. All of these works study text-only models; we extend causal mechanistic analysis to VLMs.

Multilingual vision-language models. Multilingual VLM architectures such as mBLIP (?) and PALO (?) extend English-centric models through multilingual encoders or instruction tuning, but do not examine internal mechanisms. Fan et al. (2025) propose PLAST, a language-aware approach requiring fine-tuning. Song et al. (2025) document non-English VQA failure modes without investigating internal mechanisms. Nyandwi et al. (2025) address cultural diversity at the data level. In contrast, we provide a causal mechanistic account and a training-free fix.

Mechanistic interpretability for VLMs. Golovanevsky et al. (2025) apply activation patching to LLaVA and BLIP to study how visual information is integrated under image corruption, finding that LLaVA’s attention heads perform outlier suppression rather than visual grounding—a complementary analysis of the

visual integration pathway rather than the language-processing pathway we study. Our steering intervention is related to representation engineering (Zou et al., 2023), but derived from mechanistically identified pivot layers rather than contrast pairs.

3 Background

LLaVA-1.5-7B. LLaVA-1.5-7B (Liu et al., 2024) connects a CLIP ViT-L/14 visual encoder to a Vicuna-7B backbone via a two-layer MLP projector. An image is encoded into 576 patch tokens (positions 1–576 in the sequence), followed by the tokenised question. The backbone has 32 Llama-2 decoder layers of hidden size 4096.

Logit lens and PMI. The logit lens (nostalgebraist, 2020) projects an intermediate hidden state $\mathbf{h}_\ell$ through the final layer norm and LM head to obtain token probabilities at any depth. We report *pointwise mutual information*: $\text{PMI}_\ell[\tau] = \log p_\ell[\tau] - \log p_0[\tau]$, where p_0 is the LM-head output at a zero hidden state (the model’s unconditional prior), to remove vocabulary-frequency bias.

Causal tracing and AIE. Causal tracing (Meng et al., 2022) replaces the clean hidden state at layer ℓ with the corresponding state from a corrupted run, measuring the output change. We define the *Average Indirect Effect*:

$$\text{AIE}(\ell) = \mathbb{E}_e \left[p_\ell^{\text{patch}}[\tau_{\text{en}}] - p^{\text{clean}}[\tau_{\text{en}}] \right], \quad (1)$$

where the clean run uses a non-English question and the corrupted run uses the English equivalent on the same image. τ_{en} is the first token of the model’s English response, determined dynamically per example (typically “The”, id 450; see Appendix B). Positive AIE at layer ℓ means that layer causally carries English-pivot information.

4 Experiments and Results

4.1 Experimental Setup

Model. We use llava-hf/llava-1.5-7b-hf in float16, no quantisation or fine-tuning, greedy decoding.

Probing set. We build a 195-example probing set from COCO val2017 (Lin et al., 2014) across 15 object categories (person, car, bus,

train, boat, orange, book, clock, knife, spoon, umbrella, bird, cat, dog, apple). For each example we ask the question in four languages: English (en), Portuguese (pt), German (de), and Russian (ru), using forced-choice prompts listing all 15 category names in the target language. We track the first sub-token of each answer word using contextual-subtraction tokenisation to match generation-time tokenisation (Appendix A). This controlled object-naming paradigm is designed to identify the earliest layers at which the model develops language-specific representations under a semantically invariant visual stimulus; the transfer of vectors derived from this set to the broader MMMB benchmark is an empirical finding.

Evaluation benchmarks. We evaluate steering on MMMB (Sun et al., 2025), a multilingual multiple-choice VQA benchmark covering English, Portuguese, and Russian (200 examples each). German is included in the mechanistic analysis (Figures 1–3) and cross-lingual transfer ablation (§4.5) because its residual-stream AIE profile peaks at layer 6 with a pivot region of approximately 5–17, closely matching the range identified for all languages—making it a natural cross-lingual transfer control. MMMB does not provide a German split, so German steering is assessed indirectly via transfer.

Baselines. We compare our steered model ($\alpha > 0$) against unmodified LLaVA-1.5-7B (baseline, $\alpha = 0$) and against steering vectors extracted from fixed layer ranges—early (0–10), mid (11–21), and late (22–31)—to test whether mechanistic localisation is necessary.

4.2 The English Pivot in VLMs

Figure 1 shows logit-lens PMI across all 32 layers.

Image-present condition. With a real image, both English and target-language PMI grow substantially in late layers. English PMI peaks at layers 20–23 (values 8.1–8.4) across all three languages, consistently *before* the target-language peak at layers 27–29 (values 8.6–10.1). This ordering—English representations crystallising 5–7 layers before the target language—directly instantiates Wendler et al.’s concept-space phase in the multimodal setting. The grey pivot region (layers 5–17) corresponds to

where English PMI first begins to build, preceding both peaks.

All-black-image condition. Without meaningful visual content (image replaced by an all-black tensor of the same spatial dimensions), PMI values remain near-zero or negative (< -0.4) at every layer for every language. No meaningful language-specific representations form. This confirms that visual input is not merely incidental to the pivot—it is *necessary* to activate the representational pathway that produces language-specific outputs.

Logit-lens vs. causal patching. The grey pivot region (layers 5–17) identified in Figure 1 precedes the late-layer PMI peaks (20–29). These two measurements are complementary, not contradictory: the logit lens shows where representations *crystallise* into decodable token probabilities (a readout property), while causal patching (§4.3) identifies where pivot information *transfers* between processing pathways (a causal property). Causal English-pivot information is relayed through early-to-mid layers and only decoded into language-specific probabilities later.

4.3 Causal Localisation via Activation Patching

Residual stream patching. Figure 2 (left column) shows strongly positive AIE in layers 5–17 and near-zero thereafter. Peak AIE is at **layer 8** ($\overline{\text{AIE}} = 0.49$ averaged across languages), with the signal remaining above the 50%-of-peak threshold (0.24) through layer 17 and dropping to noise floor (< 0.04) by layer 20. We define the **pivot region** as layers 5–17.

The pivot region occupies the first half of the LLM, consistent with Wendler et al.’s concept-space phase, and precedes the late-layer (20–29) representational peaks observed in §4.2.

Attention and MLP patches. Middle and right columns of Figure 2 show near-zero AIE for both attention-output and MLP-output patches across all layers ($\max |\overline{\text{AIE}}| < 0.01$ for attention; < 0.01 for MLP except layer 0 where $\text{MLP} \approx 0.08$, reflecting sub-word tokenisation effects (Geva et al., 2022)). The English pivot operates through the integrated residual stream rather than through separable attention heads or feed-forward networks.

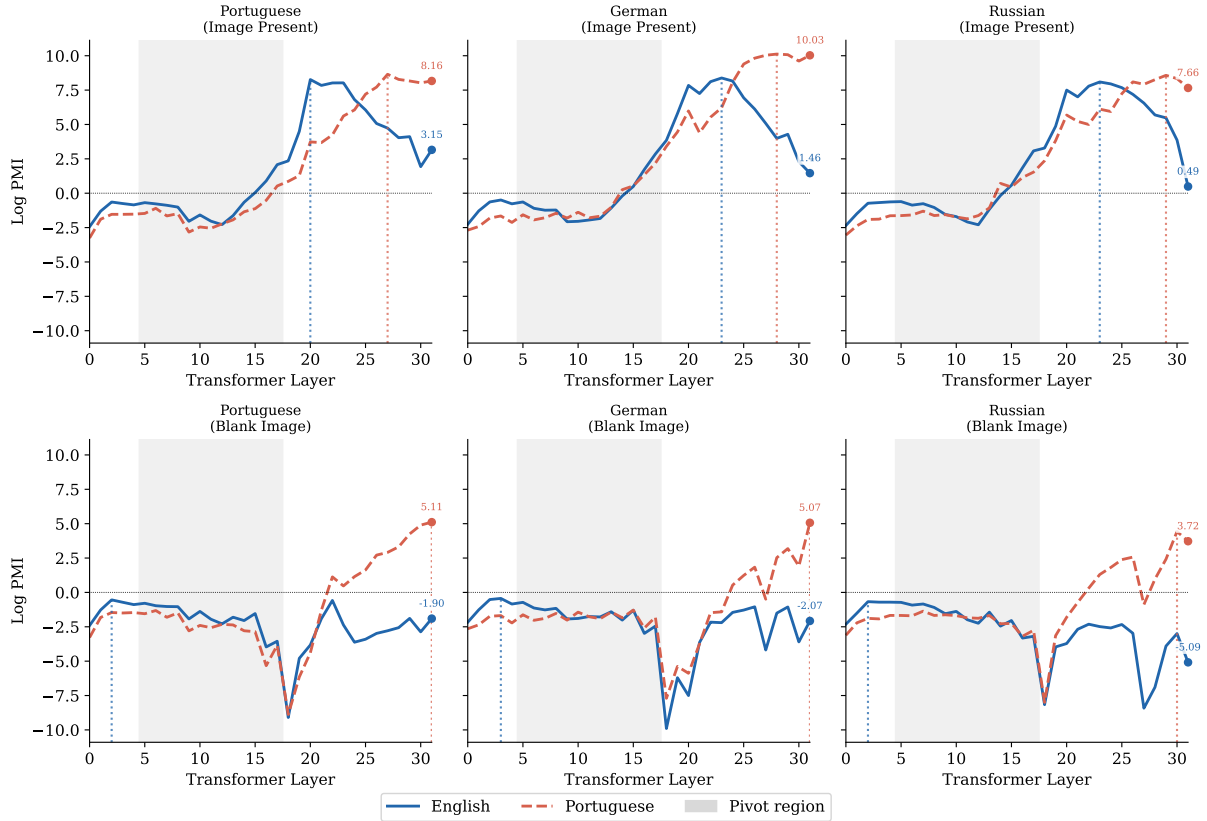


Figure 1: **Logit-lens PMI across layers.** Blue (solid): English answer token; red (dashed): target-language token. Top row: real image; bottom row: all-black image. Grey band: mechanistically identified pivot region (layers 5–17). With a real image, both tokens develop strong positive PMI in late layers (20–29), with English peaking first at layers 20–23. Without an image, PMI remains near-zero at every layer—language representations do not emerge without visual context.

Visual token contribution. Figure 3 shows that the visual-token-only AIE is zero at every layer across all languages. This follows directly from the experimental design: the same image is used in both the non-English (clean) and English (corrupted) passes, so the 576 CLIP visual-token activations are identical and contribute no differential signal. Accordingly, *under this design*, all measurable causal pivot signal runs through text-token positions. Assessing whether visual tokens could carry independent pivot information would require paired semantically-equivalent images in different languages—a direction for future work. What the current design *does* establish is that the pivot’s causal pathway does not depend on any language-specific visual signal; the blank-image ablation (§4.2) provides the positive evidence that visual context shapes *when* language-specific representations emerge at all.

4.4 Training-Free Steering at Pivot Layers

Steering vector extraction. For each non-English language ℓ , we extract a steering vector at each pivot layer $L \in \{5, \dots, 17\}$:

$$\mathbf{v}_L^{(\ell)} = \frac{1}{N} \sum_{i=1}^N \mathbf{h}_L^{(\ell,i)} - \mathbf{h}_L^{(\text{en},i)}, \quad (2)$$

where $\mathbf{h}_L^{(\cdot,i)}$ is the residual-stream hidden state at the last answer position for example i ($N=195$). Split-half cosine similarity exceeds 0.85 across all languages and pivot layers, indicating stable steering directions.

Steered inference. At inference time we add $\alpha \mathbf{v}_L^{(\ell)}$ to the hidden state at each pivot layer via an in-place forward hook, applied to the last active position at every decode step (KV-cache compatible; Appendix B).

Results (Table 1). Steering yields **+6.5 pp** on Russian MMB (51.5% $\rightarrow$ 58.0% at $\alpha=0.2$),

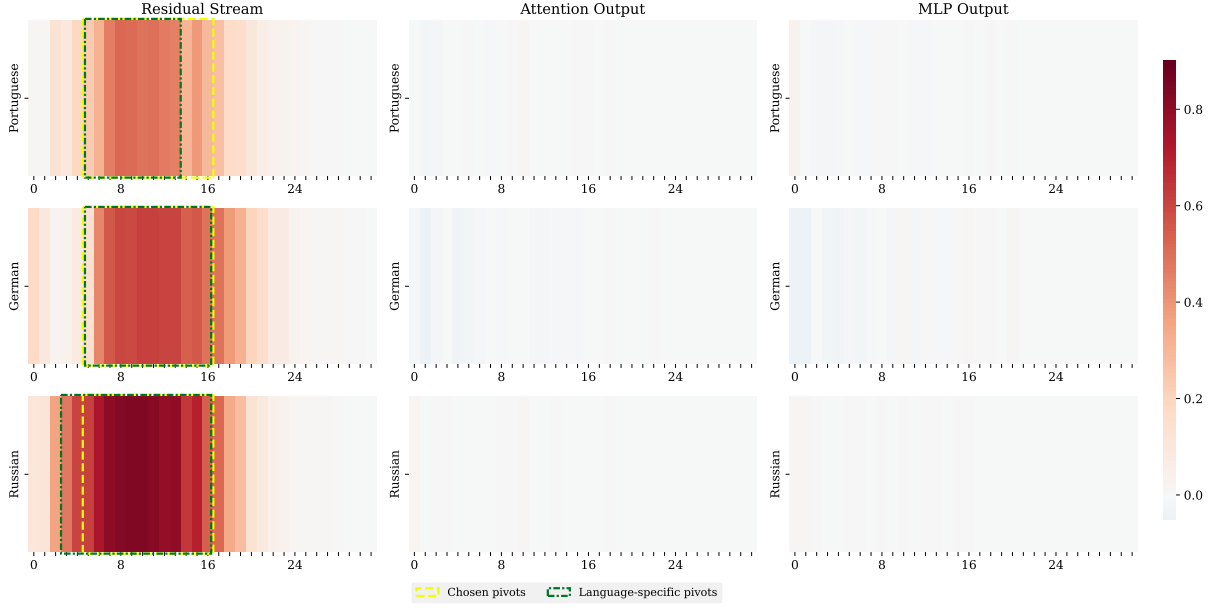


Figure 2: **Average Indirect Effect (AIE) heatmap.** Rows: Portuguese, German, Russian. Columns: residual stream / attention output / MLP output. The residual-stream pivot at layers 5–17 is pronounced across all languages; attention and MLP patches carry negligible weight.

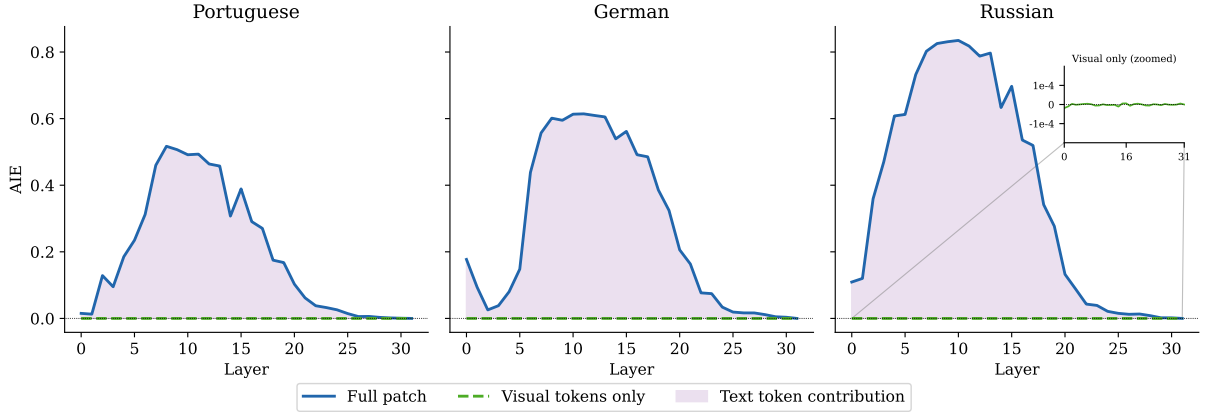


Figure 3: **Full vs. visual-token-only residual patch AIE.** The visual-token curve (green, dashed) is identically zero at every layer: the English pivot is mediated entirely through text-token positions.

Table 1: **Main results on MMMB** (4-way multiple-choice accuracy, %). “Ours”: best accuracy over $\alpha \in \{0.01, 0.02, 0.05, 0.07, 0.1, 0.2, 0.3, 0.4, 0.5\}$ (optimum $\alpha=0.2$ for PT and RU independently). EN: baseline only (no steering vector for English). Δ : gain over baseline.

Method	EN	PT	RU
Baseline	72.5	63.0	51.5
Ours ($\alpha=0.2$)	72.5	64.0	58.0
Δ	—	+1.0	+6.5

substantially reducing the 21-point gap between Russian and English baselines. Portuguese gains +1.0 pp (63.0% $\rightarrow$ 64.0%). We attribute

the smaller Portuguese gain, at least in part, to a pivot-layer mismatch: the residual-stream AIE profile for Russian spans approximately layers 3–17, closely matching our chosen range (5–17), whereas the Portuguese AIE profile peaks earlier and tapers off around layer 14 (Figure 2). By using the shared range 5–17 we include three to four layers beyond Portuguese’s own pivot region—layers that carry little Portuguese pivot signal but introduce noise into the steering intervention. Using language-specific pivot layers (e.g. 5–14 for Portuguese) may yield stronger gains; we treat this as a direction for future work. Figure 4 shows a representative

Table 2: **Layer range ablation on MMMB (best α per cell, %).** Best α shown in parentheses where it differs from 0.2.

Layer range	PT	RU
Early (0–10)	63.5 ($\alpha=0.2$)	51.5 ($\alpha=0.01$)
Mid (11–21)	63.0 ($\alpha=0.01$)	54.5 ($\alpha=0.1$)
Late (22–31)	63.0 ($\alpha=0.01$)	51.5 ($\alpha=0.01$)
Ours (5–17)	64.0 ($\alpha=0.2$)	58.0 ($\alpha=0.2$)

Table 3: **Visual token ablation on MMMB (%).** “Steer” = best α : $\alpha=0.2$ (real image), $\alpha=0.02$ (all-black image).

Condition	PT Base	PT Steer	RU Base	RU Steer
Real image	63.0	64.0	51.5	58.0
All-black image	42.0	41.5	46.5	48.5

Portuguese example where steering shifts the model’s prediction from the wrong option (C) to the correct answer (D), with the PMI curves at the pivot layers revealing the mechanism behind the correction.

4.5 Ablations

Layer range ablation (Table 2). Our mechanistic pivot region (5–17) outperforms all fixed ranges on both languages. The early range is next best for Portuguese (+0.5 pp over baseline), consistent with the AIE peak occurring in the early-to-mid network. Mid and late ranges match or fall below baseline for Russian, indicating that steering later layers is ineffective. The gap between ours and the best fixed range is +6.5 vs. +3.0 pp (mid) for Russian, confirming that mechanistic localisation is necessary.

Visual token ablation (Table 3). All-black images drastically lower baseline performance (PT: −21 pp; RU: −5 pp), confirming visual context is necessary for correct answering. With all-black images, steering is marginal or slightly harmful, consistent with the logit-lens finding that visual input is required for strong language-specific representations to form.

Steering coefficient sensitivity (Figure 5). Performance peaks at $\alpha=0.2$ for both MMMB languages (independently) and degrades sharply beyond $\alpha=0.3$. Large α values corrupt generation quality (MMMB-RU drops to 0% at $\alpha=0.5$, indicating degenerate outputs).

Table 4: **Cross-lingual transfer on MMMB (best α per cell, %).** “—” = own-language result (see Table 1).

Vector source	MMMB-PT	MMMB-RU
PT (own)	—	55.5 ($\alpha=0.3$)
DE	64.0 ($\alpha=0.2$)	58.0 ($\alpha=0.2$)
RU (own)	63.5 ($\alpha=0.3$)	—


Cross-lingual transfer (Table 4). The **German steering vector transfers perfectly** to both Portuguese (64.0% = own-language) and Russian (58.0% = own-language). In contrast, the Portuguese vector applied to Russian yields 55.5% (−2.5 pp vs. own-language). The full transferability of the German vector suggests it captures a general “non-English” axis rather than a language-specific direction, consistent with the shared concept space observed in activation patching.

5 Discussion

Why does the pivot exist in VLMs? Our results are consistent with the view that LLaVA-1.5-7B inherits the English pivot from its ViGuna backbone. The LLM backbone is pre-trained predominantly on English; non-English sequences are mapped into a concept space built around English representations. Multimodal pre-training adds a visual input modality but does not restructure this internal language topology. Visual tokens activate the language-processing pathway but do not themselves carry a language-direction signal—explaining why visual-token patching yields zero AIE.

Steering direction geometry. The complete transferability of the German vector (Table 4) suggests that all three steering directions (pt, de, ru) approximately coincide—pointing along a single “non-English language” axis rather than three language-specific directions. This is consistent with the shared concept-space hypothesis of Wendler et al. (2024) and raises the possibility that a single universal vector could suffice for multilingual correction.

Limitations. This work is a case study on a single VLM (LLaVA-1.5-7B) with three non-English languages; we hypothesise that analogous pivot structures will be found in other LLM-backbone VLMs, but generalisation to other architectures and language families re-



Qual é a cor da banheira?

A. Limpar
B. Bege
C. Porcelana
D. Branco

Correct answer: D

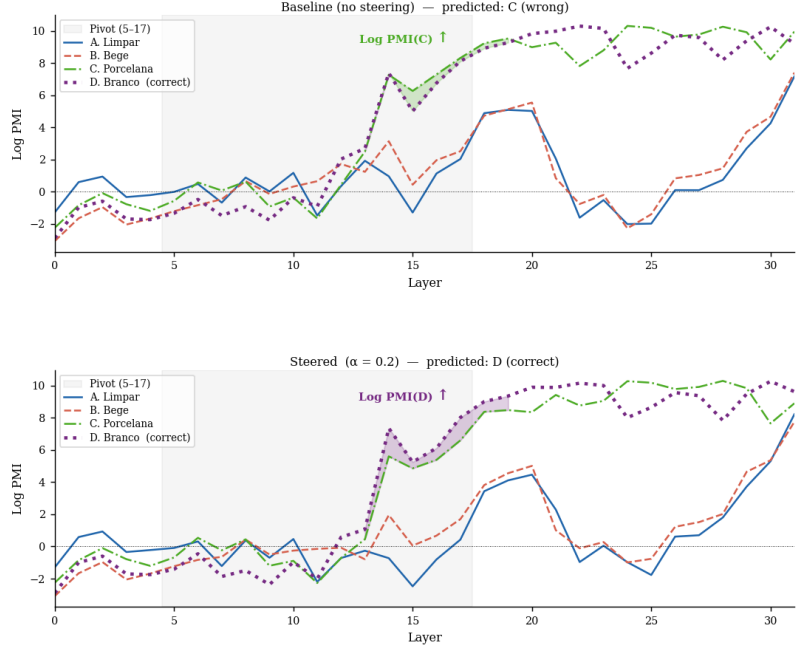


Figure 4: **Representative Portuguese MMMB case (steered wins).** *Left:* input image and question with four answer options; correct answer is D. *Top right (Baseline):* logit-lens PMI curves for all four options across 32 layers—the model incorrectly peaks on option C at layer 31. *Bottom right (Steered, $\alpha=0.2$):* after applying the Portuguese steering vector at pivot layers 5–17, option D dominates at layer 31, recovering the correct answer. The shaded fill in the pivot region highlights where C and D compete; steering resolves this competition in favour of the correct option.

quires further investigation. Our steering uses a shared pivot region (layers 5–17) derived from the residual-stream AIE profile averaged across languages; however, language-specific AIE profiles suggest that per-language pivot ranges may be narrower (e.g. approximately 5–14 for Portuguese vs. 3–17 for Russian), and using language-specific layer ranges is a promising direction for improving steering gains, particularly for languages where the shared range is over-inclusive. Our steering requires a 195-example probing set per language, assuming access to target-language COCO annotations. The zero visual-token AIE follows from using the same image in both passes; using paired images with language-relevant visual differences would probe whether visual content can carry pivot information in more ecologically valid settings.

6 Conclusion

In this case study of LLaVA-1.5-7B, we show that the model processes non-English visual queries through an English-biased representational bottleneck in layers 5–17, with peak causal influence at layer 8 ($\Delta\text{AIE}=0.49$). Vi-

sual context is necessary for language-specific representations to form at all, but once present, the pivot is mediated entirely through text-token positions. Training-free steering vectors derived from these mechanistically identified layers improve Russian MMMB by +6.5 pp and Portuguese MMMB by +1.0 pp, with German vectors transferring perfectly across languages. These findings establish the English pivot as a structural property of the LLM backbone that multimodal pre-training does not mitigate, and provide a mechanistically grounded methodology that we propose as a blueprint for investigating pivot structures in other VLMs.

References

Jannik Brinkmann, Chris Wendler, Christian Bartelt, and Aaron Mueller. 2025. [Large language models share representations of latent grammatical concepts across typologically diverse languages](#). In *Proceedings of the 2025 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*.

Clément Dumas, Chris Wendler, Veniamin

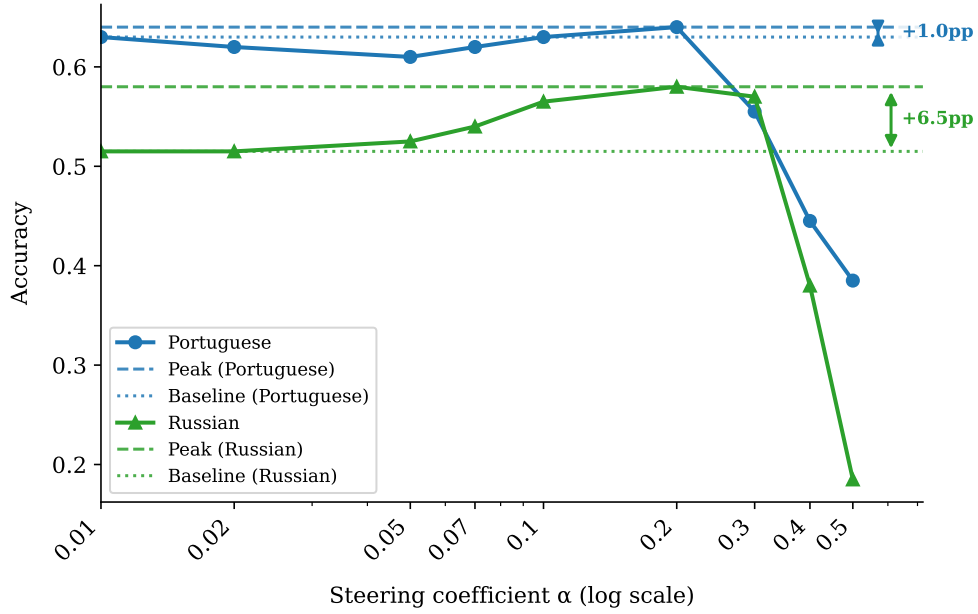


Figure 5: **Sensitivity to steering coefficient α on MMMB.** Performance peaks at $\alpha=0.2$ and degrades sharply beyond $\alpha=0.3$. The effective window ($\alpha \in [0.05, 0.2]$) is consistent with prior representation-engineering results (Zou et al., 2023).

- Veselovsky, Giovanni Monea, and Robert West. 2025. Separating tongue from thought: Activation patching reveals language-agnostic concept representations in transformers. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics*.
- Yuchun Fan, Yilong Wang, Yongyu Mu, Lei Huang, Bei Li, Xiaocheng Feng, Tong Xiao, and Jingbo Zhu. 2025. Language-specific layer matters: Efficient multilingual enhancement for large vision-language models. In *Findings of the Association for Computational Linguistics: EMNLP 2025*.
- Javier Ferrando and Marta R. Costa-jussà. 2024. On the similarity of circuits across languages: a case study on the subject-verb agreement task. In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 10115–10125.
- Mor Geva, Avi Caciularu, Kevin Ro Wang, and Yoav Goldberg. 2022. Transformer feed-forward layers build predictions by promoting concepts in the vocabulary space. *Preprint*, arXiv:2203.14680.
- Michal Golovanevsky, William Rudman, Vedant Palit, Ritambhara Singh, and Carsten Eickhoff. 2025. What do VLMs NOTICE? A mechanistic interpretability pipeline for gaussian-noise-free text-image corruption and evaluation. In *Proceedings of the 2025 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*.
- Tsung-Yi Lin, Michael Maire, Serge Belongie, and 1 others. 2014. Microsoft COCO: Common objects in context. In *Proceedings of the European Conference on Computer Vision*.
- Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. 2024. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*.
- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. 2022. Locating and editing factual associations in GPT. In *Advances in Neural Information Processing Systems*.
- nostalgebraist. 2020. Interpreting GPT: the logit lens. <https://www.lesswrong.com/posts/AcKRB8wDpdAN6v6ru/interpreting-gpt-the-logit-lens>.
- Jean de Dieu Nyandwi, Yueqi Song, Simran Khanuja, and Graham Neubig. 2025. Grounding multilingual multimodal LLMs with cultural knowledge. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*.
- Lucas Resck, Isabelle Augenstein, and Anna Korhonen. 2025. Explainability and interpretability of multilingual large language models: A survey. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*.
- Yueqi Song, Simran Khanuja, and Graham Neubig. 2025. What is missing in multilingual visual reasoning and how to fix it. In *Findings of the Association for Computational Linguistics: NAACL 2025*, pages 2654–2667.

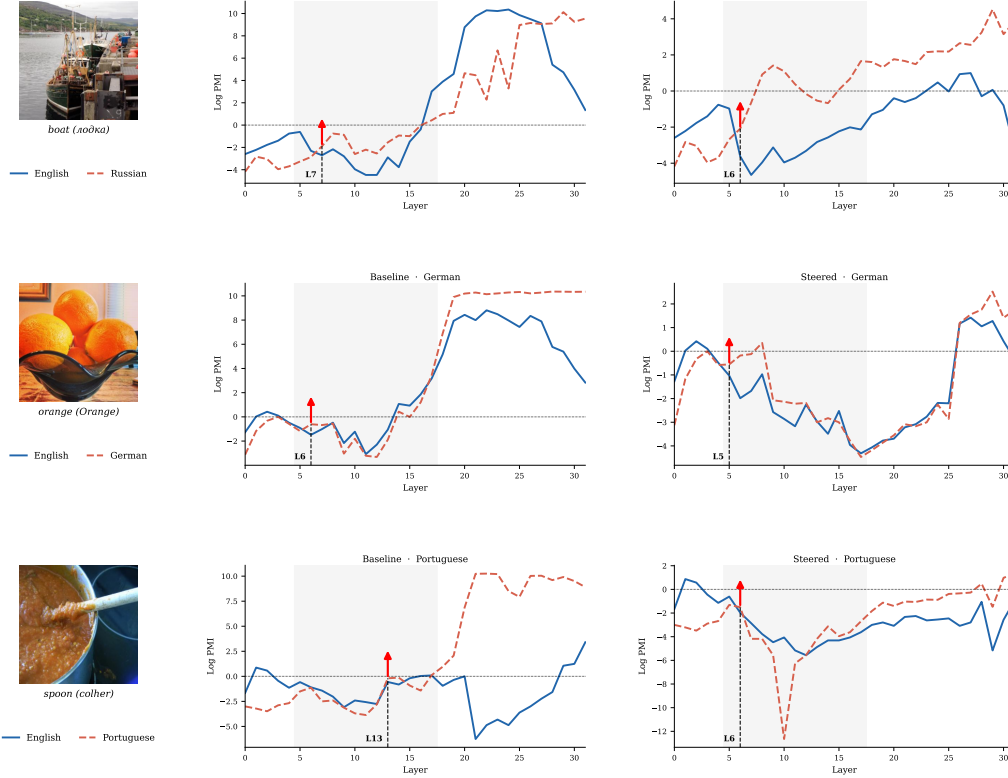


Figure 6: **Qualitative logit-lens walkthrough.** Two examples where the English pivot is most severe (Portuguese, left; German, right), shown without steering (top) and with steering at $\alpha=0.2$ (bottom). Red arrow: layer where target-language PMI first exceeds English PMI. Inset: COCO image. Steering shifts the crossover to an earlier layer, consistent with target-language representations being amplified at the pivot layers.

Hai-Long Sun, Da-Wei Zhou, Yang Li, Shiyin Lu, Chao Yi, Qing-Guo Chen, Zhao Xu, Weihua Luo, Kaifu Zhang, De-Chuan Zhan, and Han-Jia Ye. 2025. [Parrot: Multilingual visual instruction tuning](#). In *Proceedings of the 42nd International Conference on Machine Learning*.

Chris Wendler, Veniamin Veselovsky, Giovanni Monea, and Robert West. 2024. [Do Llamas work in English? On the latent language of multilingual transformers](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 15209–15228.

Andy Zou, Long Phan, Sarah Chen, and 1 others. 2023. [Representation engineering: A top-down approach to AI transparency](#). *Preprint*, arXiv:2310.01405.

A Probing Set Details

Table 5 lists the 15 COCO categories and their Portuguese and German answer tokens. All answer words are tracked by their first sub-token under the Vicuna tokeniser, using contextual subtraction (encoding “ASSISTANT: {word}” and stripping the prefix tokens) to match

generation-time tokenisation. The leading-space token (id 29871) is filtered before selecting the first sub-token.

Table 5: Object categories with PT and DE answer tokens. Multi-token words tracked by first sub-token only ($\dagger$).

Category	PT	DE
person	pessoa	Person
car	carro	Auto
bus	ônibus $\dagger$	Bus
train	trem	Zug
boat	barco	Boot
orange	laranja $\dagger$	Orange
book	livro	Buch
clock	relógio $\dagger$	Uhr
knife	faca	Messer $\dagger$
spoon	colher $\dagger$	Löffel $\dagger$
umbrella	guarda-chuva $\dagger$	Regenschirm $\dagger$
bird	pássaro $\dagger$	Vogel $\dagger$
cat	gato	Katze $\dagger$
dog	cachorro $\dagger$	Hund
apple	maçã $\dagger$	Apfel $\dagger$

B Implementation Details

Sequence alignment. Non-English questions are typically 2–5 tokens longer than English counterparts. We keep the clean (non-English) input at full length to preserve the correct `answer_pos`, and truncate only the corrupted (English) input to `min_len`.

Pre-hook patching under transformers 5.0. Transformers 5.0 wraps each `LlamaDecoderLayer` in a `GradientCheckpointingLayer` that discards post-hook return values. We register patching as a *pre-hook* on layer $\ell+1$ (which is outside the gradient-checkpointing wrapper), rather than a post-hook on layer ℓ . For the final layer ($\ell=31$), the pre-hook is on `model.language_model.model.norm`.

Response-token target. The model’s first generated token is consistently the article “The” (id 450) rather than the object name, as the model answers in sentence form. We determine τ_{en} dynamically per example via a one-token greedy generation on the English input. Steering is applied in-place at the last active token position at each generate step: $\mathbf{h}_L += \alpha \cdot \mathbf{v}_L^{(\ell)}$ via a forward hook on `model.language_model.model.layers[L]`. This correctly steers both the prefill position and each autoregressive decode step under KV-cache.