PRACTICAL LAB: JAVASCRIPT OPERATORS MASTERY

Course: DFK20013 Web Design Technology

Topic: 3.1.1 Variables, Data Types, and Operators

Duration: 60 – 90 Minutes

Student Name	**AZRIEN INSYIRAH BINTI KAMAL HALIM**
Registration No	**10DIT25F1143**
Date	**030326**

---

1. Learning Outcomes

By the end of this lab, students should be able to:

- Implement **Arithmetic Operators** for calculations.
- Use **Assignment Operators** to update values efficiently.
- Control application states using **Increment/Decrement**.
- Validate user access using **Relational** and **Logical** operators.

---

2. Practical Task: The All-in-One Operator Workshop

Create a file named lab_operators.html. Copy and complete the coding below.

HTML

```
<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="UTF-8">

    <title>DFK20013: JS Operators Workshop</title>

    <style>

        body { font-family: 'Segoe UI', sans-serif; max-width: 850px;
margin: 2rem auto; background-color: #f0f2f5; padding: 20px; color: #333;
}

        section { background: white; padding: 25px; border-radius: 12px;
margin-bottom: 25px; box-shadow: 0 4px 6px rgba(0,0,0,0.1); }

        h2 { color: #2c3e50; border-left: 5px solid #3498db; padding-
left: 10px; margin-top: 0; }

        .output-box { background: #2c3e50; color: #27ae60; padding: 15px;
border-radius: 6px; font-family: 'Courier New', monospace; margin-top:
10px; }
```

```
        .short-note { background: #fff3cd; color: #856404; padding: 15px;
border-radius: 6px; margin-top: 15px; border-left: 5px solid #ffc107;
display: none; font-size: 0.9rem; }

        input { padding: 8px; width: 100px; border-radius: 4px; border:
1px solid #ccc; }

        button { padding: 8px 20px; background: #3498db; color: white;
border: none; border-radius: 4px; cursor: pointer; font-weight: bold; }

        button:hover { background: #2980b9; }

        code { background: #eee; padding: 2px 4px; border-radius: 3px;
font-weight: bold; color: #d63384; }

    </style>

</head>
```

```
<body>



    <header style="text-align: center; margin-bottom: 30px;">

        <h1>JavaScript Operators Mastery</h1>

        <p>Follow the steps and observe the Console and UI outputs.</p>

    </header>
```

```
    <section>

        <h2>Task 1: Basic Arithmetic (Check Console)</h2>

        <p>This task demonstrates background calculations using
<code>+</code>, <code>-</code>, <code>*</code>, <code>/</code>,
<code>**</code>, and <code>%</code>.</p>

        <button onclick="runTask1()">Run Console Logic</button>

    </section>
```

```
    <section>

        <h2>Task 2: POS System (Arithmetic & Assignment)</h2>

        <p>Price: RM 50.00. <strong>Promo:</strong> Buy > 4 units to get
RM 20.00 discount.</p>

        Quantity: <input type="number" id="qty" value="1">

        <button onclick="runTask2()">Calculate Total</button>

        <div id="outPOS" class="output-box">Final Total: RM 0.00</div>

        <div id="notePOS" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 3: Stock Control (Increment & Decrement)</h2>
```

```
        <p>Simulating inventory updates.</p>

        Stock Level: <span id="stockVal" style="font-size: 1.5rem; font-
weight: bold;">10</span><br><br>

        <button onclick="runTask3('inc')">Add (+)</button>

        <button onclick="runTask3('dec')"
style="background:#6c757d;">Remove (-)</button>

        <div id="noteStock" class="short-note"></div>

    </section>
```

```
    <section>

        <h2>Task 4: Gate Access (Relational & Logical)</h2>

        <p>Rules: Age 18+ OR (Age 13+ AND Parent present).</p>

        Age: <input type="number" id="age" placeholder="Age">

        <label><input type="checkbox" id="parent"> With
Parent?</label><br><br>

        <button onclick="runTask4()" style="background:#27ae60;">Verify
Entry</button>

        <div id="outSecurity" class="output-box">Status: Waiting...</div>

        <div id="noteSecurity" class="short-note"></div>

    </section>
```

Inside the <script> tag, type all the following code:

JAVASCRIPT:

1.

```
<script>
    // Helper to show explanations
    function showNote(id, text) {
        const noteDiv = document.getElementById(id);
        noteDiv.style.display = 'block';
        noteDiv.innerHTML = text;
    }
```

2.

```
// --- TASK 1: ARITHMETIC (BASIC) ---
function runTask1() {
    console.log("--- Task 1: Arithmetic Operations ---");
    let students = 31;
    students = students + 1;   // Addition
    students = students - 2;   // Subtraction
    students = students * 2;   // Multiplication
    students = students / 2;   // Division
    let power = 10 ** 2;       // Exponentiation (100)
    let remainder = 31 % 2;    // Modulus (1 - Odd)

    console.log("Final Student Count: " + students);
    console.log("10 to the power of 2: " + power);
    console.log("Remainder of 31/2: " + remainder);
    alert("Check Browser Console (F12) for results!");
}
```

3.

```
// --- TASK 2: POS SYSTEM (ARITHMETIC & ASSIGNMENT) ---
function runTask2() {
    let price = 50;
    let qty = parseInt(document.getElementById('qty').value);

    // a. Arithmetic Operator (*)
    let total = price * qty;
    let note = "<b>Subtopic (a) Arithmetic:</b> <code>*</
    code> multiplied " + price + " by " + qty + ".<br>";

    // b. Assignment Operator (-=)
    if (qty > 4) {
        total -= 20; // Shorthand for total = total - 20
        note += "<b>Subtopic (b) Assignment:</b> <code>-=</
        code> updated the total by subtracting the discount.";
    }

    document.getElementById('outPOS').textContent = "Final
    Total: RM " + total.toFixed(2);
    showNote('notePOS', note);
}
```

4.

```
// --- TASK 3: INCREMENT & DECREMENT ---
let stock = 10;
function runTask3(type) {
    let note = "";
    if (type === 'inc') {
        stock++; // (c) Increment
        note = "<b>Subtopic (c) Increment:</b> <code>++</
        code> increased the stock by 1.";
    } else {
        stock--; // (c) Decrement
        note = "<b>Subtopic (c) Decrement:</b> <code>--</
        code> decreased the stock by 1.";
    }
    document.getElementById('stockVal').textContent = stock;
    showNote('noteStock', note);
}
```

5.

```
    // --- TASK 4: RELATIONAL & LOGICAL ---
    function runTask4() {
        let age = parseInt(document.getElementById('age').value);
        let hasParent = document.getElementById('parent').checked;
        let status = document.getElementById('outSecurity');

        if (isNaN(age)) return alert("Please enter a valid age.");

        // d. Relational: >=
        // e. Logical: || (OR), && (AND)
        let isEligible = (age >= 18) || (age >= 13 && hasParent);

        status.textContent = isEligible ? "Status: ACCESS GRANTED
        ✅" : "Status: ACCESS DENIED ❌";
        status.style.color = isEligible ? "#27ae60" : "#ff4d4d";

        let note = "<b>Subtopic (d) Relational:</b> <code>>=</
        code> compared Age (" + age + ") to the limit.<br>";
        note += "<b>Subtopic (e) Logical:</b> Used <code>||</
        code> (OR) and <code>&&</code> (AND) to combine rules.";
        showNote('noteSecurity', note);
    }
</script>
```

Capture a screenshot of the output from the previous steps. **Observe** the results and **explain** your understanding of the process.

1.	**Screenshot of the output** 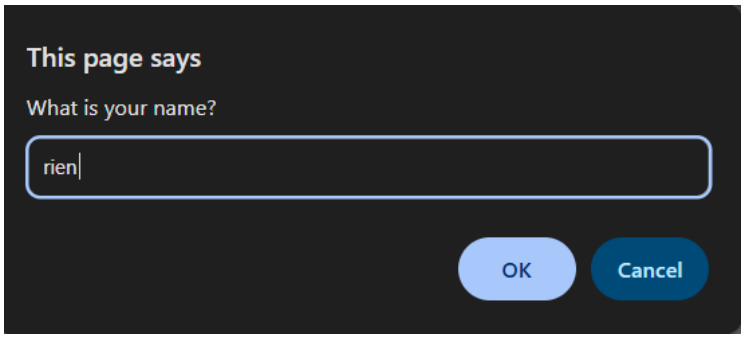
	Explanation **The website is telling you to open the Browser Console to see the result.**

2.	**Screenshot of the output** 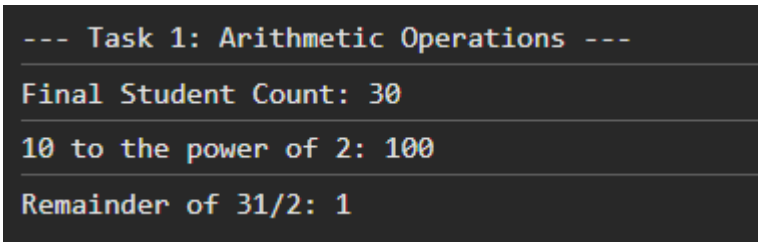
	Explanation **The final student count is 30. Ten to the power of two equals 100, and when 31 is divided by 2, the remainder is 1.**

3.	**Screenshot of the output**

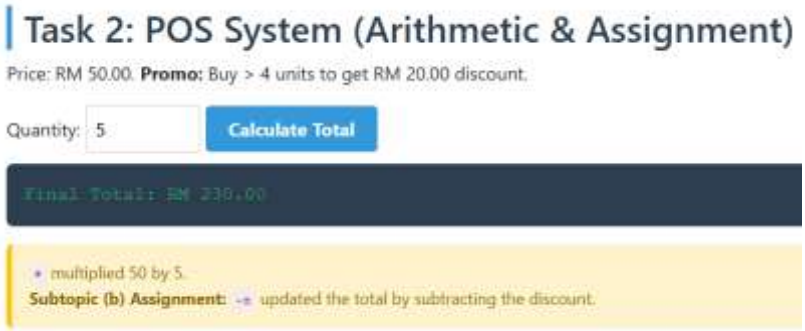

Explanation

The price is RM50 per item ,when the qty is 2, the total is calculated by multipliying 50 by 2,since 2 is less then 4 there is no RM 20 discount .So the total is RM 100.

The price is RM 50 per item ,when the qty is 5,the total calculated by multiply and substrac for RM 20 and the total is RM 230.It is because the qty is more than 4,so the RM 20 is apply.

4. **Screenshot of the output**

	Explanation **This task shows how stock (inventory) can increase or decrease.** **Increment (+) means adding 1 to the stock. Decrement (–) means subtracting 1 from the stock.**

5.	**Screenshot of the output**

Explanation

5. This task checks if someone can enter or not.

It uses:

Relational operators → to compare age (like >=, <)

Logical operators → to combine rules (&& AND, || OR)

3. Quick Check (Reflection)

Instruction: Answer the following questions based on your coding results.

1. **Modulus Utility:** Based on Task 1, if students % 2 returns 0, is the number even or odd?
    - **If student %2 return 0,the number is even because it can be divided by 2 without any remainder.**
2. **Shorthand Power:** In Task 2, rewrite total -= 20 using the standard assignment method.
    - **The standard assignment form of total -**=20 is the total =total-20
3. **Logical Priority:** In Task 4, why did we put (age >= 13 && hasParent) in parentheses?
    - **We put (age >= 13&& has parent) in parentheses to make sure this condition is checked together before combining it with other conditions.** This make the logic is clear and correct.
4. **Time Calculation:** (Extra Challenge) If a variable totalMinutes = 130, write the formula to find the remaining minutes after converting to hours using the **Modulus** operator.
    - **To find the remaining minutes after converting to hours, use totalminutes % 60.**