rubyでJavaのプロパティファイルを読み込んでみた

2014/12/13 #渋谷java

大中浩行(@setoazusa)

CC BY

- 大中浩行(Ohnaka,Hiroyuki)
- Twitter @setoazusa
- java-jaから来ますた
- n #いきものがかり #miwa #ケラケラ

Copyright 2014 Hiroyuki Ohnaka

今日のLTを申し込んだきっかけ

- 今から1ヶ月前の話

Copyright 2014 Hiroyuki Ohnaka

#ccc_r11

私がTDD出来ないのはどう考えてもお前らが悪い！

～エンタープライズJava開発におけるTDD適用の勘所～

2014/11/15

大中浩行

自分の出番が済んだ後のビズリーチさんのセッションの席で…

Copyright 2014 Hiroyuki Ohnaka

「あっちゃいけないことなんですけど、ステージング環境と本番のスキーマーで差分がでてしまうことがあるんですよー」(≧▽≦)

Copyright 2014 Hiroyuki Ohnaka

いやいや

- データベースマイグレーションツールとCIサーバーをちゃんと連携させれば、ステージングと本番で異なるDDLが実行されることはないはず…

Copyright 2014 Hiroyuki Ohnaka

- というわけで、その話をしようと思ったのですが、コミュニティの場で商用ツール(Bamboo)前提の話をするのも微妙ですので…

Copyright 2014 Hiroyuki Ohnaka

ブログを書きました

MyBatis MigrationsとBambooとSchemaSpyでデータベースの構成を管理する

http://blog.fieldnotes.jp/entry/2014/12/08/013919

Copyright 2014 Hiroyuki Ohnaka

- なので、そこでやっているツール間連携の話をしたいと思います。

Copyright 2014 Hiroyuki Ohnaka

使用しているツールの話

- データベースマイグレーションは、MyBatis Migrations
- ドキュメント作成は、SchemaSpyを使用しています。

Copyright 2014 Hiroyuki Ohnaka

MyBatis Migrations

```
1 --// create dept table
2 -- Migration SQL that makes the change goes here.
3 CREATE TABLE dept
4 (
5             deptno numeric(2,0) NOT NULL,
6             dname character varying(14),
7             loc character varying(13),
8             versionno numeric(8,0),
9             active numeric(1,0),
10            CONSTRAINT dept_pkey PRIMARY KEY (deptno)
11 )
12 WITH (
13            OIDS=FALSE
14 );
15
16 COMMENT ON TABLE dept IS '部署';
17 COMMENT ON COLUMN dept.deptno IS '部署番号';
18 COMMENT ON COLUMN dept.loc IS '地域';
19 COMMENT ON COLUMN dept.versionno IS 'バージョン番号';
20 COMMENT ON COLUMN dept.active IS '有効';
21
22 --//@UNDO
23 -- SQL to undo the change goes here.
24
25 DROP TABLE dept;
```

SchemaSpy

Tables | Relationships | Utility Tables | Constraints | Anomalies | Columns | Donate

Table d66vta52qi8mtp.public.dept

部署

Generated by

☑ Implied relationships ☐ Related columns ☐ Constraints ☑ Comments ☑ Legend

Column	Type	Size	Nulls	Auto	Default	Children	Parents	Comments
deptno	numeric	2				*emp*		部署番号
dname	varchar	14	√		null			
loc	varchar	13	√		null			地域
versionno	numeric	8	√		null			バージョン番号
active	numeric	1	√		null			有効

Table contained 0 rows at 金 9 12 20:50 JST 2014

Indexes:

Column(s)	Type	Sort
deptno	Primary key	Asc

Close relationships:



☑ All columns

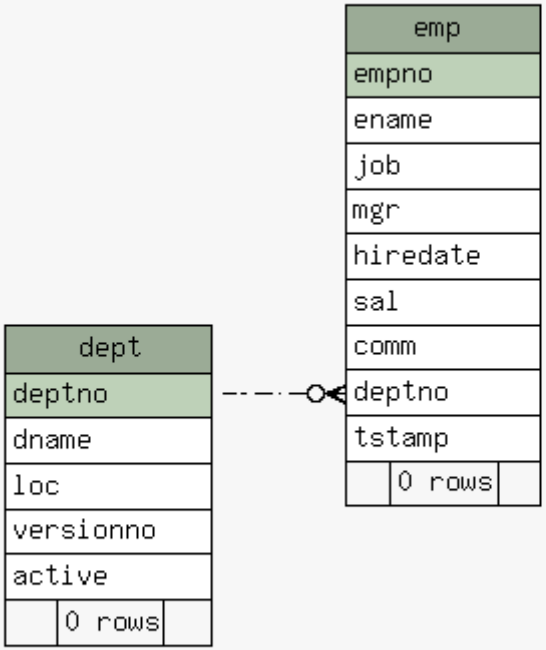

Generated by SchemaSpy

Copyright 2014 Hiroyuki Ohnaka

MyBatis Migrationsの接続先設定

```
1 ## Base time zone to ensure times are consistent across machines
2 time_zone=GMT+0:00
3
4 ## The character set that scripts are encoded with
5 script_char_set=UTF-8
6
7 ## JDBC connection properties.
8 driver=org.postgresql.Driver
9 url=jdbc:postgresql://192.168.3.3:5432/local
10 username=sqlap
11 password=[redacted]
12
13 #
14 # A NOTE ON STORED PROCEDURES AND DELIMITERS
15 #
16 # Stored procedures and functions commonly have nested delimiters
17 # that conflict with the schema migration parsing.  If you tend
18 # to use procs, functions, triggers or anything that could create
19 # this situation, then you may want to experiment with
20 # send_full_script=true (preferred), or if you can't use
21 # send_full_script, then you may have to resort to a full
22 # line delimiter such as "GO" or "/" or "!RUN!".
23 #
24 # Also play with the autocommit settings, as some drivers
25 # or databases don't support creating procs, functions or
```

SchemaSpyの接続先の渡し方

```
1 #!/bin/sh
2
3 CURRENT=$(cd $(dirname $0) && pwd)
4 cd $CURRENT/..
5
6 java -Dfile.encoding=UTF-8 -jar schemaspy/schemaSpy_5.0.0
  .jar -t pgsql -host ${host} -db ${database} -u ${username
  } -s public -p ${password} -dp schemaspy/postgresql-9.2-1
  003.jdbc4.jar -charset utf-8 -o schema -connprops bin/con
  n.propeties
7
8
```

Copyright 2014 Hiroyuki Ohnaka

「MyBatis Migraionsのプロパティファイルをパースして、SchemaSpyに引数として渡したい」

Copyright 2014 Hiroyuki Ohnaka

ググってみる

「sourceコマンドでプロパティファイルを読み込むとシェルの中で変数として読めます」

いやいや…

Copyright 2014 Hiroyuki Ohnaka

RubyでJavaのプロパティファイルをパースしよう！

Copyright 2014 Hiroyuki Ohnaka

どれを選べばいんだろう？

Google

java properties ruby

ウェブ　ニュース　動画　画像　ショッピング　もっと見る　検索ツール

約 869,000 件（0.32 秒）

jnbt/java-properties · GitHub
https://github.com/jnbt/java-properties ▾ このページを訳す
2014/06/15 - Contribute to **java-properties** development by creating an account on GitHub. ... A **ruby** library to read and write **Java properties** files. ... Loading files. You can load a valid **Java properties** file from the file system using a path:.

java_properties | RubyGems.org | your community gem host
https://rubygems.org/gems/**java_properties** ▾ このページを訳す
A class that can read and write to **Java properties** files that behaves otherwise as a standard **ruby** Enumerable. The keys to this object can be provided as Strings or Symbols, but internally they are Symbols.
このページに 3 回アクセスしています。前回のアクセス: 14/10/20

java-properties | RubyGems.org | your community gem host
rubygems.org/gems/**java-properties** ▾ このページを訳す
java-properties 0.0.2. Tool for loading and writing **Java properties** files ... RubyGems.org is the **Ruby** community's gem hosting service. Instantly publish your gems and install them. Use the API to interact and find out more information about ...

Java .properties file equivalent for Ruby? - Stack Overflow

aka

rubygems.orgで検索してみる

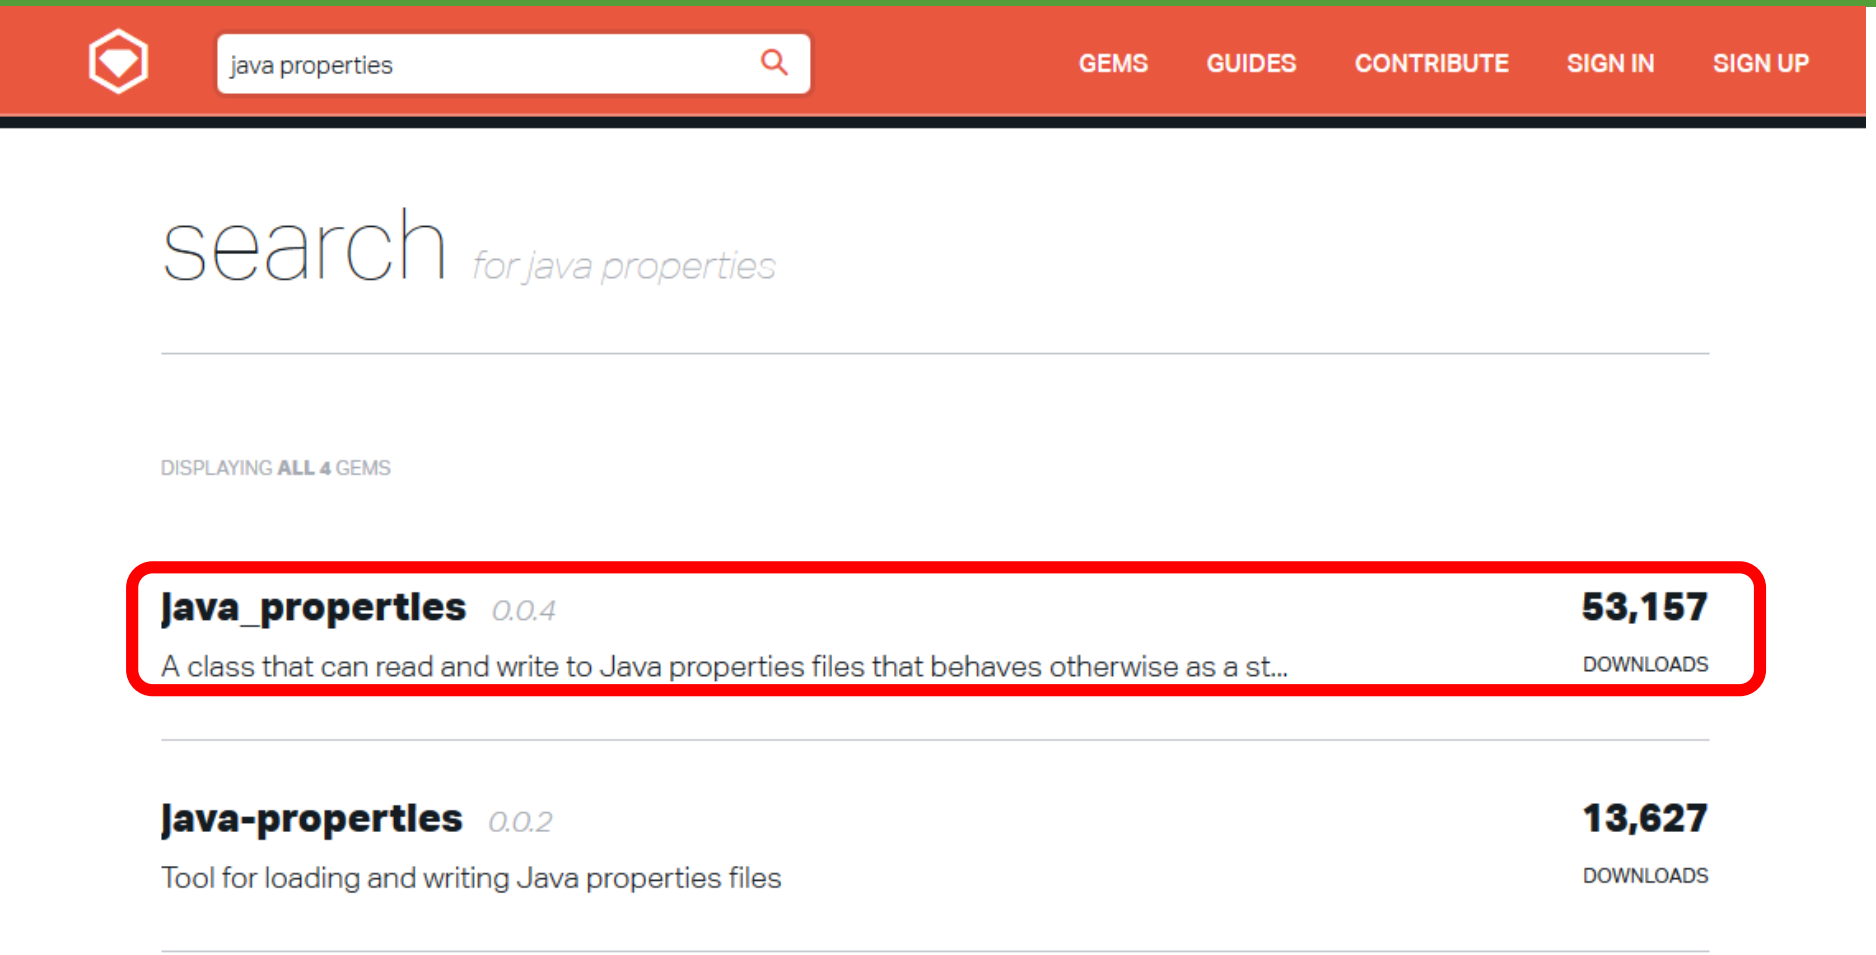

Copyright 2014 Hiroyuki Ohnaka

java_properties

- https://rubygems.org/gems/java_properties

Copyright 2014 Hiroyuki Ohnaka

Class Method Summary

co

`.load(file) ⇒ Object`

Creates a new Properties object based on the contents of a Java properties file.

Instance Method Summary

co

`#[](key) ⇒ Object`

`#[]=(key, value) ⇒ Object`

`#append(file, seperator = nil) ⇒ Object`

Appends the current properties to the end of another properties file.

`#each(&block) ⇒ Object`

`#initialize(file) ⇒ Properties` constructor

A new instance of Properties.

`#keys ⇒ Object`

`#load(file) ⇒ Object`

Merges the contents of a Java properties file with the properties already contained in this object.

`#store(file, header = nil) ⇒ Object`

Stores the current properties into a properties file.

`#to_s ⇒ Object`

Converts the properties contained in this object into a string that can be saved directly as a Java properties file.

cc BY

```
 8 props = JavaProperties::Properties.new("migration/environments/development.properties")
 9
10 urls=props.[]("url").split("/")
11
12
13
14 system("java -Dfile.encoding=UTF-8 -jar schemaspy/schemaSpy_5.0.0.jar -t pgsql -host #{u
   rls[2]} -db #{urls[3]} -u #{props.[]('username')} -s public -p #{props.[]('password')}
   -dp migration/drivers/postgresql-9.2-1003.jdbc4.jar -charset utf-8 -o schema -noads -nol
   ogo")
~
~
~
~
~
~
~
~
~
~
```

Copyright 2014 Hiroyuki Ohnaka

用途

- MyBatis Migrationsの接続先設定を、SchemaSpyのスクリプトに渡す
- 戻しマイグレーションのチェック時に、適用前のバージョン情報を取得するpsqlコマンドに接続先情報を渡す
- 環境ごとのアプリケーションの設定ファイルを検証するRspecスクリプトで、プロパティファイルを読み込む

Copyright 2014 Hiroyuki Ohnaka

と、ここまで書いて思ったんですが…

Copyright 2014 Hiroyuki Ohnaka

スクリプトの中から、Javaのプロパティファイルを読み込みたいんですよね？

Copyright 2014 Hiroyuki Ohnaka

Groovyでよかったじゃないか…orz

Copyright 2014 Hiroyuki Ohnaka

ツールは適材適所で選びましょう。

Copyright 2014 Hiroyuki Ohnaka