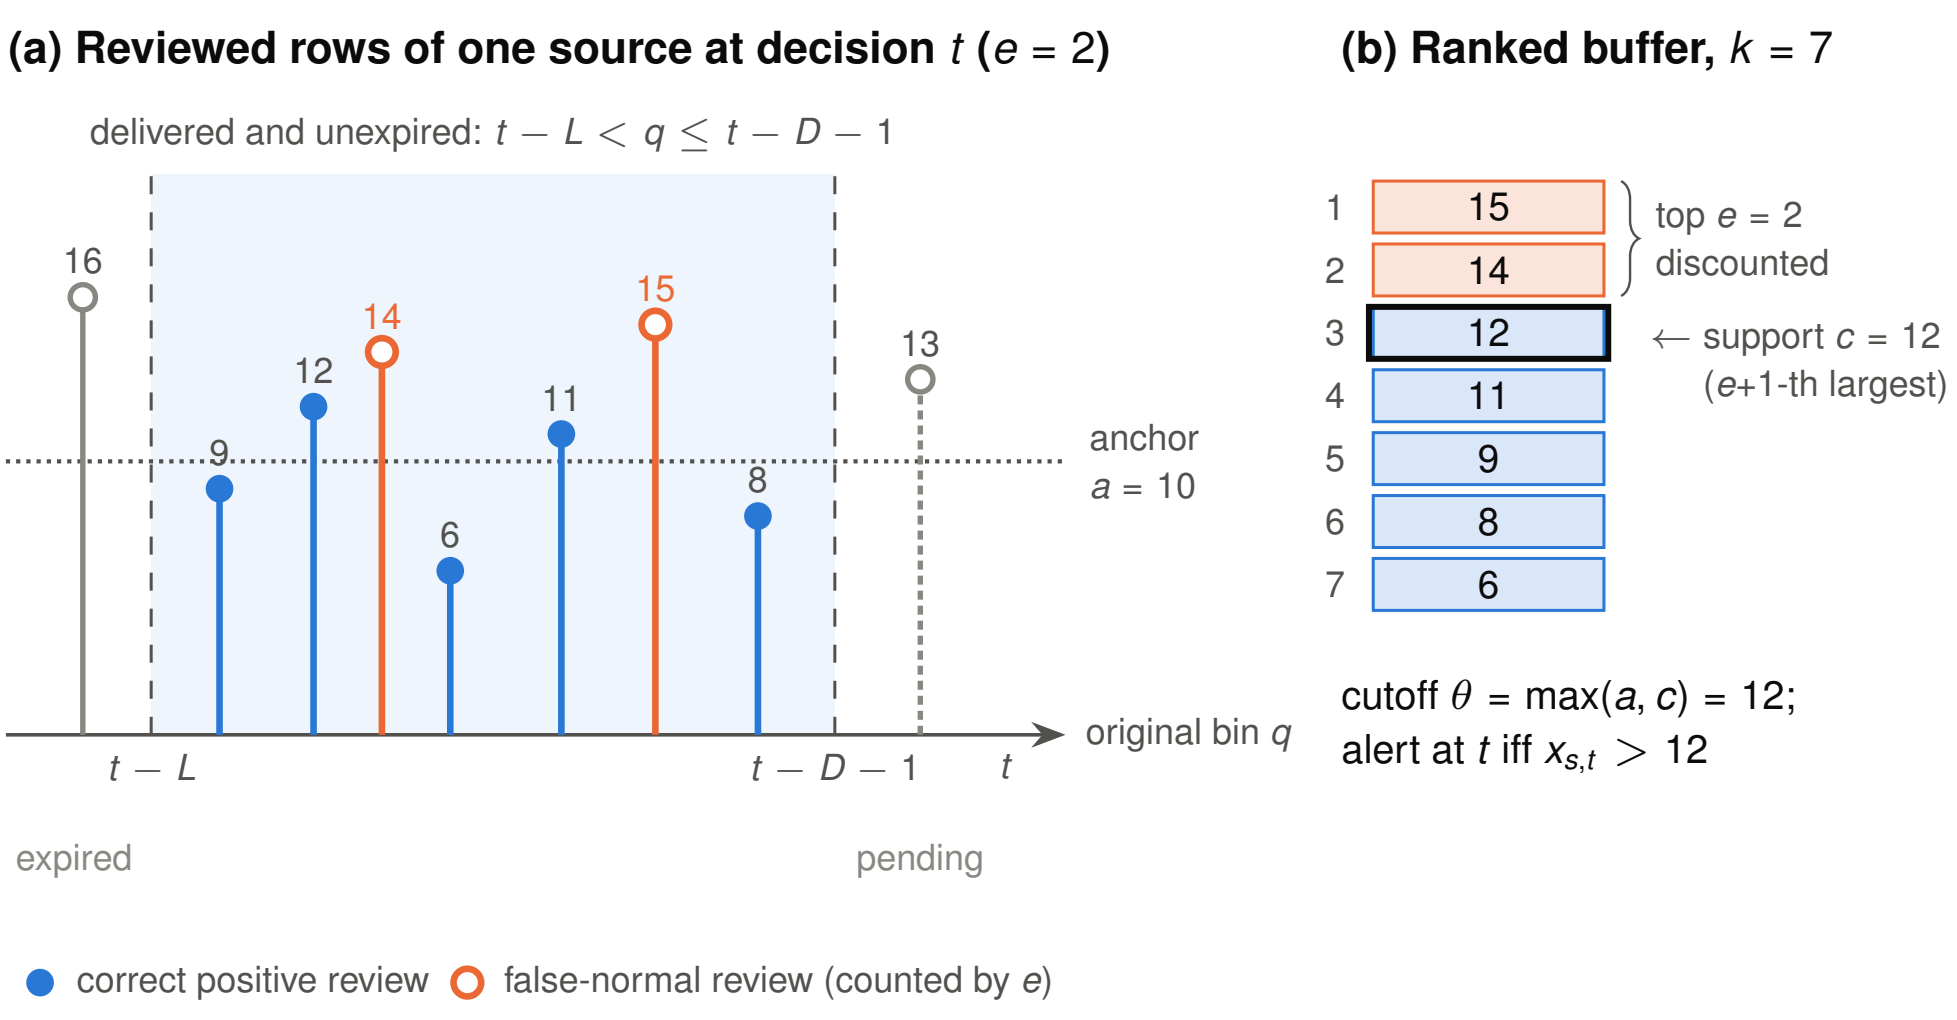
(a) Reviewed rows of one source at decision t (e = 2)
delivered and unexpired: $t - L < q \leq t - D - 1$
16
9
12
14
6
11
15
8
13
anchor
a = 10
original bin q
$t - L$
$t - D - 1$
t
expired
pending
correct positive review
false-normal review (counted by e)
(b) Ranked buffer, k = 7
1
15
2
14
top e = 2
discounted
3
12
← support c = 12
(e+1-th largest)
4
11
5
9
6
8
7
6
cutoff θ = max(a, c) = 12;
alert at t iff $x_{s,t} > 12$