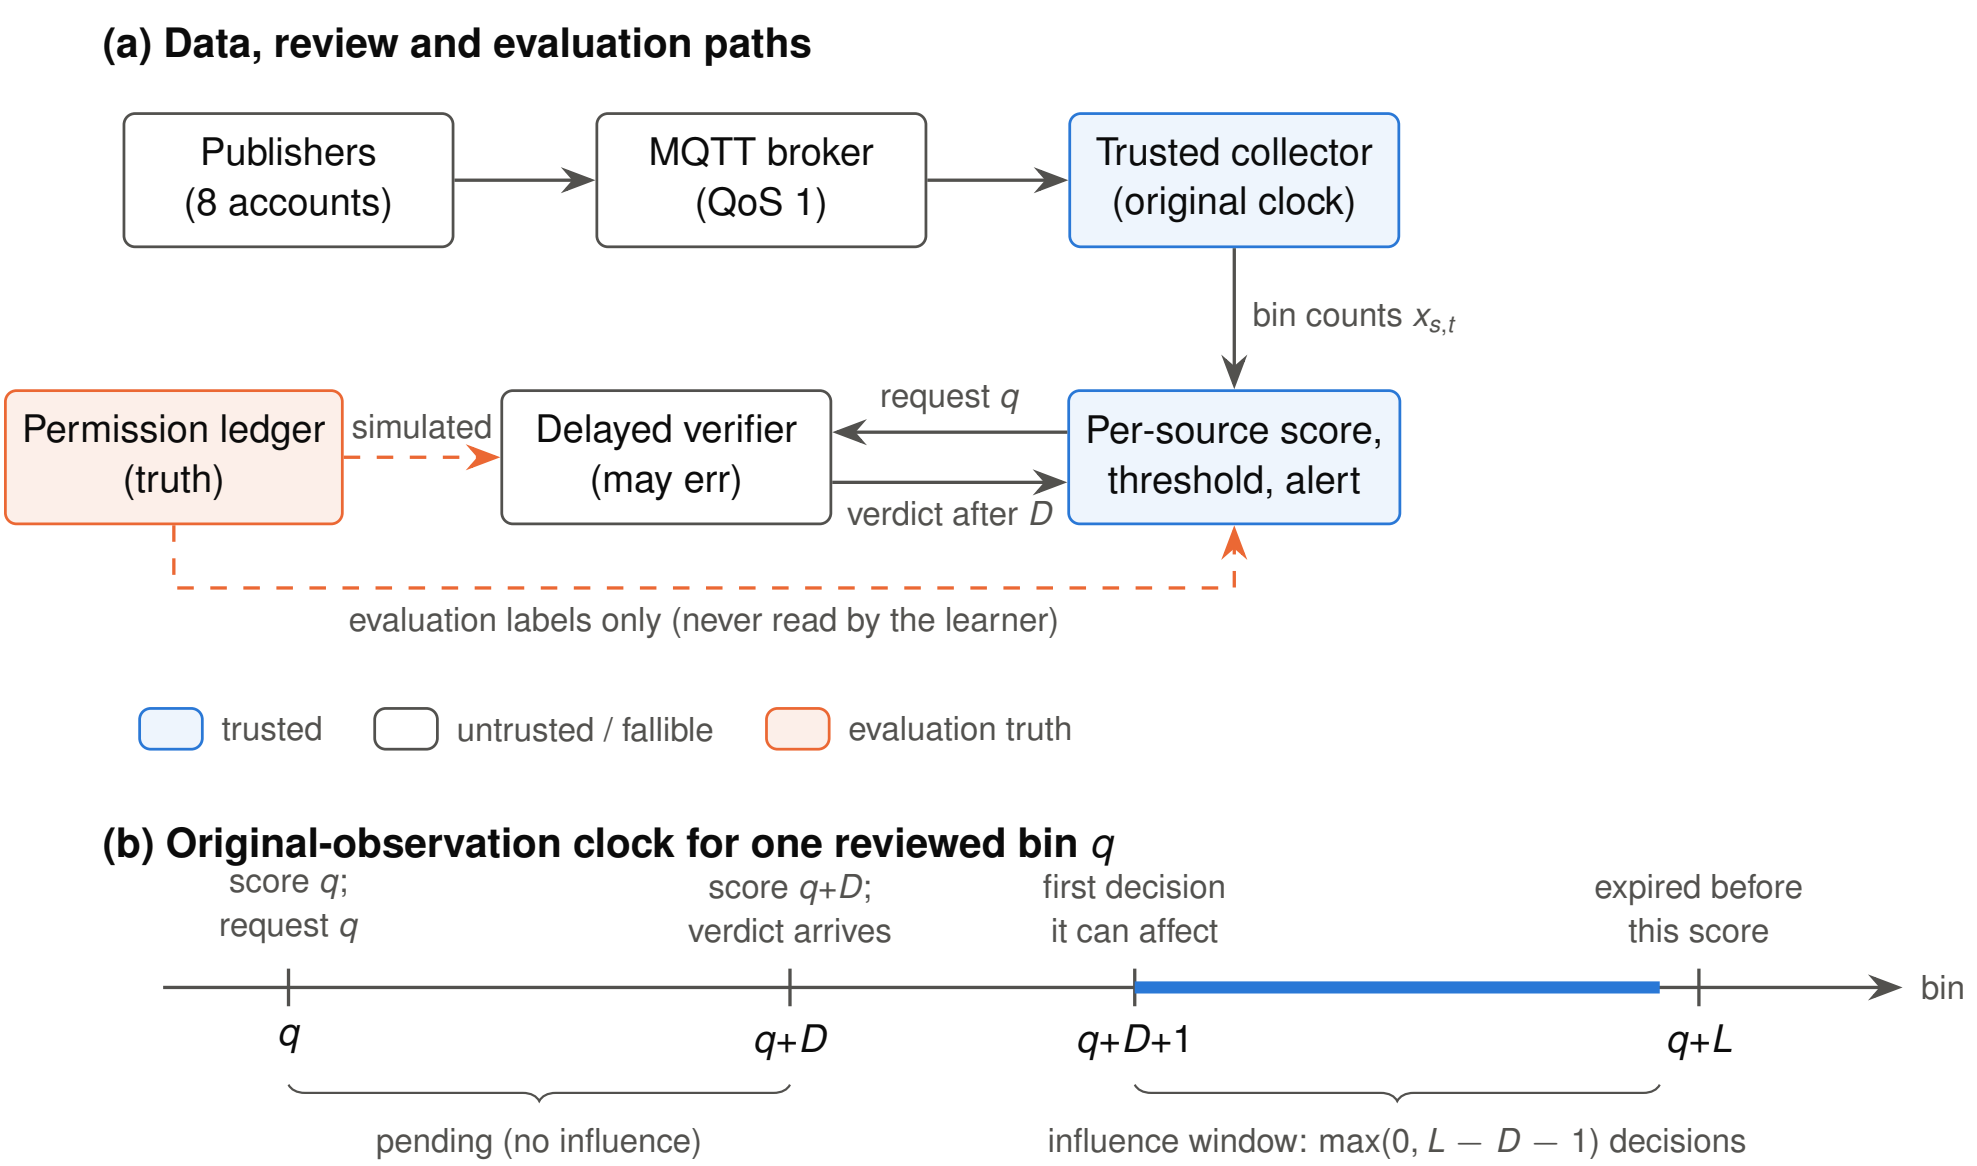
(a) Data, review and evaluation paths
Publishers
(8 accounts)
MQTT broker
(QoS 1)
Trusted collector
(original clock)
bin counts $x_{s,t}$
Permission ledger
(truth)
simulated
Delayed verifier
(may err)
request q
verdict after D
Per-source score,
threshold, alert
evaluation labels only (never read by the learner)
trusted
untrusted / fallible
evaluation truth
(b) Original-observation clock for one reviewed bin q
score q;
request q
score q+D;
verdict arrives
first decision
it can affect
expired before
this score
bin
q
q+D
q+D+1
q+L
pending (no influence)
influence window: max(0, L − D − 1) decisions