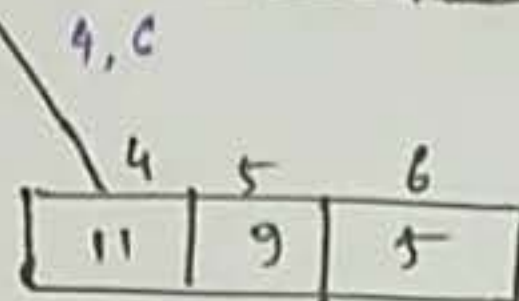
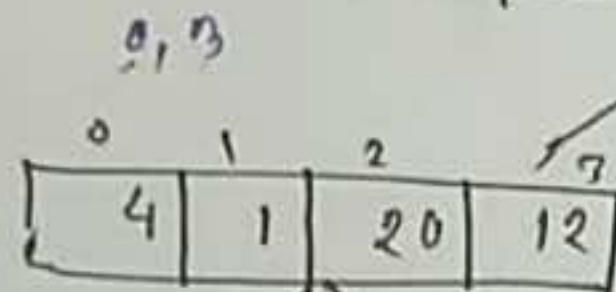
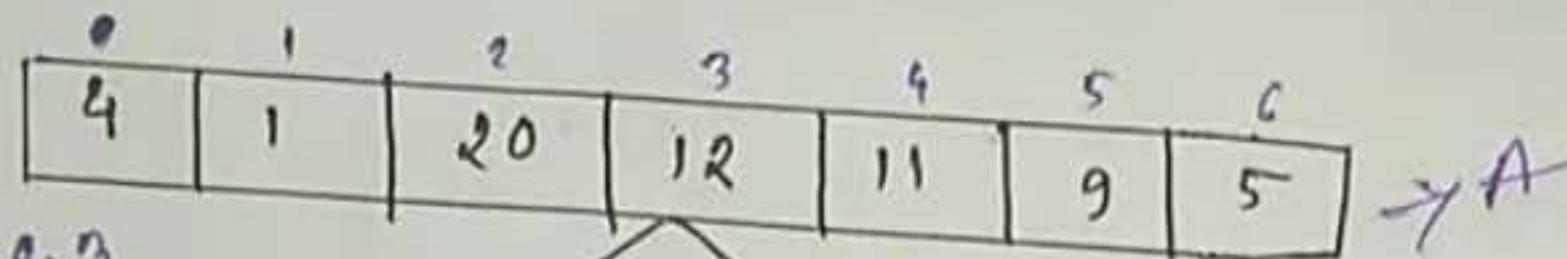


Handwritten notes for merge function:

```

i = 0; mid = 3;
j = 4; h = 6;
k = 0;
while (i <= mid & j <= h)
{
    if (A[i] <= A[j])
    {
        temp[k] = A[i];
        i++;
    }
    else
    {
        temp[k] = A[j];
        j++;
    }
    k++;
}

```

merge (A, l, mid, h)

```

{
    i = l;
    j = mid + 1;
    k = l;
    while (i <= mid & j <= h)
    {
        if (A[i] <= A[j])
        {
            temp[k] = A[i];
            i++;
        }
        else
        {
            temp[k] = A[j];
            j++;
        }
        k++;
    }
}

```

Handwritten notes for merge function (continued):

```

else
{
    while (i <= mid)
    {
        temp[k] = A[i];
        i++;
    }
}

```

mergeSort(A, l, h)

< if (l < h)

< mid = (l + h) / 2

mergeSort(A, l, mid);

mergeSort(A, mid + 1, h);

merge(A, l, mid, h);

>