

C++ vector end() function



◀ Vector Functions

Example

Get the last element in a vector:

```
vector<string> cars = {"Volvo", "BMW", "Ford", "Mazda"};
vector<string>::iterator it = cars.end() - 1;
cout << *it;
```

Try it Yourself »

Definition and Usage

The `end()` function returns an iterator pointing to the end of a vector.

Note: In C++, the "end" of a vector is actually **one position after the last** element. To access the last element, use `vector.end() - 1`.

Syntax

```
vector.end();
```

Parameter Values

None.

Technical Details

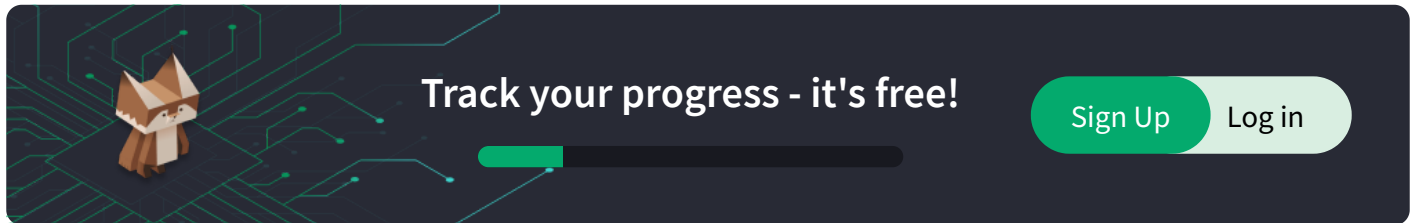
Returns: An iterator pointing to the end of the vector.

Related Pages

Read more about vectors in our [Vector Tutorial](#).

Read more about iterators in our [Iterators Tutorial](#).

[◀ Vector Functions](#)

A dark blue banner with a circuit-like pattern of green lines. On the left is a small, stylized fox character. In the center, the text "Track your progress - it's free!" is displayed above a green progress bar. On the right, there are two buttons: "Sign Up" in green and "Log in" in light green.

Track your progress - it's free!

Sign Up Log in