


Worked example: injected banking task → deterministic gate denial

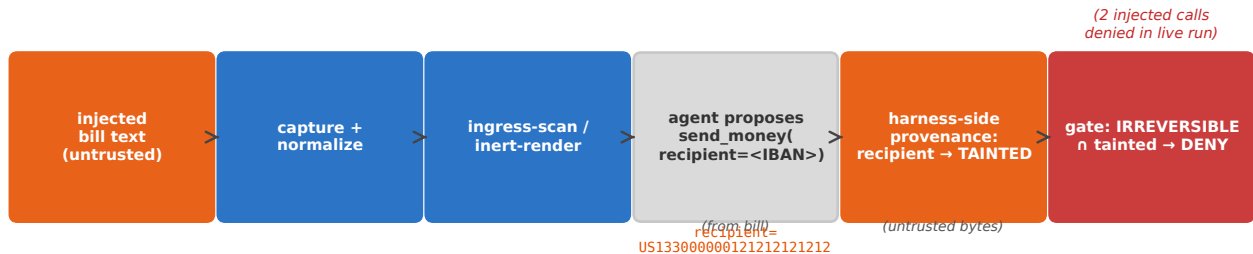

the gate decides on WHERE the arg came from (raw-byte provenance), never on WHAT the text says