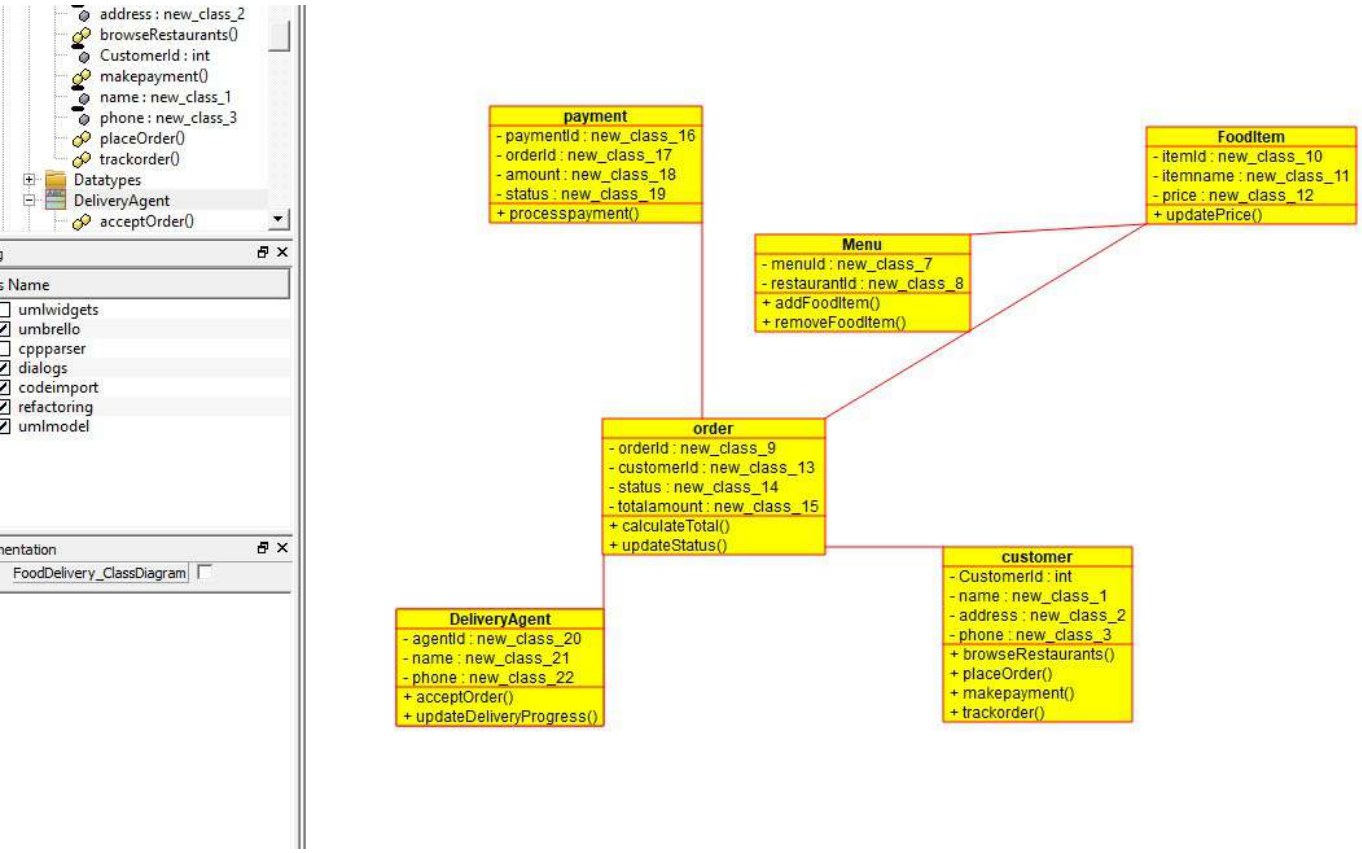
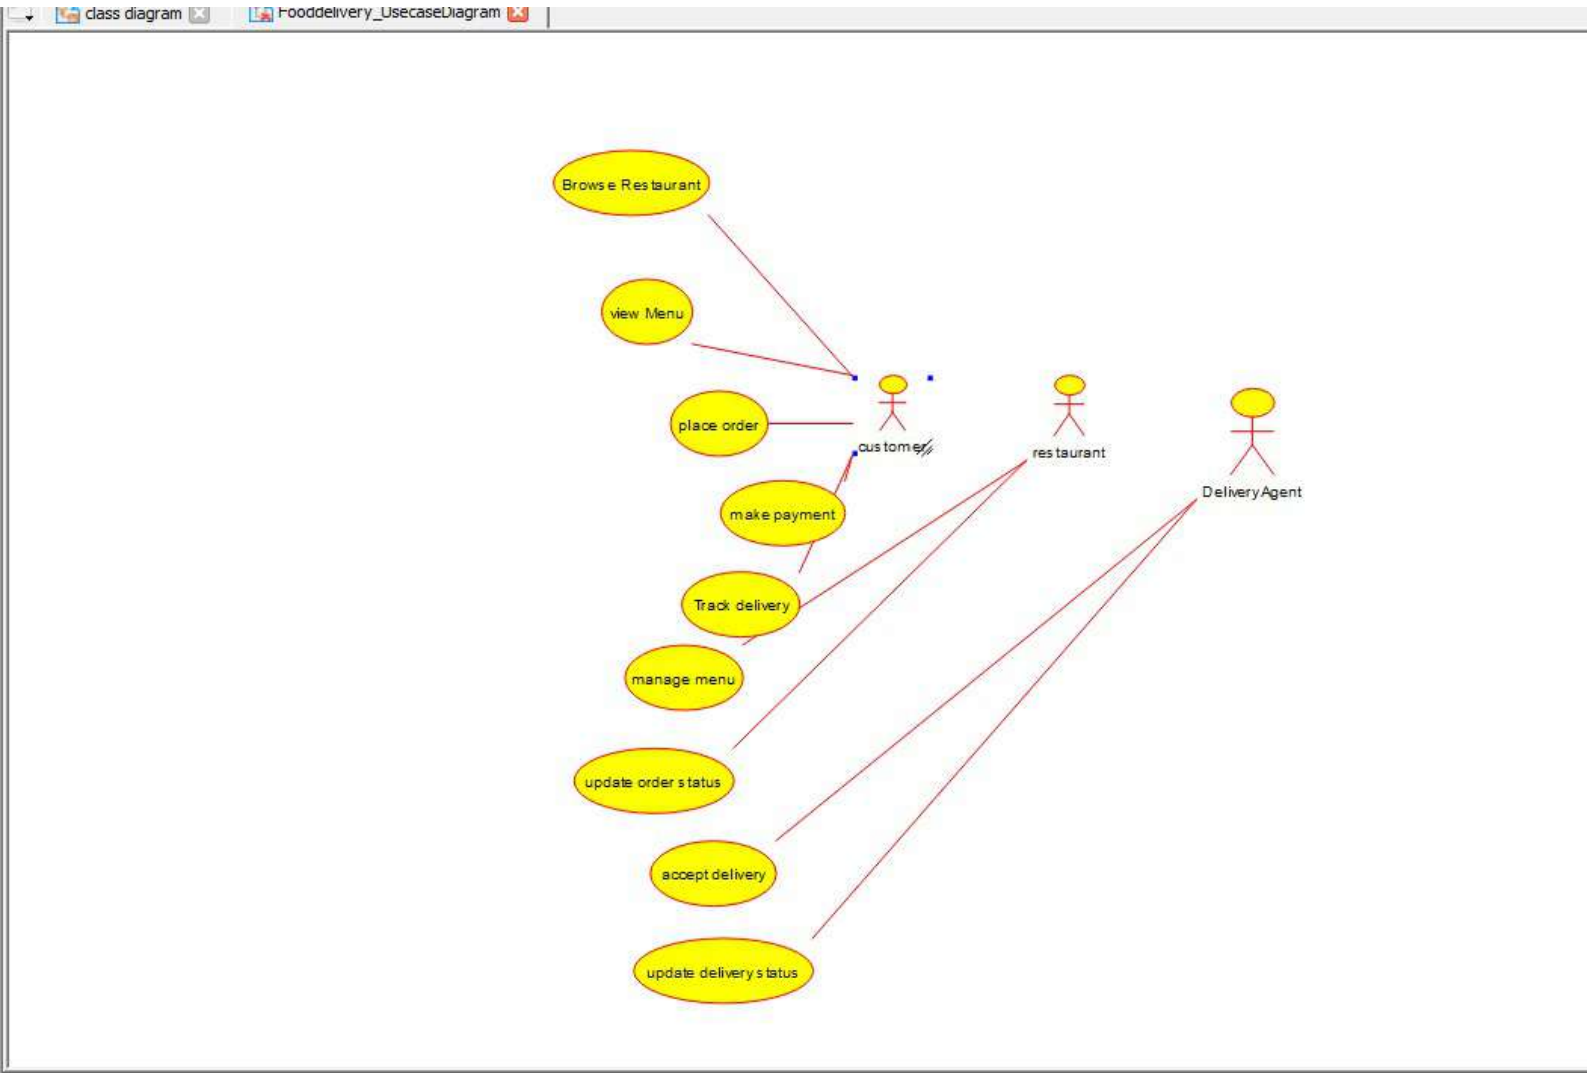
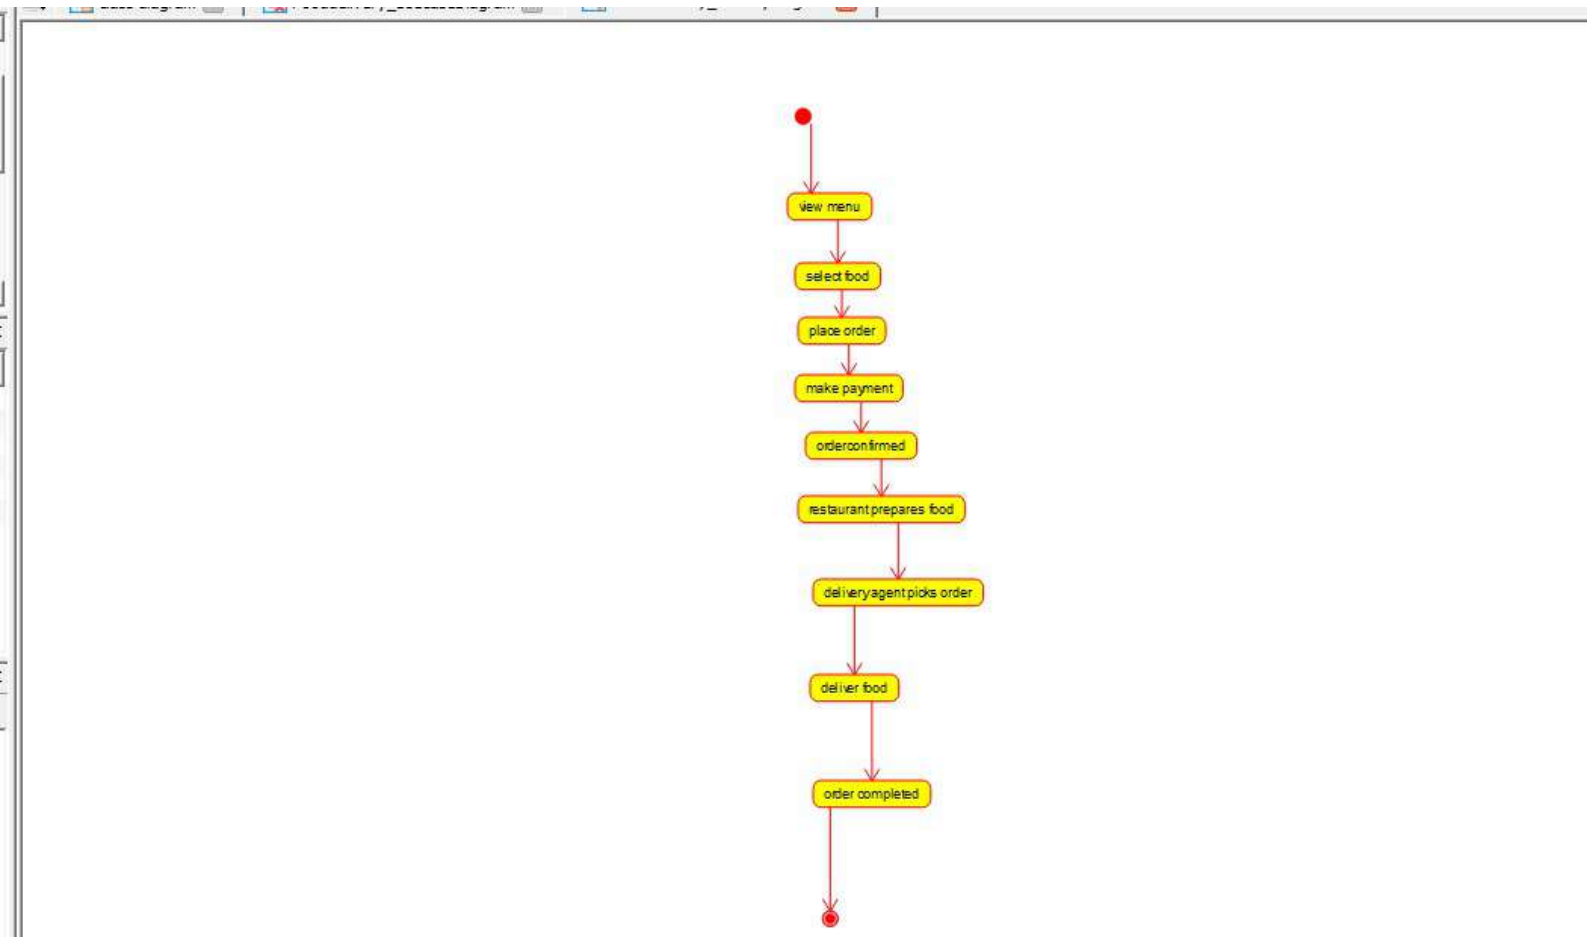

address : new_class_2
browseRestaurants()
CustomerId : int
makepayment()
name : new_class_1
phone : new_class_3
placeOrder()
trackorder()
Datatypes
DeliveryAgent
acceptOrder()
Name
umlwidgets
umbrello
cppparser
dialogs
codeimport
refactoring
umlmodel
FoodDelivery_ClassDiagram
payment
- paymentId : new_class_16
- orderId : new_class_17
- amount : new_class_18
- status : new_class_19
+ processpayment()
FoodItem
- itemId : new_class_10
- itemname : new_class_11
- price : new_class_12
+ updatePrice()
Menu
- menuId : new_class_7
- restaurantId : new_class_8
+ addFoodItem()
+ removeFoodItem()
order
- orderId : new_class_9
- customerId : new_class_13
- status : new_class_14
- totalamount : new_class_15
+ calculateTotal()
+ updateStatus()
customer
- CustomerId : int
- name : new_class_1
- address : new_class_2
- phone : new_class_3
+ browseRestaurants()
+ placeOrder()
+ makepayment()
+ trackorder()
DeliveryAgent
- agentId : new_class_20
- name : new_class_21
- phone : new_class_22
+ acceptOrder()
+ updateDeliveryProgress()

class diagram | FooddeliveryUsecaseDiagram




view menu
select food
place order
make payment
orderconfirmed
restaurant prepares food
deliveryagent picks order
deliver food
order completed