





PYCARET

SUMÁRIO

- COLAB
- MÉTRICAS
- DOCKER
 - IDE
 - WEB

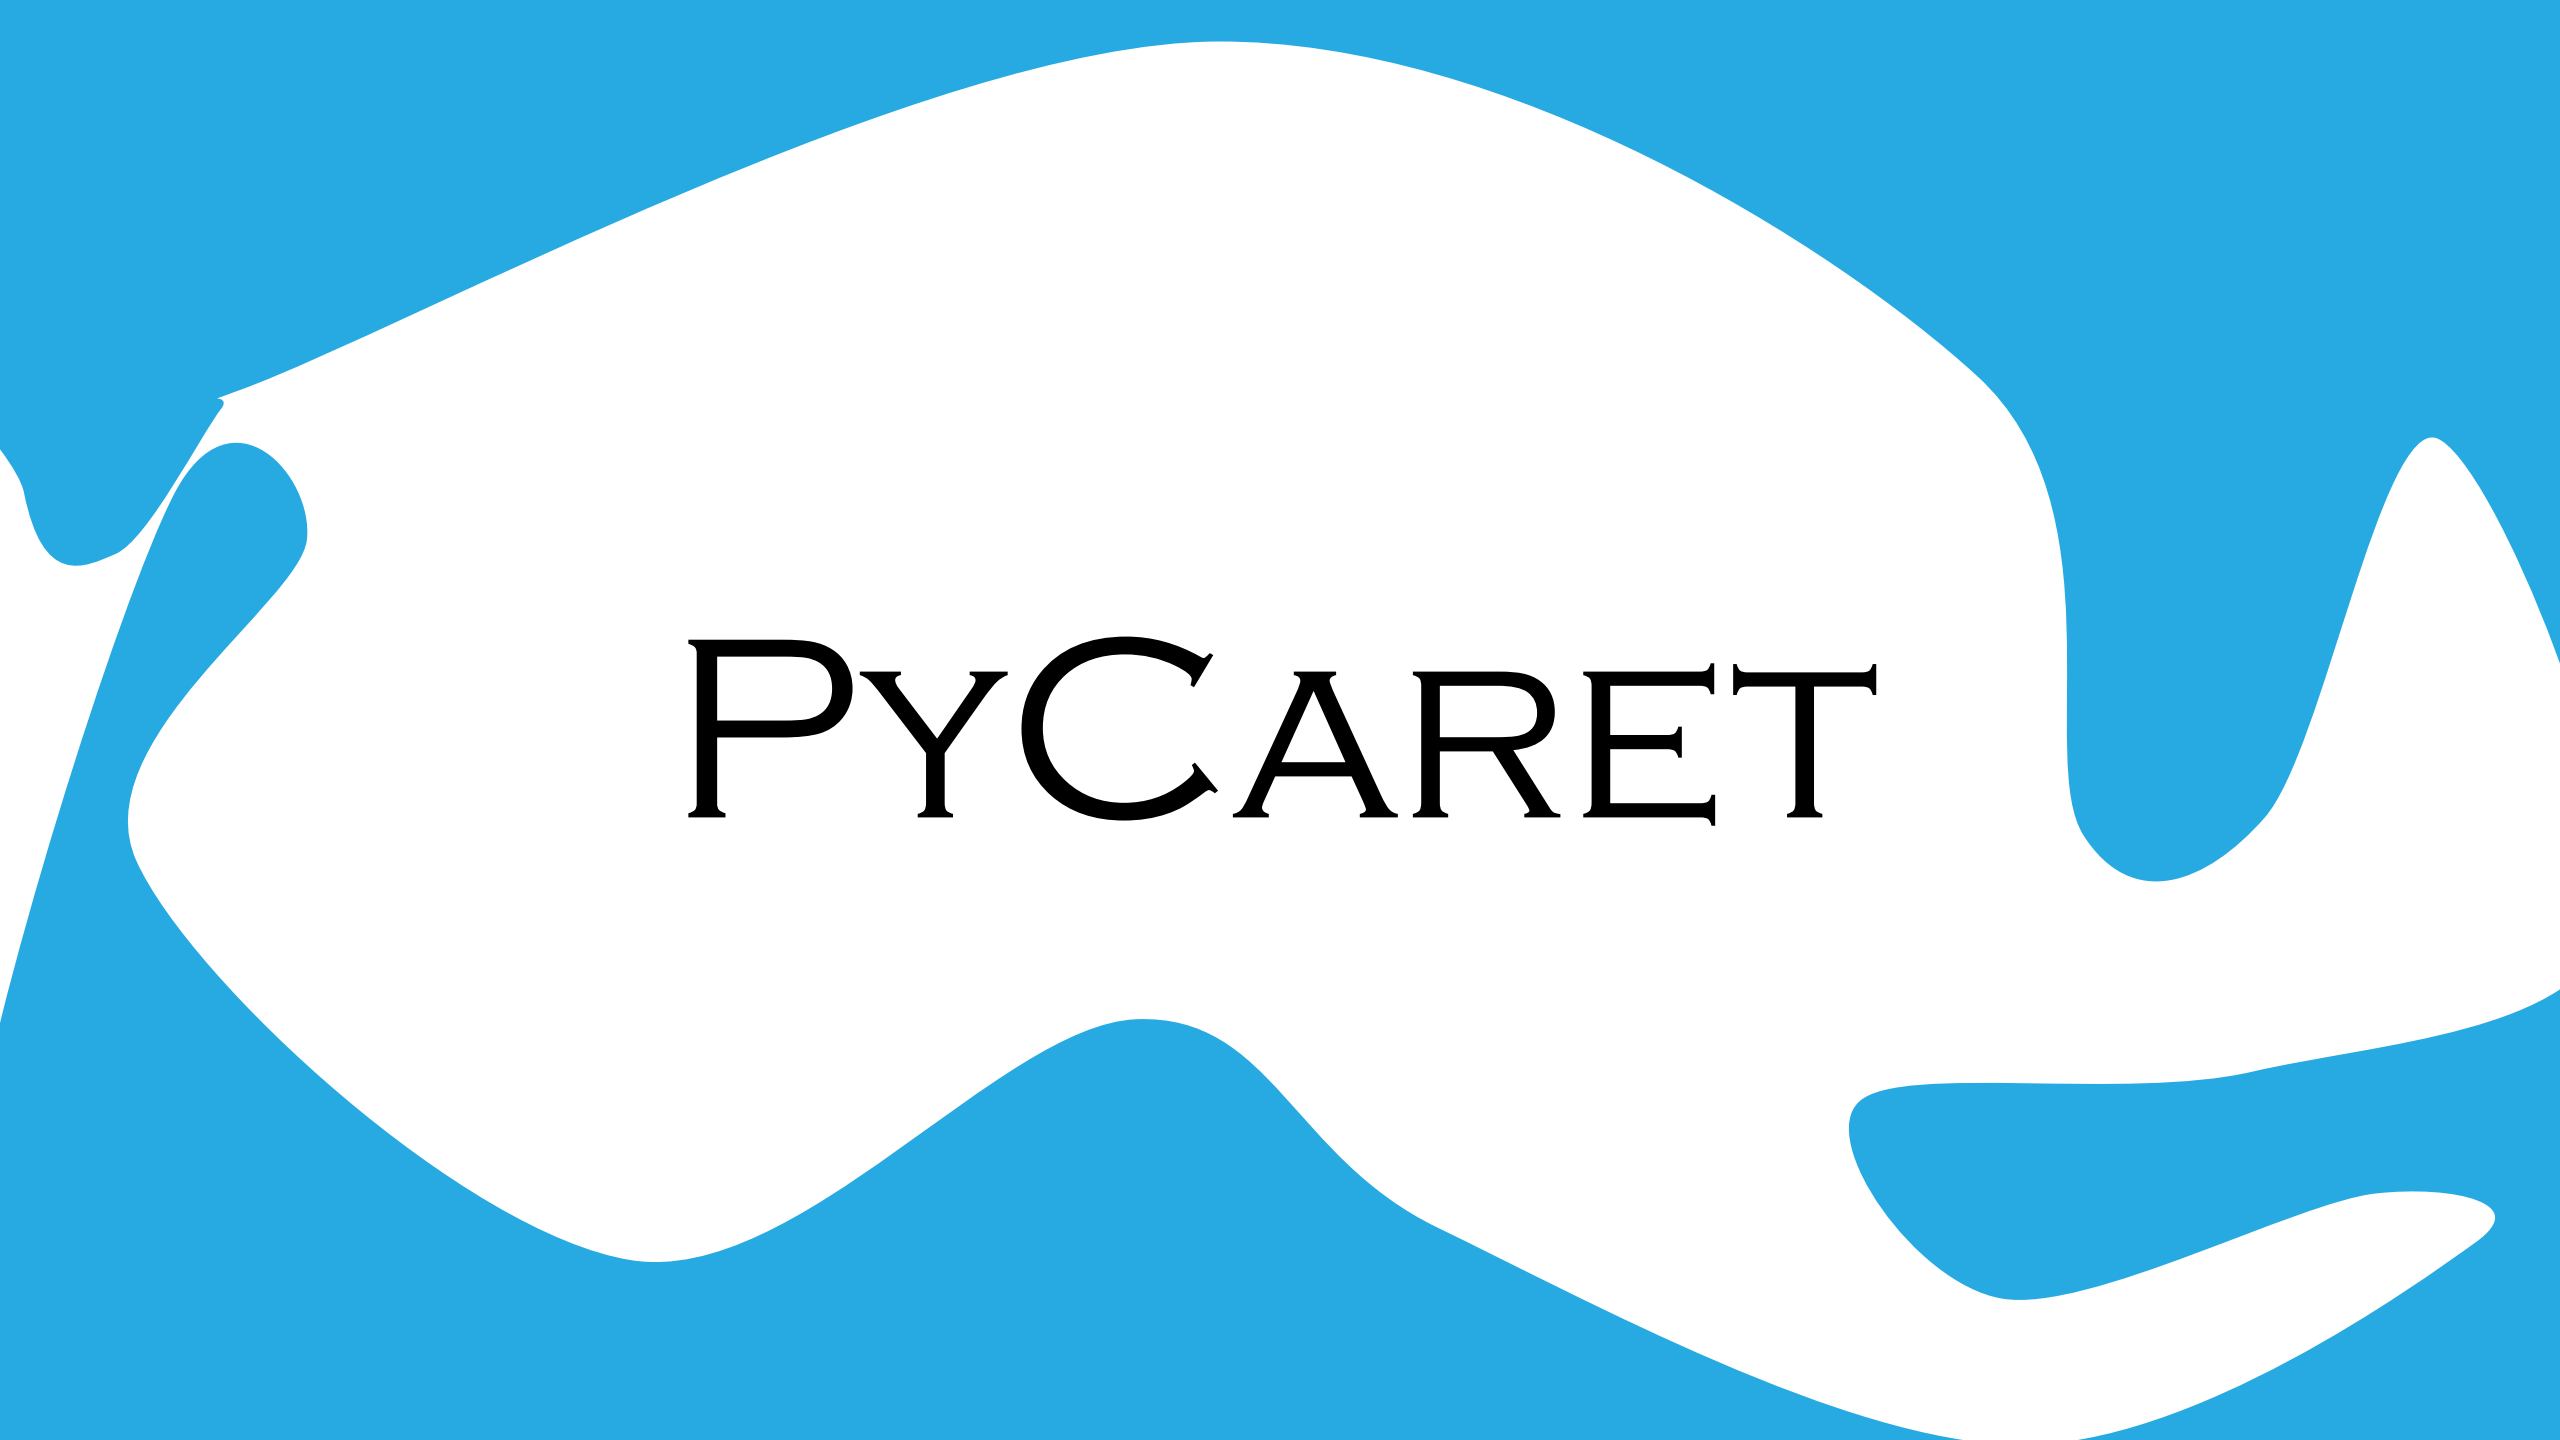


MÉTRICAS

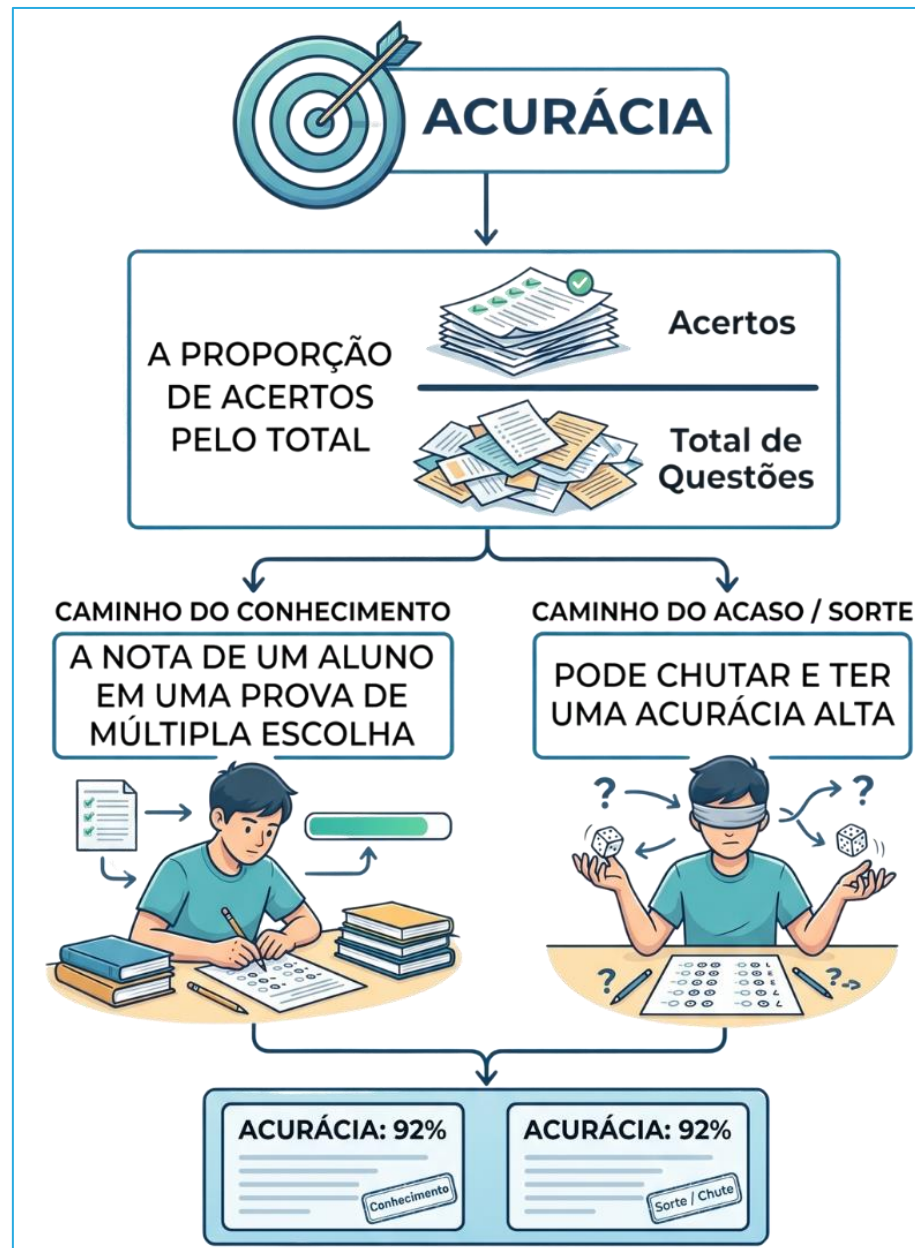

MÉTRICAS



MÉTRICAS

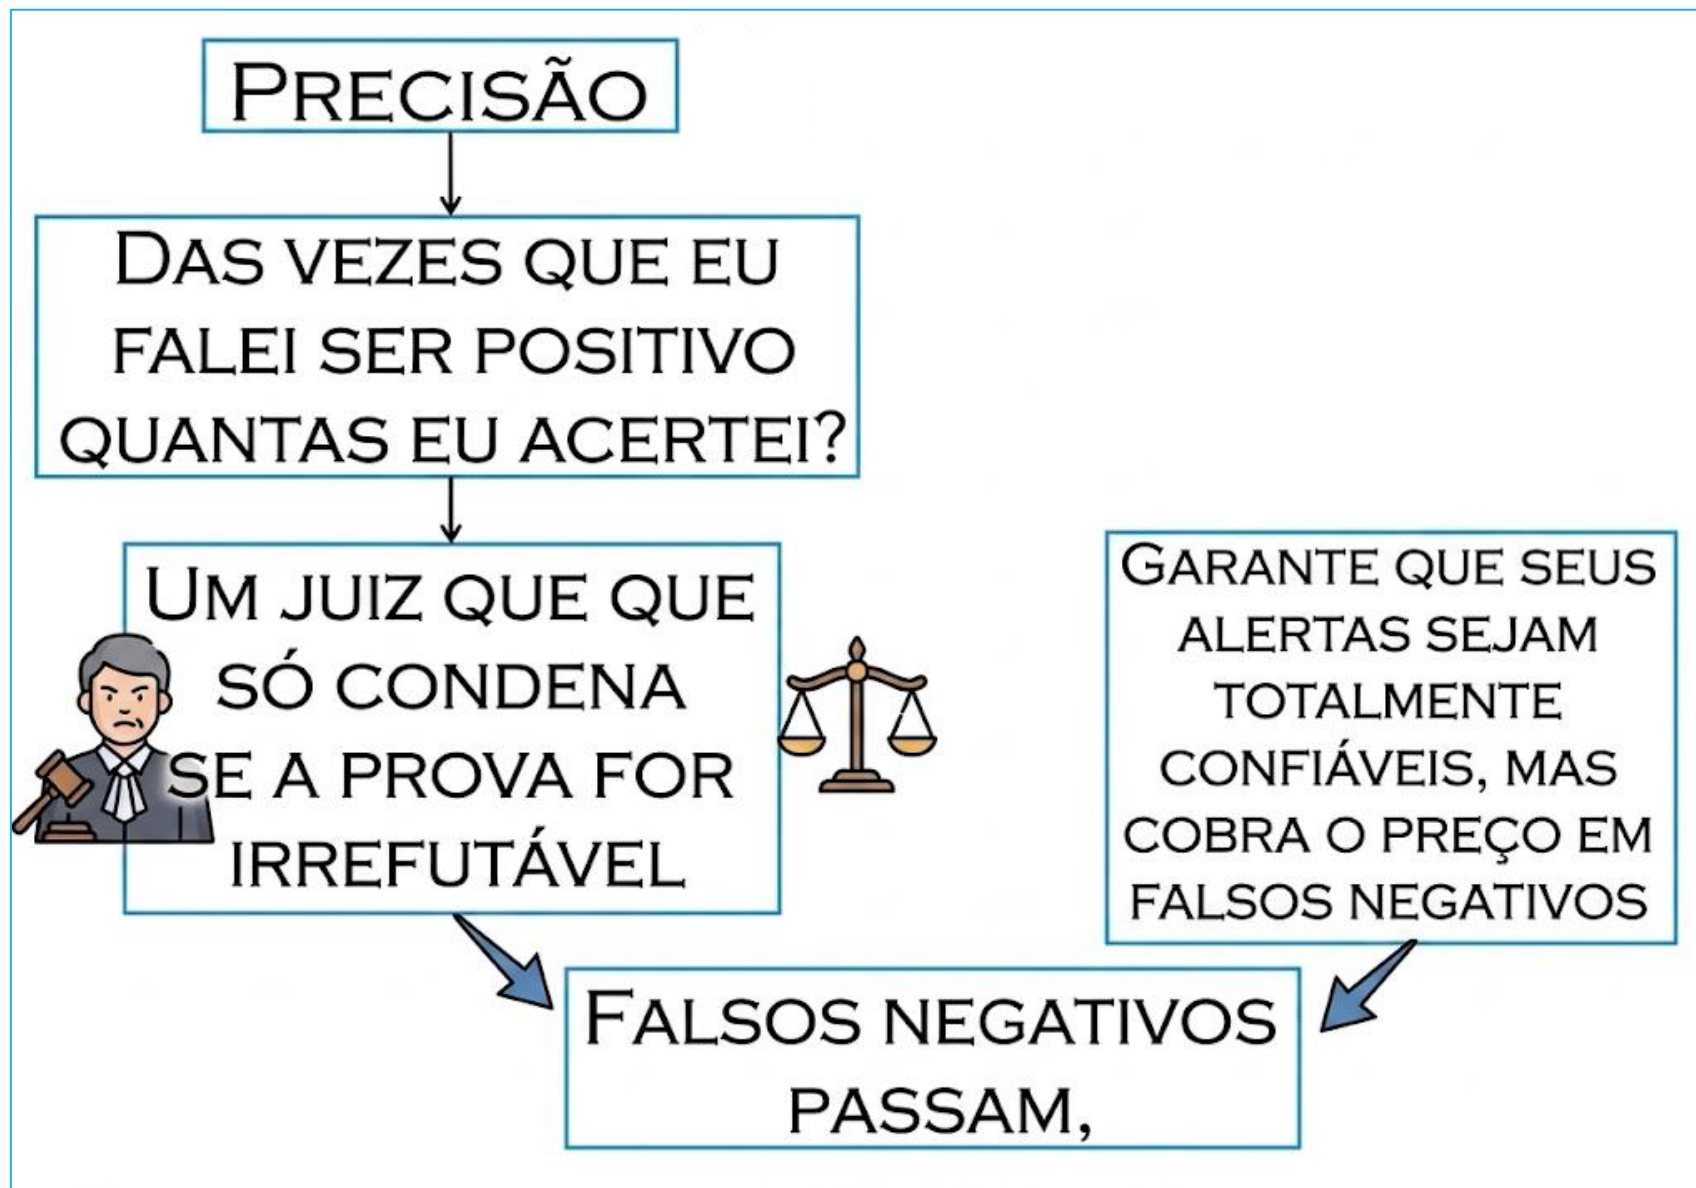

MÉTRICAS

F1 - SCORE


PRECISÃO E RECALL

REDE LARGA DEIXA
PEIXE MENOR FUGIR,
REDE FINA PEGA
PEIXE E LIXO




CONSIDERADA
A IDEAL

PYCARET IDE

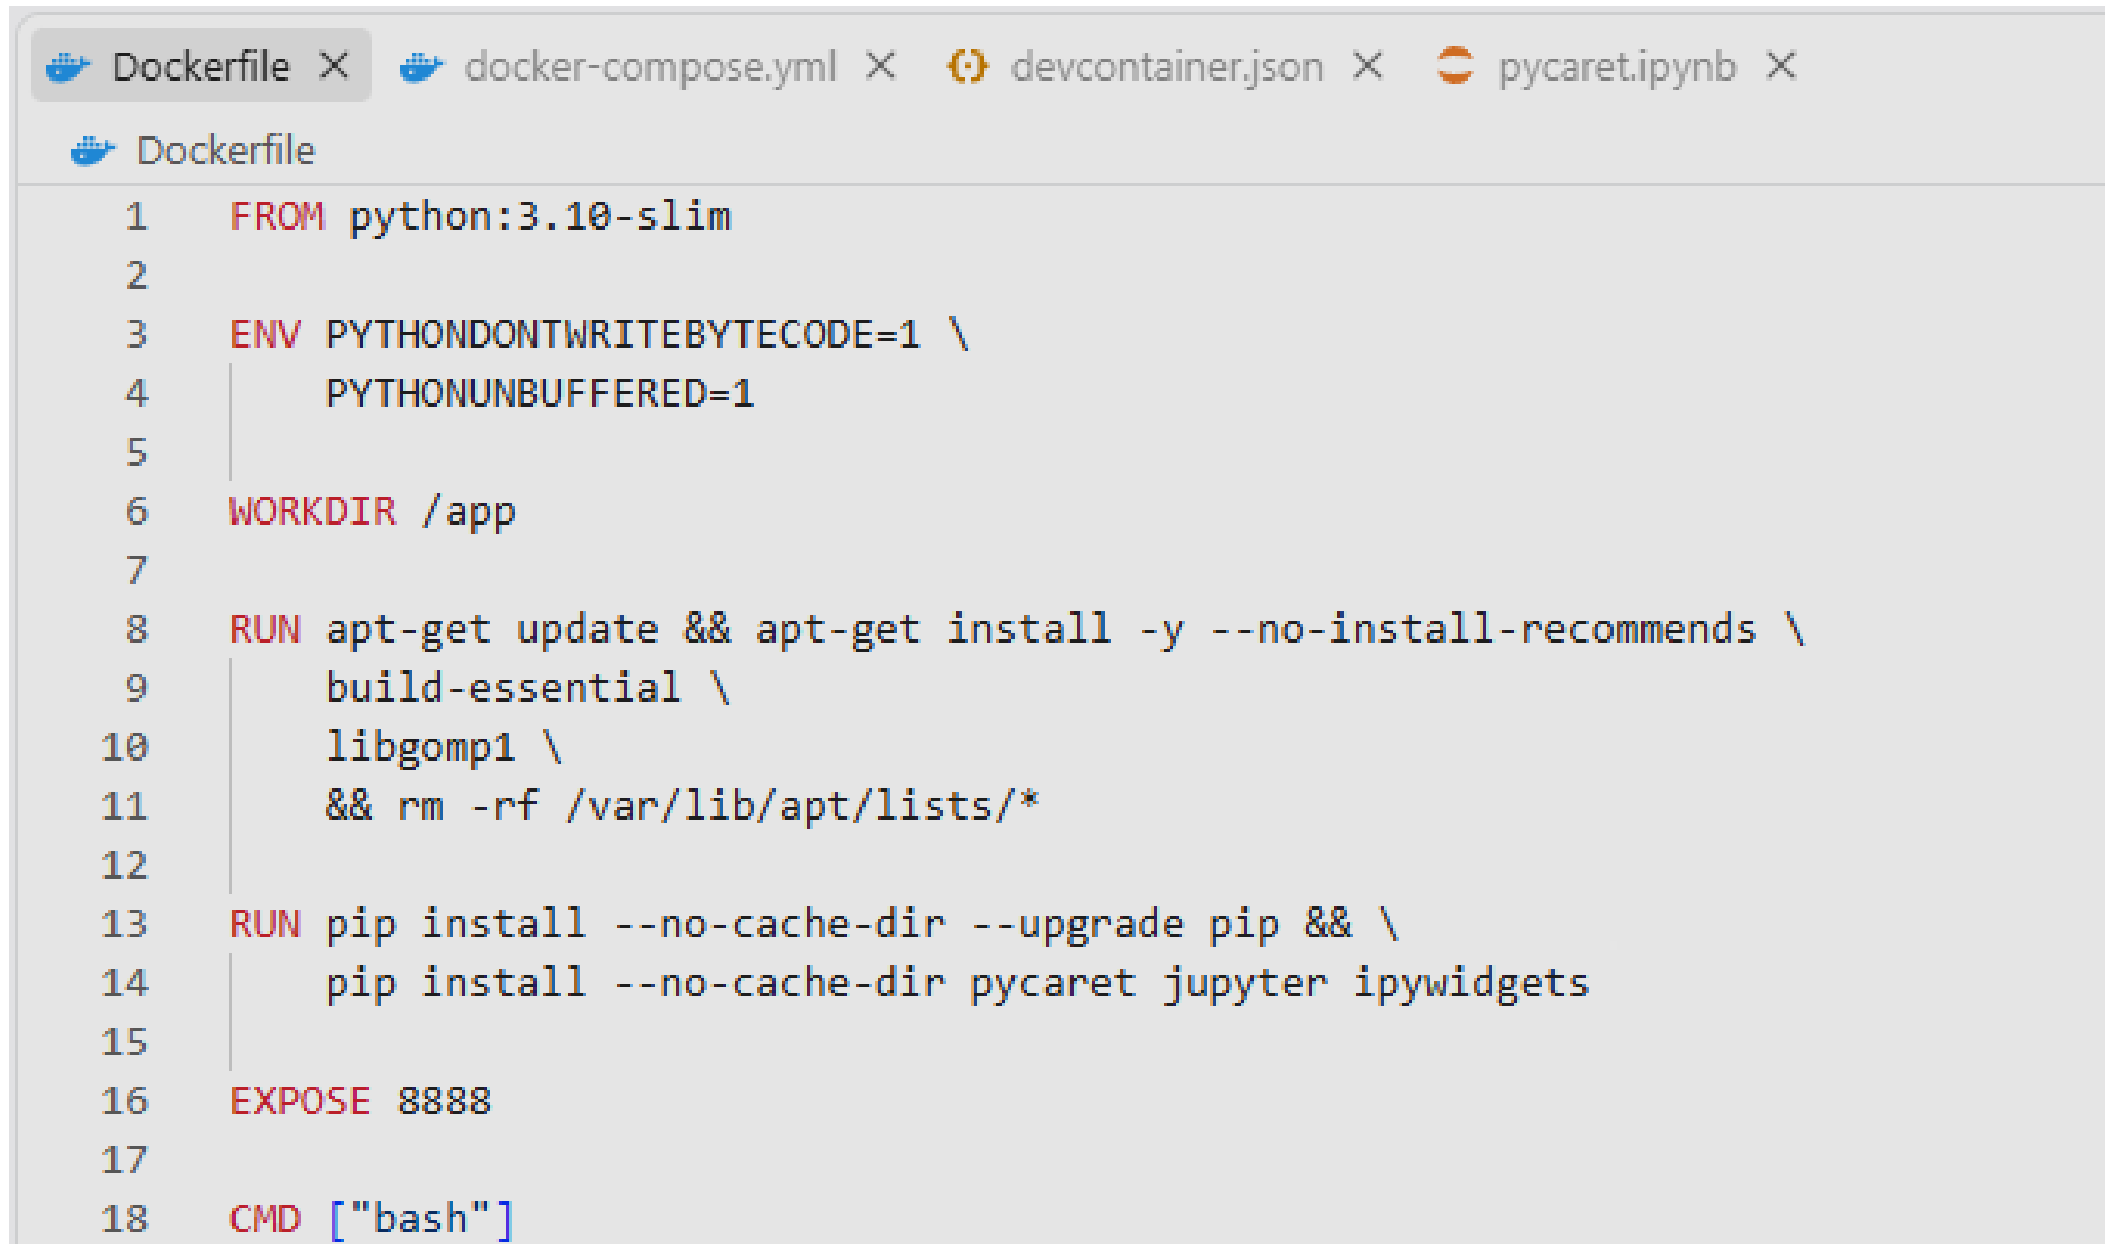

```
1 FROM python:3.10-slim
2
3 ENV PYTHONDONTWRITEBYTECODE=1 \
4     PYTHONUNBUFFERED=1
5
6 WORKDIR /app
7
8 RUN apt-get update && apt-get install -y --no-install-recommends \
9     build-essential \
10    libgomp1 \
11    && rm -rf /var/lib/apt/lists/*
12
13 RUN pip install --no-cache-dir --upgrade pip && \
14     pip install --no-cache-dir pycaret jupyter ipywidgets
15
16 EXPOSE 8888
17
18 CMD ["bash"]
```

PYCARET IDE

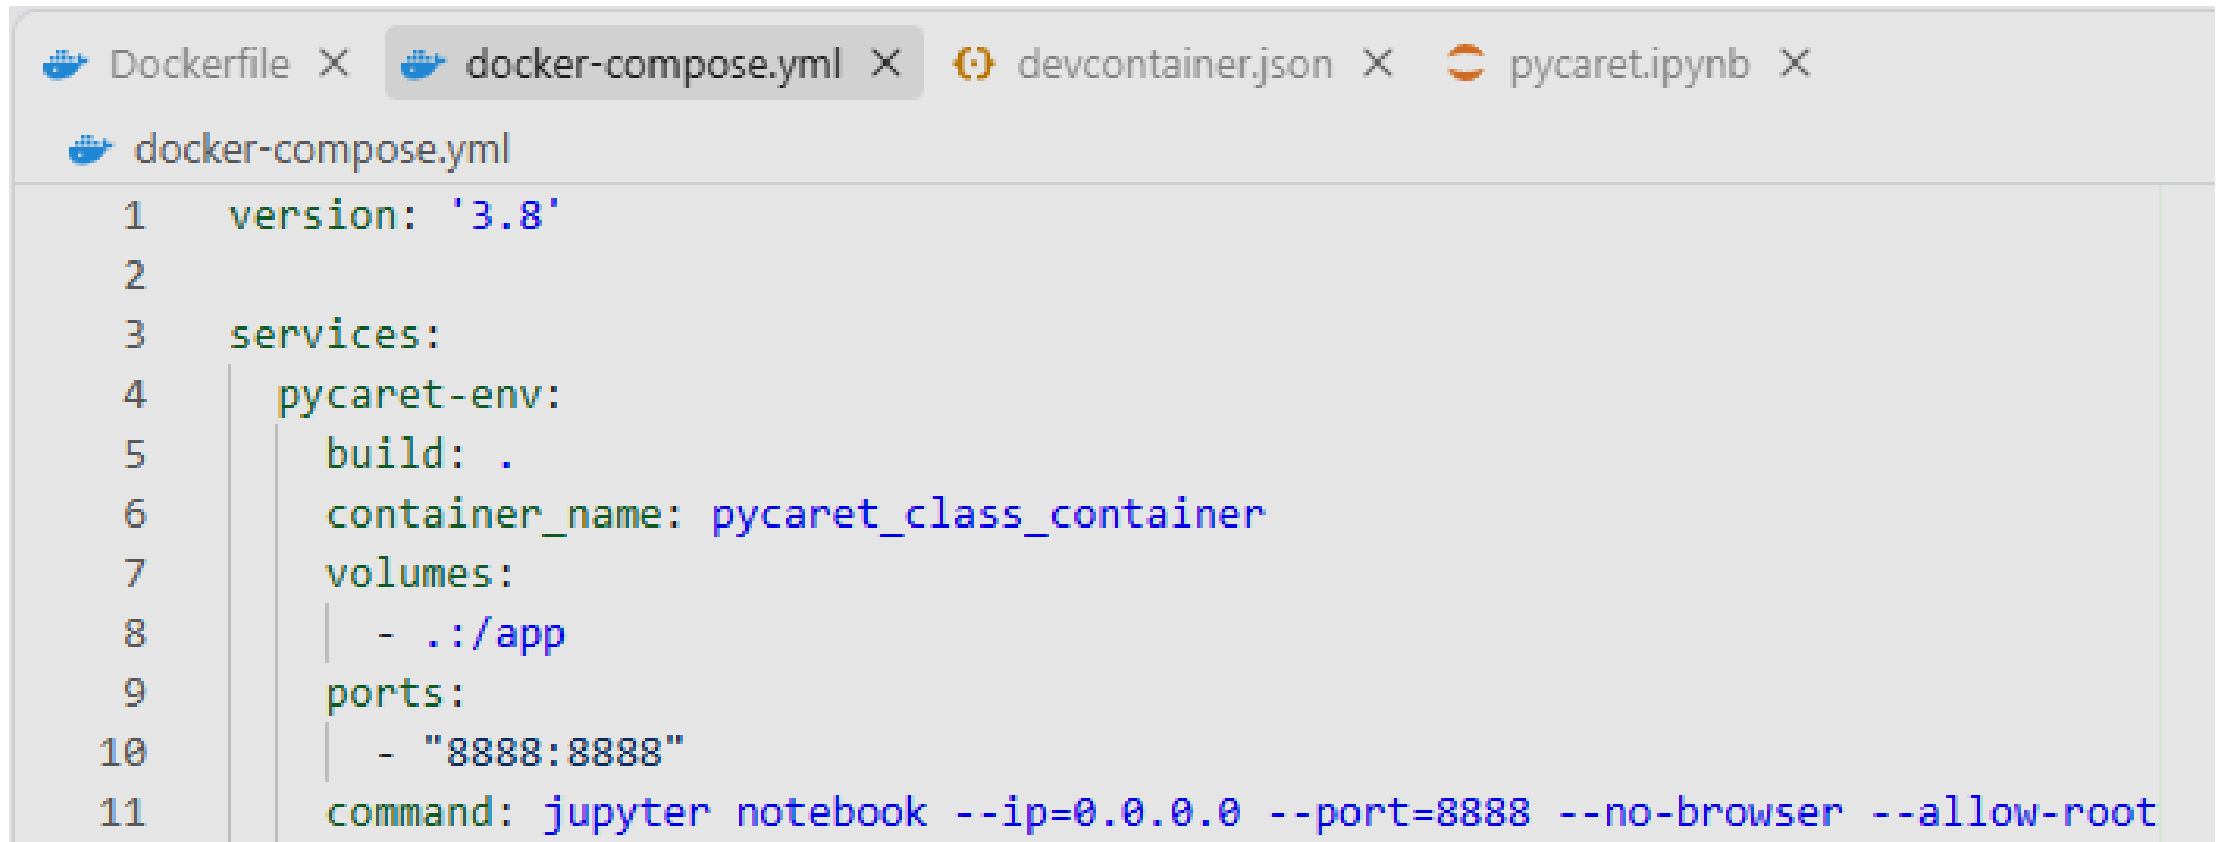

The image shows a screenshot of the PYCARET IDE interface. At the top, there are four tabs: 'Dockerfile', 'docker-compose.yml' (which is the active tab), 'devcontainer.json', and 'pycaret.ipynb'. The 'docker-compose.yml' tab is selected, and its content is displayed in a code editor. The code is a Docker Compose file for version 3.8, defining a service named 'pycaret-env'. The service is built from the current directory, runs in a container named 'pycaret_class_container', and maps the local directory to the container's volume. It also maps port 8888 from the container to the host. The command to run is 'jupyter notebook --ip=0.0.0.0 --port=8888 --no-browser --allow-root'.


```
1  version: '3.8'
2
3  services:
4    pycaret-env:
5      build: .
6      container_name: pycaret_class_container
7      volumes:
8        - ./app
9      ports:
10       - "8888:8888"
11     command: jupyter notebook --ip=0.0.0.0 --port=8888 --no-browser --allow-root
```


PYCARET IDE



```
Dockerfile X docker-compose.yml X devcontainer.json X pycaret.ipynb X
.devcontainer > devcontainer.json > ...
1  {
2    "name": "PyCaret Ambiente",
3    "build": {
4      "dockerfile": "../Dockerfile"
5    },
6    "customizations": {
7      "vscode": {
8        "settings": {
9          "python.defaultInterpreterPath": "/usr/local/bin/python"
10       },
11      "extensions": [
12        "ms-python.python",
13        "ms-toolsai.jupyter"
14      ]
15    }
16  },
17  "remoteUser": "root"
18 }
```

PYCARET IDE

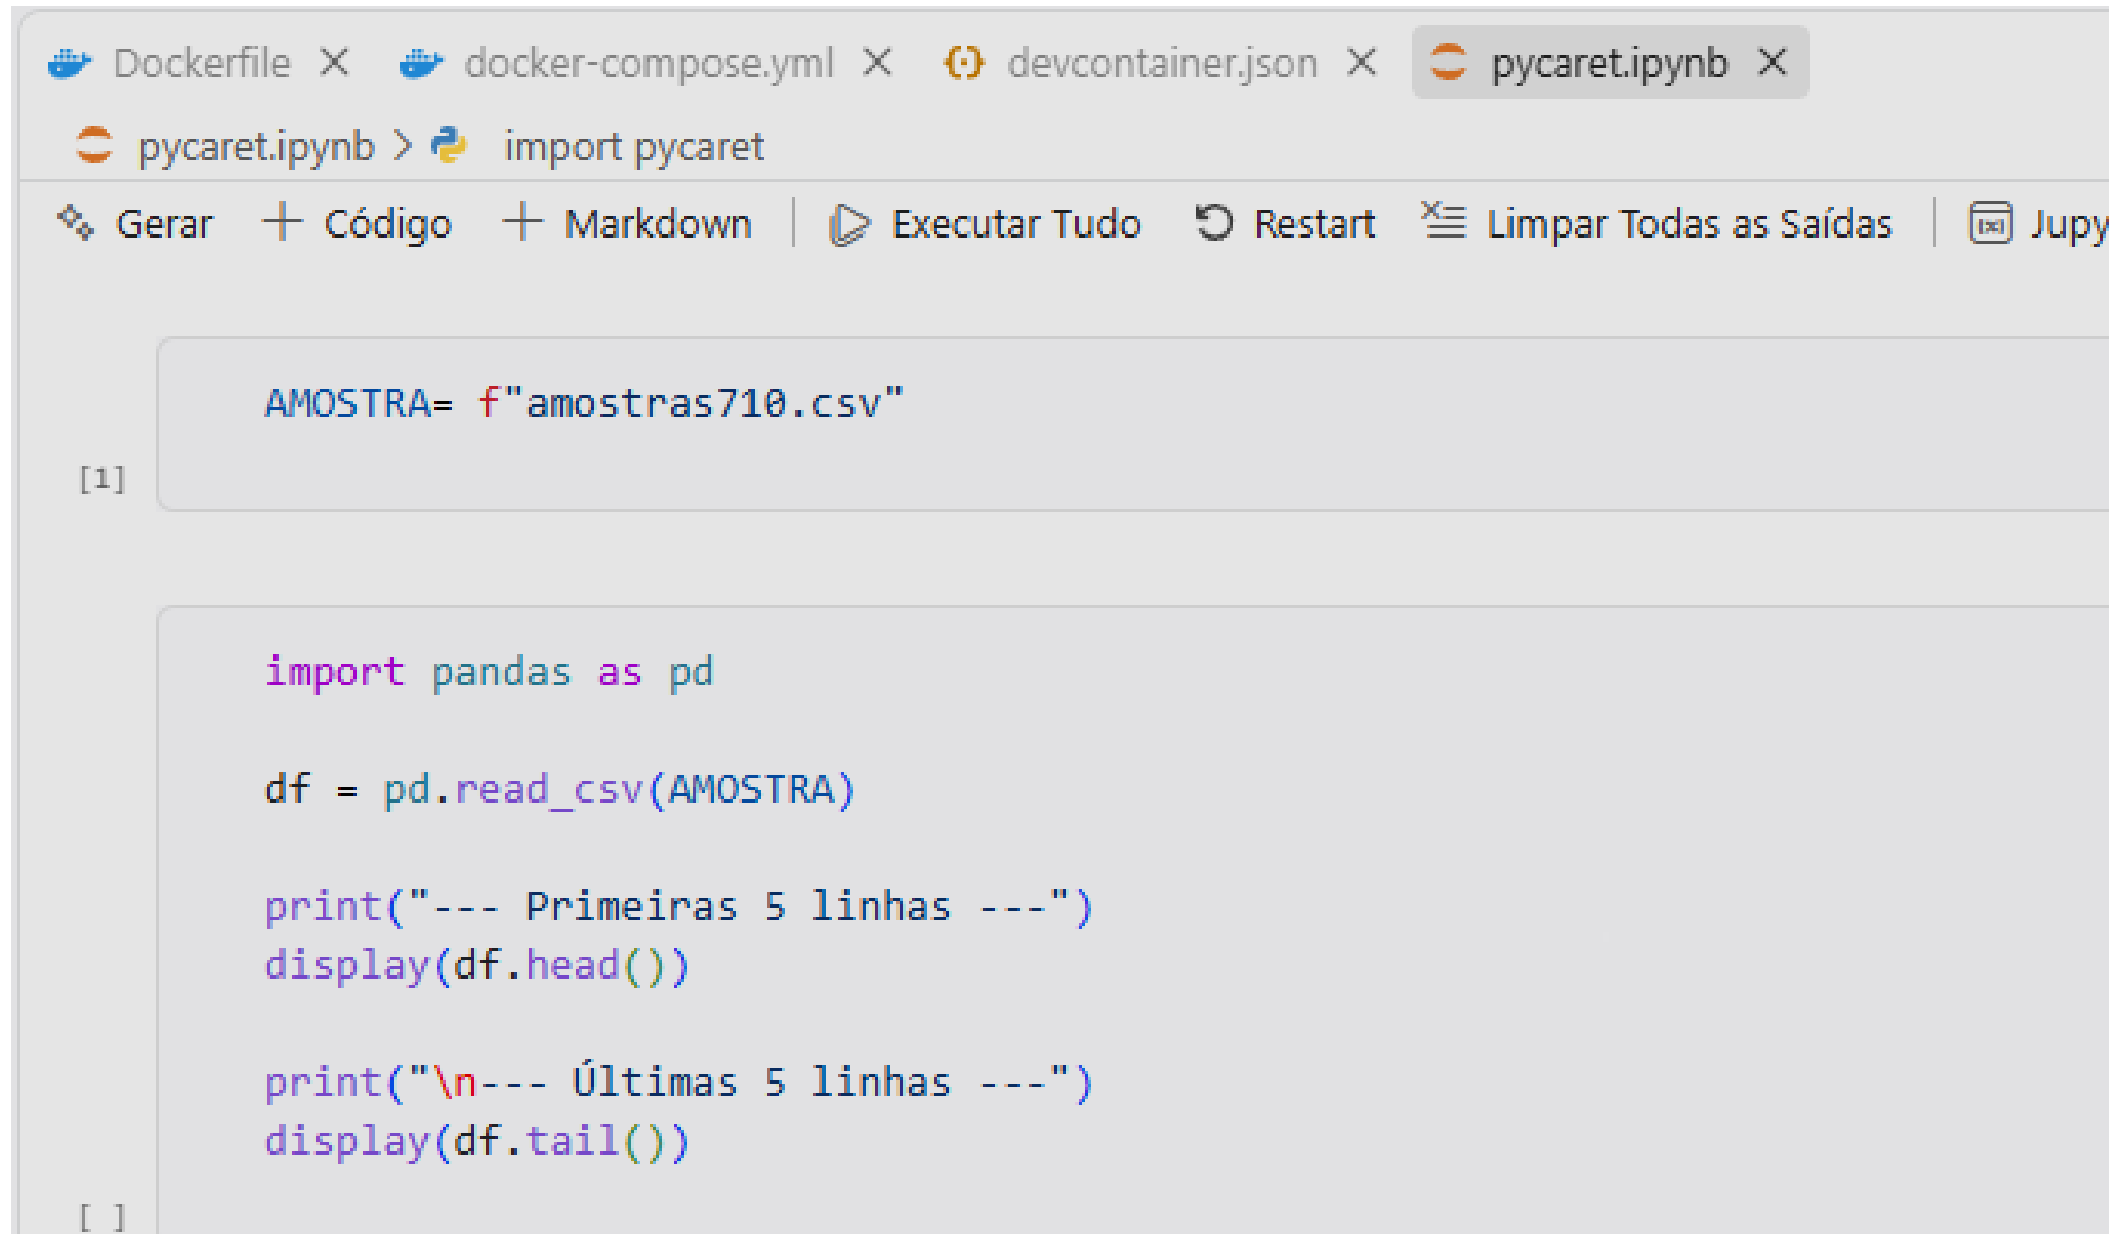

The image shows the PYCARET IDE interface. At the top, there are four tabs: 'Dockerfile', 'docker-compose.yml', 'devcontainer.json', and 'pycaret.ipynb'. The 'pycaret.ipynb' tab is active. Below the tabs, there is a toolbar with buttons: 'Gerar', '+ Código', '+ Markdown', 'Executar Tudo', 'Restart', 'Limpar Todas as Saídas', and 'Jupy'. The main area contains two code cells. The first cell, labeled '[1]', contains the code 'AMOSTRA= f"amostras710.csv"'. The second cell, labeled '[]', contains the code 'import pandas as pd', 'df = pd.read_csv(AMOSTRA)', 'print("--- Primeiras 5 linhas ---)', 'display(df.head())', 'print("\n--- Últimas 5 linhas ---)', and 'display(df.tail())'.

```
Dockerfile X docker-compose.yml X devcontainer.json X pycaret.ipynb X
```

pycaret.ipynb > import pycaret

Gerar + Código + Markdown | Executar Tudo Restart Limpar Todas as Saídas | Jupy

```
[1] AMOSTRA= f"amostras710.csv"
```

```
[ ] import pandas as pd

df = pd.read_csv(AMOSTRA)

print("--- Primeiras 5 linhas ---")
display(df.head())

print("\n--- Últimas 5 linhas ---")
display(df.tail())
```

PYCARET WEB

A BASE DE DADOS TEM QUE
PASSAR PELA ENGENHARIA
DE DADOS ANTES

```
git clone https://github.com/pycaret/pycaret.git  
cd pycaret  
docker compose up --build
```

PYCARET WEB

Workspaces

A workspace groups projects, datasets, pipelines, and deployments for a team or environment.

+ New workspace



Teste

No description

Created 28/08/2026

PYCARET WEB

 PyCaret

BUILD

Dashboard

Projects

Datasets

MODELS

Model registry

Deployments

Monitoring

Drift

Lineage

AUTOMATION

Approvals

Schedules

Templates

Webhooks

SETTINGS

Connections

Secrets

Git

LLM

Members

Admin

ACCOUNT

API keys

Platform users

Teste

Search

Workspaces / Teste

Teste

+ New project

PROJECTS

DATA SOURCES

MODEL VERSIONS

DEPLOYMENTS

1

3

0

0

Projects

Each project groups experiments, runs, and pipelines around one ML problem.

Teste

No description

Created 21h ago

Data sources

CSV uploads available to experiments in this workspace.

+ Browse samples

+ Upload CSV

amostras510.csv

509 rows · 57.8 kB · 15 columns

Explore

Versions

+ AI

amostras710_limpo.csv

709 rows · 80.5 kB · 15 columns

Explore

Versions

+ AI

amostras710.csv

709 rows · 111.1 kB · 16 columns

Explore

Versions

+ AI

b3rnard0p@gmail.com

...

AI

PYCARET WEB

< Back

Workspaces / Teste / Teste

Teste

Analyses

Notebooks

+ New experiment

Data sources

CSV uploads available to experiments in this workspace.

+ Browse samples

+ Upload CSV



amostras510.csv

509 rows · 57.8 kB · 15 columns

🔍 Explore

Versions

+ AI



amostras710_limpo.csv

709 rows · 80.5 kB · 15 columns

🔍 Explore

Versions

+ AI



amostras710.csv

709 rows · 111.1 kB · 16 columns

🔍 Explore

Versions

+ AI



Experiments (3)



Teste

classification

target: cultura_ideal_rotulo

✗ 1

28/08/2026



Teste 2

classification

target: cultura_ideal_rotulo

✗ 1

29/08/2026



Teste 3

classification

target: cultura_ideal_rotulo

✓ 1

29/08/2026

PYCARET WEB

[< Back](#)

Workspaces / Run · d7613a7f-7e7e-45cc-bbad-369d86c787cb

Run Running

Event log Cancel

● Trained rf

ELAPSED
—

The leaderboard lands below as soon as the run finishes. Open the event log drawer for live per-model details — the run continues server-side if you close this tab.

Workers

2 running · 8 queued · 2/12 done

ETA
~41.3s remaining

17% complete

avg per trial: 8.3s

● lr training...	● dt Accuracy 0.611 3.8s	● rf Accuracy 0.667 12.7s	● et training...
● ada waiting	● gbc waiting	● lda waiting	● qda waiting
● nb waiting	● knn waiting	● ridge waiting	● svm waiting

PYCARET WEB

Request snapshot

Frozen copy of every parameter the engine received when this run was submitted. Use it to reproduce the result.

task	classification
target	cultura_ideal_rotulo
setup_params	{}
plan	compare
model_id	—
plan_params	{}
sklearn_dataset	—
data_inline	—
data_inline_rows	0
data_source_id	8d3b513e-335a-45fd-a5df-b9e2ae9b42ee
data_source_path	/data/artifacts/data-sources/250407cf-e71d-40fb-9313-c7398c421968.csv
triggered_by	user
triggered_by_id	—

PYCARET WEB

Trials (12)

Every candidate model the engine tried, ranked by Accuracy.

Blend models

Stack models

Table

Chart

☐	#	Model		Accuracy	AUC	Recall	Prec.	F1	Kappa	MCC	Pipeline
☐	1 ★	Random Forest Classifier rf		0.6667	0.0000	0.6667	0.6287	0.6292	0.6488	0.6552	—
☐	2	Extra Trees Classifier et		0.6667	0.0000	0.6667	0.6981	0.6412	0.6482	0.6541	—
☐	3	Gradient Boosting Classifier gbc		0.6667	0.0000	0.6667	0.6287	0.6097	0.6473	0.6538	—
☐	4	Decision Tree Classifier dt		0.6111	0.0000	0.6111	0.6537	0.5963	0.5892	0.5941	—
☐	5	Naive Bayes nb		0.5833	0.0000	0.5833	0.5625	0.5251	0.5592	0.5657	—
☐	6	Logistic Regression lr		0.5278	0.0000	0.5278	0.5532	0.4937	0.5008	0.5066	—
☐	7	Linear Discriminant Analysis lda		0.5000	0.0000	0.5000	0.5278	0.4880	0.4723	0.4774	—
☐	8	K-Neighbors Classifier knn		0.5000	0.0000	0.5000	0.4491	0.4449	0.4693	0.4756	—
☐	9	Ridge Classifier ridge		0.4444	0.0000	0.4444	0.4001	0.3574	0.4040	0.4161	—
☐	10	Ada Boost Classifier ada		0.2778	0.0000	0.2778	0.1767	0.1951	0.2161	0.2920	—
☐	11	SVM - Linear Kernel svm		0.1667	0.0000	0.1667	0.0889	0.1115	0.1241	0.1380	—
☐	12	Quadratic Discriminant Analysis qda		0.0278	0.0000	0.0278	0.0008	0.0015	0.0000	0.0000	—