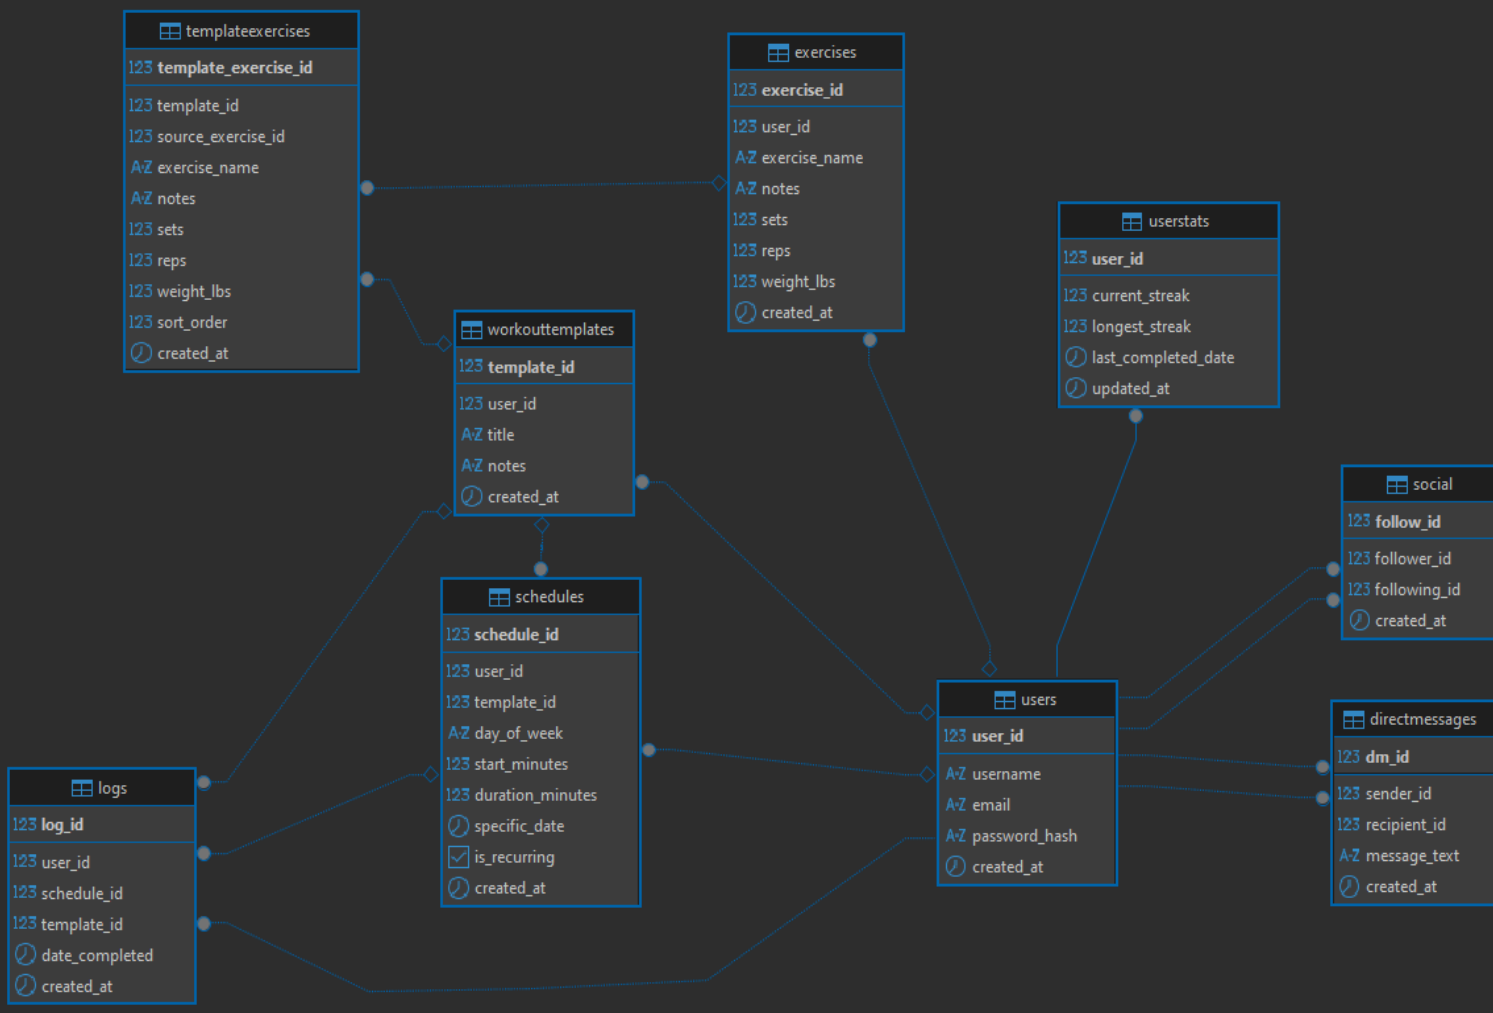

templateexercises
123 template_exercise_id
123 template_id
123 source_exercise_id
A-Z exercise_name
A-Z notes
123 sets
123 reps
123 weight_lbs
123 sort_order
created_at
exercises
123 exercise_id
123 user_id
A-Z exercise_name
A-Z notes
123 sets
123 reps
123 weight_lbs
created_at
userstats
123 user_id
123 current_streak
123 longest_streak
last_completed_date
updated_at
workouttemplates
123 template_id
123 user_id
A-Z title
A-Z notes
created_at
social
123 follow_id
123 follower_id
123 following_id
created_at
schedules
123 schedule_id
123 user_id
123 template_id
A-Z day_of_week
123 start_minutes
123 duration_minutes
specific_date
is_recurring
created_at
users
123 user_id
A-Z username
A-Z email
A-Z password_hash
created_at
directmessages
123 dm_id
123 sender_id
123 recipient_id
A-Z message_text
created_at
logs
123 log_id
123 user_id
123 schedule_id
123 template_id
date_completed
created_at

```sql
CREATE TABLE IF NOT EXISTS Users (
   user_id SERIAL PRIMARY KEY,
   username VARCHAR(255) UNIQUE NOT NULL,
   email VARCHAR(255) UNIQUE NOT NULL,
   password_hash VARCHAR(255) NOT NULL,
   created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE IF NOT EXISTS WorkoutTemplates (
   template_id SERIAL PRIMARY KEY,
   user_id INT REFERENCES Users(user_id) ON DELETE CASCADE,
   title VARCHAR(100) NOT NULL,
   notes TEXT,
   created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE IF NOT EXISTS Exercises (
   exercise_id SERIAL PRIMARY KEY,
   user_id INT REFERENCES Users(user_id) ON DELETE CASCADE,
   exercise_name VARCHAR(100) NOT NULL,
   notes TEXT,
   sets INT NOT NULL DEFAULT 3,
   reps INT NOT NULL DEFAULT 10,
   weight_lbs INT,
   created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);

CREATE TABLE IF NOT EXISTS TemplateExercises (
   template_exercise_id SERIAL PRIMARY KEY,
   template_id INT REFERENCES WorkoutTemplates(template_id) ON DELETE
CASCADE,
   source_exercise_id INT REFERENCES Exercises(exercise_id) ON DELETE SET
NULL,
   exercise_name VARCHAR(100) NOT NULL,
   notes TEXT,
   sets INT NOT NULL DEFAULT 3,
   reps INT NOT NULL DEFAULT 10,
   weight_lbs INT,
   sort_order INT NOT NULL DEFAULT 0,
   created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);
CREATE TABLE IF NOT EXISTS Schedules (
   schedule_id SERIAL PRIMARY KEY,
   user_id INT REFERENCES Users(user_id) ON DELETE CASCADE,
   template_id INT REFERENCES WorkoutTemplates(template_id) ON DELETE
CASCADE,
   day_of_week VARCHAR(15),
   start_minutes INT,
   duration_minutes INT NOT NULL DEFAULT 60,
   specific_date DATE,
   is_recurring BOOLEAN DEFAULT FALSE,
   created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);
```

```
CREATE TABLE IF NOT EXISTS Logs (
   log_id SERIAL PRIMARY KEY,
   user_id INT REFERENCES Users(user_id) ON DELETE CASCADE NOT NULL,
   schedule_id INT REFERENCES Schedules(schedule_id) ON DELETE SET NULL,
   template_id INT REFERENCES WorkoutTemplates(template_id) ON DELETE SET
NULL,
   date_completed DATE DEFAULT CURRENT_DATE,
   created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);

CREATE UNIQUE INDEX IF NOT EXISTS logs_user_schedule_date_idx
   ON Logs (user_id, schedule_id, date_completed);

CREATE TABLE IF NOT EXISTS DirectMessages (
   dm_id SERIAL PRIMARY KEY,
   sender_id INT REFERENCES Users(user_id) ON DELETE CASCADE NOT NULL,
   recipient_id INT REFERENCES Users(user_id) ON DELETE CASCADE NOT NULL,
   message_text VARCHAR(1000) NOT NULL,
   created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP,
   CHECK (sender_id <> recipient_id)
);

CREATE INDEX IF NOT EXISTS direct_messages_pair_idx
   ON DirectMessages (
   LEAST(sender_id, recipient_id),
   GREATEST(sender_id, recipient_id),
   created_at DESC,
   dm_id DESC
);

CREATE TABLE IF NOT EXISTS Social (
   follow_id SERIAL PRIMARY KEY,
   follower_id INT REFERENCES Users(user_id) ON DELETE CASCADE NOT NULL,
   following_id INT REFERENCES Users(user_id) ON DELETE CASCADE NOT NULL,
   UNIQUE(follower_id, following_id),
   created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);

CREATE INDEX IF NOT EXISTS social_following_idx
   ON Social (follower_id, following_id);

CREATE INDEX IF NOT EXISTS social_followers_idx
   ON Social (following_id, follower_id);

CREATE TABLE IF NOT EXISTS UserStats (
   user_id INT PRIMARY KEY REFERENCES Users(user_id) ON DELETE CASCADE,
   current_streak INT NOT NULL DEFAULT 0,
   longest_streak INT NOT NULL DEFAULT 0,
   last_completed_date DATE,
   updated_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
);
```