

spatial-efd: A spatial-aware implementation of elliptical Fourier analysis

Stuart W D Grieve^{1, 2}

¹The University of Edinburgh, School of GeoScience

²Queen Mary, University of London, School of Geography

23 February 2017

Paper DOI: <http://dx.doi.org/>

Software Repository: <https://github.com/sgrieve/spatial-efd>

Software Archive: <https://doi.org/xxxxxxx>

Summary

A Python implementation of the calculation of elliptical Fourier descriptors as described by Kuhl and Giardina (1982). This package is designed to allow the rapid analysis of spatial data stored as ESRI shapefiles, handling all of the geometric conversions. The computed Fourier ellipses can then be written back to shapefiles to allow analysis with other spatial data, or can be plotted using matplotlib (Hunter 2007). The code is built upon the Blidh (2013) module and it is hoped that this package will make analyzing spatial data using Fourier ellipses more straightforward.

This package implements the original methodology of Kuhl and Giardina (1982) to compute Fourier coefficients from polygon data loaded from shapefiles, and to transform these coefficients back into spatial coordinates with a range of different coordinate normalization schemes. The number of harmonics required to describe a polygon to a user defined threshold Fourier power can be computed, following Costa et al. (2009). The averaging of Fourier coefficients is also implemented, as described by Raj and Cannon (1999), which can be used to provide averaged shapes to machine learning algorithms. Functions are available to handle the challenges of relating spatial coordinates to the normalized Fourier ellipse coordinates, to allow the calculated Fourier ellipses to be output as shapefiles for further analysis in GIS packages.

The latest stable release of the software can be downloaded from pypi, the development version is available on github and the full documentation and API can be found here.

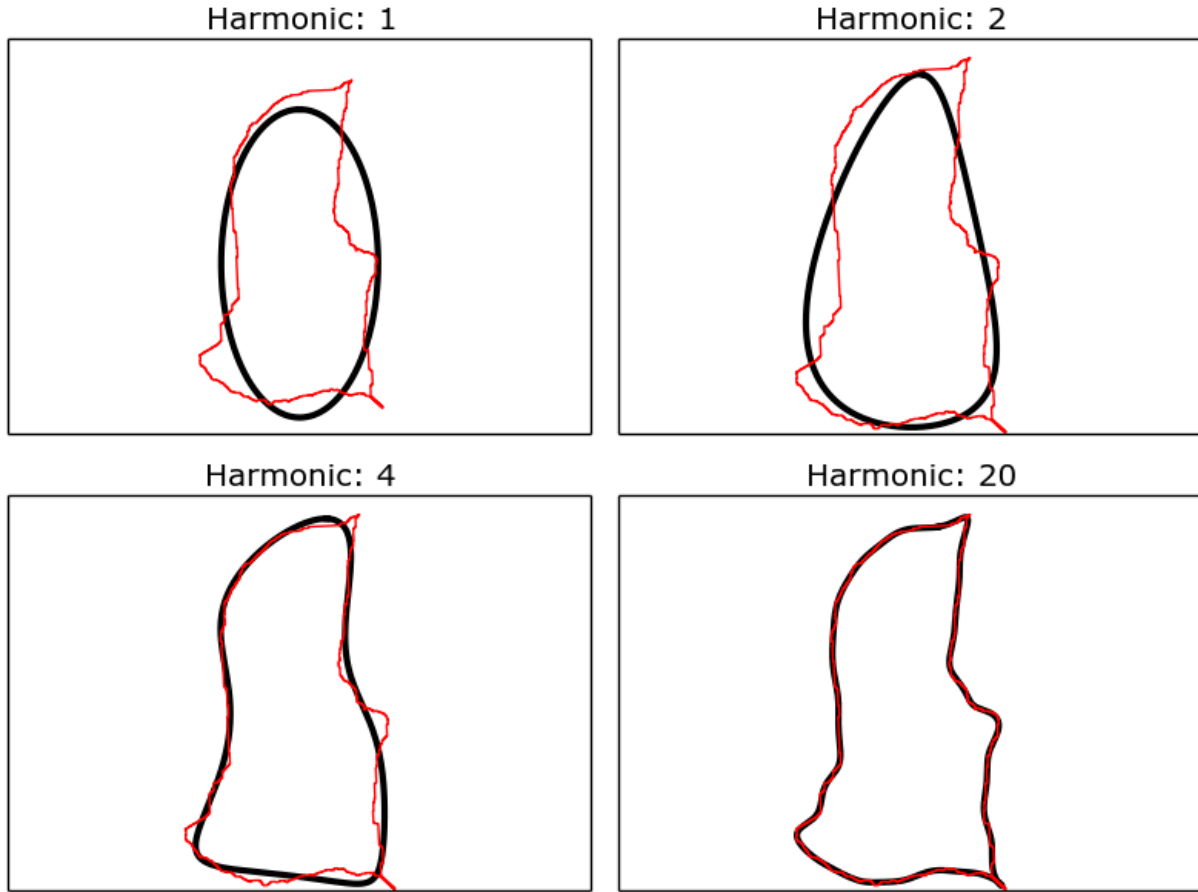


Figure 1: Examples of Fourier ellipses (black) being fitted to a shapefile outline (red), for increasing numbers of harmonics.

Acknowledgements

The development of this software has been supported by Natural Environment Research Council grants NE/J009970/1 and NE/N01300X/1.

References

- Blidh, Henrik. 2013. “Python Implementation of Elliptic Fourier Features of a Closed Contour.” <https://github.com/hblidh/pyefd>.
- Costa, Corrado, Paolo Menesatti, Graziella Paglia, Federico Pallottino, Jacopo Aguzzi, Valentina Rimatori, Giuseppe Russo, Santo Recupero, and Giuseppe Reforgiato Recupero. 2009. “Quantitative Evaluation of Tarocco Sweet Orange Fruit Shape Using Optoelectronic Elliptic Fourier Based Analysis.” *Postharvest Biology and Technology* 54 (1). Elsevier: 38–47.
- Hunter, J. D. 2007. “Matplotlib: A 2d Graphics Environment.” *Computing in Science & Engineering* 9 (3). IEEE COMPUTER SOC: 90–95. doi:10.1109/MCSE.2007.55.
- Kuhl, Frank P, and Charles R Giardina. 1982. “Elliptic Fourier Features of a Closed Contour.” *Computer*

Graphics and Image Processing 18 (3). Elsevier: 236–58.

Raj, P Markondeya, and W Roger Cannon. 1999. “2-d Particle Shape Averaging and Comparison Using Fourier Descriptors.” *Powder Technology* 104 (2). Elsevier: 180–89.