


cmta.

Rules Specification

**Functional specifications of the
Rules for CMTAT and RuleEngine
on Ethereum and EVM compatible blockchains.**

Rules version: v0.4.0

First published: July 2026

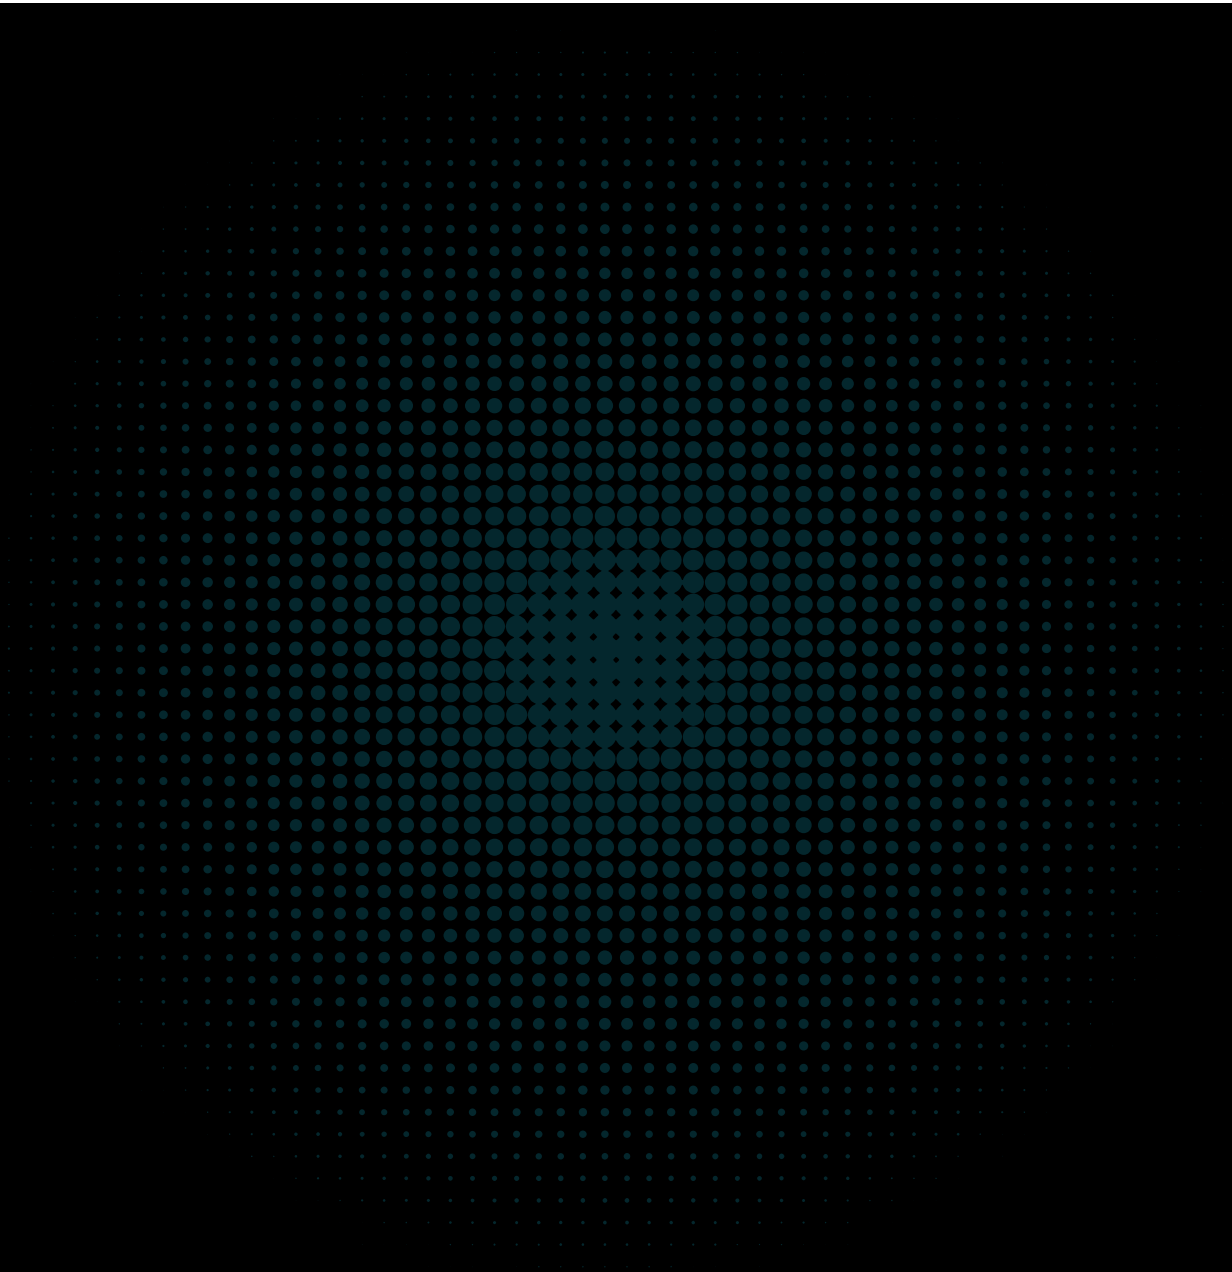

RuleEngine - Rules

Rules is a collection of on-chain compliance and transfer-restriction rules designed for use with the [CMTA RuleEngine](#) and the [CMTAT token standard](#).

Each rule can be used **standalone**, directly plugged into a CMTAT token, **or** managed collectively via a RuleEngine.

The **RuleEngine** is an external smart contract that applies transfer restrictions to security tokens such as **CMTAT** or [ERC-3643](#)-compatible tokens through a RuleEngine.

Rules are modular validator contracts that the `RuleEngine` or `CMTAT` compatible token can call on every transfer to ensure regulatory and business-logic compliance.

Current package version: `v0.4.0` (contracts report `version()` → `"0.4.0"`). Built against CMTAT `v3.3.0-rc1` and RuleEngine `v3.0.0-rc4`; see [Compatibility](#) for the supported range.


This project has not undergone an audit and is provided as-is without any warranties.

Table of Contents


- [Schema](#)
- [Overview](#)
- [Compatibility](#)
- [Specifications](#)
- [Architecture](#)
- [Types of Rules](#)
- [Quick Start](#)
- [Deployment Guide](#)
- [Rules details](#)
- [Access Control](#)
- [Toolchains and Usage](#)
- [API](#)
- [Security](#)
- [Intellectual property](#)

Schema

- Using rules with CMTAT and ERC-3643 tokens through a [RuleEngine](#)

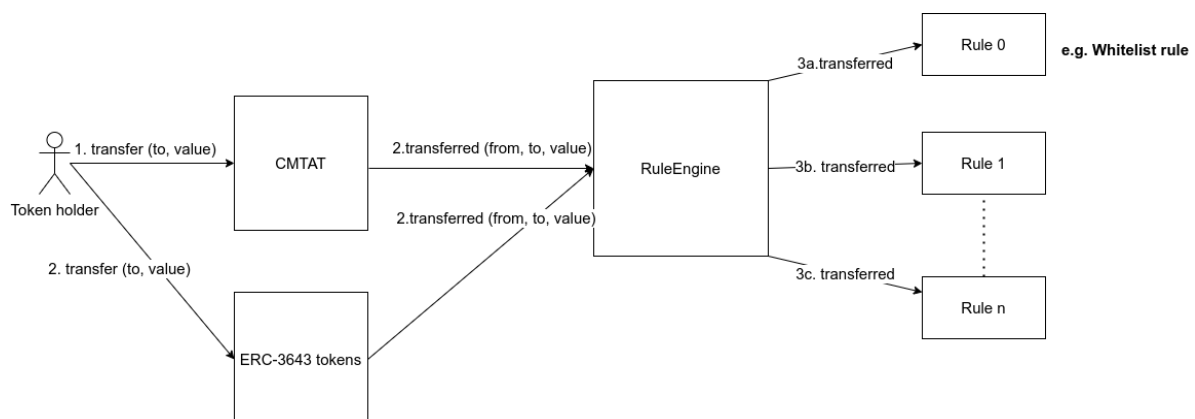

- Using a rule directly with CMTAT and ERC-3643 tokens

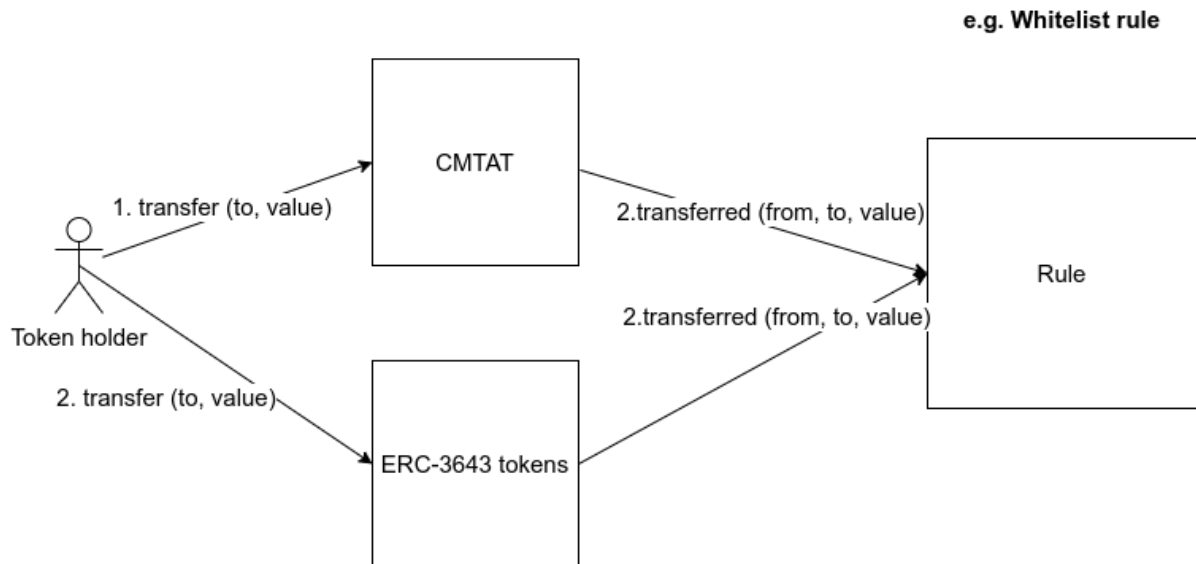

Overview

Key Concepts

- **Rules are controllers** that validate or modify token transfers.
- They can be applied:
 - Directly on **CMTAT** (no RuleEngine required), **or**
 - Through the [RuleEngine](#) (for multi-rule orchestration).
- Rules enforce conditions such as:
 - Whitelisting / blacklisting
 - Sanctions checks
 - Multi-party operator-managed lists
 - Conditional approvals
 - Arbitrary compliance logic

Integration modes

A rule can be consumed in three ways. All three call the same rule contract; they differ only in who calls it and how much of the compliance interface is required.

Mode	Caller	What the rule must implement	When to use
Direct CMTAT rule	A CMTAT token calls the rule directly (no RuleEngine)	<code>IRuleEngine (canTransfer + transferred, including the spender-aware overload)</code>	A single rule is enough; no multi-rule orchestration needed
RuleEngine-managed rule	A <code>RuleEngine</code> aggregates one or more rules and calls each on every transfer	<code>IRule (IRuleEngine + canReturnTransferRestrictionCode)</code>	Several rules must be combined, ordered, or share restriction codes

Mode	Caller	What the rule must implement	When to use
ERC-3643 through RuleEngine	An ERC-3643 token drives <code>created</code> / <code>destroyed</code> / transfer hooks on a RuleEngine, which forwards them to the rules	Rules as above; the RuleEngine implements the full ERC-3643 <code>ICompliance</code>	The token is ERC-3643 and needs full <code>ICompliance</code> — a standalone rule cannot back an ERC-3643 token directly

Interface details for each mode are documented under [Architecture](#); full signatures live in the [API](#) reference.

Compatibility

Component	Compatible Versions
Rules v0.4.0	CMTAT $\geq$ v3.0.0 (tested against v3.3.0-rc1) RuleEngine v3.0.0-rc4

Spender-aware paths (e.g. `RuleMintAllowance`) rely on the 4-argument `canTransferFrom` / `transferred(spender, from, to, value)` callbacks, which require a CMTAT / RuleEngine that forwards the spender to the rule; this repository is validated against CMTAT `v3.3.0-rc1`. The other rules only use the 3-argument path and work across the full CMTAT $\geq$ v3.0.0 range.

Each Rule implements the interface `IRuleEngine` defined in CMTAT.

This interface declares the ERC-3643 functions `transferred` (read-write) and `canTransfer` (read-only) with several other functions related to [ERC-1404](#), [ERC-7551](#) and [ERC-3643](#).

Specifications

ERC-3643

Each rule implements the following functions from the ERC-3643 `ICompliance` interface

```
function canTransfer(address _from, address _to, uint256 _amount) external view
returns (bool);
function transferred(address _from, address _to, uint256 _amount) external;
```

However, contrary to the RuleEngine, the whole interface is currently not implemented (e.g. `created` and `destroyed`) and as a result, the rule cannot directly support ERC-3643 token.

The alternative to use a Rule with an ERC-3643 token is through the RuleEngine, which implements the whole `ICompliance` interface.

The diagram below shows the recommended integration: the ERC-3643 token drives transfer, mint (`created`) and burn (`destroyed`) compliance hooks on the RuleEngine, which forwards them to the rules. A rule used on its own only implements `canTransfer` + `transferred`, so it cannot back an ERC-3643 token directly.

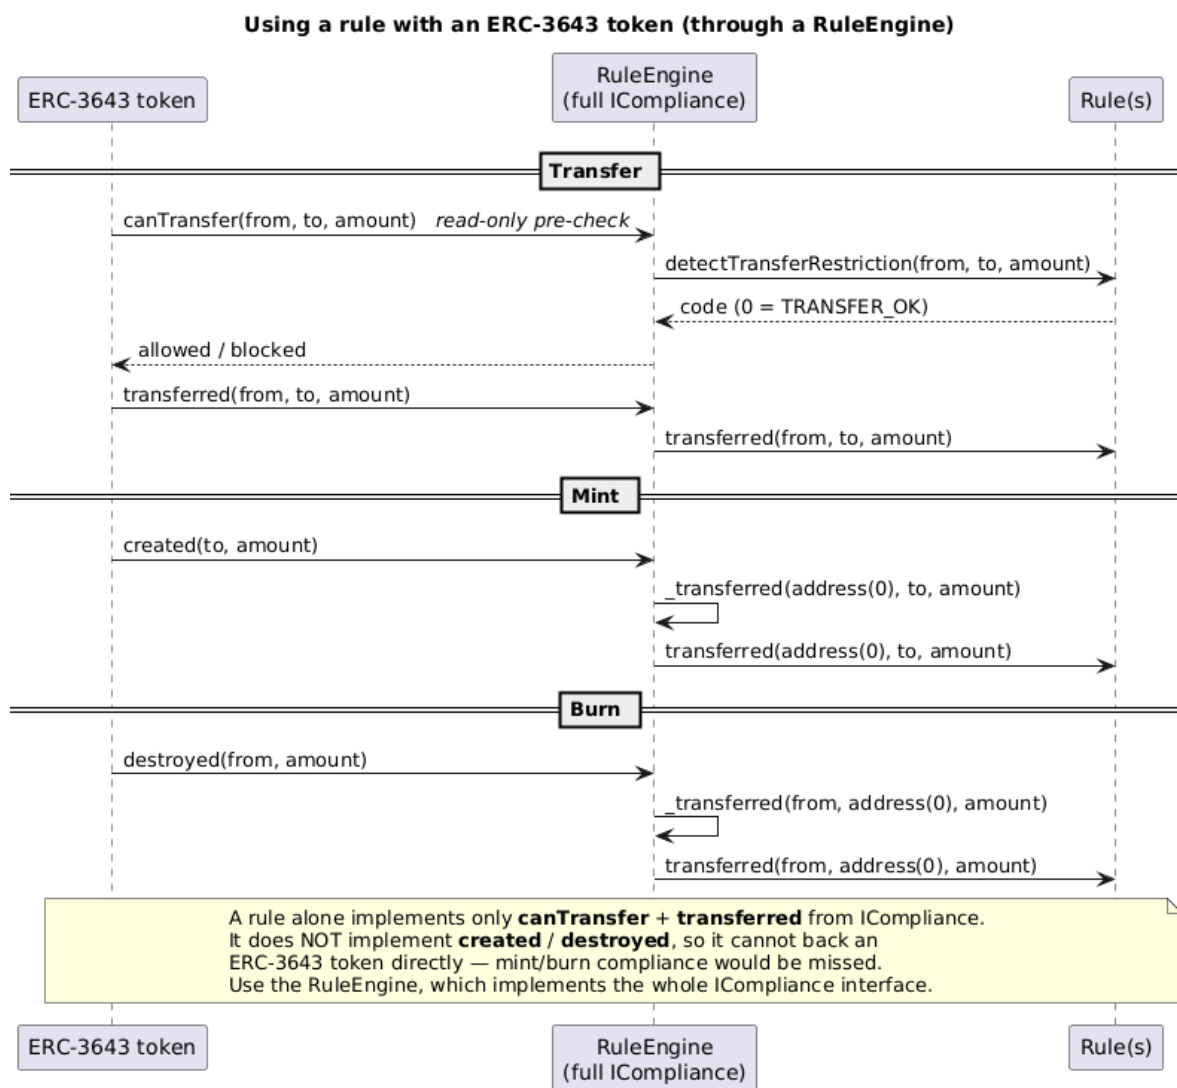


Diagram source: <doc/img/readme-erc3643-integration.puml>.

ERC-721/ERC-1155

To improve compatibility with [ERC-721](#) and [ERC-1155](#), most validation rules implement the interface `IERC7943NonFungibleComplianceExtend` which includes compliance functions with the `tokenId` argument. Operation rules (such as `RuleConditionalTransferLight`) are ERC-20 only and do not expose the ERC-721/1155 interfaces. `RuleMaxTotalSupply` is ERC-20 only as well and does not expose ERC-721/1155 interfaces.

While no rules currently apply restriction on the token id, the validation interfaces can be used to implement flexible restriction on ERC-721 or ERC-1155 tokens.

```

// IERC7943NonFungibleCompliance interface
// Read-only functions
function canTransfer(address from, address to, uint256 tokenId, uint256 amount)
external view returns (bool allowed)

// IERC7943NonFungibleComplianceExtend interface
// Read-only functions
function detectTransferRestriction(address from, address to, uint256 tokenId,
uint256 amount) external view returns (uint8 code);
function detectTransferRestrictionFrom(address spender, address from, address
to, uint256 tokenId, uint256 value) external view returns (uint8 code);
function canTransferFrom(address spender, address from, address to, uint256
tokenId, uint256 value) external returns (bool allowed);

// State modifying functions (write)
function transferred(address from, address to, uint256 tokenId, uint256 value)
external;
function transferred(address spender, address from, address to, uint256
tokenId, uint256 value) external;

```

The diagram below shows a non-fungible transfer flowing through the `tokenId`-aware compliance signatures. For validation rules a single `transferred(...)` call both validates and reverts — it internally runs `detectTransferRestrictionFrom` and requires `TRANSFER_OK` — so no separate pre-check is required in the transfer path; the read-only `detectTransferRestriction*` / `canTransfer*` overloads remain available for off-chain queries. The `RuleNFTAdapter` carries the `tokenId` argument but currently delegates to the address-based checks (`from` / `to` / `spender`), so no rule restricts on the token id yet.

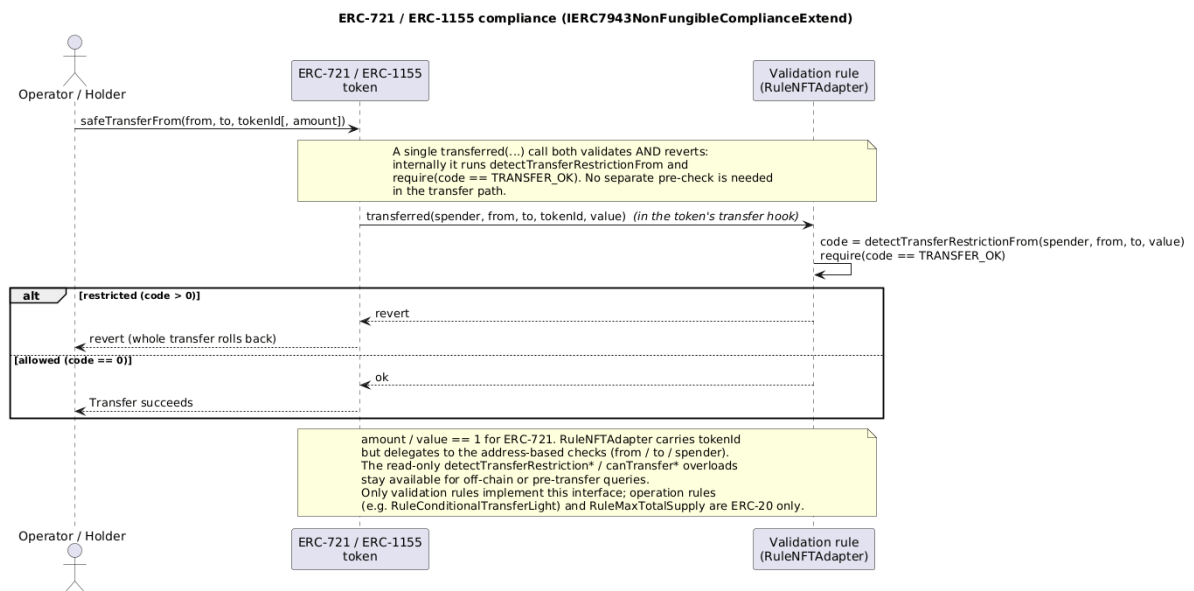


Diagram source: [doc/img/readme-erc721-erc1155-compliance.puml](#).

Architecture

Naming Conventions

- `*Base` contracts contain core logic without an access-control policy.
- `*InvariantStorage` contracts group constants, custom errors, and events.
- `*Common` contracts provide shared helper logic across variants (legacy naming retained for compatibility).

Directory Layout

- `src/modules/`: reusable modules shared across rules (`AccessControlModuleStandalone`, `MetaTxModuleStandalone`, `VersionModule`).
- `src/rules/interfaces/`: shared interfaces (`IAddressList`, `IIdentityRegistry`, `ISanctionsList`, `ITransferContext`).
- `src/rules/validation/abstract/`: shared base contracts and invariant storage.
- `src/rules/validation/abstract/base/`: base contracts with core rule logic (no access control).
- `src/rules/validation/abstract/core/`: shared adapters/validation helpers.
- `src/rules/validation/abstract/invariant/`: invariant storage contracts (constants, errors, events).
- `src/rules/validation/deployment/`: deployable validation rules (concrete contracts).
- `src/rules/operation/`: read-write (operation) rules that modify state on transfer.
- `test/`: Foundry tests, one folder per rule.
- `script/`: deployment scripts.

Rule - Code list

It is very important that each rule uses a unique code

Here is the list of codes used by the different rules

Contract	Constant name	Value
All	TRANSFER_OK (from CMTAT)	0
RuleWhitelist	CODE_ADDRESS_FROM_NOT_WHITELISTED	21
	CODE_ADDRESS_TO_NOT_WHITELISTED	22
	CODE_ADDRESS_SPENDER_NOT_WHITELISTED	23
	CODE_MINT_NOT_ALLOWED	24
	CODE_BURN_NOT_ALLOWED	25
	Reserved slot	26-29
RuleSanctionList	CODE_ADDRESS_FROM_IS_SANCTIONED	30
	CODE_ADDRESS_TO_IS_SANCTIONED	31
	CODE_ADDRESS_SPENDER_IS_SANCTIONED	32
	Reserved slot	33-35
RuleBlacklist	CODE_ADDRESS_FROM_IS_BLACKLISTED	36
	CODE_ADDRESS_TO_IS_BLACKLISTED	37

Contract	Constant name	Value
	CODE_ADDRESS_SPENDER_IS_BLACKLISTED	38
	Reserved slot	39-45
RuleConditionalTransferLight	CODE_TRANSFER_REQUEST_NOT_APPROVED	46
	Reserved slot	47-49
RuleMaxTotalSupply	CODE_MAX_TOTAL_SUPPLY_EXCEEDED	50
	Reserved slot	51-54
RuleIdentityRegistry	CODE_ADDRESS_FROM_NOT_VERIFIED	55
	CODE_ADDRESS_TO_NOT_VERIFIED	56
	CODE_ADDRESS_SPENDER_NOT_VERIFIED	57
	Reserved slot	58-59
RuleERC2980	CODE_ADDRESS_FROM_IS_FROZEN	60
	CODE_ADDRESS_TO_IS_FROZEN	61
	CODE_ADDRESS_SPENDER_IS_FROZEN	62
	CODE_ADDRESS_TO_NOT_WHITELISTED	63
	CODE_MINT_NOT_ALLOWED	64
	CODE_BURN_NOT_ALLOWED	65
RuleSpenderWhitelist	CODE_ADDRESS_SPENDER_NOT_WHITELISTED	66
	Reserved slot	67-69
RuleMintAllowance	CODE_MINTER_ALLOWANCE_EXCEEDED	70
	Reserved slot	71-74

Note:

- The CMTAT already uses the code 0-6 and the code 7-12 should be left free to allow further additions in the CMTAT.
- If you decide to create your own rules, we encourage you to use code > 100 to leave free the other restriction codes for future rules added in this project.
- Reserved slots are intentionally left unused for future rule expansion (maximum of 3 per rule).
- New rule code blocks should start at codes ending in `1` or `6` (e.g., `21`, `26`), leaving the remaining codes in the previous block for that prior rule's reserved slots.
- Current allocations are legacy; new rules should follow the start-at-1-or-6 policy without changing existing codes.

Rules as Standalone Compliance Contracts

Every rule implements the minimal interface expected by **CMTAT**, notably:

```
function transferred(address from, address to, uint256 value)
function transferred(address spender, address from, address to, uint256 value)
```

This makes rules directly pluggable into CMTAT without any intermediary RuleEngine.

Transfer Context Helper

Rules also expose an optional unified entrypoint using `MultiTokenTransferContext` / `FungibleTransferContext` (see `ITransferContext`) to pass a single struct instead of multiple arguments. This is a helper API inspired by [TokenF](#) and does not replace the standard ERC-3643 / RuleEngine interfaces. Validation rules generally expose both the non-fungible and fungible variants; `RuleConditionalTransferLight` and `RuleMaxTotalSupply` expose only the fungible variant.

Two struct variants are available:

```
// For ERC-721 / ERC-1155 (includes tokenId)
struct MultiTokenTransferContext {
    bytes4 selector; // function selector of the original call
    address sender;  // operator/spender (address(0) for direct transfers)
    address from;    // token sender
    address to;      // token recipient
    uint256 value;   // amount transferred
    uint256 tokenId; // token id (non-fungible)
    bytes data;      // Optional token-provided metadata for rules
}

// For ERC-20 (no tokenId)
struct FungibleTransferContext {
    bytes4 selector; // function selector of the original call
    address sender;  // operator/spender (address(0) for direct transfers)
    address from;    // token sender
    address to;      // token recipient
    uint256 value;   // amount transferred
    bytes data;      // Optional token-provided metadata for rules
}
```

Both structs are passed to `transferred(MultiTokenTransferContext calldata ctx)` or `transferred(FungibleTransferContext calldata ctx)`. If `ctx.sender` is non-zero, the spender-aware path is used internally; otherwise the standard two-party path is used. The `data` field is reserved for optional token-provided metadata that rules can interpret.

Using Rules via RuleEngine

When used through the RuleEngine, a rule must also implement:

```
interface IRule is IRuleEngine {
    function canReturnTransferRestrictionCode(uint8 restrictionCode)
        external
        view
        returns (bool);
}
```

The RuleEngine can then:

- Aggregate multiple rules
- Execute them sequentially on each transfer
- Return restriction codes
- Mutate rule state (operation rules)

The same rule can also be plugged **directly** into a CMTAT token (see [Rules as Standalone Compliance Contracts](#) above): the direct-CMTAT path only requires `IRuleEngine`, while the RuleEngine-managed path additionally requires `IRule`. Full signatures for both interfaces are documented in the [API](#) reference (`IRuleEngine`, `IERC1404Extend`, `IERC7551Compliance`, `IERC3643IComplianceContract`).

Types of Rules

There are two categories of rules: validation rules (read-only) and operation rules (read-write).

Which rule should I use?

Need	Rule
Only approved holders can send/receive	<code>RuleWhitelist</code>
Combine several whitelists (OR logic)	<code>RuleWhitelistWrapper</code>
Restrict <code>transferFrom</code> operators (spenders)	<code>RuleSpenderWhitelist</code>
Block known bad addresses	<code>RuleBlacklist</code>
Block sanctioned addresses (Chainalysis oracle)	<code>RuleSanctionsList</code>
Cap total token supply	<code>RuleMaxTotalSupply</code>
Require identity-registry verification (ERC-3643)	<code>RuleIdentityRegistry</code>
ERC-2980 Swiss compliance (whitelist + frozenlist)	<code>RuleERC2980</code>
Require operator approval per transfer	<code>RuleConditionalTransferLight</code>
Per-transfer approval across several directly-bound tokens (not behind a RuleEngine)	<code>RuleConditionalTransferLightMultiToken</code>

Need	Rule
Limit mint quota per minter	<code>RuleMintAllowance</code>

Each rule is also available in `Ownable2Step` and `AccessControl` variants; see [Choosing a Rule Variant](#). Stateful rules have binding constraints — see the [Binding model](#) table.

How rules differ (semantics comparison)

Rules do **not** all treat the spender, mint/burn, or an unset oracle the same way. The full side-by-side table — who each rule screens (`from` / `to` / spender on `transferFrom` / mint / burn), how it behaves when its oracle/registry is unset, whether it is stateful, and which pre-flight view is authoritative — is in [RULE SEMANTICS.md](#). The differences most likely to surprise an integrator:

- **Spender on mint.** `RuleWhitelist` / `RuleWhitelistWrapper` / `RuleSpenderWhitelist` **exempt** the minter; `RuleBlacklist` / `RuleSanctionsList` **screen** it (deny-list, by design); `RuleIdentityRegistry` also screens it, so the minter must itself be identity-verified; `RuleMintAllowance` **debits the minter's quota**.
- **Unset oracle/registry.** `RuleSanctionsList` (oracle unset) and `RuleIdentityRegistry` (registry unset) **fail open** — all transfers pass. An empty `RuleWhitelistWrapper` **fails closed**.
- **Authoritative pre-flight view.** For `RuleMintAllowance`, `canTransfer` is not authoritative — use `canTransferFrom`. For `RuleConditionalTransferLightMultiToken`, `detectTransferRestriction` is `msg.sender`-dependent.

Validation Rules (Read-Only)

Validation rules only read blockchain state — they never modify it during a transfer. They implement `transferred()` as a `view` function: it re-runs the same restriction check and reverts if the transfer would be blocked, but writes nothing to storage.

All validation rules implement `IRuleEngine` to be usable both standalone (plugged directly into CMTAT) and via the RuleEngine.

Available validation rules: `RuleWhitelist`, `RuleWhitelistWrapper`, `RuleSpenderWhitelist`, `RuleBlacklist`, `RuleSanctionsList`, `RuleMaxTotalSupply`, `RuleIdentityRegistry`, `RuleERC2980`.

A community made project, [RuleSelf](#), which uses [Self](#), a zero-knowledge identity is also available but is not developed or maintained by CMTA.

Operation Rules (Read-Write)

Operation rules modify blockchain state during transfer execution. Their `transferred()` function is state-mutating: it consumes or updates stored data as part of the transfer flow.

Available operation rules: `RuleConditionalTransferLight`, `RuleConditionalTransferLightMultiToken`, `RuleMintAllowance`.

A full-featured variant, `RuleConditionalTransfer`, is maintained as a separate experimental repository at [CMTA/RuleConditionalTransfer](#).

Quick Start

```
# 1. Clone the repository
git clone <repo-url>
cd Rules

# 2. Install Foundry (if not already installed)
# https://book.getfoundry.sh/getting-started/installation

# 3. Install submodule dependencies
forge install

# 4. Compile
forge build

# 5. Run tests
forge test
```

Deployment Guide

⚠ Before production deployment: this project has [not undergone an audit](#). Review the unaudited status, configure roles with least privilege (grant only the roles each operator needs, and prefer the `Ownable2Step` variants for single-owner setups), and run an end-to-end transfer test on the target token setup.

1. Deploy the rule contract(s) with the desired admin and optional module addresses.
2. Configure the rule state and roles, including whitelist/blacklist entries and oracle or registry addresses.
3. Add rules to the RuleEngine, or set the rule directly on the CMTAT token.
4. Verify the transfer flow end-to-end with a small test transfer before enabling production flows.

Deployment scripts:

- `script/DeployCMTATWithWhitelist.s.sol`
- `script/DeployCMTATWithBlacklist.s.sol`
- `script/DeployCMTATWithBlacklistAndSanctionsList.s.sol` — CMTAT + RuleEngine with blacklist and sanctions rules

Choosing a Rule Variant

Several rules are available in multiple access-control variants. Use the simplest one that fits your needs:

- `AccessControl` variants: use when you need multi-operator roles or delegated administration.
- `Ownable2Step` variants: use when you want a safer two-step ownership transfer.

Validation Rules (Read-Only)

- Cannot modify blockchain state during transfers.
- Used for simple eligibility checks.
- Examples:
 - Whitelist

- Whitelist Wrapper
- Spender Whitelist
- Blacklist
- Sanction list (Chainalysis)
- ERC-2980 (whitelist + frozenlist)

Operation Rules (Read-Write)

- Can update state during transfer calls.
- Example:
 - Conditional Transfer (approval-based)

Rules details

Summary tab

Rule	Type [read-only / read-write]	ERC-721 / ERC-1155	ERC-3643 via RuleEngine / CMTAT path *	Security Audit planned in the roadmap	Description
RuleWhitelist	Read-only	✓	✓	✓	This rule can be used to restrict transfers from/to only addresses inside a whitelist.
RuleWhitelistWrapper	Read-Only	✓	✓	✓	This rule can be used to restrict transfers from/to only addresses inside a group of whitelist rules managed by different operators.
RuleBlacklist	Read-Only	✓	✓	✓	This rule can be used to forbid transfer from/to addresses in the blacklist
RuleSanctionList	Read-Only	✓	✓	✓	The purpose of this contract is to use the oracle contract from Chainalysis to forbid transfer from/to an address included in a sanctions designation (US, EU, or UN).
RuleMaxTotalSupply	Read-Only	✗	✓	✓	This rule limits minting so that the total supply never exceeds a configured maximum.
RuleIdentityRegistry	Read-Only	✓	✓	✓	This rule checks the ERC-3643 Identity Registry for transfer participants when configured.
RuleSpenderWhitelist	Read-Only	✓	✓	✓	This rule blocks <code>transferFrom</code> when the spender is not in the whitelist. Direct transfers are always allowed.
RuleERC2980	Read-Only	✓	✓	✓	ERC-2980 Swiss Compliant rule combining a whitelist (recipient-only) and a frozenlist (blocks sender, recipient, and spender for <code>transferFrom</code>). Frozenlist takes priority over whitelist.

Rule	Type [read-only / read-write]	ERC-721 / ERC-1155	ERC-3643 via RuleEngine / CMTAT path *	Security Audit planned in the roadmap	Description
RuleConditionalTransferLight	Read-Write	✗	✓	✓	This rule requires that transfers have to be approved by an operator before being executed. Each approval is consumed once and the same transfer can be approved multiple times.
RuleConditionalTransferLightMultiToken	Read-Write	✗	✓	✓	Multi-token variant of ConditionalTransferLight. Approvals are token-scoped with key <code>(token, from, to, value)</code> so one token cannot consume another token's approvals.
RuleMintAllowance	Read-Write	✗	Partial [†]	✓	Enforces a per-minter mint quota managed by an operator; each mint reduces the minter's allowance. Regular transfers and burns are not restricted.
RuleConditionalTransfer (external)	Read-Write	✗	✓	✗ (experimental rule)	Full-featured approval-based transfer rule implementing Swiss law <i>Vinkulierung</i> . Supports automatic approval after three months, automatic transfer execution, and a conditional whitelist for address pairs that bypass approval. Maintained in a separate repository.
RuleSelf (community)	—	✗	—	✗ (community project)	Use Self , a zero-knowledge identity solution to determine which is allowed to interact with the token. Community-maintained rule project. Not developed or maintained by CMTA.

All rules implement the CMTAT rule interfaces needed by their supported transfer paths. Some operation rules require the spender-aware callback, as documented in their rule-specific notes.

* A checkmark in this column means the rule enforces compliance for ERC-3643 tokens **through a RuleEngine or the CMTAT transfer path** — it does **not** mean the rule is itself a full ERC-3643 `ICompliance` contract. A standalone rule implements only `canTransfer` + `transferred`, so it cannot back an ERC-3643 token directly; use it through a RuleEngine, which implements the full `ICompliance` interface (see [Integration modes](#)).

[†] `RuleMintAllowance` is **Partial**: it does not advertise the full ERC-3643 `ICompliance` interface via ERC-165 because its per-minter mint quota requires the spender-aware mint callback to identify the minter, which the 3-argument ERC-3643 mint callback cannot provide.

Technical documentation

Detailed technical documentation for each rule is available in [doc/technical/](#):

Rule	Document
RuleWhitelist	RuleWhitelist.md
RuleWhitelistWrapper	RuleWhitelistWrapper.md
RuleBlacklist	RuleBlacklist.md
RuleSanctionsList	RuleSanctionList.md
RuleMaxTotalSupply	RuleMaxTotalSupply.md
RuleIdentityRegistry	RuleIdentityRegistry.md
RuleSpenderWhitelist	RuleSpenderWhitelist.md
RuleERC2980	RuleERC2980.md
RuleConditionalTransferLight	RuleConditionalTransferLight.md
RuleConditionalTransferLightMultiToken	RuleConditionalTransferLightMultiToken.md
RuleMintAllowance	RuleMintAllowance.md

Operational Notes

Binding model

Stateful (operation) rules restrict which caller may consume their state via `transferred()`, so the target must be explicitly bound with `bindToken`. The binding model differs per rule:

Rule	Binding model	Notes
<code>RuleConditionalTransferLight</code>	Single token + optional RuleEngine	Two independent bindings: <code>bindToken(token)</code> sets the ERC-20 this rule acts on, <code>bindRuleEngine(engine)</code> authorises the engine to call <code>transferred</code> . <code>transferred</code> accepts either. Behind a RuleEngine, bind both — then <code>approveAndTransferIfAllowed</code> works too. Rebind only after <code>unbindToken</code> / <code>unbindRuleEngine</code> . See Binding: token vs RuleEngine
<code>RuleConditionalTransferLightMultiToken</code>	Multiple direct tokens only	Approvals keyed by <code>(token, from, to, value)</code> but <i>consumed</i> under <code>msg.sender</code> . ⚠ Do not add this rule to a RuleEngine — bind each token directly <code>(CMTAT.setRuleEngine(rule))</code> . Behind an engine the rule either reverts or silently loses all per-token isolation; see Deployment topology .

Rule	Binding model	Notes
<code>RuleMintAllowance</code>	Single RuleEngine/token	Bind the RuleEngine address in a CMTAT + RuleEngine setup; rebind only after <code>unbindToken</code> . Requires the spender-aware mint callback

Validation (read-only) rules have no binding requirement: they hold no per-transfer state and can be shared across tokens and RuleEngines freely.

RuleIdentityRegistry

- `RuleIdentityRegistry`: allows burns (`to == address(0)`) even if the sender is not verified. This matters only if the token allows self-burn.
- `RuleIdentityRegistry`: can be disabled with `clearIdentityRegistry()`, which allows all transfers to pass this rule.
- `RuleIdentityRegistry`: constructor accepts `address(0)` to start in a disabled state.

RuleSanctionsList

- `RuleSanctionsList`: rejects zero address in `setSanctionListOracle`. Use `clearSanctionListOracle()` to disable checks.
- `RuleSanctionsList`: constructor accepts `address(0)` to start in a disabled state.

RuleMaxTotalSupply

- `RuleMaxTotalSupply`: trusts the configured `tokenContract` to return an accurate `totalSupply()`.
- `RuleMaxTotalSupply`: does not allow clearing the token contract; disable the rule by removing it from the RuleEngine or token.

RuleWhitelistWrapper

- `RuleWhitelistWrapper`: requires child rules that implement `IAddressList`. A wrapper with zero rules rejects all transfers (fail-closed).
- **Scan cost is paid on every transfer, by the transferring user.** The wrapper makes one external `STATICCALL` per child rule — **~8.8k gas each** — and the scan runs during transfer *execution*, not only in views. At the default cap of 10 children the worst case is ~90k gas per transfer (~121k with `checkSpender = true`).
- **Two amplifiers:** a transfer that is going to be *rejected* never resolves its target addresses, so it never early-exits and always scans **all** children — the failing path is the most expensive one. And `checkSpender = true` adds a third address that must also be found, lowering the early-exit rate.
- **Operator responsibility:** keep the child list at or below the default `maxRules = 10`, and order children by expected hit rate so the early exit fires sooner. The scan is linear (~8.8k gas/child, measured flat up to 200 children), so `setMaxRules` accepts any non-zero value and raising the cap to 100 makes every transfer cost ~884k gas. That is a permanent tax on holders rather than a broken token — transfers still fit in a block until ~3,400 children — but it cannot be undone for transfers already paid. Full cost model and guidance: [RuleWhitelistWrapper.md](#).

RuleSpenderWhitelist

- `RuleSpenderWhitelist`: only checks the spender in `transferFrom`; direct transfers always pass this rule.

RuleERC2980

- `RuleERC2980`: frozenlist takes priority over whitelist; an address that is both whitelisted and frozen is rejected.
- `RuleERC2980`: a frozen address acting as `transferFrom` spender is also blocked (code 62), even if `from` and `to` are not frozen.
- `RuleERC2980`: sender (`from`) does not need to be whitelisted; only recipient (`to`) must be whitelisted.

RuleConditionalTransferLight

- `RuleConditionalTransferLight`: approvals are keyed by `(from, to, value)` and are not nonce-based.
- `RuleConditionalTransferLight`: `approveAndTransferIfAllowed` approves and immediately executes `transferFrom` when this rule has allowance; it assumes token callback to `transferred()`.
- `RuleConditionalTransferLight`: `transferred()` is restricted to the single token bound via `bindToken`; second bind reverts with `RuleConditionalTransferLight_TokenAlreadyBound` until `unbindToken`.
- `RuleConditionalTransferLight`: `mints (from == address(0))` and `burns (to == address(0))` are exempt from approval checks; `created` and `destroyed` delegate to `_transferred`.

RuleConditionalTransferLightMultiToken

- `RuleConditionalTransferLightMultiToken`: approvals are keyed by `(token, from, to, value)` and are not nonce-based.
- `RuleConditionalTransferLightMultiToken`: operator functions are token-scoped (`approveTransfer(token, ...)`, `cancelTransferApproval(token, ...)`, `approvedCount(token, ...)`, `approveAndTransferIfAllowed(token, ...)`).
- `RuleConditionalTransferLightMultiToken`: execution is restricted to bound tokens; only the calling bound token can consume approvals for its own key space.
- `RuleConditionalTransferLightMultiToken`: `mints (from == address(0))` and `burns (to == address(0))` are exempt from approval checks; `created` and `destroyed` delegate to `_transferred`.
- `RuleConditionalTransferLightMultiToken`: with a shared `RuleEngine`, the caller seen by the rule is the engine address (not the underlying token). In that topology, token-scoped approvals are not visible unless approvals are keyed to the engine address, which is not per-token scoping.
- **Warning:** `RuleConditionalTransferLightMultiToken` supports several tokens when integrated directly with each token contract. It must not be used for per-token approval isolation through a shared `RuleEngine`.

General notes

- All validation rules: read-only rules still implement `transferred()` for ERC-3643 and RuleEngine compatibility, but do not change state.
- All AccessControl variants: use `onlyRole(ROLE)` in `_authorize*()` and mark internal helpers `virtual`.
- All AccessControl variants: use `AccessControlEnumerable`, so role members can be enumerated with `getRoleMember` / `getRoleMemberCount`; default admin is treated as having all roles via `hasRole`, but may not appear in role member lists unless explicitly granted.
- All meta-tx-enabled rules: `forwarderIrrevocable` is accepted as-is (including `address(0)`) and is not validated against ERC-165 because some forwarders do not implement it.
- All rules: implement `IERC3643Version` via `VersionModule` and expose `version()` returning `"0.4.0"`.

Read-only (validation) rule

Currently, there are eight validation rules: whitelist, whitelist wrapper, spender whitelist, blacklist, sanctions list, max total supply, identity registry, and ERC-2980.

Whitelist

Only whitelisted addresses may hold or receive tokens.

Transfers are rejected if:

- `from` is not whitelisted
- `to` is not whitelisted

The rule is read-only: it only checks stored state.


- Constructor parameter `allowMintBurn` sets **both** `allowMint` and `allowBurn` — the common case. Use `setAllowMint(bool)` / `setAllowBurn(bool)` afterwards for independent control (e.g. permanently close issuance while keeping redemptions open).
- Mint/burn permission is an **explicit flag**, never list membership of `address(0)`. The zero address can never enter the list (`addAddress(address(0))` reverts), so `isVerified(address(0))` / `contains(address(0))` stay `false`, as ERC-3643 requires.
- The flag gates the **operation only**: a permitted mint still requires a whitelisted *recipient*; a permitted burn still requires a whitelisted *sender*.
- Blocked mint/burn return dedicated codes `24` / `25` (not the misleading "sender not whitelisted").

Example

During a transfer, this rule, called by the RuleEngine, will check if the address concerned is in the list, applying a read operation on the blockchain.

Usage scenario

An operator configures CMTAT to use `RuleWhitelist`. The issuer tries to mint to Alice via `mint/transfer` and the token calls `detectTransferRestriction/transferred`; Alice is not listed so the call reverts. The operator calls `addAddress(Alice)`. The issuer retries the mint and it succeeds.

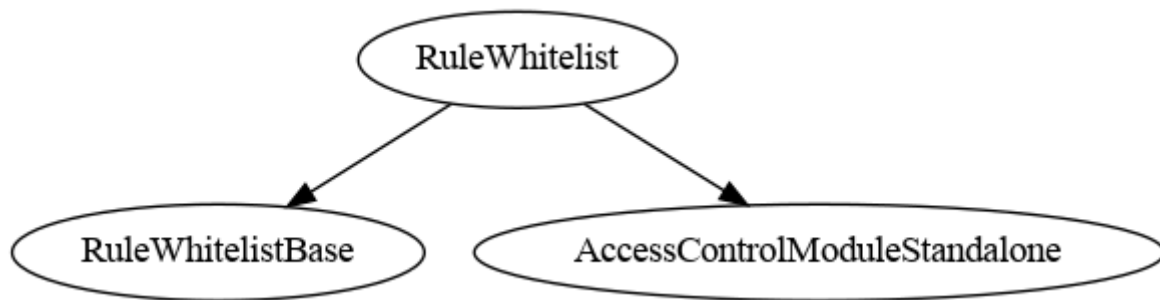


Spender whitelist

This rule only checks `transferFrom` spender authorization:

- Direct transfers (`transfer`) are always allowed by this rule.
- `transferFrom` is rejected when `spender` is not listed.
- Restriction code: `66 (CODE_ADDRESS_SPENDER_NOT_WHITELISTED)`.

Usage scenario

The operator deploys `RuleSpenderWhitelist` and sets it in the token or `RuleEngine`. Alice calls `transfer` to Bob and it passes this rule. Bob then tries `transferFrom(Alice, Bob, amount)` and it is rejected until the operator calls `addAddress(Bob)` (or whichever spender account should be authorized).

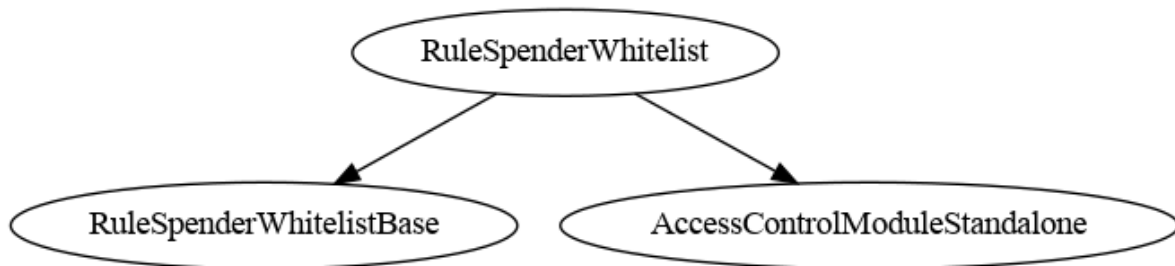

Whitelist wrapper

Allows independent whitelist groups managed by different operators.


- Each operator manages a dedicated whitelist.
- A transfer is allowed only if both addresses belong to *at least one* operator-managed list.
- Enables multi-party compliance

Usage scenario

Two operators maintain separate whitelists using `addRule` / `setRules` and each child rule's `addAddress`. A transfer between Alice and Bob is allowed if at least one child whitelist returns `true` for both via `areAddressesListed`; otherwise `detectTransferRestriction` rejects it.

Architecture

This rule inherits from `RuleEngineValidationCommon`. Thus the whitelist rules are managed with the same architecture and code than for the ruleEngine. For example, rules are added with the functions `setRules` or `addRule`.

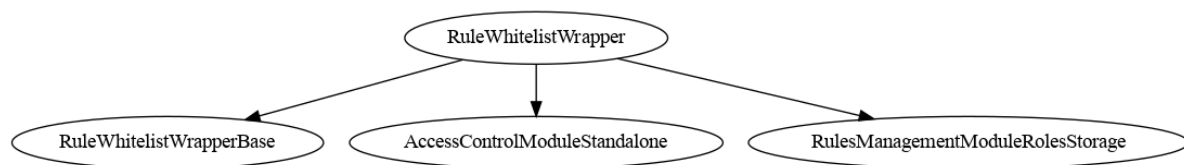


Blacklist

Opposite of whitelist:

- Transfer fails if **either** address is blacklisted.

Usage scenario

The operator sets `RuleBlacklist` on the token. The issuer tries to transfer to Bob; `detectTransferRestriction` passes. The operator calls `addAddress (Bob)`. A subsequent transfer to Bob is rejected until `removeAddress (Bob)` is called.

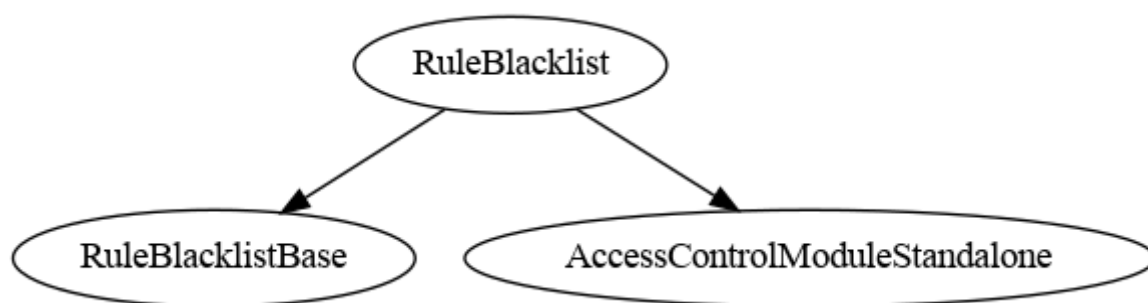


ERC-2980 (Whitelist + Frozenlist)

Implements the [ERC-2980](#) Swiss Compliant Asset Token transfer restriction using two independent address lists managed in a single rule:

- **Whitelist:** only whitelisted addresses may *receive* tokens. Senders do not need to be whitelisted and may freely transfer tokens they already hold.
- **Frozenlist:** frozen addresses are completely blocked — they can neither send nor receive tokens. Additionally, a frozen address acting as a `transferFrom` spender will have the transfer rejected (code 62), even if `from` and `to` are not frozen.
- **Priority:** frozenlist is checked first. If `from`, `to`, or `spender` is frozen, the transfer is rejected regardless of whitelist membership.
- **Mint/burn handling:** governed by the explicit `allowMint` / `allowBurn` flags, never by whitelisting `address(0)`. The zero address can never enter either list, so the **mandatory ERC-2980 getters** `whitelist(address(0))` / `frozenlist(address(0))` always return `false`.
 - `allowMintBurn = false` (default-safe): mint is refused with code **64**, burn with code **65**.
 - `allowMintBurn = true`: both permitted. A permitted mint still requires the recipient to be whitelisted and not frozen; a permitted burn still requires the sender not to be frozen.
 - Independently settable afterwards via `setAllowMint(bool)` / `setAllowBurn(bool)`.
- Constructors:

- `RuleERC2980(address admin, address forwarderIrrevocable, bool allowMintBurn)`
- `RuleERC2980Ownable2Step(address owner, address forwarderIrrevocable, bool allowMintBurn)`

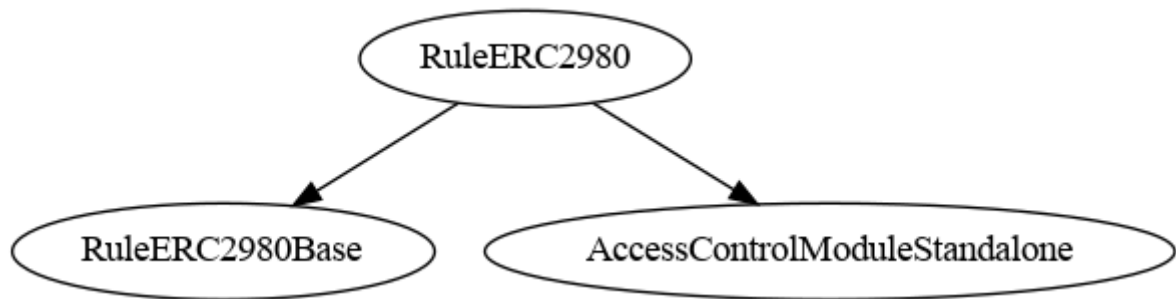

Restriction codes:

Constant	Code	Meaning
<code>CODE_ADDRESS_FROM_IS_FROZEN</code>	60	Sender is frozen
<code>CODE_ADDRESS_TO_IS_FROZEN</code>	61	Recipient is frozen
<code>CODE_ADDRESS_SPENDER_IS_FROZEN</code>	62	Spender is frozen
<code>CODE_ADDRESS_TO_NOT_WHITELISTED</code>	63	Recipient is not whitelisted
<code>CODE_MINT_NOT_ALLOWED</code>	64	Minting is disabled (<code>allowMint == false</code>)
<code>CODE_BURN_NOT_ALLOWED</code>	65	Burning is disabled (<code>allowBurn == false</code>)

Deviation from spec: the ERC-2980 `Whitelistable` / `Freezable` example interfaces define single-address management functions that return `bool` and do not revert on duplicates or missing entries. This implementation reverts on invalid single-item operations, consistent with the codebase convention. Batch operations remain non-reverting.

Usage scenario


The operator deploys `RuleERC2980` and chooses `allowBurn` according to the redemption policy. The issuer whitelists Alice with `addWhitelistAddress(Alice)`. A transfer to Alice succeeds. The compliance officer freezes Bob with `addFrozenlistAddress(Bob)`. Any transfer from or to Bob is now rejected even if Bob was previously whitelisted.

Sanction list with Chainalysis

Uses the [Chainalysis](#) Oracle to reject transfers involving sanctioned addresses.

- Checks lists for: **US**, **EU**, and **UN** sanctions.
- Documentation: *Chainalysis Oracle for sanctions screening*
- If `from` or `to` is sanctioned, transfer is rejected.

The documentation and contract addresses are available here: [Chainalysis oracle for sanctions screening](#).

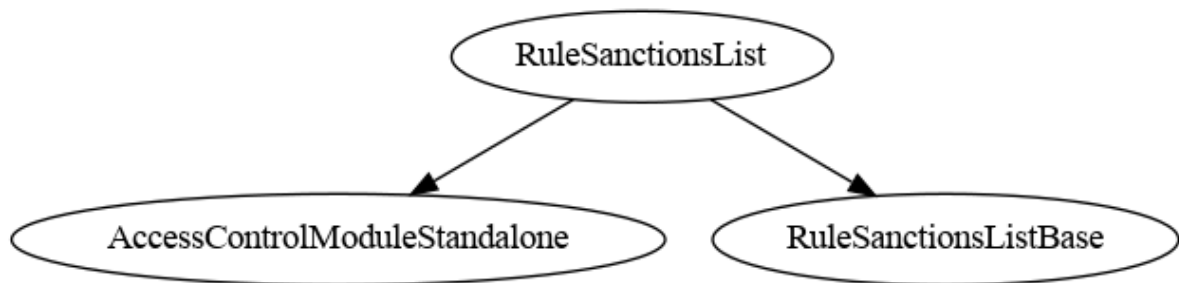

Example


During a transfer, if either address (from or to) is in the sanction list of the Oracle, the rule will return false, and the transfer will be rejected by the CMTAT.

Usage scenario

The operator sets the Chainalysis oracle with `setSanctionListOracle`. The token's transfer path calls `detectTransferRestriction`; if the oracle flags `from` or `to`, the transfer is rejected. Calling `clearSanctionListOracle` disables checks.

Max total supply

Limits minting so that total supply never exceeds a configured maximum. Transfers and burns are not affected; only mints (`from == address(0)`) are checked.

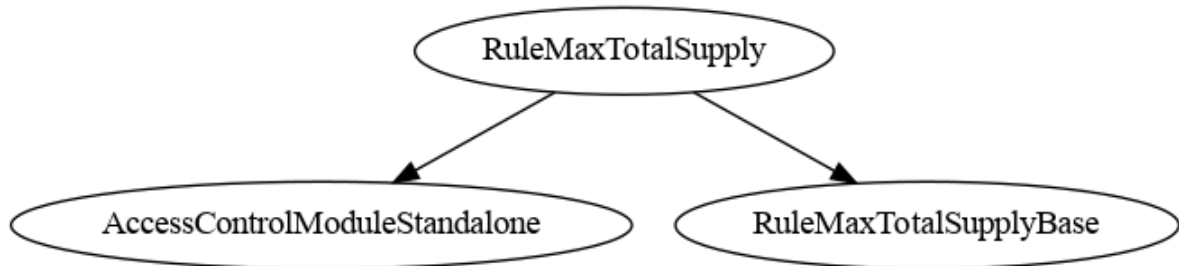

Usage scenario

The operator deploys `RuleMaxTotalSupply` with `setMaxTotalSupply(1_000_000)` and sets the token with `setTokenContract`. When the issuer mints and `totalSupply + amount` exceeds the limit, `detectTransferRestriction` rejects the mint. Transfers between holders still pass.

Identity registry


ERC-3643 conformant: only the RECEIVER is verified. The specification mandates exactly one identity check — *"The receiver MUST be whitelisted on the Identity Registry and verified"* — and states that `transferFrom` "works the same way", that `mint` "only require[s] the receiver", and that `burn` "bypasses all checks on eligibility". The **sender**, the **spender** and the **minter** are therefore **not** verified by default.

Checking the sender is deliberately avoided: ERC-3643 screens only the receiver precisely so that an investor whose identity lapses can still **exit their position** by sending to a verified counterparty. Screening the sender would trap them — unable to receive *and* unable to send.

Stricter screening is available as an **explicit opt-in**, never a silent default:

- `checkSender` — also verify the sender (stricter than ERC-3643).
- `checkSpender` — also verify the spender on `transferFrom` (stricter than ERC-3643). Mint and burn stay exempt regardless.

Constructors: `RuleIdentityRegistry(address admin, address identityRegistry, bool checkSender, bool checkSpender)` — pass `false, false` for the conformant default. Both flags are settable afterwards via `setCheckSender(bool)` / `setCheckSpender(bool)`.

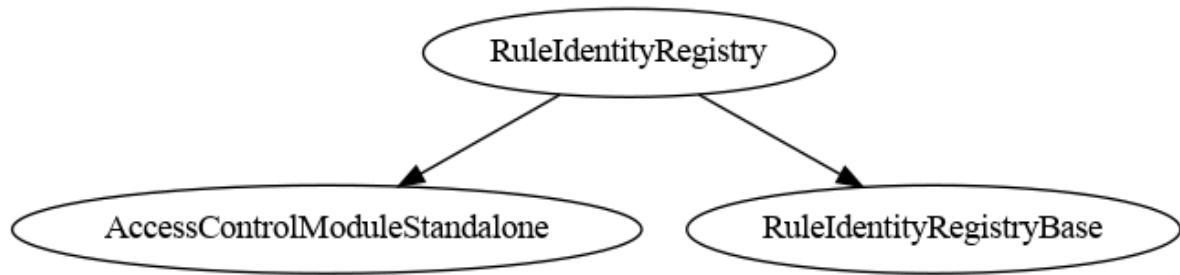

Usage scenario


The operator calls `setIdentityRegistry(registry)`. The issuer attempts a transfer to Alice; `detectTransferRestriction` consults `isVerified` and rejects if Alice is unverified. After the registry marks Alice verified, the transfer succeeds. Calling `clearIdentityRegistry` disables checks.

Read-Write (Operation) rule

There are three operation rules available: `RuleConditionalTransferLight`, `RuleConditionalTransferLightMultiToken`, and `RuleMintAllowance`.

Conditional transfer (light)

This rule requires that transfers must be approved by an operator before being executed. It hashes `(from, to, value)` to track approvals and allows the same transfer to be approved multiple times. Each successful transfer consumes one approval, applying a write operation on the blockchain. Mints (`from == address(0)`) and burns (`to == address(0)`) are exempt and always pass without requiring approval.

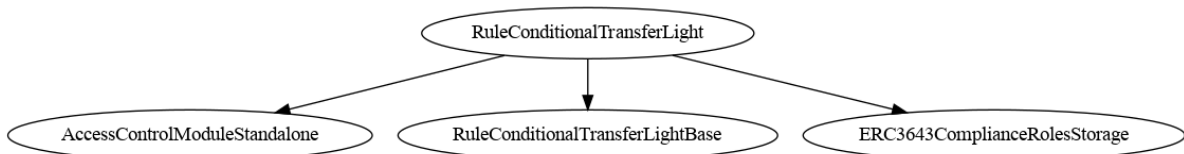

Usage scenario

An operator calls `approveTransfer(from, to, value)`. The compliance manager binds exactly one token with `bindToken(token)`; attempting to bind a second token reverts. The token calls `detectTransferRestriction` (passes) and later `transferred` to consume the approval. Without approval, `detectTransferRestriction` returns code 46 and the transfer is rejected. The operator can revoke with `cancelTransferApproval`. To migrate to a different token, the compliance manager must first call `unbindToken` before binding the new one.

Mint allowance

This rule enforces a per-minter mint quota for one bound RuleEngine/token at a time. An operator sets the number of tokens each minter address is allowed to mint via `setMintAllowance(minter, amount)`. Every successful mint reduces the minter's remaining quota. The operator can adjust quotas at any time with `increaseMintAllowance` / `decreaseMintAllowance`. Regular transfers and burns are not restricted.

Compatibility warning: `RuleMintAllowance` does not enforce quotas for a token that only calls the standard ERC-3643 3-arg compliance functions. It requires the CMTAT/RuleEngine spender-aware path so the minter address is passed as `spender`.

For the same reason, it does not advertise the full ERC-3643 `ICompliance` interface through ERC-165; the 3-arg callbacks alone cannot enforce the mint quota.

 `canTransfer` / `detectTransferRestriction` are not authoritative for this rule — they are hardcoded to "allowed" because the 3-arg signature has no minter identity, so they disagree with enforcement. Pre-flight a mint with the spender-aware view `canTransferFrom(minter, address(0), to, value)` (or `detectTransferRestrictionFrom`). See [RuleMintAllowance.md](#).

Usage scenario

The compliance manager binds the rule to the RuleEngine with `bindToken(ruleEngine)`. Attempting to bind a second RuleEngine/token reverts until the current binding is removed with `unbindToken`. The operator assigns `setMintAllowance(alice, 100_000e18)`. Alice's mints deduct from her quota through `transferred(alice, address(0), recipient, amount)`; once exhausted, further mints revert with code 70 until the operator increases the quota.

Conditional transfer (light, multi-token)

This variant scopes approvals by token address. It hashes `(token, from, to, value)` and supports multiple bound tokens in a single rule instance. Each successful transfer consumes one approval in the calling token namespace. Mints `(from == address(0))` and burns `(to == address(0))` remain exempt.

Usage scenario

An operator calls `approveTransfer(tokenA, from, to, value)` for `tokenA`. A transfer on `tokenA` succeeds and consumes the approval. The same `(from, to, value)` transfer on `tokenB` is still rejected until separately approved with `approveTransfer(tokenB, from, to, value)`.

Access Control

The module `AccessControlModuleStandalone` implements RBAC access control by inheriting from OpenZeppelin's `AccessControlEnumerable`.

Each rule implements its own access control by inheriting from `AccessControlModuleStandalone`. The default admin is the address passed as `admin` to the constructor at deployment.

`DEFAULT_ADMIN_ROLE` implicit role behaviour

`AccessControlModuleStandalone` overrides OpenZeppelin's `hasRole` so that any account holding `DEFAULT_ADMIN_ROLE` returns `true` for **every** role check. This is intentional: the OpenZeppelin `DEFAULT_ADMIN_ROLE` holder can already grant itself any role at any time, so treating it as implicitly holding all roles from the start removes unnecessary ceremony and makes access management easier in practice.

Practical consequences integrators must be aware of:

- **grantRole to a default admin is a no-op.** `_grantRole` checks `!hasRole(role, account)` before writing storage; since the admin already returns `true` via the override, the storage write and the `RoleGranted` event are skipped. The admin will **not** appear in `getRoleMember` / `getRoleMemberCount` enumerations for non-default roles unless the role was explicitly granted before the admin was set.
- **revokeRole** / **renounceRole** on a non-default role for a default admin are misleading. They emit `RoleRevoked` and clear the storage flag, but `hasRole` continues to return `true` because the account still holds `DEFAULT_ADMIN_ROLE`. The effective privilege is unchanged. To fully remove access, `DEFAULT_ADMIN_ROLE` itself must be revoked.
- **Off-chain monitoring** should use `hasRole` queries, not role-membership events or enumeration, to determine the effective privileges of admin accounts.

See also [docs.openzeppelin.com - AccessControl](https://docs.openzeppelin.com/AccessControl)

Role Summary

Role	Hash	Functions (by rule)
<code>DEFAULT_ADMIN_ROLE</code>	<code>0x00</code>	<code>grantRole</code> , <code>revokeRole</code> , <code>renounceRole</code> (all <code>AccessControl</code> rules); <code>setCheckSpender</code> (<code>RuleWhitelist</code> , <code>RuleWhitelistWrapper</code>); <code>setMaxTotalSupply</code> , <code>setTokenContract</code> (<code>RuleMaxTotalSupply</code>); <code>setIdentityRegistry</code> , <code>clearIdentityRegistry</code> (<code>RuleIdentityRegistry</code>)
<code>ADDRESS_LIST_ADD_ROLE</code>	<code>0x1b03c849816e077359373cf0a8d6d8f741d643bce95273ffe11515f83bebf61</code>	<code>addAddress</code> , <code>addAddresses</code> (<code>RuleWhitelist</code> , <code>RuleBlacklist</code>)
<code>ADDRESS_LIST_REMOVE_ROLE</code>	<code>0x1b94c92b564251ed6b49246d9a82eb7a486b6490f3b3a3bf3b28d2e99801f3ec</code>	<code>removeAddress</code> , <code>removeAddresses</code> (<code>RuleWhitelist</code> , <code>RuleBlacklist</code>)
<code>SANCTIONLIST_ROLE</code>	<code>0x30842281ac34bdc7d568c7ab276f84ba6fc1aldelae858b0afd35e716fb0650d</code>	<code>setSanctionListOracle</code> , <code>clearSanctionListOracle</code> (<code>RuleSanctionsList</code>)
<code>RULES_MANAGEMENT_ROLE</code>	<code>0xea5f4eb72290e50c32abd6c23e45de3d830b3286e1cbc2e293114b92e034e5e</code>	<code>setRules</code> , <code>clearRules</code> , <code>addRule</code> , <code>removeRule</code> (<code>RuleWhitelistWrapper</code>)
<code>OPERATOR_ROLE</code>	<code>0x97667070c54ef182b0f5858b034beac1b6f3089aa2d3188bb1e8929f4fa9b929</code>	<code>approveTransfer</code> , <code>cancelTransferApproval</code> (<code>RuleConditionalTransferLight</code> / <code>RuleConditionalTransferLightMultiToken</code>)
<code>COMPLIANCE_MANAGER_ROLE</code>	<code>0xe5c50d0927e06141e032cb9a67e1d7092dc85c0b0825191f7e1ced600028568</code>	<code>bindToken</code> , <code>unbindToken</code> (<code>RuleConditionalTransferLight</code> / <code>RuleConditionalTransferLightMultiToken</code> / <code>RuleMintAllowance</code>)
<code>ALLOWANCE_OPERATOR_ROLE</code>	<code>0x86a2482724302deea267bc1ca14032806c318aeaf8d1e0d445a6fb7e7c997beb</code>	<code>setMintAllowance</code> , <code>increaseMintAllowance</code> , <code>decreaseMintAllowance</code> (<code>RuleMintAllowance</code>)
<code>WHITELIST_ADD_ROLE</code>	<code>0x77c0b4c0975a0b0417d8ce295502737b95fee8923755fed0cce952907a1861ed</code>	<code>addWhitelistAddress</code> , <code>addWhitelistAddresses</code> (<code>RuleERC2980</code>)
<code>WHITELIST_REMOVE_ROLE</code>	<code>0xf4d11a530c5b90f459c6ab1e335d3d77156b8ff3093308e4fca6d10ee87ade9</code>	<code>removeWhitelistAddress</code> , <code>removeWhitelistAddresses</code> (<code>RuleERC2980</code>)
<code>FROZENLIST_ADD_ROLE</code>	<code>0xc52c49807a071974b9260f4b553ee09bd9fd85f687d8d4cc3232de7104ff7835</code>	<code>addFrozenlistAddress</code> , <code>addFrozenlistAddresses</code> (<code>RuleERC2980</code>)
<code>FROZENLIST_REMOVE_ROLE</code>	<code>0x8be92b33a413d98540bfb0edc9129253db6d924f6c2e32c4b7809d237f7b2aaa</code>	<code>removeFrozenlistAddress</code> , <code>removeFrozenlistAddresses</code> (<code>RuleERC2980</code>)

Ownable2Step variants

For simpler ownership-based control, `Ownable2Step` variants (two-step ownership transfer) are available:

- `RuleWhitelistOwnable2Step`
- `RuleBlacklistOwnable2Step`
- `RuleWhitelistWrapperOwnable2Step`

- `RuleSanctionsListOwnable2Step`
- `RuleIdentityRegistryOwnable2Step`
- `RuleMaxTotalSupplyOwnable2Step`
- `RuleERC2980Ownable2Step`
- `RuleConditionalTransferLightOwnable2Step`
- `RuleConditionalTransferLightMultiTokenOwnable2Step`
- `RuleMintAllowanceOwnable2Step`

`RuleConditionalTransferLightOwnable2Step` now grants approval and execution permissions exclusively to the owner.

All `Ownable2Step` variants enforce access using OpenZeppelin's `onlyOwner` modifier.

All `Ownable2Step` variants also advertise ERC-165 support for `IERC165` (`0x01ffc9a7`), ERC-173 ownership (`0x7f5828d0`), and `Ownable2Step` handover (`0x9ab669ef`).

Address List

Common access control between the blacklist rule and whitelist rule.

These roles are listed above in the Role Summary table.

Toolchains and Usage

This repository is developed and tested with [Foundry](#); a Hardhat config is also present for compilation and a small smoke test. Build settings (`foundry.toml` / `hardhat.config.js`): solc `v0.8.34`, EVM `Prague`, optimizer on (200 runs).

Main commands

Task	Command
Install / update submodules	<code>forge install</code> · <code>forge update</code>
Build	<code>forge build</code>
Contract sizes	<code>forge compile --sizes</code>
Run all tests	<code>forge test</code>
Run one test	<code>forge test --match-contract <name> --match-test <fn></code>
Gas report	<code>forge test --gas-report</code>
Gas snapshot	<code>forge snapshot</code> (check only: <code>forge snapshot --check</code>)
Coverage	<code>forge coverage</code>
Coverage report (doc/coverage)	<code>forge coverage --no-match-coverage "(script\ mocks\ test)" --report lcov && genhtml lcov.info --branch-coverage --prefix "\$PWD/" --output-dir coverage</code>
Invariant suite only	<code>forge test --match-path "test/invariant/*"</code>

Task	Command
Format	<code>forge fmt</code>
Deploy a script	<code>forge script script/<Deploy...>.s.sol --rpc-url <url> --account <keystore></code>

Invariant testing

The two **stateful (operation) rules** — `RuleConditionalTransferLight` and `RuleMintAllowance` — are covered by a handler-driven `StdInvariant` suite in [test/invariant/](#), which fuzzes long randomly-ordered call sequences and re-checks four invariants after every step (8 192 calls each, `fail_on_revert = true`):

Invariant	Asserts
<code>invariant_approvalConservation</code>	<code>totalApproved - totalCancelled - totalExecuted == Σ approvalCounts</code> — approvals are never double-spent or lost
<code>invariant_noApprovalExceedsTotalRecorded</code>	<code>Σ approvalCounts $\leq$ totalApproved</code>
<code>invariant_allowanceMatchesGhost</code>	the on-chain mint quota exactly matches an independently-computed ghost mirror, after any interleaving
<code>invariant_mintedNeverExceedsCredited</code>	<code>Σ minted $\leq$ Σ credited</code>

Both suites are **mutation-verified**: injecting an approval double-spend or an off-by-one quota deduction makes them fail. Validation rules are read-only and hold no per-transfer state, so they are covered by unit and fuzz tests instead.

Full details — handler architecture, ghost variables, the negative controls, the coverage map against the threat-model invariants, and how to add a new one — are in [doc/technical/INVARIANT TESTS.md](#).

Deployment scripts: `script/DeployCMTATWithWhitelist.s.sol`,
`script/DeployCMTATWithBlacklist.s.sol`,
`script/DeployCMTATWithBlacklistAndSanctionsList.s.sol`.

Deployment key security: avoid passing `--private-key` on the command line (visible in shell history and to any process that can read `/proc`). Prefer hardware wallets (`--ledger`, `--trezor`) or encrypted keystores (`--account <keystore>`). See [Foundry best practices](#).

For the full toolchain guide — dependency versions, Hardhat commands, HTML coverage generation, the gas-benchmark workflow, and the generic Forge / Cast / Anvil / Chisel reference — see [doc/FOUNDRY.md](#) and the [Foundry book](#).

API

IRuleEngine

All rules implement `IRuleEngine`. The behaviour of `transferred()` differs by rule type:

- **Validation rules** implement `transferred()` as `view`: it re-runs the restriction check and reverts if the transfer would be blocked, but does not modify state.
- **Operation rules** implement `transferred()` as a state-mutating function: it updates storage as part of the transfer (e.g. consuming an approval in `RuleConditionalTransferLight`).

transferred

```
function transferred(address spender, address from, address to, uint256 value)
    external;
```

Called by a token or RuleEngine after a transfer. For validation rules, enforces the restriction check. For operation rules, mutates internal state.

Parameters

Name	Type	Description
<code>spender</code>	<code>address</code>	Address executing the transfer (owner, operator, or approved).
<code>from</code>	<code>address</code>	Current token holder.
<code>to</code>	<code>address</code>	Recipient address.
<code>value</code>	<code>uint256</code>	Amount transferred.

IERC1404

detectTransferRestriction

```
function detectTransferRestriction(address from, address to, uint256 value)
    external
    view
    returns (uint8);
```

Returns a restriction code describing why a transfer is blocked.

Parameters

Name	Type	Description
<code>from</code>	<code>address</code>	Sender address.
<code>to</code>	<code>address</code>	Recipient address.
<code>value</code>	<code>uint256</code>	Amount being transferred.

Returns

Name	Type	Description
0	uint8	Transfer allowed.
other	uint8	Implementation-defined restriction code.

messageForTransferRestriction

```
function messageForTransferRestriction(uint8 restrictionCode)
    external
    view
    returns (string memory);
```

Returns a human-readable message associated with a restriction code.

Parameters

Name	Type	Description
restrictionCode	uint8	Restriction code returned by <code>detectTransferRestriction</code> .

Returns

Name	Type	Description
message	string	Explanation for the restriction code.

IERC1404Extend

REJECTED_CODE_BASE

```
enum REJECTED_CODE_BASE {
    TRANSFER_OK,
    TRANSFER_REJECTED_DEACTIVATED,
    TRANSFER_REJECTED_PAUSED,
    TRANSFER_REJECTED_FROM_FROZEN,
    TRANSFER_REJECTED_TO_FROZEN,
    TRANSFER_REJECTED_SPENDER_FROZEN,
    TRANSFER_REJECTED_FROM_INSUFFICIENT_ACTIVE_BALANCE
}
```

Base transfer restriction codes used by ERC-1404 extensions.

detectTransferRestrictionFrom

```
function detectTransferRestrictionFrom(
    address spender,
    address from,
    address to,
    uint256 value
)
    external
    view
    returns (uint8);
```

Restriction code for transfers performed by a spender (approved operator).

Parameters

Name	Type	Description
<code>spender</code>	<code>address</code>	Address performing the transfer.
<code>from</code>	<code>address</code>	Current token owner.
<code>to</code>	<code>address</code>	Recipient address.
<code>value</code>	<code>uint256</code>	Transfer amount.

Returns

Name	Type	Description
<code>code</code>	<code>uint8</code>	0 if transfer allowed, otherwise a restriction code.

IERC7551Compliance

canTransferFrom

```
function canTransferFrom(address spender, address from, address to, uint256
value)
    external
    view
    returns (bool);
```

Determines if a spender-initiated transfer is permitted.

Parameters

Name	Type	Description
<code>spender</code>	<code>address</code>	Caller executing transfer.
<code>from</code>	<code>address</code>	Token owner.
<code>to</code>	<code>address</code>	Recipient.

Name	Type	Description
<code>value</code>	<code>uint256</code>	Amount.

Returns

Name	Type	Description
<code>allowed</code>	<code>bool</code>	<code>true</code> if transfer permitted.

IERC3643ComplianceRead

canTransfer

```
function canTransfer(address from, address to, uint256 value)
    external
    view
    returns (bool isValid);
```

Returns whether a transfer is compliant.

Parameters

Name	Type	Description
<code>from</code>	<code>address</code>	Sender.
<code>to</code>	<code>address</code>	Receiver.
<code>value</code>	<code>uint256</code>	Transfer amount.

Returns

Name	Type	Description
<code>isValid</code>	<code>bool</code>	<code>true</code> if compliant.

IERC3643IComplianceContract

transferred

```
function transferred(address from, address to, uint256 value)
    external;
```

Hook invoked during an ERC-20 token transfer.

Parameters

Name	Type	Description
<code>from</code>	<code>address</code>	Previous owner.
<code>to</code>	<code>address</code>	New owner.
<code>value</code>	<code>uint256</code>	Amount transferred.

Address List Management

This API is common to whitelist and blacklist rules

addAddresses

```
function addAddresses(address[] calldata targetAddresses)
    public
    onlyAddressListAdd
```

Description

Adds multiple addresses to the internal address set.

Details

- Does **not** revert if one or more addresses are already listed.
- Restricted by the rule's access control policy (role- or owner-based).
- Emits `AddAddresses`. Skipped/added counts are not emitted to keep gas cost minimal.

Parameters

Name	Type	Description
<code>targetAddresses</code>	<code>address[]</code>	Array of addresses to be added to the set.

removeAddresses

```
function removeAddresses(address[] calldata targetAddresses)
    public
    onlyAddressListRemove
```

Description

Removes multiple addresses from the internal set.

Details

- Does **not** revert if an address is not currently listed.
- Restricted by the rule's access control policy (role- or owner-based).
- Emits `RemoveAddresses`. Skipped/removed counts are not emitted to keep gas cost minimal.

Parameters

Name	Type	Description
<code>targetAddresses</code>	<code>address[]</code>	Array of addresses to be removed.

addAddress

```
function addAddress(address targetAddress)
    public
    onlyAddressListAdd
```

Description

Adds a **single** address to the set.

Details

- **Reverts** if the address is already listed.
- Restricted by the rule's access control policy (role- or owner-based).
- Emits an `AddAddress` event.

Parameters

Name	Type	Description
<code>targetAddress</code>	<code>address</code>	Address to add.

removeAddress

```
function removeAddress(address targetAddress)
    public
    onlyAddressListRemove
```

Description

Removes a **single** address from the set.

Details

- **Reverts** if the address is not listed.
- Restricted by the rule's access control policy (role- or owner-based).
- Emits a `RemoveAddress` event.

Parameters

Name	Type	Description
<code>targetAddress</code>	<code>address</code>	Address to remove.

listedAddressCount

```
function listedAddressCount() public view returns (uint256 count)
```

Description

Returns the total number of addresses currently listed in the internal set.

Returns

Name	Type	Description
<code>count</code>	<code>uint256</code>	Total number of listed addresses.

contains

```
function contains(address targetAddress)
    public
    view
    override (IIIdentityRegistryContains)
    returns (bool isListed)
```

Description

Checks whether a specific address is listed.

Implements `IIIdentityRegistryContains`.

Parameters

Name	Type	Description
<code>targetAddress</code>	<code>address</code>	Address to check.

Returns

Name	Type	Description
<code>isListed</code>	<code>bool</code>	<code>true</code> if the address is listed, otherwise <code>false</code> .

isAddressListed

```
function isAddressListed(address targetAddress)
    public
    view
    returns (bool isListed)
```

Description

Returns whether a given address is included in the internal set.

Parameters

Name	Type	Description
<code>targetAddress</code>	<code>address</code>	Address to check.

Returns

Name	Type	Description
<code>isListed</code>	<code>bool</code>	Listing status.

areAddressesListed

```
function areAddressesListed(address[] memory targetAddresses)
    public
    view
    returns (bool[] memory results)
```

Description

Checks the listing status of multiple addresses in a single call.

Parameters

Name	Type	Description
<code>targetAddresses</code>	<code>address[]</code>	Array of addresses to check.

Returns

Name	Type	Description
<code>results</code>	<code>bool[]</code>	Array of boolean listing results, aligned by index.

Details

Null address

It is possible to add the null address (0x0) to the address list. In a whitelist, this enables mint/burn flows (since `from/to` can be zero). In a blacklist, adding `0x0` blocks mint/burn.

For `RuleWhitelist`, you can also pre-list `0x0` at deployment using the constructor parameter `allowMintBurn=true`.

Duplicate address

addAddress

If the address already exists, the transaction is reverted to save gas.

addAddresses

If one of the addresses already exist, there is no change for this address. The transaction remains valid (no revert).

NonExistent Address

removeAddress

If the address does not exist in the whitelist, the transaction is reverted to save gas.

removeAddresses

If the address does not exist in the whitelist, there is no change for this address. The transaction remains valid (no revert).

IERC7943NonFungibleCompliance

Compliance interface for ERC-721 / ERC-1155-style non-fungible assets. This is implemented by validation rules only. `RuleConditionalTransferLight` and `RuleMaxTotalSupply` are ERC-20 only and do not implement this interface.

For ERC-721, `amount` must always be `1`.

Functions

Name	Description
<code>canTransfer</code>	Verifies whether a transfer is permitted according to the token's compliance rules.

canTransfer

```
function canTransfer(  
    address from,  
    address to,  
    uint256 tokenId,  
    uint256 amount  
) external view returns (bool allowed)
```

Description

Verifies whether a token transfer is permitted according to the rule-based compliance logic.

Details

- Must not modify state.
- May enforce checks such as allowlists, blocklists, freezing, transfer limits, regulatory rules.
- Must return `false` if the transfer is not permitted.

Parameters

Name	Type	Description
<code>from</code>	<code>address</code>	Current token owner.
<code>to</code>	<code>address</code>	Receiving address.
<code>tokenId</code>	<code>uint256</code>	Token ID.
<code>amount</code>	<code>uint256</code>	Transfer amount (always <code>1</code> for ERC-721).

Returns

Name	Type	Description
<code>allowed</code>	<code>bool</code>	<code>true</code> if transfer is allowed; otherwise <code>false</code> .

IERC7943NonFungibleComplianceExtend

Extended compliance interface for ERC-721 / ERC-1155 non-fungible assets. This is implemented by validation rules only. `RuleConditionalTransferLight` and `RuleMaxTotalSupply` are ERC-20 only and do not implement this interface.

Adds restriction-code reporting, spender-aware checks, and a post-transfer hook.

For ERC-721, `amount` / `value` must always be `1`.

Functions

Name	Description
<code>detectTransferRestriction</code>	Returns a restriction code indicating why a transfer is blocked.
<code>detectTransferRestrictionFrom</code>	Returns a restriction code for a spender-initiated transfer.
<code>canTransferFrom</code>	Checks whether a spender-initiated transfer is allowed.
<code>transferred</code>	Notifies the compliance engine that a transfer has occurred.

`detectTransferRestriction`

```
function detectTransferRestriction(  
    address from,  
    address to,  
    uint256 tokenId,  
    uint256 amount  
) external view returns (uint8 code)
```

Description

Returns a restriction code describing whether and why a transfer is blocked.

Details

- Must not modify state.
- Must return `0` when the transfer is allowed.
- Non-zero codes should follow ERC-1404 or similar standards.

Parameters

Name	Type	Description
<code>from</code>	<code>address</code>	Current token holder.
<code>to</code>	<code>address</code>	Receiving address.
<code>tokenId</code>	<code>uint256</code>	Token ID.
<code>amount</code>	<code>uint256</code>	Transfer amount (<code>1</code> for ERC-721).

Returns

Name	Type	Description
<code>code</code>	<code>uint8</code>	<code>0</code> if allowed; otherwise a restriction code.

detectTransferRestrictionFrom

```
function detectTransferRestrictionFrom(  
    address spender,  
    address from,  
    address to,  
    uint256 tokenId,  
    uint256 value  
) external view returns (uint8 code)
```

Description

Returns a restriction code for a transfer initiated by a spender (approved operator or owner).

Details

- Must not modify state.
- Must return `0` when the transfer is permitted.

Parameters

Name	Type	Description
<code>spender</code>	<code>address</code>	Address performing the transfer.
<code>from</code>	<code>address</code>	Current owner.

Name	Type	Description
<code>to</code>	<code>address</code>	Recipient address.
<code>tokenId</code>	<code>uint256</code>	Token ID being checked.
<code>value</code>	<code>uint256</code>	Transfer amount (<code>1</code> for ERC-721).

Returns

Name	Type	Description
<code>code</code>	<code>uint8</code>	<code>0</code> if allowed; otherwise restriction code.

canTransferFrom

```
function canTransferFrom(
    address spender,
    address from,
    address to,
    uint256 tokenId,
    uint256 value
) external view returns (bool allowed)
```

Description

Checks whether a spender-initiated transfer is allowed under the compliance rules.

Details

- Must not modify state.
- Should internally use `detectTransferRestrictionFrom`.

Parameters

Name	Type	Description
<code>spender</code>	<code>address</code>	Address executing the transfer.
<code>from</code>	<code>address</code>	Current owner.
<code>to</code>	<code>address</code>	Recipient.
<code>tokenId</code>	<code>uint256</code>	Token ID.
<code>value</code>	<code>uint256</code>	Transfer amount (<code>1</code> for ERC-721 token).

Returns

Name	Type	Description
<code>allowed</code>	<code>bool</code>	<code>true</code> if transfer is allowed.

transferred

```
function transferred(  
    address spender,  
    address from,  
    address to,  
    uint256 tokenId,  
    uint256 value  
) external
```

Description

Signals to the compliance engine that a transfer has successfully occurred.

Details

- May modify compliance state.
- For stateful rules, should be called by the token contract or RuleEngine after a successful transfer.
- Rules may enforce access control on callers depending on their policy.

Parameters

Name	Type	Description
<code>spender</code>	<code>address</code>	Address executing the transfer.
<code>from</code>	<code>address</code>	Previous owner.
<code>to</code>	<code>address</code>	New owner.
<code>tokenId</code>	<code>uint256</code>	Token transferred.
<code>value</code>	<code>uint256</code>	Transfer amount (<code>1</code> for ERC-721 token).

RuleSanctionsList

Compliance rule enforcing sanctions-screening for token transfers.

Integrates a sanctions-oracle (e.g., Chainalysis) to block transfers when the sender, recipient, or spender is sanctioned.

Constructor

```
constructor(address admin, address forwarderIrrevocable, ISanctionsList  
sanctionContractOracle_)
```

Initializes access control, meta-transaction forwarder, and optionally the sanctions oracle.

setSanctionListOracle

```
function setSanctionListOracle(ISanctionsList sanctionContractOracle_)
    public
    virtual
    onlyRole (SANCTIONLIST_ROLE)
```

Set the sanctions-oracle contract used for transfer-restriction checks.

Parameters

Name	Type	Description
<code>sanctionContractOracle_</code>	<code>ISanctionsList</code>	Address of the sanctions-oracle. Zero address is not allowed; use <code>clearSanctionListOracle</code> .

Description

Updates the sanctions-oracle contract reference.

This function may only be called by accounts granted the `SANCTIONLIST_ROLE`.

Passing the zero address reverts; use `clearSanctionListOracle` to disable checks.

Emits

Event	Description
<code>SetSanctionListOracle(address)</code>	Emitted when the sanctions-oracle address is updated.

RuleMaxTotalSupply

Compliance rule that caps total token supply; only mints (`from == address(0)`) are restricted.

Constructor

```
constructor(address admin, address tokenContract_, uint256 maxTotalSupply_)
```

Initializes access control, the token contract, and the max supply.

setMaxTotalSupply

```
function setMaxTotalSupply(uint256 newMaxTotalSupply)
    public
    virtual
    onlyRole (DEFAULT_ADMIN_ROLE)
```

Updates the configured maximum supply.

setTokenContract

```
function setTokenContract(address tokenContract_)
    public
    virtual
    onlyRole(DEFAULT_ADMIN_ROLE)
```

Sets the token contract used to read `totalSupply()`.

RuleConditionalTransferLight

Operation rule requiring explicit approval before a transfer executes.

bindToken

```
function bindToken(address token)
    public
    onlyRole(COMPLIANCE_MANAGER_ROLE)
```

Binds a token so it may call `transferred()`.

unbindToken

```
function unbindToken(address token)
    public
    onlyRole(COMPLIANCE_MANAGER_ROLE)
```

Revokes the token binding.

approveTransfer

```
function approveTransfer(address from, address to, uint256 value)
    public
    onlyTransferApprover
```

Approves one transfer (consumed on execution).

cancelTransferApproval

```
function cancelTransferApproval(address from, address to, uint256 value)
    public
    onlyTransferApprover
```

Removes one approval for the transfer.

approveAndTransferIfAllowed

```
function approveAndTransferIfAllowed(address from, address to, uint256 value)
    public
    onlyTransferApprover
    returns (bool)
```

Approves then calls `SafeERC20.safeTransferFrom` on the bound token using this rule as spender.

approvedCount

```
function approvedCount(address from, address to, uint256 value)
    public
    view
    returns (uint256)
```

Returns the number of approvals for the transfer hash.

Security

Manual Threat Model & Review (v0.4.0)

The published report is [CLAUDE_AUDIT.md](#) — findings, invariant verification, access-control verification, what was remediated, and the open improvement backlog. It is backed by the working deliverables at the repository root:

Document	Contents
CLAUDE_AUDIT.md	The audit report. Findings, invariant + access-control verification, remediation record, open backlog
THREAT_MODEL.md	Trust model and actors, 30 catalogued threats with IDs, data-flow diagrams, 12 invariants, reachable privileged surface
RESULT.md	Findings, invariant and access-control verification, and an explicit disposition for every threat ID
TEST_IMPROVEMENT.md	Test-gap analysis and the deferred test backlog

Outcome: 0 Critical, 0 High, 0 Medium, 2 Low, 8 Informational. Two hypotheses that would have been High were specifically probed and cleared: an ERC-2771 forwarder cannot impersonate a bound token (the operation rules deliberately do not inherit `ERC2771Context`), and the hand-rolled keccak preimage in `_transferHash` is injective.

ID	Severity	Summary
F-1	Low	<code>RuleIdentityRegistry</code> screens the minter as <code>spender</code> on mint, unlike its three sibling allowlist rules, so issuance halts unless the minter is itself identity-verified. Fail-closed; no bypass
F-4	Low	<code>RuleConditionalTransferLightMultiToken</code> stores approvals under the caller-supplied <code>token</code> but consumes them under <code>msg.sender</code> . Behind a shared <code>RuleEngine</code> this strands token-keyed approvals and collapses per-token isolation

ID	Severity	Summary
F-2, F-3, F-5, F-7, F-8, F-9, F-10, F-14	Info	Max-supply views panic on overflow; <code>approveAndTransferIfAllowed</code> is direct-binding-only; the wrapper does not interface-check child rules; <code>RuleMintAllowance.canTransfer</code> is not authoritative; multi-token <code>detectTransferRestriction</code> depends on <code>msg.sender</code> ; <code>unbindToken</code> leaves stale state; documentation drift

Proofs live in [test/ThreatModel/ThreatModelTests.t.sol](#) (18 tests: 15 unit/integration, 3 fuzz).

Automated Analysis

See the consolidated [Audit & Security-Analysis Overview](#) for the full index and triage. Latest tool outputs (including feedback documents) are in [doc/security/audits/tools/v0.4.0/](#).

Commands used for `v0.4.0` (mocks excluded):

```
slither . --checklist --filter-paths "node_modules,lib,test,forge-std,mocks" \
  > doc/security/audits/tools/v0.4.0/slither-report.md
aderyn -x mocks --output doc/security/audits/tools/v0.4.0/aderyn-report.md
```

Aderyn (v0.4.0)

Static analysis with [Aderyn](#) 0.6.5, re-run **2026-07-14** after the security remediation. Full report and feedback in [doc/security/audits/tools/v0.4.0/](#). **No High/Medium issues; nothing to fix** — all 9 Low findings are by-design or false positives (see [feedback](#)). The run initially reported 10: an `Unused Import` (dead `RuleTransferValidation` import in the two `RuleSpenderWhitelist` deployment files) was a genuine cosmetic defect and has been **fixed**.

ID	Title	Instances	Verdict
L-1	Centralization Risk	68	By design (regulated token issuer model)
L-2	Unspecific Solidity Pragma	63	By design (<code>^0.8.20</code> library; project pins solc 0.8.34)
L-3	Address State Variable Set Without Checks	1	False positive — zero-check enforced at public <code>setSanctionListOracle</code>
L-4	PUSH0 Opcode	64	By design — project targets Prague EVM
L-5	Modifier Invoked Only Once	2	By design — template method pattern
L-6	Empty Block	61	By design — <code>_authorize*()</code> hooks + required interface no-ops

ID	Title	Instances	Verdict
L-7	Loop Contains <code>require/revert</code>	3	By design — recommendation rejected. Batch adds revert on <code>address(0)</code> on purpose: skipping it made the emitted event name the sentinel as a set member
L-8	Costly operations inside loop	7	By design — <code>EnumerableSet</code> requires one <code>SSTORE</code> per element
L-9	Unchecked Return	13	Mixed — majority false positives; constructor <code>_grantRole</code> intentional
—	Unused Import	0	Fixed during this run (was 2)

Slither (v0.4.0)

Static analysis with [Slither](#) 0.11.5, re-run **2026-07-14** after the security remediation (tally unchanged from the previous run). Full report and feedback in [doc/security/audits/tools/v0.4.0/](#). **Nothing to fix** — the two High `arbitrary-send-erc20` hits are false positives (approval-gated, allowance-checked compliance flow); see [feedback](#).

Category	Severity	Instances	Verdict
arbitrary-send-erc20	High	2	False positive — <code>from</code> guarded by <code>onlyTransferApprover</code> , recorded approval, allowance check, bound token (light + multi-token)
unused-return	Medium	6	False positive — existence pre-checked at public layer before internal helper
calls-loop	Low	16	By design — wrapper must query each child rule; child rules are read-only
assembly	Informational	2	By design — memory-safe hash in <code>_transferHash</code> (light + multi-token)
naming-convention	Informational	2	By design — parameter names match ERC-2980 spec
unused-state	Informational	8	False positive — <code>RuleNFTAdapter</code> constants used in base dispatch (per-contract analysis limitation)

Aderyn (v0.3.0)

Static analysis was performed with [Aderyn](#). The full report and the project team's feedback are available in [doc/security/audits/tools/v0.3.0/](#).

ID	Title	Instances	Verdict
----	-------	-----------	---------

ID	Title	Instances	Verdict
L-1	Centralization Risk	46	Acknowledged — by design (regulated token issuer model)
L-2	Unspecific Solidity Pragma	54	Acknowledged — intentional for a library
L-3	Address State Variable Set Without Checks	1	False positive — check enforced in public-facing function
L-4	PUSH0 Opcode	54	Acknowledged — project targets Prague EVM
L-5	Modifier Invoked Only Once	2	Acknowledged — template method pattern; inlining would break abstraction
L-6	Empty Block	38	Acknowledged — <code>_authorize*()</code> hooks use modifiers; intentional no-op implementations in required interface paths
L-7	Costly operations inside loop	6	Acknowledged — unavoidable (<code>EnumerableSet</code> requires one <code>SSTORE</code> per element)
L-8	Unchecked Return	13	Mixed — mostly false positives (<code>void</code> helpers or pre-checked single-item paths); constructor <code>_grantRole</code> intentionally ignored

No high-severity issues were reported.

Slither (v0.3.0)

Static analysis was performed with [Slither](#). The full report and the project team's feedback are available in <doc/security/audits/tools/v0.3.0/>.

Category	Severity	Instances	Verdict
arbitrary-send-erc20	High	1	False positive — <code>from</code> is guarded by <code>onlyTransferApprover</code> , ERC-20 allowance check, and a pre-recorded approval
unused-return	Medium	6	False positive — existence pre-checked at public layer before calling internal helper
calls-loop	Low	16	Acknowledged — by design; wrapper must query each child rule; child rules are read-only
assembly	Informational	1	Acknowledged — intentional gas optimisation in <code>_transferHash</code> ; minimal and well-scoped

Category	Severity	Instances	Verdict
naming-convention	Informational	2	Acknowledged — parameter names match ERC-2980 spec
unindexed-event-address	Informational	2	Out of scope (both in <code>lib/RuleEngine</code>); <code>IAddressList</code> events previously fixed
unused-state	Informational	8	False positive — <code>RuleNFTAdapter</code> constants used in base dispatch logic; Slither per-contract analysis limitation

Wake Arena (v0.2.0)

AI-assisted static analysis was performed with [Wake Arena](#) by Ackee Blockchain Security. The full report and the project team's feedback are available in [doc/security/audits/tools/v0.2.0/](#).

Ackee Blockchain Security, Wake Arena AI Report | CMTA: Rules, March 16, 2026 18:00 UTC.

ID	Title	Severity	Confidence	Verdict
H-1	ConditionalTransferLight approvals not scoped by token	High	High	Fixed — single-token binding enforced in <code>bindToken</code> ; <code>RuleConditionalTransferLight_TokenAlreadyBound</code> error added
M-1	Incomplete <code>supportsInterface</code> breaks ERC-165 discovery	Medium	High	Fixed — pre-computed constants + <code>IERC7551Compliance</code> + full ERC-3643 <code>ICompliance</code> ID (<code>IERC3643ComplianceFull</code> , <code>0x3144991c</code>) added
I-1	RuleERC2980 docs omit frozen spender on <code>transferFrom</code>	Informational	High	Fixed (doc only) — README, <code>AGENTS.md</code> , and <code>CLAUDE.md</code> updated to document spender freeze path
I-2	<code>hasRole</code> override: admin implicitly passes all role checks	Informational	High	Fixed (doc only) — dedicated section added to README documenting intentional design and off-chain monitoring guidance

Intellectual property

The code is copyright (c) Capital Market and Technology Association, 2022-2026, and is released under [Mozilla Public License 2.0](#).