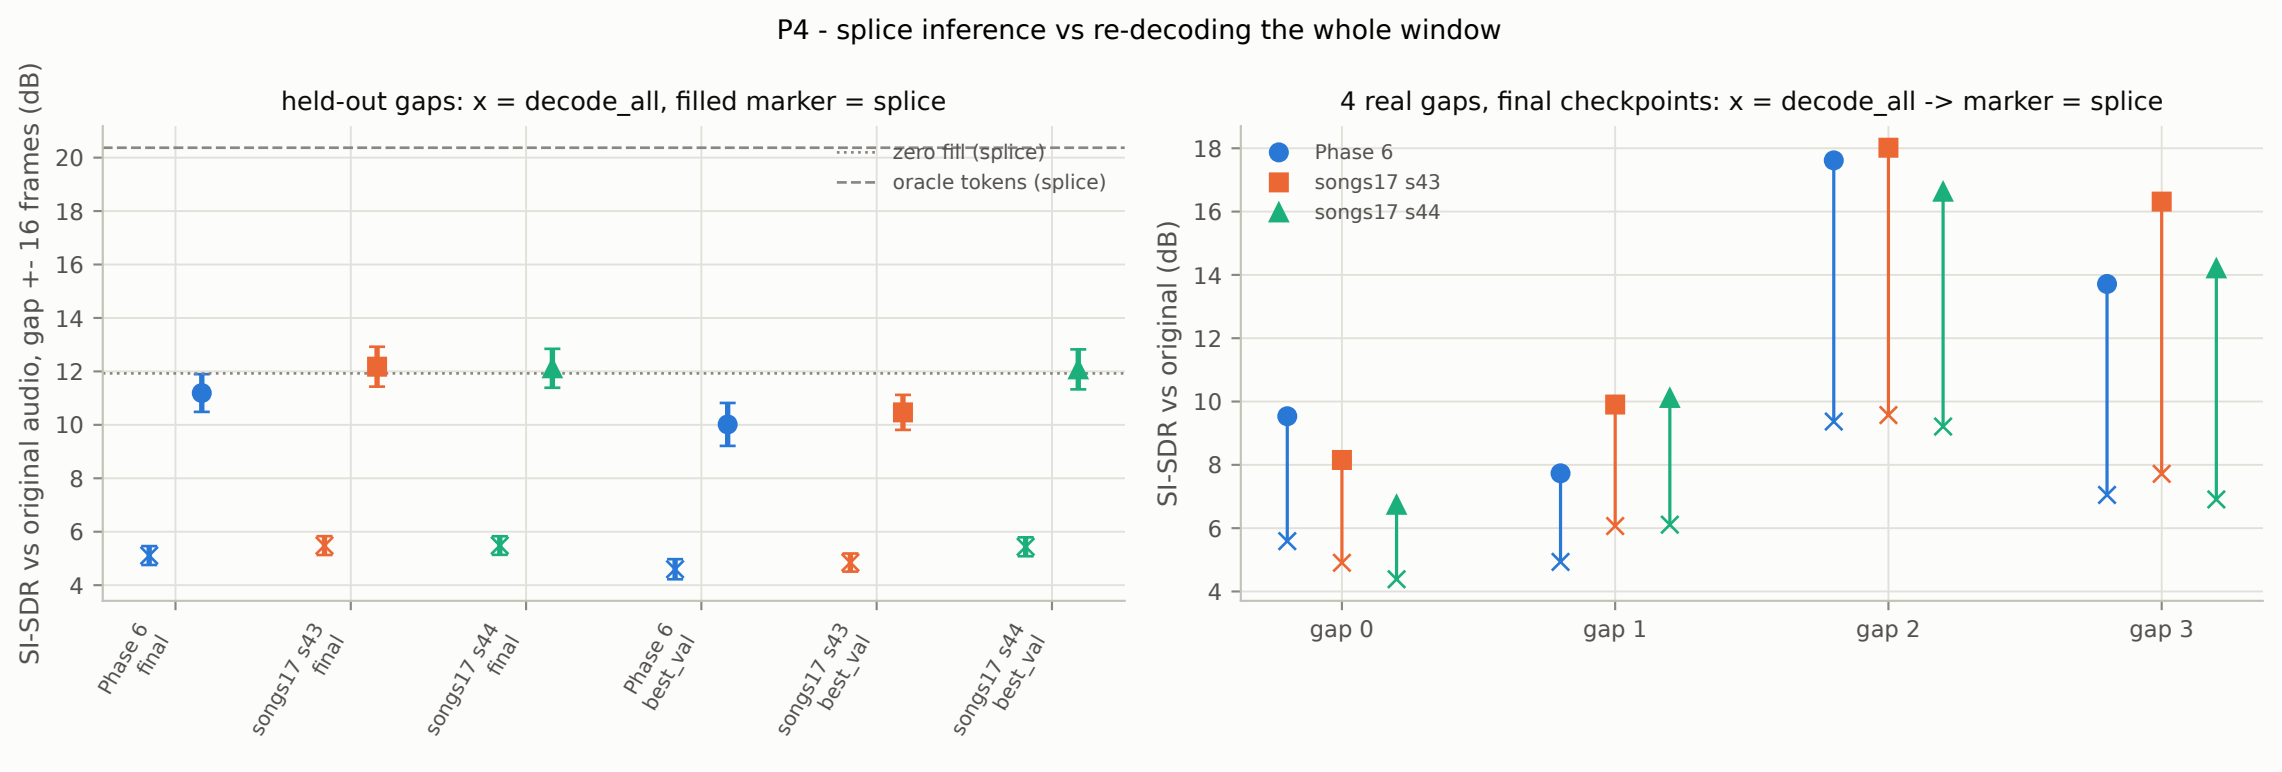
P4 - splice inference vs re-decoding the whole window
held-out gaps: x = decode_all, filled marker = splice
SI-SDR vs original audio, gap +- 16 frames (dB)
zero fill (splice)
oracle tokens (splice)
Phase 6 final
songs17 s43 final
songs17 s44 final
Phase 6 best_val
songs17 s43 best_val
songs17 s44 best_val
4 real gaps, final checkpoints: x = decode_all -> marker = splice
SI-SDR vs original (dB)
Phase 6
songs17 s43
songs17 s44
gap 0
gap 1
gap 2
gap 3