




```
<template lang="pug">
  .content-wrapper
    .-hidden-content(:class='hiddenContentClass')
      p.text
        slot
    button.read-more(v-on:click='show = !show')
      .read-more__icon(:class='toggleButtonClass')
      | {{ readMoreText }}
</template>
```

```
<script>
export default {
 name: 'CollapsibleContent',
 data() {
    return {
     show: false,
  computed: {
    hiddenContentClass: function(){
      return this.show ? '-is-open' : '-is-collapsed';
    toggleButtonClass: function(){
      return this.show ? 'read-more__icon--is-open' : 'read-more__icon--is-collapsed';
    readMoreText() {
      return this show ? 'Show less' : 'Show more';
</script>
```

## COLLAPSIBLE CONTENT COMPONENT

```
.read-more__icon {
 width: 18px;
 height: 18px;
 border-radius: 50%;
 border: 2px solid $primary-color;
 position: relative;
 &::before,
 &::after {
   transition: all .5s cubic-bezier(.68, -.55, .27, 1.55);
   width: 10px;
   height: 2px;
   background: $primary-color;
   content: ' ';
    left: 2px;
   top: 6px;
   position: absolute;
 &--is-collapsed::before { transform: rotate(270deg); }
 &--is-collapsed::after { transform: rotate(180deg); }
```

⊕ Show more

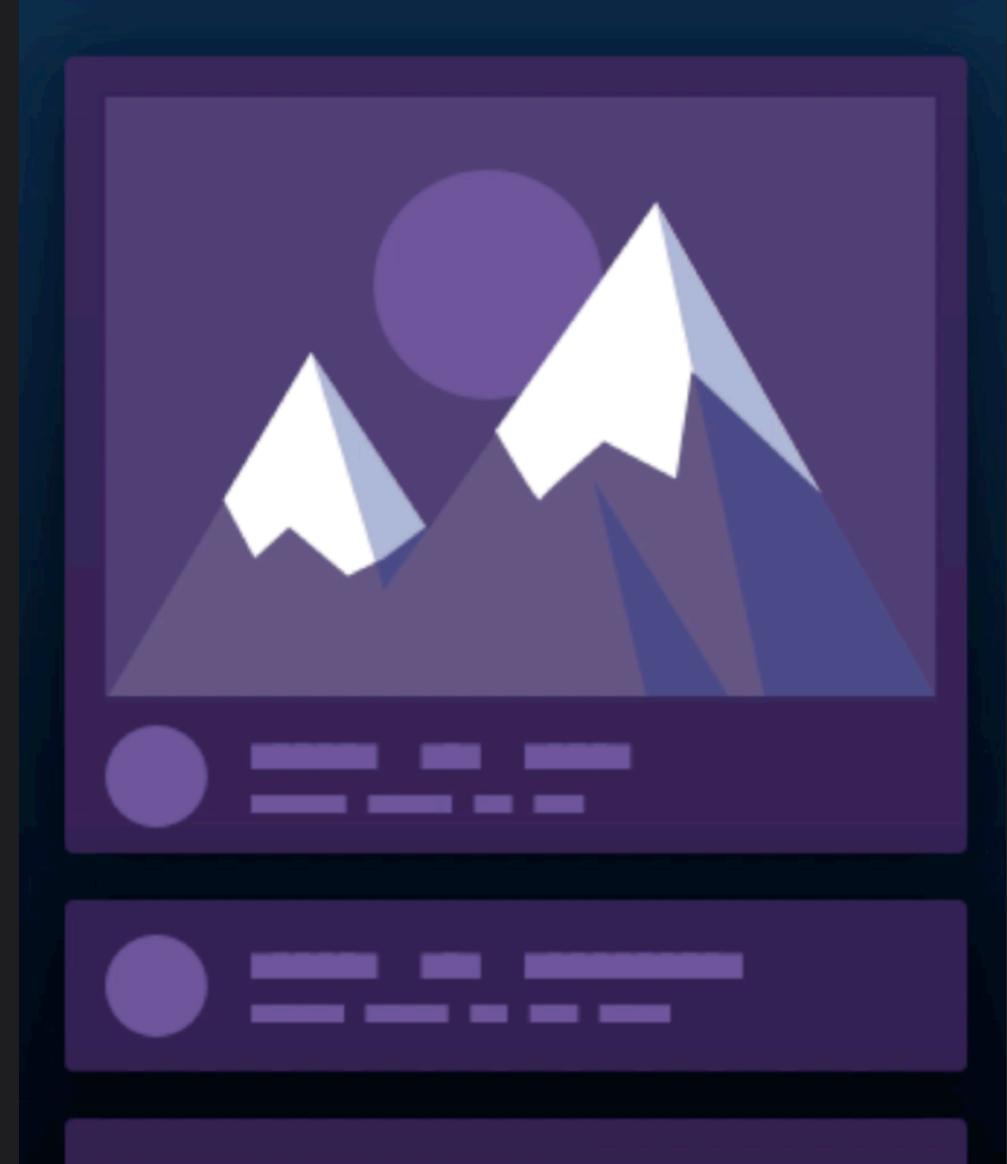

## COLLAPSIBLE CONTENT COMPONENT

```
<script>
export default {
  name: 'CollapsibleContent',
 data() {
    return {
     show: false,
  computed: {
   hiddenContentClass: function(){
     return this show ? '-is-open' : '-is-collapsed';
   toggleButtonClass: function(){
      return this show ? 'read-more__icon--is-open' : 'read-more__icon--is-collapsed';
    readMoreText() {
     return this show ? 'Show less' : 'Show more';
</script>
```