

Scripting your Mac setup 🖥️⚡

👉 <https://github.com/josh-/dotfiles>

# Dotfiles

`gitignore`  
`vimrm`  
`zshrc`

# Brewfile

- Automate Homebrew dependencies

# Example Brewfile

```
tap 'homebrew/cask-fonts'
```

```
brew 'youtube-dl'
```

```
cask 'font-hack'
```


```
mas 'Xcode', id: 497799835
```

```
$ brew bundle
```

```
.dotfiles — josh@Josh-MacBook-Pro-2 — ~/.dotfiles — -zsh — 81x28
Using ruby
Using x264
Using xmlstarlet
Installing youtube-dl
Using dotnet-sdk
Using dotnet
Using font-fira-code
Using font-hack
Using font-source-code-pro
Using qlmarkdown
Installing qlscpt
Using qlstephen
Using quicklook-csv
Using quicklook-json
Using suspicious-package
Using 1Blocker
Using The Unarchiver
Using Pixelmator
Using Tweetbot
Using Xcode
Using ForkLift
Using Souver
Using GrandPerspective
Using Marked
Using GIF Brewery 3
Using Sip
Homebrew Bundle complete! 41 Brewfile dependencies now installed.
[~/dotfiles][master]
```

# Preferences

Adapted from Mathias Bynens' .macos script

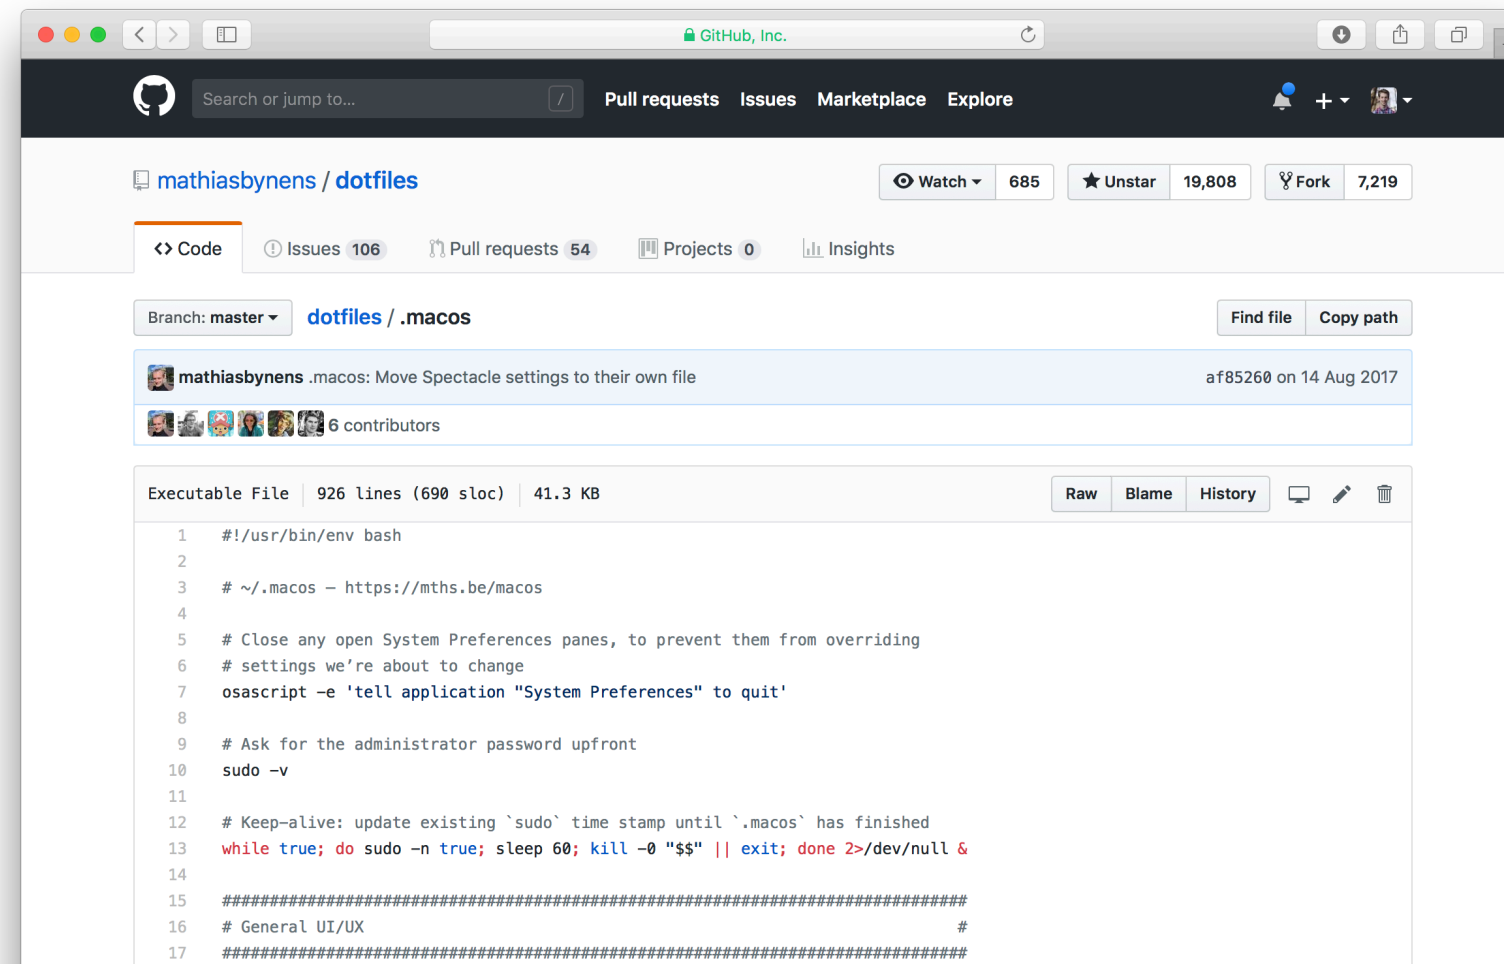

mathiasbynens / dotfiles

Watch 685 Unstar 19,808 Fork 7,219

Code Issues 106 Pull requests 54 Projects 0 Insights

Branch: master dotfiles / .macos Find file Copy path

mathiasbynens .macos: Move Spectacle settings to their own file af85260 on 14 Aug 2017

6 contributors

Executable File 926 lines (690 sloc) 41.3 KB Raw Blame History

```
1  #!/usr/bin/env bash
2
3  # ~/.macos - https://mths.be/macos
4
5  # Close any open System Preferences panes, to prevent them from overriding
6  # settings we're about to change
7  osascript -e 'tell application "System Preferences" to quit'
8
9  # Ask for the administrator password upfront
10 sudo -v
11
12 # Keep-alive: update existing `sudo` time stamp until `.macos` has finished
13 while true; do sudo -n true; sleep 60; kill -0 "$$" || exit; done 2>/dev/null &
14
15 #####
16 # General UI/UX
17 #####
```



# Preferences

# Menu bar: show battery percentage

```
defaults write com.apple.menuextra.battery ShowPercent -string "YES"
```

# Menu bar: disable transparency

```
defaults write NSGlobalDomain AppleEnableMenuBarTransparency -bool false
```

# Preferences

# Finder: show hidden files by default

```
defaults write com.apple.Finder AppleShowAllFiles -bool true
```

# Finder: show path bar

```
defaults write com.apple.finder ShowPathbar -bool true
```

# Avoid creating .DS\_Store files on network or USB volumes

```
defaults write com.apple.desktopservices DSDontWriteNetworkStores -bool true
```

```
defaults write com.apple.desktopservices DSDontWriteUSBStores -bool true
```

# Preferences

```
# Set double-click to stage file instead of opening in editor
defaults write com.torusknot.SourceTreeNotMAS fileDoubleClickBehaviour -int 1

# Set file filter status to sort by path alphabetically
defaults write com.torusknot.SourceTreeNotMAS fileStatusFilterMode -int 1

# Set staging view to split view
defaults write com.torusknot.SourceTreeNotMAS fileStatusStagingViewMode -int 1

# Disable tips
defaults write com.torusknot.SourceTreeNotMAS showStagingTip -bool false
defaults write com.torusknot.SourceTreeNotMAS showToolbarTip -bool false
```

# Preferences

```
# Enable the "Do Not Disturb On/Off" keyboard shortcut
defaults write com.apple.symbolichotkeys.plist AppleSymbolicHotKeys -dict-add 175 "{
    enabled = 0;
    value = {
        parameters = (
            65535,
            53,
            262144
        );
        type = standard;
    };
}"
```

🤔 How do I find these preferences?

```
$ defaults read > before.txt
```


*Do the things*

```
$ defaults read > after.txt
```

Diff & commit!

# 🤔 How do I find these preferences?

Credit to [@FiloSottile](#):

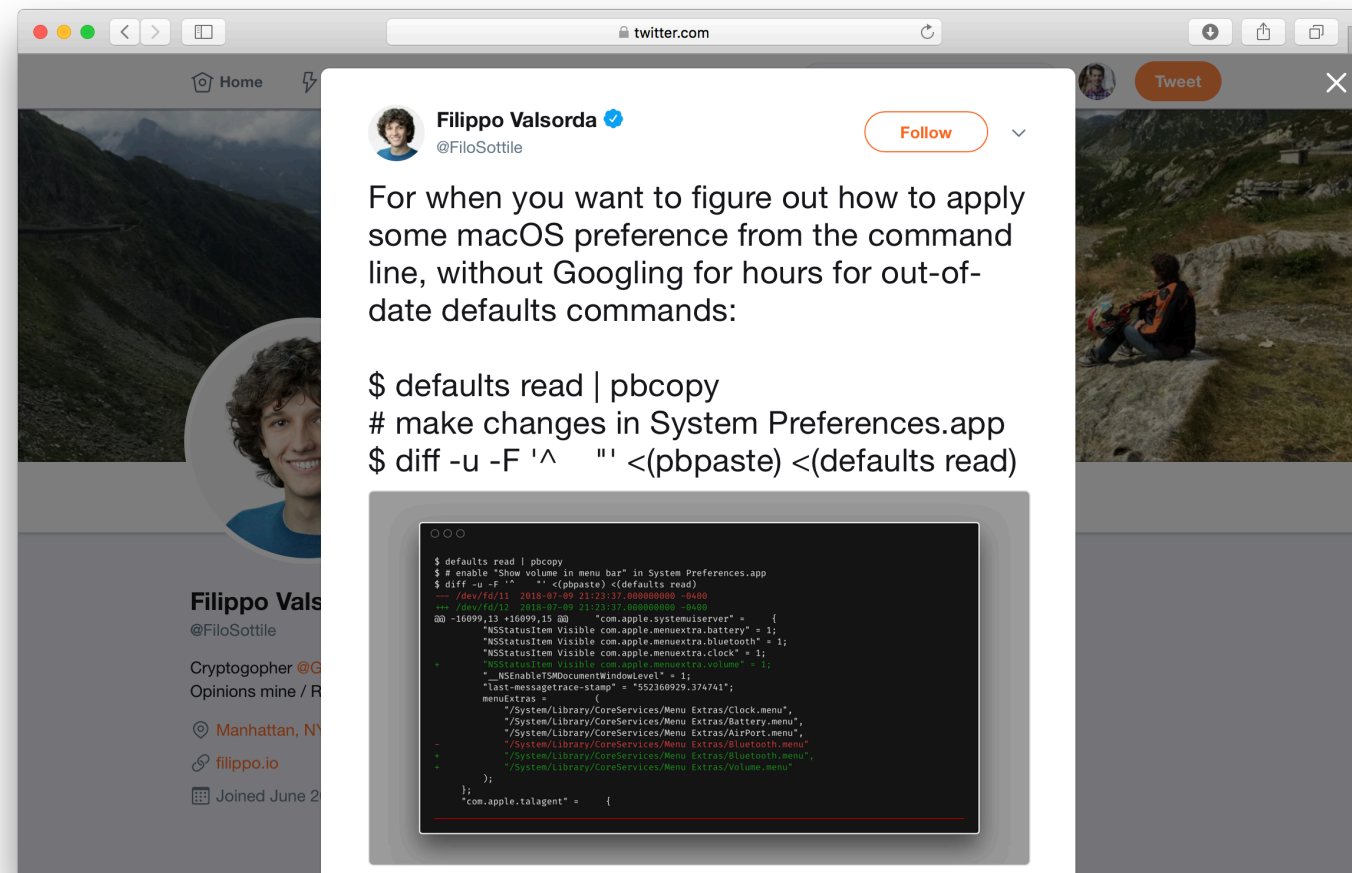

Thanks 🙌

@joshparnham

github.com/josh-