


com.mysql.jdbc.Connection.is
ServerLocal

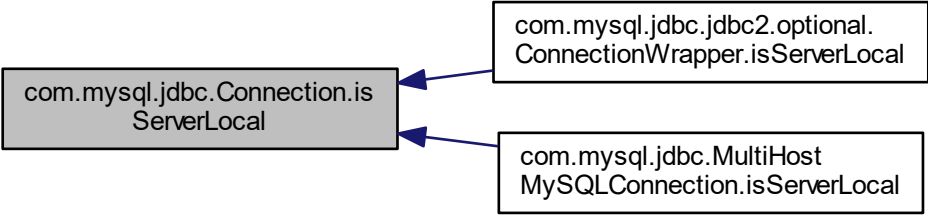

```
graph RL; A[com.mysql.jdbc.jdbc2.optional.ConnectionWrapper.isServerLocal] --> C[com.mysql.jdbc.Connection.isServerLocal]; B[com.mysql.jdbc.MultiHostMySQLConnection.isServerLocal] --> C;
```

The diagram illustrates the inheritance of the `isServerLocal` method in the `com.mysql.jdbc` package. A central box on the left, representing the base class `com.mysql.jdbc.Connection`, is shaded gray. Two boxes on the right represent subclasses: `com.mysql.jdbc.jdbc2.optional.ConnectionWrapper` (top) and `com.mysql.jdbc.MultiHostMySQLConnection` (bottom). Blue arrows point from each subclass box to the base class box, indicating that both subclasses inherit the `isServerLocal` method from the base class.

com.mysql.jdbc.jdbc2.optional.
ConnectionWrapper.isServerLocal

com.mysql.jdbc.MultiHost
MySQLConnection.isServerLocal