


testsuite.simple.StringUtils
Test.testQuoteUnQuoteIdentifier
WithBackQuote

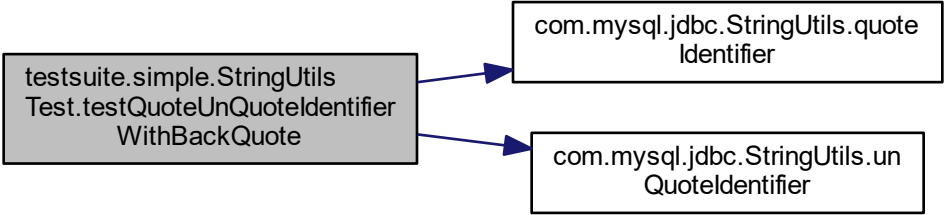

```
graph LR; A[testsuite.simple.StringUtils  
Test.testQuoteUnQuoteIdentifier  
WithBackQuote] --> B[com.mysql.jdbc.StringUtils.quoteIdentifier]; A --> C[com.mysql.jdbc.StringUtils.unQuoteIdentifier];
```

The diagram consists of three rectangular boxes. The leftmost box is shaded gray and contains the text 'testsuite.simple.StringUtils', 'Test.testQuoteUnQuoteIdentifier', and 'WithBackQuote'. Two blue arrows originate from the right side of this box. The top arrow points to the top-right box, which is white and contains 'com.mysql.jdbc.StringUtils.quoteIdentifier'. The bottom arrow points to the bottom-right box, which is also white and contains 'com.mysql.jdbc.StringUtils.unQuoteIdentifier'.

com.mysql.jdbc.StringUtils.quote
Identifier

com.mysql.jdbc.StringUtils.un
QuoteIdentifier