


com.mysql.jdbc.Connection
Properties.getDynamicCalendars

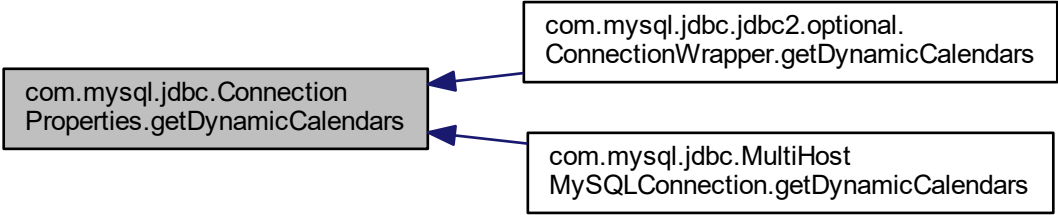

```
graph LR; A["com.mysql.jdbc.jdbc2.optional.ConnectionWrapper.getDynamicCalendars"] --> C["com.mysql.jdbc.ConnectionProperties.getDynamicCalendars"]; B["com.mysql.jdbc.MultiHostMySQLConnection.getDynamicCalendars"] --> C;
```

The diagram illustrates the inheritance of the `getDynamicCalendars` method. A central box on the left, representing the base class `com.mysql.jdbc.ConnectionProperties`, is shaded gray. Two boxes on the right represent subclasses: `com.mysql.jdbc.jdbc2.optional.ConnectionWrapper` (top) and `com.mysql.jdbc.MultiHostMySQLConnection` (bottom). Blue arrows point from each subclass box to the base class box, indicating that both subclasses inherit the `getDynamicCalendars` method from the base class.

com.mysql.jdbc.jdbc2.optional.
ConnectionWrapper.getDynamicCalendars

com.mysql.jdbc.MultiHost
MySQLConnection.getDynamicCalendars