

Implement Playwright with TypeScript

Before implementation:

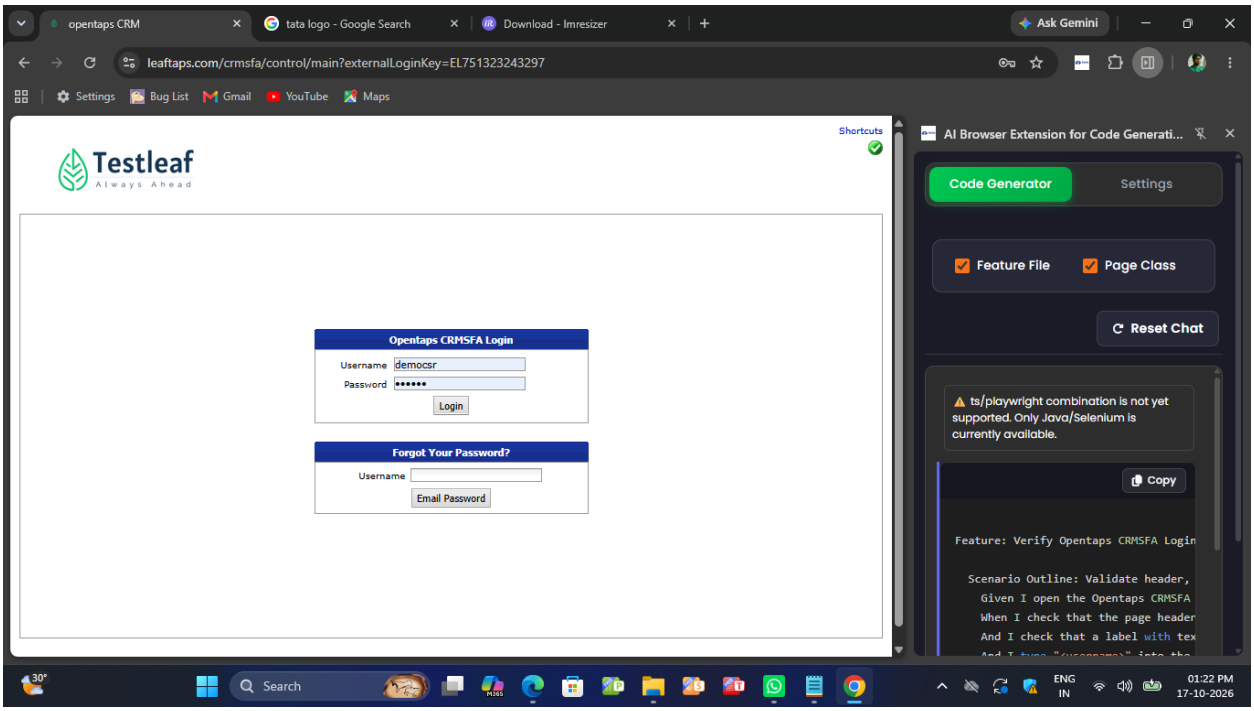


Steps followed:


1.

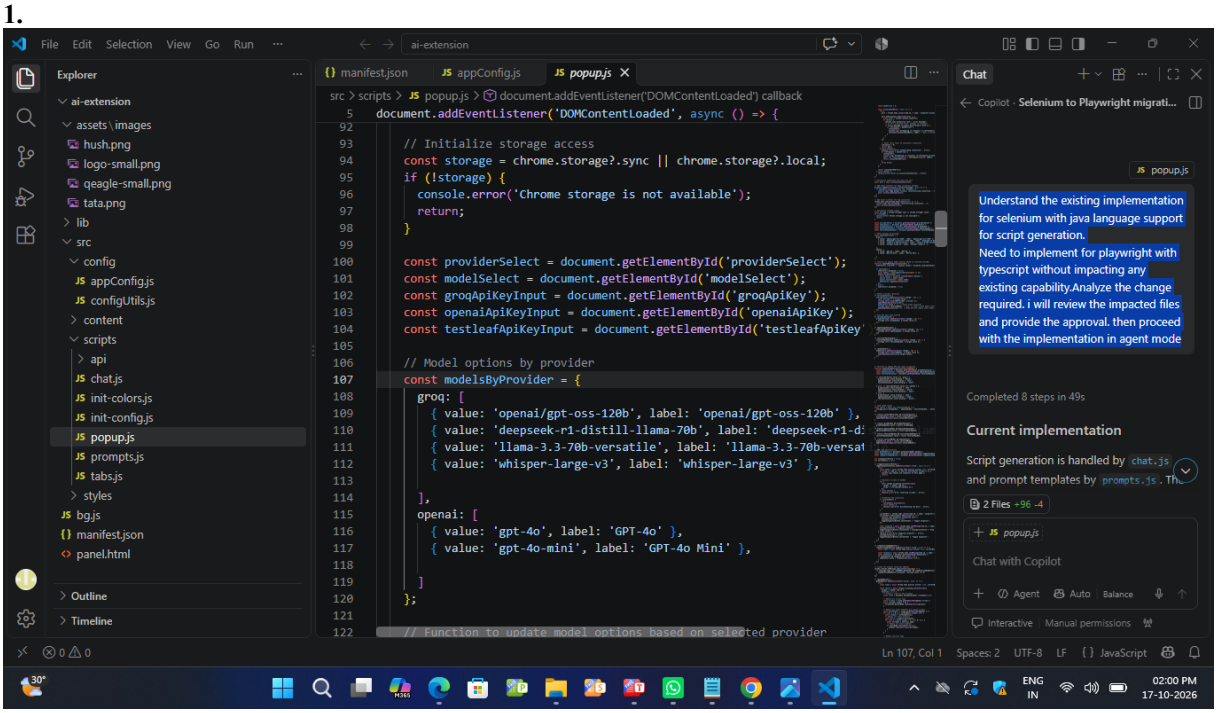

2.

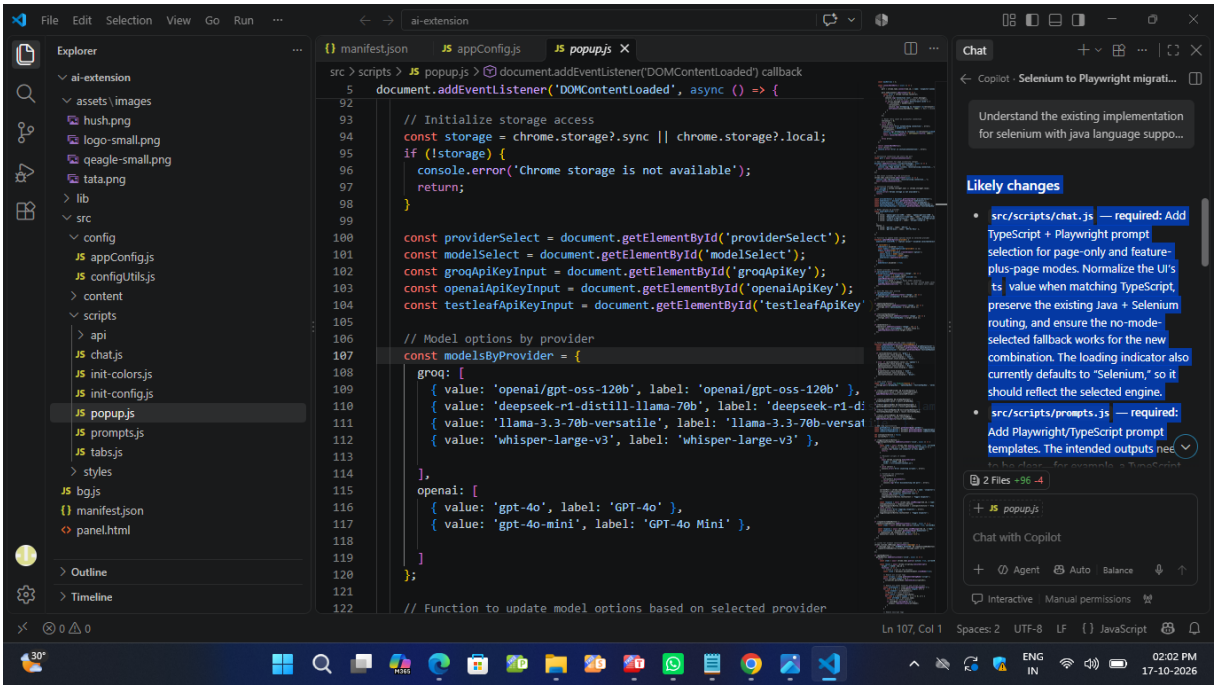
File Edit Selection View Go Run
ai-extension
Explorer
ai-extension
assets\images
hush.png
logo-small.png
qeagle-small.png
tata.png
lib
src
config
appConfig.js
configUtils.js
content
scripts
api
chat.js
init-colors.js
init-config.js
popup.js
prompts.js
tabs.js
styles
bg.js
manifest.json
panel.html
Outline
Timeline
manifest.json
appConfig.js
popup.js
src > scripts > popup.js > document.addEventListener('DOMContentLoaded') callback
document.addEventListener('DOMContentLoaded', async () => {
// Initialize storage access
const storage = chrome.storage?.sync || chrome.storage?.local;
if (!storage) {
console.error('Chrome storage is not available');
return;
}
const providerSelect = document.getElementById('providerSelect');
const modelSelect = document.getElementById('modelSelect');
const groqApiKeyInput = document.getElementById('groqApiKey');
const openaiApiKeyInput = document.getElementById('openaiApiKey');
const testleafApiKeyInput = document.getElementById('testleafApiKey'
// Model options by provider
const modelsByProvider = {
groq: [
{ value: 'openai/gpt-oss-120b', label: 'openai/gpt-oss-120b' },
{ value: 'deepseek-r1-distill-llama-70b', label: 'deepseek-r1-d
{ value: 'llama-3.3-70b-versatile', label: 'llama-3.3-70b-versat
{ value: 'whisper-large-v3', label: 'whisper-large-v3' },
],
openai: [
{ value: 'gpt-4o', label: 'GPT-4o' },
{ value: 'gpt-4o-mini', label: 'GPT-4o Mini' },
]
};
// Function to update model options based on selected provider
Ln 107, Col 1 Spaces: 2 UTF-8 LF JavaScript
Chat
Copilot · Selenium to Playwright migrati...
Understand the existing implementation for selenium with java language suppo...
Likely changes
src/scripts/chat.js — required: Add TypeScript + Playwright prompt selection for page-only and feature-plus-page modes. Normalize the UI's ts value when matching TypeScript, preserve the existing Java + Selenium routing, and ensure the no-mode-selected fallback works for the new combination. The loading indicator also currently defaults to "Selenium," so it should reflect the selected engine.
src/scripts/prompts.js — required: Add Playwright/TypeScript prompt templates. The intended outputs nee
2 Files +96 -4
popup.js
Chat with Copilot
Agent Auto Balance
Interactive Manual permissions
ENG IN
02:02 PM 17-10-2026

3.

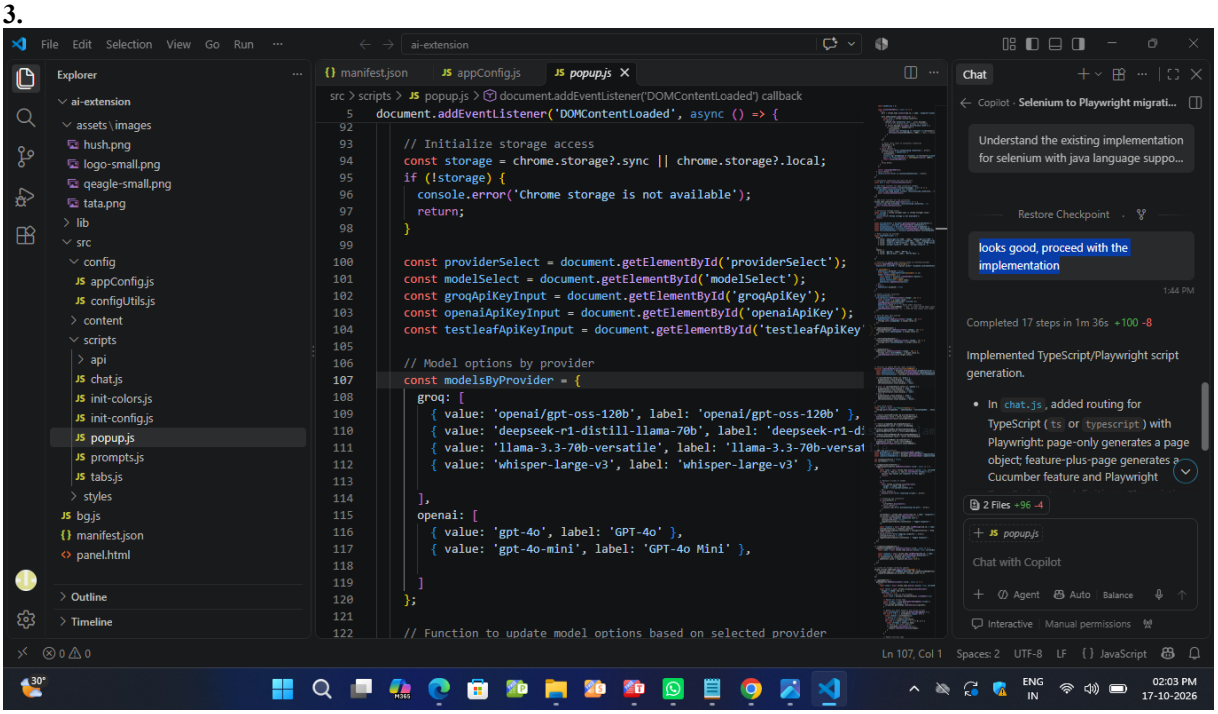
File Edit Selection View Go Run
ai-extension
Explorer
ai-extension
assets\images
hush.png
logo-small.png
qeagle-small.png
tata.png
lib
src
config
appConfig.js
configUtils.js
content
scripts
api
chat.js
init-colors.js
init-config.js
popup.js
prompts.js
tabs.js
styles
bg.js
manifest.json
panel.html
Outline
Timeline
manifest.json
appConfig.js
popup.js
src > scripts > popup.js > document.addEventListener('DOMContentLoaded') callback
document.addEventListener('DOMContentLoaded', async () => {
// Initialize storage access
const storage = chrome.storage?.sync || chrome.storage?.local;
if (!storage) {
console.error('Chrome storage is not available');
return;
}
const providerSelect = document.getElementById('providerSelect');
const modelSelect = document.getElementById('modelSelect');
const groqApiKeyInput = document.getElementById('groqApiKey');
const openaiApiKeyInput = document.getElementById('openaiApiKey');
const testleafApiKeyInput = document.getElementById('testleafApiKey'
// Model options by provider
const modelsByProvider = {
groq: [
{ value: 'openai/gpt-oss-120b', label: 'openai/gpt-oss-120b' },
{ value: 'deepseek-r1-distill-llama-70b', label: 'deepseek-r1-d
{ value: 'llama-3.3-70b-versatile', label: 'llama-3.3-70b-versat
{ value: 'whisper-large-v3', label: 'whisper-large-v3' },
],
openai: [
{ value: 'gpt-4o', label: 'GPT-4o' },
{ value: 'gpt-4o-mini', label: 'GPT-4o Mini' },
]
};
// Function to update model options based on selected provider
Ln 107, Col 1 Spaces: 2 UTF-8 LF JavaScript
Chat
Copilot · Selenium to Playwright migrati...
Understand the existing implementation for selenium with java language suppo...
Restore Checkpoint
looks good, proceed with the implementation
1:44 PM
Completed 17 steps in 1m 36s +100 -8
Implemented TypeScript/Playwright script generation.
In chat.js, added routing for TypeScript (ts or typescript) with Playwright: page-only generates a page object; feature-plus-page generates a Cucumber feature and Playwright
2 Files +96 -4
popup.js
Chat with Copilot
Agent Auto Balance
Interactive Manual permissions
ENG IN
02:03 PM 17-10-2026

After implementation:

