

ROME



```
graph LR; ROME[ROME] --> BucketA((Bucket "A"));
```

keys: [1,2,3,4]

{class: "A", id:1}


{class: "A", id:2}

{class: "A", id:3}

{class: "A", id:4}

Bucket "A"

## 1) Grab the Keys of Buckets A

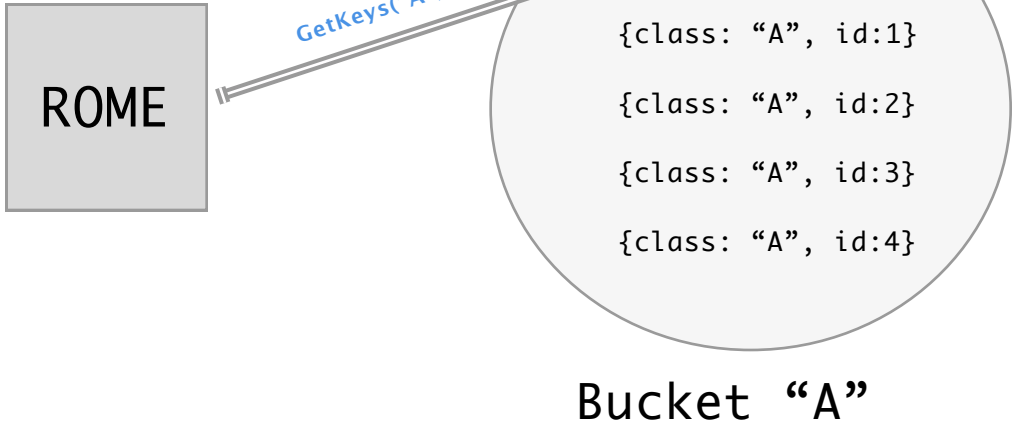

## 2) Get the objects sequentially

