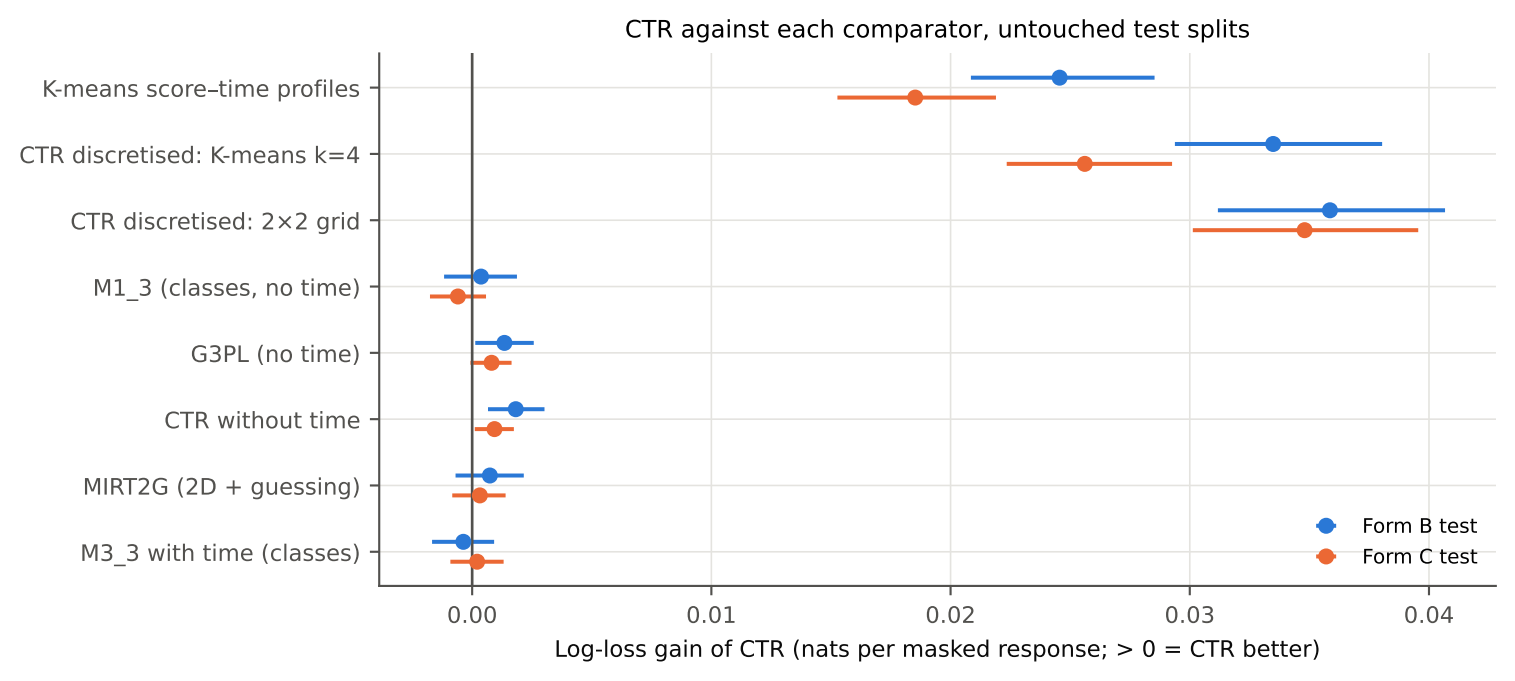
CTR against each comparator, untouched test splits
K-means score–time profiles
CTR discretised: K-means k=4
CTR discretised: 2×2 grid
M1_3 (classes, no time)
G3PL (no time)
CTR without time
MIRT2G (2D + guessing)
M3_3 with time (classes)
Form B test
Form C test
0.00
0.01
0.02
0.03
0.04
Log-loss gain of CTR (nats per masked response; > 0 = CTR better)