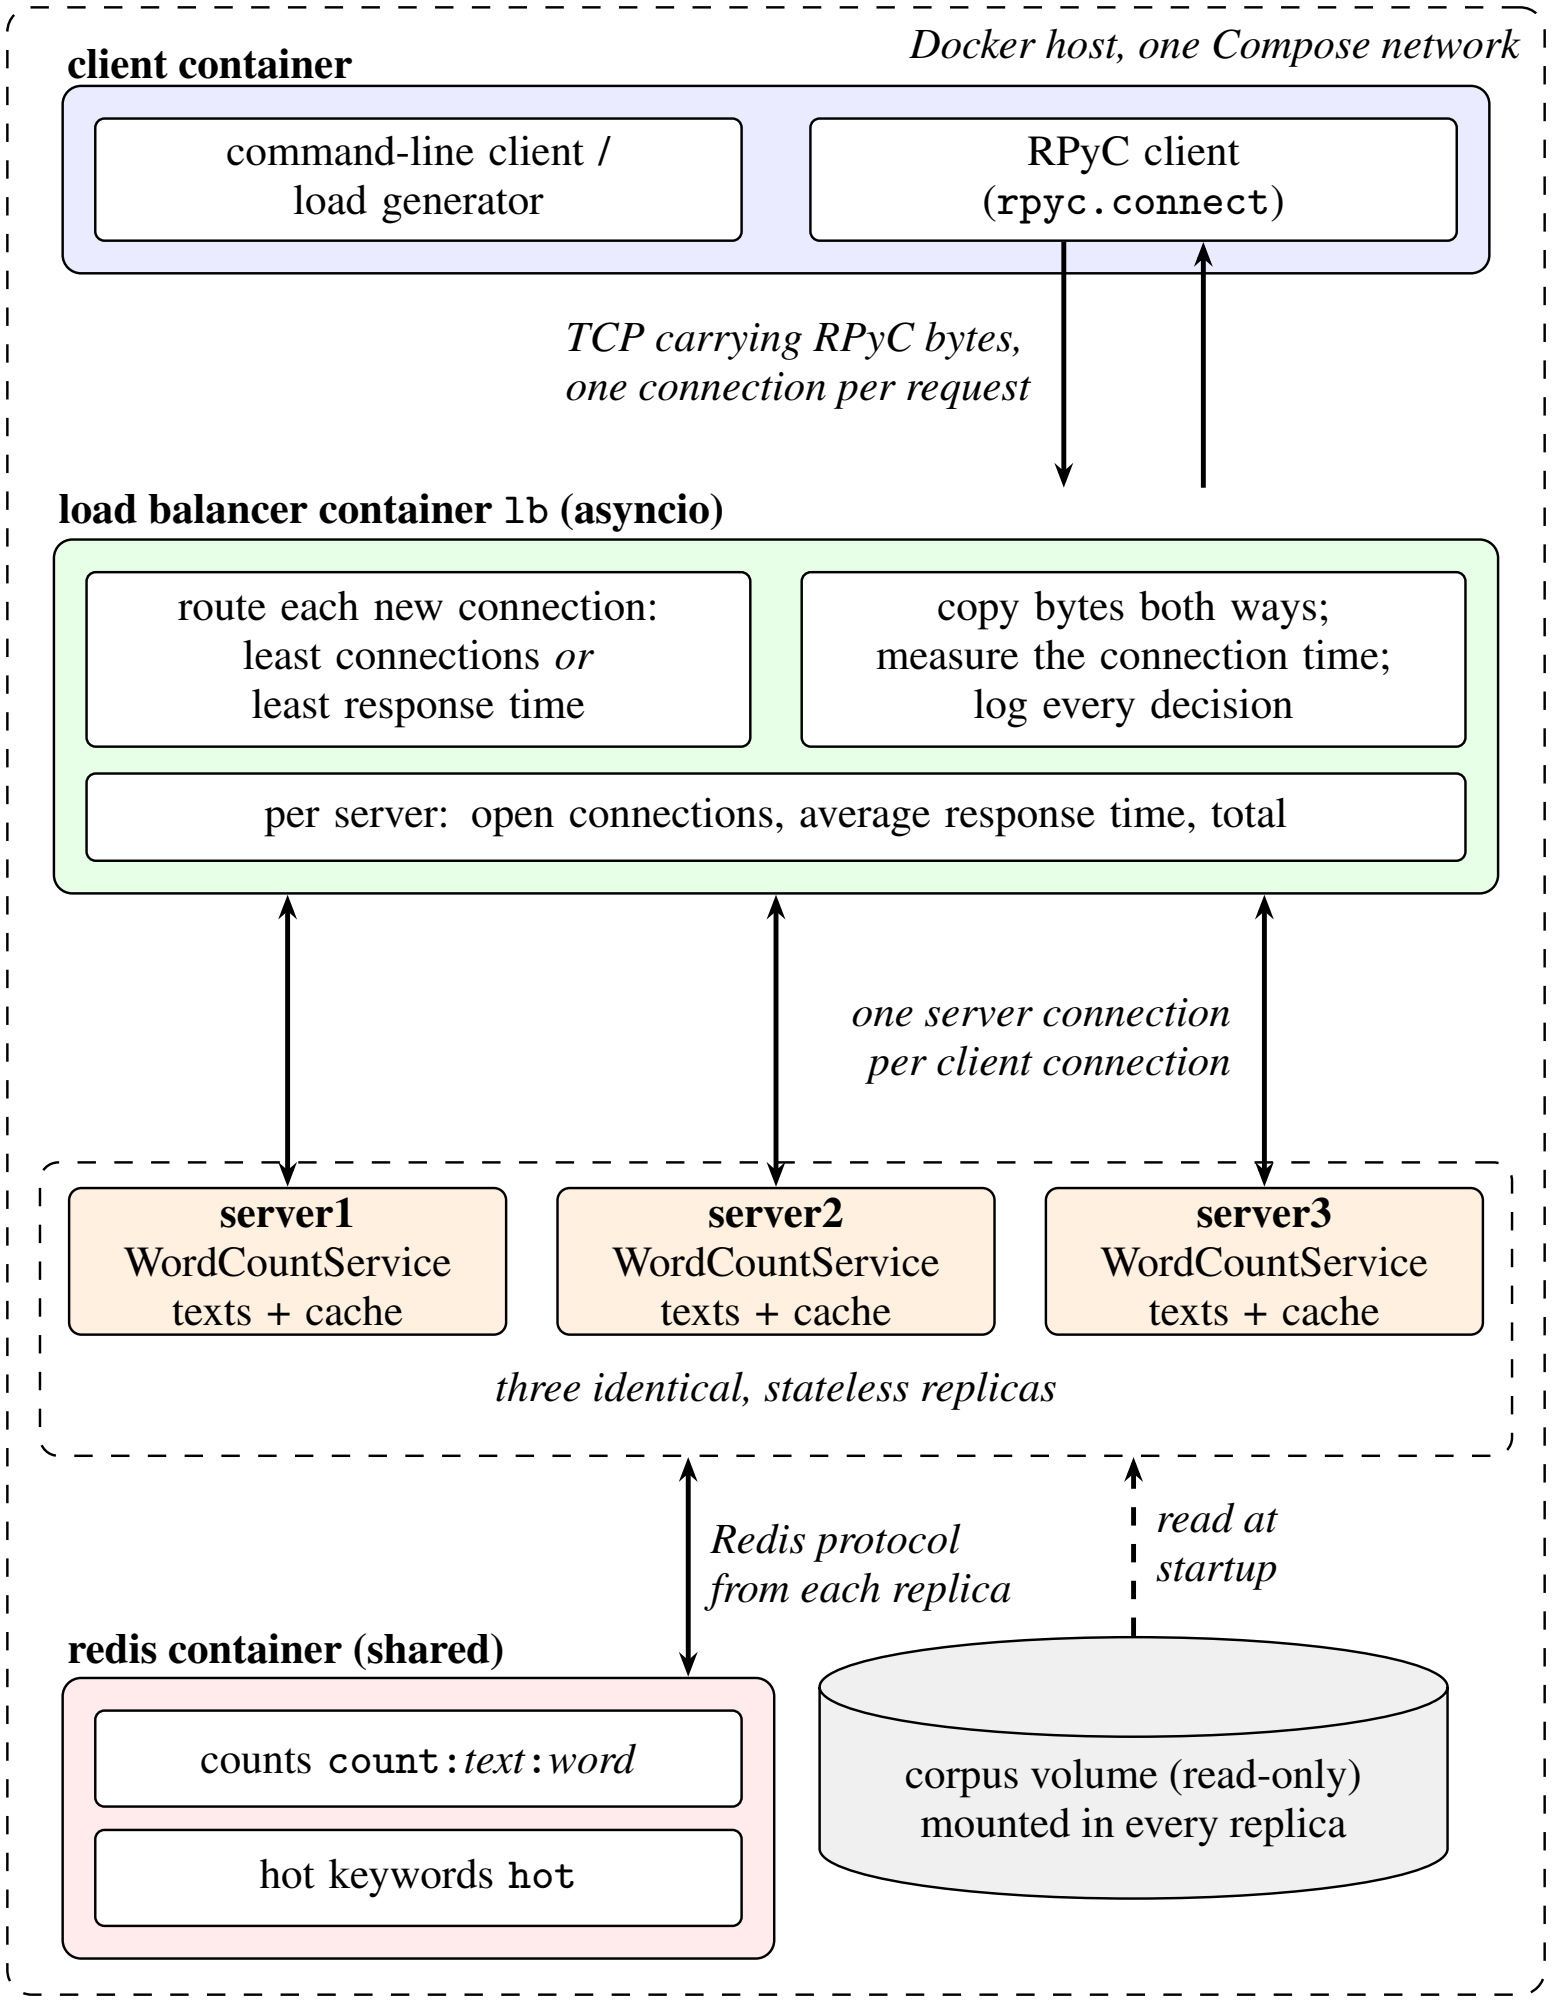
Docker host, one Compose network
client container
command-line client / load generator
RPyC client (rpyc.connect)
TCP carrying RPyC bytes, one connection per request
load balancer container lb (asyncio)
route each new connection: least connections or least response time
copy bytes both ways; measure the connection time; log every decision
per server: open connections, average response time, total
one server connection per client connection
server1 WordCountService texts + cache
server2 WordCountService texts + cache
server3 WordCountService texts + cache
three identical, stateless replicas
Redis protocol from each replica
read at startup
redis container (shared)
counts count:text:word
hot keywords hot
corpus volume (read-only) mounted in every replica