

1. Recap
○○○○

2. Basic Operators
○○○○○○○○○○

3. Branching
○○

4. Objects
○○○○

5. Basic Functions
○○○○○

KOLT Python

Basic Operators, Intro to Branching & Simple Functions

Ceren Kocaoğullar

Tuesday 4th February, 2020



**KOÇ
UNIVERSITY**

OFFICE OF LEARNING AND TEACHING



1. Recap
○○○○

2. Basic Operators
○○○○○○○○○○

3. Branching
○○

4. Objects
○○○○

5. Basic Functions
○○○○○

Agenda

1. Recap

2. Basic Operators

3. Branching

4. Objects

5. Basic Functions



Comments

```
# Single line comments start with a '#'
```

```
"""
```

```
Multiline comments can be written between  
three "s and are often used as function  
and module comments.
```

```
"""
```

```
print('Hello, stranger!')
```

Python will basically ignore comments, they are purely written **for humans!**

Variables

Type	Explanation	Examples
int	represent integers	3, 4, 17, -10
float	represent real numbers	3.0, 1.11, -109.123123
bool	represent boolean truth values	True, False
str	A sequence of characters.	'Hello', '', '3'
NoneType	special and has one value, None	None

- How to create a variable? `variable_name = value`
- How about types? use `type()`
- Can a variable change type? **Yes!** Just assing a new value with any type.
- What if we if want to convert a value between types, i.e, '2' → 2?

Casting

- `int('2') → 2`

Casting

- `int('2') → 2`
- Any possible reasons for casting?

Casting

- `int('2') → 2`
- Any possible reasons for casting?
 - Taking user input
 - Reading numbers from a file

Casting

- `int('2') → 2`
- Any possible reasons for casting?
 - Taking user input
 - Reading numbers from a file
- Can we cast every value to every type?

Casting

- `int('2') → 2`
- Any possible reasons for casting?
 - Taking user input
 - Reading numbers from a file
- Can we cast every value to every type?

NO!

```
try int('hello')
```

Console I/O(Input/Output)

`print(*args, sep=' ', end='\n')`

- Can take arbitrary number of arguments
- Separates elements with space by default
- Adds newline character `'\n'` to end by default

`input([prompt])`

- Prints the prompt to Console
- Program is paused until user enters something
- **returns an `str` object!**

Arithmetic Operators

These operations are applicable on Numeric types: `int` and `float`

Arithmetic Operators

These operations are applicable on Numeric types: `int` and `float`

- `+`: Addition

Arithmetic Operators

These operations are applicable on Numeric types: `int` and `float`

- `+`: Addition
- `-`: Subtraction

Arithmetic Operators

These operations are applicable on Numeric types: `int` and `float`

- `+`: Addition
- `-`: Subtraction
- `*`: Multiplication

Arithmetic Operators

These operations are applicable on Numeric types: `int` and `float`

- `+`: Addition
- `-`: Subtraction
- `*`: Multiplication
- `/`: Division

Arithmetic Operators

These operations are applicable on Numeric types: `int` and `float`

- `+`: Addition
- `-`: Subtraction
- `*`: Multiplication
- `/`: Division
- `//`: Floor (integer) Division

Arithmetic Operators

These operations are applicable on Numeric types: `int` and `float`

- `+`: Addition
- `-`: Subtraction
- `*`: Multiplication
- `/`: Division
- `//`: Floor (integer) Division
- `%`: Modulo

Arithmetic Operators

These operations are applicable on Numeric types: `int` and `float`

- `+`: Addition
- `-`: Subtraction
- `*`: Multiplication
- `/`: Division
- `//`: Floor (integer) Division
- `%`: Modulo
- `**`: Power

Arithmetic Operators

These operations are applicable on Numeric types: `int` and `float`

- `+`: Addition
- `-`: Subtraction
- `*`: Multiplication
- `/`: Division
- `//`: Floor (integer) Division
- `%`: Modulo
- `**`: Power

```
3.2 + 1.4 # => 4.6
3.2 - 1    # => 2.2
3.2 * 1.2  # => 3.84
3.5 / 1.5  # => 2.333333335
3.5 // 1.5 # => 2.0
3.5 % 1.5  # => 0.5
2 ** 10    # => 1024
```

Assignment Operators

We have already seen '=': `variable_name = value`

Assignment Operators

We have already seen '=': `variable_name = value`

Frequently we will update variables' values based on their **old value**.

Ex: Increment a number: `num = num + 1`

Assignment Operators

We have already seen '=': `variable_name = value`

Frequently we will update variables' values based on their **old value**.

Ex: Increment a number: `num = num + 1`

Python has shorter representations for these updates with arithmetic operators.

Assignment Operators

We have already seen '=': `variable_name = value`

Frequently we will update variables' values based on their **old value**.

Ex: Increment a number: `num = num + 1`

Python has shorter representations for these updates with arithmetic operators.

`num += 1` is equivalent to `num = num + 1`

Assignment Operators

We have already seen '=': `variable_name = value`

Frequently we will update variables' values based on their **old value**.

Ex: Increment a number: `num = num + 1`

Python has shorter representations for these updates with arithmetic operators.

`num += 1` is equivalent to `num = num + 1`

`result *= 2` is equivalent to `result = result * 2`

Assignment Operators

Operator	Usage	Equivalent
<code>+=</code>	<code>val += 3</code>	<code>val = val + 3</code>
<code>-=</code>	<code>val -= 3</code>	<code>val = val - 3</code>
<code>*=</code>	<code>val *= 3</code>	<code>val = val * 3</code>
<code>/=</code>	<code>val /= 3</code>	<code>val = val / 3</code>
<code>%=</code>	<code>val %= 3</code>	<code>val = val % 3</code>
<code>**=</code>	<code>val **= 3</code>	<code>val = val ** 3</code>
<code>//=</code>	<code>val //= 3</code>	<code>val = val // 3</code>

bool Operators

How to represent logical operations in Python?

A	B	A or B	A and B	not A
True	True	True	True	False
True	False	True	False	False
False	True	True	False	True
False	False	False	False	True

bool Operators

How to represent logical operations in Python?

A	B	A or B	A and B	not A
True	True	True	True	False
True	False	True	False	False
False	True	True	False	True
False	False	False	False	True

- and

bool Operators

How to represent logical operations in Python?

A	B	A or B	A and B	not A
True	True	True	True	False
True	False	True	False	False
False	True	True	False	True
False	False	False	False	True

- **and**
- **or**

bool Operators

How to represent logical operations in Python?

A	B	A or B	A and B	not A
True	True	True	True	False
True	False	True	False	False
False	True	True	False	True
False	False	False	False	True

- and
- or
- not

bool Operators

How to represent logical operations in Python?

A	B	A or B	A and B	not A
True	True	True	True	False
True	False	True	False	False
False	True	True	False	True
False	False	False	False	True

- **and**
- **or**
- **not**

True or False and False \Rightarrow



bool Operators

How to represent logical operations in Python?

A	B	A or B	A and B	not A
True	True	True	True	False
True	False	True	False	False
False	True	True	False	True
False	False	False	False	True

- **and**
- **or**
- **not**

True or False and False \Rightarrow **True**



bool Operators

How to represent logical operations in Python?

A	B	A or B	A and B	not A
True	True	True	True	False
True	False	True	False	False
False	True	True	False	True
False	False	False	False	True

- `and`
- `or`
- `not`

True or False and False \Rightarrow **True**

WHY?

Operator Precedence

Logical operators are evaluated in this order:

1. not
2. and
3. or

Operator Precedence

Logical operators are evaluated in this order:

1. `not`
2. `and`
3. `or`

You can override this order with parentheses

Operator Precedence

Logical operators are evaluated in this order:

1. `not`
2. `and`
3. `or`

You can override this order with parentheses
(`True or False`) `and` `False` \Rightarrow

Operator Precedence

Logical operators are evaluated in this order:

1. `not`
2. `and`
3. `or`

You can override this order with parentheses
(`True or False`) `and` `False` \Rightarrow **`False`**

Short-Circuit Evaluation

X: Any boolean value

True or X \Rightarrow

Short-Circuit Evaluation

X: Any boolean value

True or X \Rightarrow **True**

Short-Circuit Evaluation

X: Any boolean value

True or X \Rightarrow **True**

False and X \Rightarrow

Short-Circuit Evaluation

X: Any boolean value

True or X \Rightarrow **True**

False and X \Rightarrow **False**

Short-Circuit Evaluation

X: Any boolean value

True or X \Rightarrow **True**

False and X \Rightarrow **False**

Python is smart enough to take advantage of this!

Short-Circuit Evaluation

X: Any boolean value

True or X \Rightarrow **True**

False and X \Rightarrow **False**

Python is smart enough to take advantage of this!

```
1/0 # => ZeroDivisionError
True or 1/0 # => True
False and 1/0 # => False
1/0 or True # => ZeroDivisionError
1/0 and False # => ZeroDivisionError
```

Truthy & Falsy Values

```
# 'Falsy' values
bool(None) # => False
bool(False) # => False
bool(0) # => False
bool(0.0) # => False
bool('') # => False
# Empty data structures
bool([]) # => False
```

Truthy & Falsy Values

```
# 'Falsy' values
bool(None) # => False
bool(False) # => False
bool(0) # => False
bool(0.0) # => False
bool('') # => False
# Empty data structures
bool([]) # => False
```

```
# Everything else is 'truthy'
bool(-100000) # => True
bool('False') # => True
bool(3.14) # => True
bool(int) # => True
# Nonempty data structures
bool([1, 'a', []]) # => True
bool([False]) # => True
```

Comparison Operators

- <: Strictly less than

Comparison Operators

- <: Strictly less than
- <=: Less than or equal

Comparison Operators

- <: Strictly less than
- <=: Less than or equal
- >: Strictly greater than

Comparison Operators

- <: Strictly less than
- <=: Less than or equal
- >: Strictly greater than
- >=: Greater than or equal

Comparison Operators

- <: Strictly less than
- <=: Less than or equal
- >: Strictly greater than
- >=: Greater than or equal
- ==: Equal

Comparison Operators

- <: Strictly less than
- <=: Less than or equal
- >: Strictly greater than
- >=: Greater than or equal
- ==: Equal
- !=: Not equal

Comparison Operators

- <: Strictly less than
- <=: Less than or equal
- >: Strictly greater than
- >=: Greater than or equal
- ==: Equal
- !=: Not equal

```
3.0 == 3    # => True
3.0 >= 3    # => True
# Small-case characters
# have bigger ASCII value
'Aa' > 'aa'  # => False
'hi' == 'hi' # => True
'a' == None  # => False
3 > 'a'      # => TypeError
3 == 'a'     # => False
```

Chained Comparisons

$1 < 2 < 3 \Rightarrow$

Chained Comparisons

1 < 2 < 3 ⇒ **True**

Chained Comparisons

`1 < 2 < 3` \Rightarrow **True**

You can chain arbitrarily many comparison operations together.

Chained Comparisons

`1 < 2 < 3` \Rightarrow **True**

You can chain arbitrarily many comparison operations together.

v_i : variables/values, op_i : comparison operators

Chained Comparisons

$1 < 2 < 3 \Rightarrow \text{True}$

You can chain arbitrarily many comparison operations together.

v_i : variables/values, op_i : comparison operators

$v_1 \ op_1 \ v_2 \ op_2 \ v_3 \ \dots \ op_{n-1} \ v_n$ is equivalent to:

$v_1 \ op_1 \ v_2 \ \text{and} \ v_2 \ op_2 \ v_3 \ \text{and} \ \dots \ v_{n-1} \ op_{n-1} \ v_n$

Chained Comparisons

`1 < 2 < 3` \Rightarrow **True**

You can chain arbitrarily many comparison operations together.

v_i : variables/values, op_i : comparison operators

`v_1 op_1 v_2 op_2 v_3 ... op_{n-1} v_n` is equivalent to:

`v_1 op_1 v_2 and v_2 op_2 v_3 and ... v_{n-1} op_{n-1} v_n`

```
3 > 2 == 1 < 5 > 4 # => False
3 > (2 == 1) < 5 > 4 # => True
3 > True > False # => True
3 > 5 < 1/0 # => False
3 < 5 < 1/0 # => ZeroDivisionError
```

1. Recap
○○○○

2. Basic Operators
○○○○○○○○○

3. Branching
●○


4. Objects
○○○○

5. Basic Functions
○○○○○

Branching



Branching

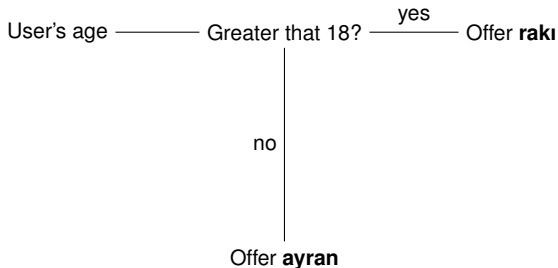

Branching

```
if <condition>:  
    <expression>  
    <expression>  
    ...
```

```
if <condition>:  
    <expression>  
    <expression>  
    ...  
else:  
    <expression>  
    <expression>  
    ...
```

```
if <condition>:  
    <expression>  
    <expression>  
    ...  
elif <condition>:  
    <expression>  
    <expression>  
    ...  
...  
else:  
    <expression>  
    <expression>  
    ...
```

- <condition> has a **bool** value (True or False)
- Which expressions will be evaluated in which conditions?

1. Recap
○○○○

2. Basic Operators
○○○○○○○○○○

3. Branching
○○

4. Objects
●○○○

5. Basic Functions
○○○○○

Python Data Model



1. Recap
○○○○

2. Basic Operators
○○○○○○○○○

3. Branching
○○

4. Objects
●○○○

5. Basic Functions
○○○○○

Python Data Model

How did we represent data in Python?



Python Data Model

How did we represent data in Python?

Variables!

Python Data Model

How did we represent data in Python?

Variables!

How do they work?

Python Data Model

How did we represent data in Python?

Variables!

How do they work?

Do they store the data themselves?

Python Data Model

How did we represent data in Python?

Variables!

How do they work?

Do they store the data themselves?

Objects

Everything is an object in Python.

⇒ Values at the right side of our label analogy are objects!

Objects

Everything is an object in Python.

⇨ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

⇨ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has
a **fixed** `type`.

Objects

Everything is an object in Python.

```
a = 5
```

↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

`a = 5`

5

↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has
a **fixed** `type`.

Objects

Everything is an object in Python.

`a = 5`



↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

`a = 5`



⇨ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

```
a = 5  
a = 10
```




↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

```
a = 5  
a = 10
```




↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

```
a = 5  
a = 10
```




↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

```
a = 5  
a = 10
```




↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

```
a = 5  
a = 10  
a += 3
```




↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

```
a = 5  
a = 10  
a += 3
```




↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

```
a = 5  
a = 10  
a += 3
```




↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

```
a = 5  
a = 10  
a += 3
```




↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects

Everything is an object in Python.

```
a = 5  
a = 10  
a += 3  
print(a)
```



↪ Values at the right side of our label analogy are objects!
Even though variables **do not** have `types`, each object has a **fixed** `type`.

Objects - Identity

Each object has an `identity`,

Objects - Identity

Each object has an `identity`, this value can be obtained by using `id()` function.

Objects - Identity

Each object has an `identity`, this value can be obtained by using `id()` function.

`==` operator compares values

`is` operator compares identities

Objects - Identity

Each object has an `identity`, this value can be obtained by using `id()` function.

`==` operator compares values

`is` operator compares identities

Objects - Identity

Is this glass half full or half empty?



Objects - Identity

Is this glass half full or half empty?



```
# What fraction of this glass is water?
pessimist = 0.5
optimist = 0.5
pessimist == optimist      # => True
pessimist is optimist      # => False
```


Objects - Identity

Is this glass half full or half empty?



```
# What fraction of this glass is water?
pessimist = 0.5
optimist = 0.5
pessimist == optimist      # => True
pessimist is optimist      # => False
```

Functions

Functions are blocks of

Functions

Functions are blocks of **organized**,

Functions

Functions are blocks of **organized, reusable** code

Functions

Functions are blocks of **organized, reusable** code that carry some **specific** tasks.

Functions

Functions are blocks of **organized**, **reusable** code that carry some **specific** tasks.



Functions

Menemen *without* Onions

```
print("Chop the tomatoes")
print("Deseed and slice the peppers")
print("Cook the vegetables until they soften")
print("Crack and cook the eggs")
```

Functions

Menemen *without* Onions

```
print("Chop the tomatoes")
print("Deseed and slice the peppers")
print("Cook the vegetables until they soften")
print("Crack and cook the eggs")
```

Menemen *with* Onions

```
print("Slice the onions")
print("Chop the tomatoes")
print("Deseed and slice the peppers")
print("Cook the onions until they soften")
print("Cook the vegetables until they soften")
print("Crack and cook the eggs")
```


Functions

Menemen *without* Onions **Reduce**

```
print("Chop the tomatoes")  
print("Deseed and slice the tomatoes")  
print("Cook the vegetables until they soften")  
print("Crack and cook the eggs")
```

Menemen *with* Onions

```
print("Slice the onions")  
print("Chop the tomatoes")  
print("Deseed and slice the peppers")  
print("Cook the onions until they soften")  
print("Cook the vegetables until they soften")  
print("Crack and cook the eggs")
```

Defining Functions

def keyword introduces a function *definition*.

```
def prepare_base_vegetables():  
    print("Chop the tomatoes")  
    print("Deseed and slice the peppers")
```

```
def cook():  
    print("Cook the vegetables until they soften")  
    print("Crack and cook the eggs")
```

Functions

Defining a `function` only makes it available.

Functions

Defining a function only makes it available.
You should *call* the function to execute it.

Functions

Defining a function only makes it available.
You should *call* the function to execute it.

Menemen *without* Onions

```
prepare_base_vegetables()  
cook()
```

Functions

Defining a function only makes it available.
You should *call* the function to execute it.

Menemen *without* Onions

```
prepare_base_vegetables()  
cook()
```

Menemen *with* Onions

```
print("Slice the onions")  
prepare_base_vegetables()  
print("Cook the onions until they soften")  
cook()
```

Defining a function = **writing down the recipe**
Calling a function = **executing the recipe**

Functions

You **can** call a function inside another function.

Functions

You **can** call a function inside another function.

```
def menemen_with_onions():  
    prepare_base_vegetables()  
    cook()
```


Functions

You **can** call a function inside another function.

```
def menemen_with_onions():  
    prepare_base_vegetables()  
    cook()
```

```
def menemen_without_onions():  
    print("Slice the onions")  
    prepare_base_vegetables()  
    print("Cook the onions until they soften")  
    cook()
```